

www.efy.in

EFY GROUP  
YOURS SINCE 1999

“  
Branding is  
what people  
say about  
you when  
you are not  
in the room.  
”



-Jeff Bezos

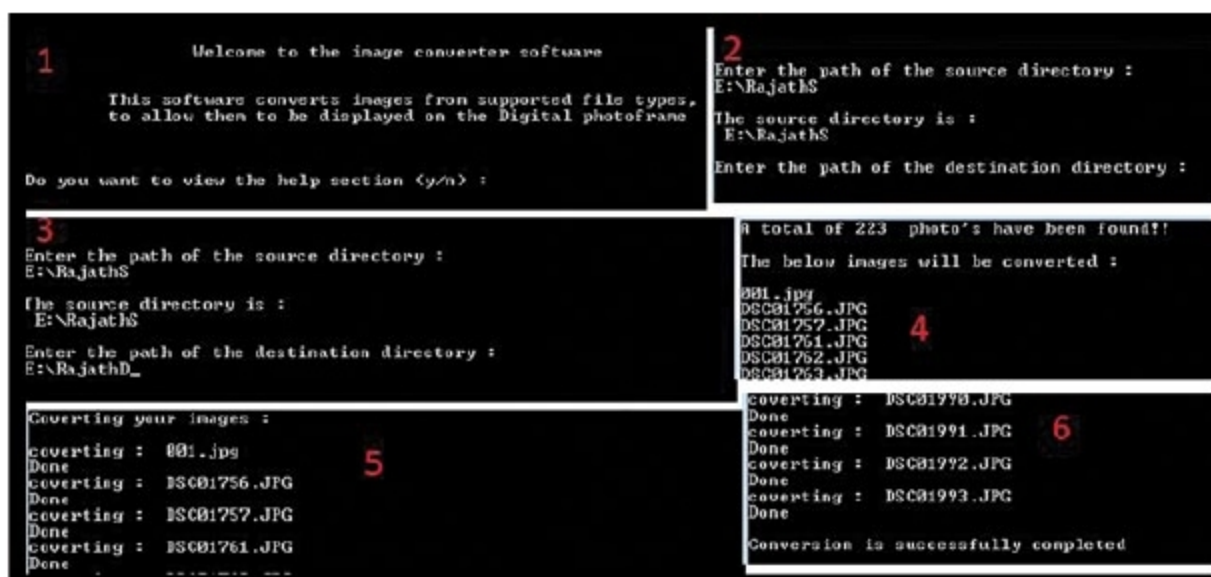


Fig. 3: Snapshot of the sequence of steps for running Converter.exe software



Fig. 4: Proposed enclosure of the digital photo frame

process. As shown in Fig. 3, there are 223 photos detected in the SD card. Once conversion is complete, images from destination folder can be copied onto the micro-SD card and inserted into the TFT LCD shield. The author's prototype is shown in Fig. 4.

### Testing steps

Follow the steps given below to test the project:

1. Install Arduino IDE and copy library files to Arduino library folder.
2. Open display.ino file from Arduino IDE and click verify/compile. (This should show 'Done Compiling' message. If not, ensure that library files are in the correct destination.)

After opening Arduino IDE, make sure to select Show Verbose Output During Compilation from File/Prefer-

ences/Menu. Otherwise, you will get an error message, 'warning: converting to non-pointer type 'int' from NULL [-Wconversion-null]'

3. Make sure photos are stored on an SD card. Insert the micro-SD card to the TFT LCD shield module.

4. After compiling and uploading the code to Arduino, connect the TFT LCD shield to Arduino Uno.

5. Connect Arduino to a suitable power supply using a USB cable or 12V adaptor.

6. Photos in the SD card should now appear on the display module in the form of a slideshow.

7. Ensure the digital photo frame works as expected. **EFY**



Dr J. Manikandan is professor in department of electronics and communication engineering, Crucible of Research and Innovation, PES University, Bengaluru



Rajath J. is an electronics hobbyist at Crucible of Research and Innovation, PES University, Bengaluru

### EFY Note

The source code of this project is available for free download at [source.efymag.com](http://source.efymag.com)