

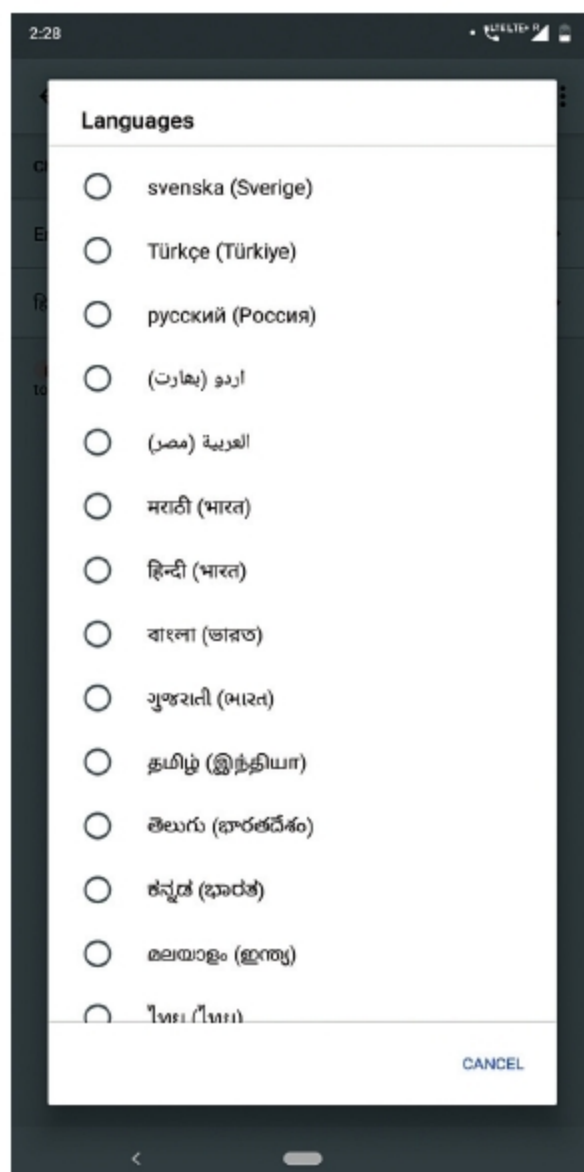


Fig. 4: Setting language in Google Assistant

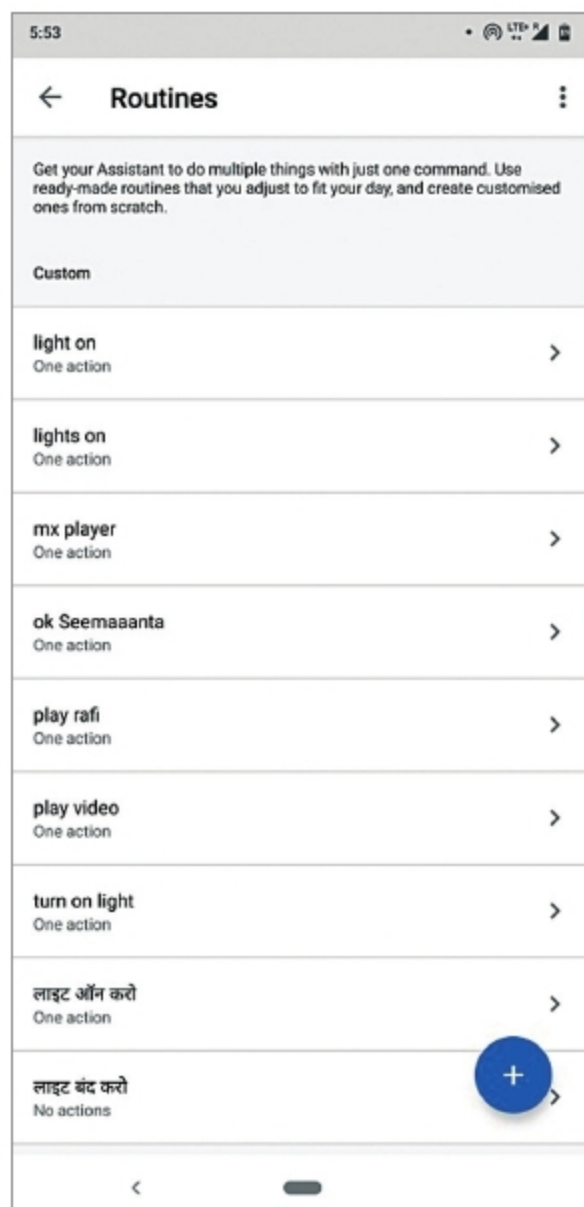


Fig. 5: Routines in Google Assistant

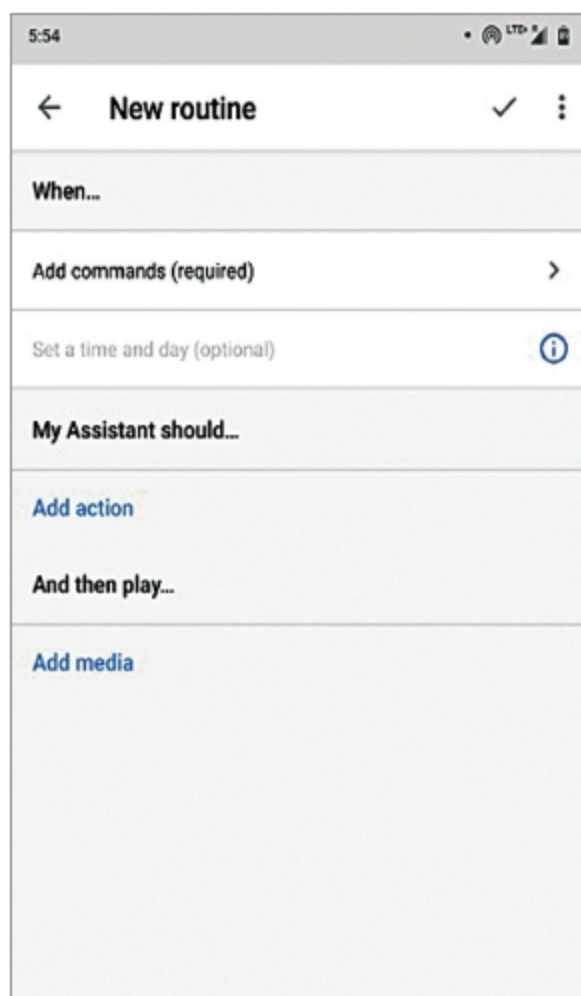


Fig. 6: Add commands in Routines

Connections		Table 2
Raspberry Pi	Relay board	
GPIO13	Relay IN1	
GPIO15	Relay IN2	
5V	Relay 5V	
GND	GND	

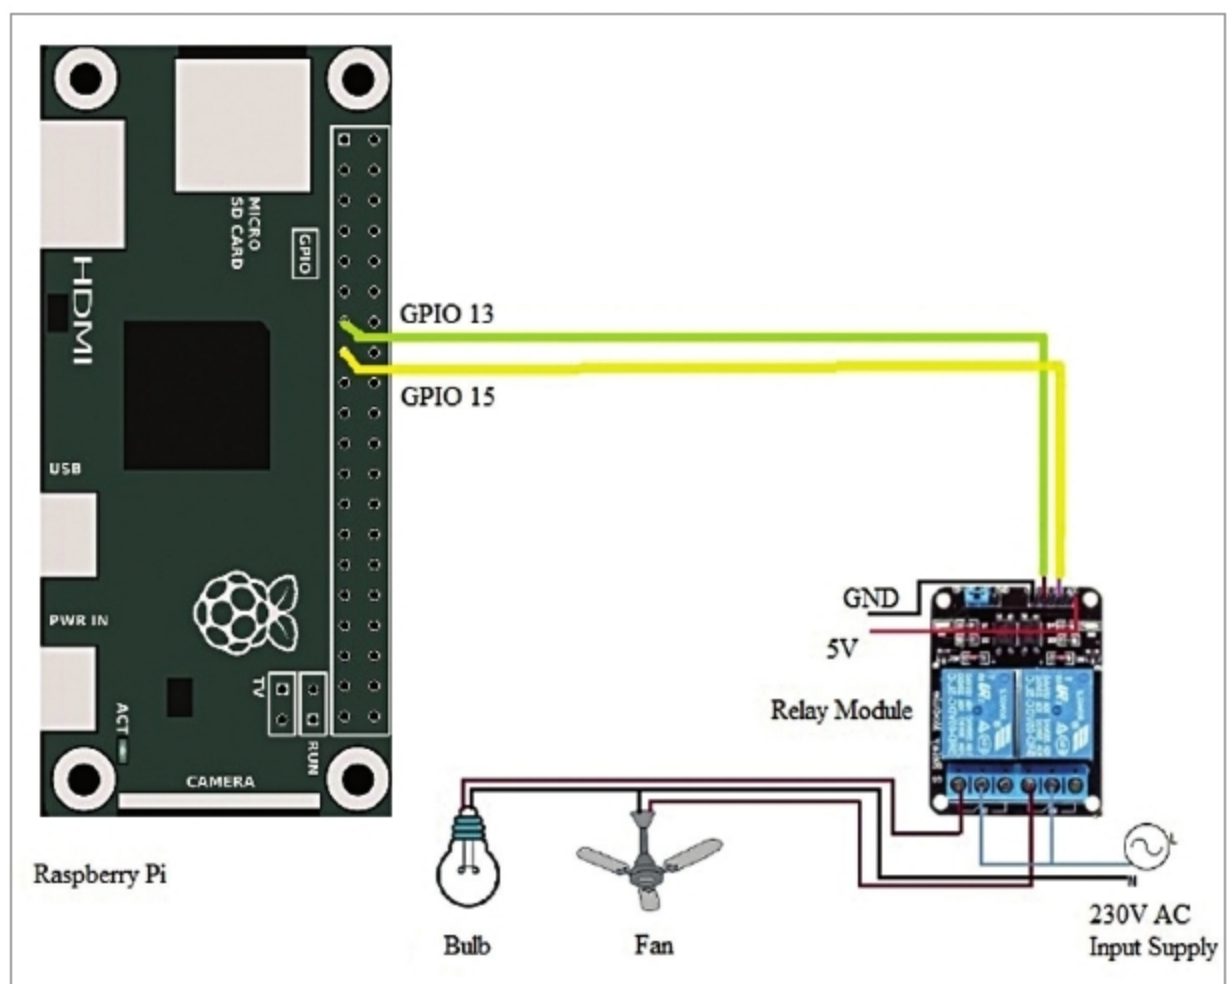


Fig. 7: Connections

command, as shown in Fig. 1.

Next, create a PHP file to turn off the lights by using 'sudo nano light-soff.php' command and write the following piece of code:

```
<?php
System ("gpio -g mode 27 out");
System ("gpio -g write 27 0");
?>
```

Then, press Ctrl + X to save and exit from the editor.

After this, create a lightson.php file as given below for turning on the light.

```
<?php
System ("gpio -g mode 27 out");
System ("gpio -g write 27 1");
?>
```

Repeat the same process for controlling other GPIO of Raspberry Pi. We have added GPIO 13 and 15 for controlling a light bulb and fan, respectively.

Setting Google Assistant

Now, configure Google Assistant for voice command in your preferred language on an Android phone. First, open the language settings of Google Assistant and select the language of your choice. Tap on Google, go to More > Settings > Google Assistant > Assistant > Languages. These steps may be slightly different depending on your device.