


## » PAS-8-S8M4

PA System with Active sub-woofer & 4-Channel active microphone mixer with audio amplifier

- A high-performance ultra-compact line-array speaker featuring a wide and uniform horizontal dispersion with constant vertical beam-width and long throw distance: PHA-8
- Compact, high-efficiency front-firing, active sub-woofer: PSUB-81
- A 4-Channel active microphone mixer with built-in high-performance digital audio power amplifier: PMA-4
- Quick and easy set-up and intuitive operation
- Built-in high-capacity rechargeable battery for 12+ hours of normal use
- Compact size, rugged construction, fully self-contained design
- Ideal solution for portable PA system or fixed installations
- Speaker can be used with other high-powered amplifiers

### Applications:

Fixed install PA Systems, Gymnasiums, Sports courts, Dance studios, health and fitness clubs, cafeterias, Portable PA Systems, Class-room audio solutions, Conference rooms, Solo/Duet Singers, Acoustic Guitar players, Mobile DJ, Lecturers, Small group seminars, Singer/song writers, Hotel meeting rooms, Hotels, Restaurants, Street performers, Magicians, etc.

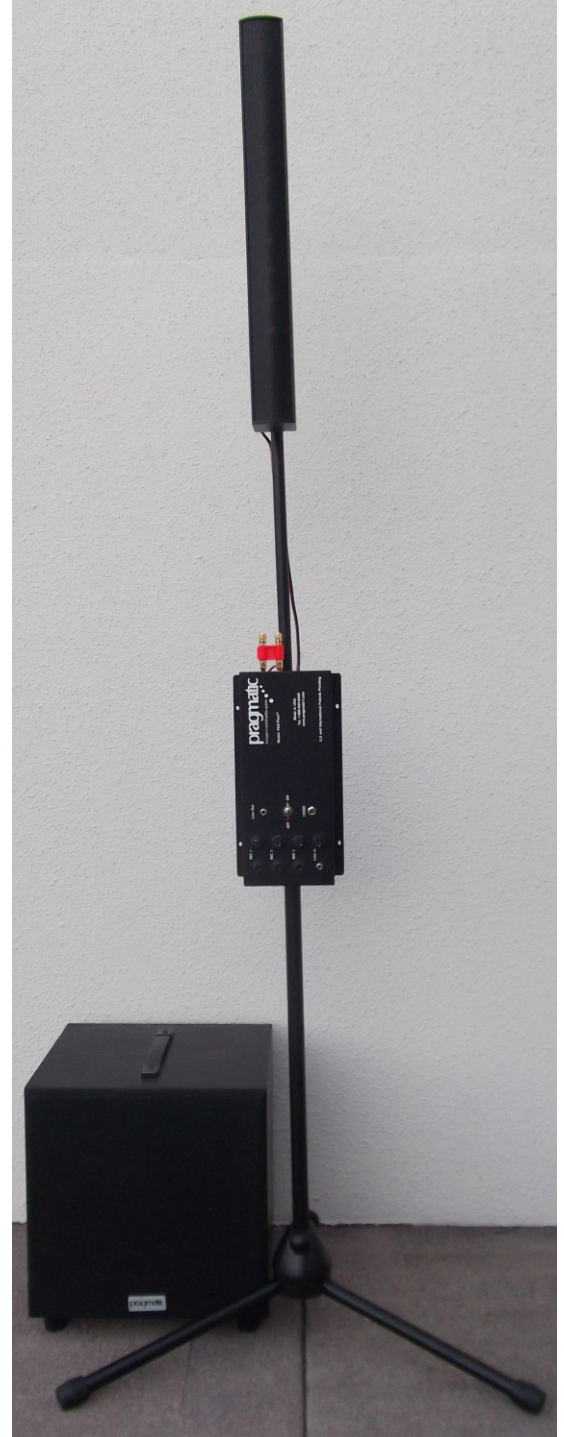

**TO PLACE an ORDER or for QUESTIONS,**

**Emails Us: [sales@wireless-experts.com](mailto:sales@wireless-experts.com), Call Us: (408) 748-1100 or Fax Us: (408) 663-9783**

## PHA-8 speaker



### RELATED PRODUCTS

- PAS\*Port™ complete portable Public Address system
- PHA (ultra compact line-array speakers)
- MBA-148 Mono - amplifier
- PSUB-12 sub-woofer
- PWM Wireless microphones
- PreAmp9 - Compact audio preamplifier with 9 dB gain

|                                 |                                                                    |
|---------------------------------|--------------------------------------------------------------------|
| <b>LINE-ARRAY SPEAKER</b>       | 8 High-performance full-range drivers (75 Watts max)               |
| <b>ACTIVE SUB-WOOFER</b>        | 8" dual-voice coils, front-firing, ported, variable cross-over     |
| <b>MICROPHONE PRE-AMPLIFIER</b> | Ultra low noise, wide-dynamic range                                |
| <b>MICROPHONE INPUTS</b>        | 2 high-gain, 1 medium gain                                         |
| <b>LINE LEVEL INPUTS</b>        | 1 line-level input with variable gain                              |
| <b>INPUT IMPEDANCE</b>          | 20K Ohms                                                           |
| <b>MICROPHONE INPUT</b>         | Un-balanced TRS Phono jack                                         |
| <b>FREQUENCY RESPONSE</b>       | Sub-woofer (33 Hz - 150 Hz), Line array (120 Hz - 20 KHz)          |
| <b>SPEAKER IMPEDANCE</b>        | 4 Ohms                                                             |
| <b>POWER</b>                    | DC 15V (16.5V max) mixer-preamp, Sub-woofer                        |
| <b>OPERATING CONDITIONS</b>     | Temperature 50°-104°F (10°-40°C), Humidity 20-85% (non-condensing) |
| <b>DIMENSIONS (HxWxD)</b>       | 18"x2"x2" (Line-array), 12"x12"x13" (Sub-woofer), 10"x5"x2" mixer  |
| <b>WEIGHT</b>                   | 7.5 lb with rechargeable internal battery pack, excludes subwoofer |
| <b>POWER SUPPLY REGULATIONS</b> | UL, cUL, FCC (Class A/B), TUV, CCC, CE, CISPR, RoHS                |
| <b>PACKAGE CONTENTS</b>         | Microphone mixer/power amplifier, AC/DC adapter                    |
| <b>WARRANTY</b>                 | One year limited warranty on parts and labor                       |

## PMA-4 4-channel active mixer with audio power amplifier



Complete system fully self-contained in a simple soft carrying bag



**TO PLACE an ORDER or for QUESTIONS,**  
**Emails Us: [sales@wireless-experts.com](mailto:sales@wireless-experts.com), Call Us: (408) 748-1100 or Fax Us: (408) 663-9783**