

V1.6.0



Referee System Serial Port Protocol

Prepared by RoboMaster Organizing Committee
Updated in January, 2025

Release Notes

Date	Version	Revisions
January 6, 2025	V1.7.0	- Revised command codes 0x0003, 0x0101, 0x0105, 0x0201, 0x0202, 0x0204, 0x0209, 0x020B, and 0x020C. - Deleted command codes 0x0102 and 0x0205. - Added command code 0x0309.
July 15, 2024	V1.6.4	- Revised command codes 0x0305 and 0x020D. - Added details about command codes 0x0206 and 0x0303. - Fixed some known errors.
May 27, 2024	V1.6.3	Revised command code 0x020C.
April 26, 2024	V1.6.2	Revised command code 0x0301.
January 22, 2024	V1.6.1	- Revised command codes 0x0101, 0x0201, 0x0203, 0x0209, 0x020A, 0x0303. - Resolved known issues such as inconsistent data segment lengths and structure definition errors. - Optimized some descriptions.
November 22, 2023	V1.6	- Revised the transmission frequencies for command codes 0x0001, 0x0101, 0x0105, 0x0203, 0x0205, 0x020A - Revised command codes 0x0101, 0x0102, 0x0104, 0x0105, 0x0201, 0x0203, 0x0209, 0x0301, 0x0303, 0x0307. - Added command codes 0x020D, 0x020E, 0x0308. - Optimized some descriptions.
July 7, 2023	V1.5	- Added descriptions about the transmission/trigger conditions and sender/receiver of all command words. - Added descriptions about the regular link and VTM link of the Referee System.

Date	Version	Revisions
		3. Revised command codes 0x0101, 0x0204, 0x0205, 0x0208, and 0x0209. 4. Added command codes 0x020B, 0X020C, 0x0307, and 0x0306. 5. Deleted command codes 0x0004, 0x0005, and 0x0103. 6. Optimized some descriptions.
August 5, 2022	V1.4	Revised the transmission frequencies and trigger methods for command codes 0x0001, 0x0003, 0x0101, 0x0105, 0x0204, 0x0208, and 0x0209.
December 31, 2021	V1.3	Revised the distribution of the Buff/Debuff Zones and lurking mode in the RoboMaster AI Challenge. 0x0005
April 30, 2021	V1.2	Fixed some errors.
April 19, 2021	V1.1	Fixed some errors.
February 3, 2021	V1.0	First release

Table of Contents

Release Notes.....	2
1. Serial Port Protocol Format	5
2. Command Code IDs and Regular Link Data	7
3. Small Map Interaction Data	36
3.1 Data Transmission by Player Clients	36
3.2 Data Receiving by Player Clients	37
4. VTM Link Data	41
4.1 Custom Controller and Robot Interaction Data	41
4.2 Keyboard-Mouse Remote Control Data	41
5. Non-Link Data	44
Appendix 1: CRC Code Samples.....	46
Appendix 2: ID Descriptions.....	50

1. Serial Port Protocol Format

The serial port is used for communication and is configured with a Baud rate of 115200, an 8-bit data bit, and a 1-bit stop bit without hardware flow control and check bit.

Table 1-1 Communication Protocol Format

frame_header	cmd_id	data	frame_tail
5-byte	2-byte	n-byte	2-byte, CRC16, full packet check

Table 1-2 Frame Header Format


SOF	data_length	seq	CRC8
1-byte	2-byte	1-byte	1-byte

Table 1-3 Frame Header Definitions


Domain	Offset Position	Size (Byte)	Description
SOF	0	1	Data frame start byte; the fixed value is 0xA5
data_length	1	2	Length of data in the data frame
seq	3	1	Sequence number
CRC8	4	1	Frame header CRC8

There are two types of serial port data links for the Referee System: regular links and VTM links.

- For regular links, data is relayed via the Referee System's server and Main Controller Module, where it is transmitted and received by the user serial port of the Power Management Module, as shown below:

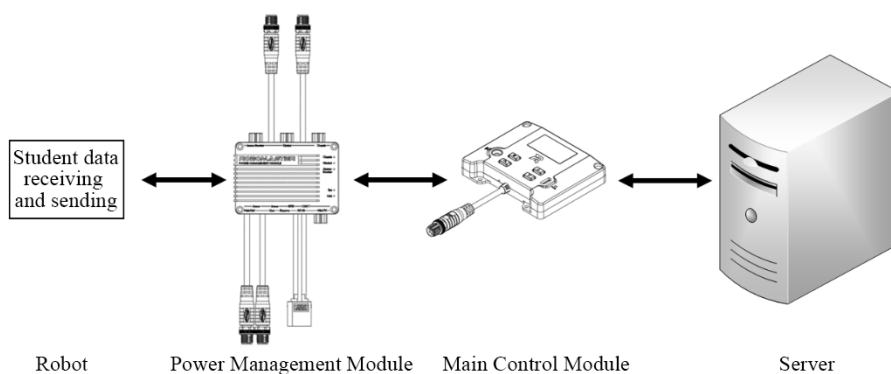

- VTM links involve relaying data through the Referee System's player client and VTM, where it is transmitted and received by the serial port of the VTM (Transmitter), as shown below:

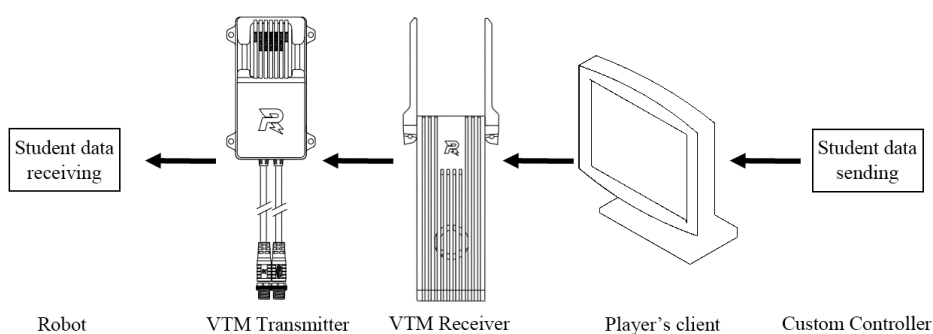

- In the normal operating state, the delay of data transmission through the Referee System is approximately 130 ms, with a packet loss rate of less than 1%.
- In the event of poor network conditions, the delay of data transmission through the Referee System is approximately 200 ms, with a packet loss rate of approximately 3%.
- There may be errors in the measurement data, and the data is for your reference only.

2. Command Code IDs and Regular Link Data

Table 2-1 Overview of Command Code IDs

Command Code	Data Segment Length	Descriptions	Sender/Receiver	Data Link
0x0001	11	Competition status data, transmitted at a fixed frequency of 1 Hz.	Server→All robots	Regular link
0x0002	1	Competition result data, transmitted upon completion of the competition.	Server→All robots	Regular link
0x0003	32	Robot health data, transmitted at a fixed frequency of 3 Hz.	Server→All robots	Regular link
0x0101	4	Site event data, transmitted at a fixed frequency of 1 Hz.	Server→All robots of the own side	Regular link
0x0104	3	Referee warning data, transmitted when one's team is issued a penalty/forfeiture and at a fixed frequency of 1 Hz in other cases.	Server→All robots of the penalized team	Regular link
0x0105	3	Dart launching data, transmitted at a fixed frequency of 1 Hz.	Server→All robots of the own side	Regular link
0x0201	13	Robot performance system data, transmitted at a fixed frequency of 10 Hz.	Main Controller Module→Corresponding robot	Regular link
0x0202	16	Real-time chassis Buffer Energy and Barrel Heat data, transmitted at a fixed frequency of 10 Hz.	Main Controller Module→Corresponding robot	Regular link

Command Code	Data Segment Length	Descriptions	Sender/Receiver	Data Link
0x0203	16	Robot position data, transmitted at a fixed frequency of 1 Hz.	Main Controller Module→Corresponding robot	Regular link
0x0204	7	Robot buff and chassis energy data, transmitted at a fixed frequency of 3 Hz.	Server→Corresponding robot	Regular link
0x0206	1	Damage status data, transmitted after the damage occurs.	Main Controller Module→Corresponding robot	Regular link
0x0207	7	Real-time launching data, transmitted after a projectile is launched.	Main Controller Module→Corresponding robot	Regular link
0x0208	6	Projectile allowance, transmitted at a fixed frequency of 10 Hz.	Server→Own side's Hero, Standard, Sentry, and Aerial Robots	Regular link
0x0209	4	Robot RFID module status, transmitted at a fixed frequency of 3 Hz.	Server→Own side's robots with an RFID module	Regular link
0x020A	6	Dart player's client command data, transmitted at a fixed frequency of 3 Hz.	Server→Own side's Dart Robots	Regular link
0x020B	40	Ground Robot position data, transmitted at a fixed frequency of 1 Hz.	Server→Own side's Sentry Robots	Regular link

Command Code	Data Segment Length	Descriptions	Sender/Receiver	Data Link
0x020C	1	Radar-marked progress data, transmitted at a fixed frequency of 1 Hz.	Server→Own side's Radar Robots	Regular link
0x020D	6	Decision-making data of Sentry Robot, transmitted at a fixed frequency of 1 Hz.	Server→Own side's Sentry Robots	Regular link
0x020E	1	Decision-making data of Radar, transmitted at a fixed frequency of 1 Hz.	Server→Own side's Radar Robots	Regular link
0x0301	127	Robot interaction data, transmitted at a maximum frequency of 30 Hz when triggered by the sender.	-	Regular link
0x0302	30	Data about the interaction between the Custom Controller and robots, transmitted at a maximum frequency of 30 Hz when triggered by the sender.	Custom Controller→Robots with VTM links to player clients	VTM link
0x0303	15	Player client's small map interaction data, transmitted when triggered by the player client.	Tap the player client→Server→Own side's robots selected by the sender	Regular link
0x0304	12	Keyboard, mouse, and remote control data, transmitted at a fixed frequency of 30 Hz.	Player client→Robots with VTM links to player clients	VTM link
0x0305	24	Radar data received by Mini-maps in player's clients, transmitted at a maximum frequency of 5 Hz.	Radar→Server→All player clients of the own side	Regular link

Command Code	Data Segment Length	Descriptions	Sender/Receiver	Data Link
0x0306	8	Data about the interaction between the Custom Controller and player clients, transmitted at a maximum frequency of 30 Hz when triggered by the sender.	Custom Controller→Player client	-
0x0307	103	Sentry data received by player clients' Small Maps, transmitted at a maximum frequency of 1 Hz.	Sentry/Semiautomatic Control Robot→Player client of the corresponding operator	Regular link
0x0308	34	Robot data received by player clients' Small Map, transmitted at a maximum frequency of 3 Hz.	Own side's robots→Own side's player clients	Regular link
0x0309	30	Robot data received by Custom Controllers, transmitted at a maximum frequency of 10 Hz.	Own side's robot→Custom Controller connected to the player's client of the corresponding Operator	VTM link

Table 2-2 0x0001

Byte Offset	Size	Description
0	1	Bits 0-3: competition type 1: RoboMaster University Championship (RMUC) 2: RoboMaster University Technical Challenge (RMUT) 3: ICRA RoboMaster University AI Challenge (RMUA) 4: RoboMaster University League (RMUL) 3V3 Match 5: RMUL Standard Match Bits 4-7: current stage

Byte Offset	Size	Description
		0: pre-competition period 1: set-up period 2: 15-second Referee System initialization period 3: 5-second countdown 4: in competition 5: competition result calculation
1	2	Remaining time in the current round; unit: second.
3	8	UNIX time, effective after the robot is correctly connected to the Referee System's NTP server

```
typedef _packed struct
{
    uint8_t game_type : 4;
    uint8_t game_progress : 4;
    uint16_t stage_remain_time;
    uint64_t SyncTimeStamp;
}game_status_t;
```

Table 2-3 0x0002

Byte Offset	Size	Description
0	1	0: Draw 1: Red team wins 2: Blue team wins

```
typedef _packed struct
{
    uint8_t winner;
}game_result_t;
```

Table 2-40x0003

Byte Offset	Size	Description
0	2	HP of Red 1 Hero Robot. If the robot has not entered the stage or has been ejected, the HP is zero.
2	2	HP of Red 2 Engineer Robot.

Byte Offset	Size	Description
4	2	HP of Red 3 Standard Robot.
6	2	HP of Red 4 Standard Robot.
8	2	Reserved bits.
10	2	HP of Red 7 Sentry Robot.
12	2	HP of Red Outpost.
14	2	HP of Red Base.
16	2	HP of Blue 1 Hero Robot.
18	2	HP of Blue 2 Engineer Robot.
20	2	HP of Blue 3 Standard Robot.
22	2	HP of Blue 4 Standard Robot.
24	2	Reserved bits
26	2	HP of Blue 7 Sentry Robot.
28	2	HP of Blue Outpost.
30	2	HP of Blue Base.

```
typedef _packed struct
{
    uint16_t red_1_robot_HP;
    uint16_t red_2_robot_HP;
    uint16_t red_3_robot_HP;
    uint16_t red_4_robot_HP;
    uint16_t reserved;
    uint16_t red_7_robot_HP;
    uint16_t red_outpost_HP;
    uint16_t red_base_HP;
    uint16_t blue_1_robot_HP;
    uint16_t blue_2_robot_HP;
    uint16_t blue_3_robot_HP;
    uint16_t blue_4_robot_HP;
    uint16_t reserved;
    uint16_t blue_7_robot_HP;
    uint16_t blue_outpost_HP;
```

```
uint16_t blue_base_HP;
}game_robot_HP_t;
```

Table 2-5 0x0101

Byte Offset	Size	Description
0	4	0: non-occupied/non-activated 1: occupied/activated Bits 0-2: ● Bit 0: occupation status of the own side's Resupply Zone that does not overlap with the Exchange Zone; a value of 1 indicates that it is occupied. ● Bit 1: occupation status of the own side's Resupply Zone that overlaps with the Exchange Zone; a value of 1 indicates that it is occupied. ● Bit 2: occupation status of the own side's Resupply Zone; a value of 1 indicates that it is occupied (for RMUL only). Bits 3-5: status of the own side's Power Rune ● Bit 3: activation status of the own side's Small Power Rune; a value of 1 indicates that it is activated. ● Bit 4: activation status of the own side's Large Power Rune; a value of 1 indicates that it is activated. ● Bits 5-6: occupation status of the own side's Central Elevated Ground; a value of 1 indicates that it is occupied by the own side; a value of 2 indicates that it is occupied by the opponent. ● Bits 7-8: occupation status of the own side's Trapezoid-Shaped Elevated Ground; a value of 1 indicates that it is occupied. ● Bits 9-17: time when the own side's Outpost or Base was last hit by an opponent dart (valid values: 0 to 420; default value at the start of a round: 0).

Byte Offset	Size	Description
		● Bits 18-20: specific target at the own side's Outpost or Base that was last hit by an opponent dart. The default value at the start of a round is 0; a value of 1 indicates that the dart hit the Outpost; a value of 2 indicates that the dart hit a Fixed Target at the Base; a value of 3 indicates that the dart hit a Random Fixed Target at the Base; and a value of 4 indicates that the dart hit a Random Moving Target at the Base. ● Bits 21-22: occupation status of the Central Buff Point; a value of 0 indicates that it is not occupied; a value of 1 indicates that it is occupied by the own side; a value of 2 indicates that it is occupied by the opponent; a value of 3 indicates that it is occupied by both sides which applies only to RMUL. ● Bits 23-31: Reserved bits.

```
typedef _packed struct
{
    uint32_t event_data;
}event_data_t;
```

Table 2-6 0x0104

Byte Offset	Size	Description
0	1	Level of penalty that was last received by the own side. ● 1: Both teams received a Yellow Card. ● 2: Yellow Card ● 3: Red Card ● 4: Forfeiture
1	1	● ID of the own side's offending robot that received the last penalty. (For example, Red 1 Robot's ID is 1, and Blue 1 Robot's ID is 101.) ● In the case of a forfeiture or where both teams have been issued a Yellow Card, the value is 0.
2	1	Number of violations (at the corresponding penalty level) triggered by the own side's offending robot that received the last penalty. (The default value at the start of a round is 0.)

```
typedef _packed struct
{
    uint8_t level;
    uint8_t offending_robot_id;
    uint8_t count;
}referee_warning_t;
```

Table 2-7 0x0105

Byte Offset	Size	Description
0	1	Own side's remaining time for dart launching; unit: second.
1	2	Bits 0-2: Target that was last hit by a dart of the own side. The default value at the start of a round is 0; a value of 1 indicates that the dart hit the Outpost; a value of 2 indicates that the dart hit a Fixed Target at the Base; a value of 3 indicates that the dart hit a Random Fixed Target at the Base; and a value of 4 indicates that the dart hit a Random Moving Target at the Base. Bits 3-5: Total number of hits on the last hit target in the opponent team. The default value at the start of a round is 0, and the maximum value is 4. Bits 6-7: Target currently selected to be hit by the dart. The default value at the start of a round is 0. When no hit target is selected or the Outpost is selected, the value is also 0. A value of 1 indicates that a Fixed Target at the Base is selected; a value of 2 indicates that a Random Fixed Target at the Base is selected; and a value of 3 indicates that a Random Moving Target at the Base is selected. Bits 8-15: Reserved bits.

```
typedef _packed struct
{
    uint8_t dart_remaining_time;
    uint16_t dart_info;
}dart_info_t;
```

Table 2-8 0x0201

Byte Offset	Size	Description
0	1	Current robot ID.

Byte Offset	Size	Description
1	1	Robot level.
2	2	Robot's current HP.
4	2	Robot's maximum HP.
6	2	Robot's barrel heat cooling rate.
8	2	Robot's barrel heat limit.
10	2	Robot's chassis power consumption limit.
12	1	Output status of the Power Management Module. ● Bit 0: gimbal port output. A value of 0 indicates no output, and a value of 1 indicates 24 V output. ● Bit 1: chassis port output. A value of 0 indicates no output, and a value of 1 indicates 24 V output. ● Bit 2: shooter port output. A value of 0 indicates no output, and a value of 1 indicates 24 V output.

```
typedef _packed struct
{
    uint8_t robot_id;
    uint8_t robot_level;
    uint16_t current_HP;
    uint16_t maximum_HP;
    uint16_t shooter_barrel_cooling_value;
    uint16_t shooter_barrel_heat_limit;
    uint16_t chassis_power_limit;
    uint8_t power_management_gimbal_output : 1;
    uint8_t power_management_chassis_output : 1;
    uint8_t power_management_shooter_output : 1;
}robot_status_t;
```

Table 2-9 0x0202

Byte Offset	Size	Description
0	2	Reserved bits
2	2	Reserved bits

4	4	Reserved bits
8	2	Buffer Energy (unit: J.
10	2	Barrel heat of the 1 st Launching Mechanism (17 mm Projectile)
12	2	Barrel heat of the 2 nd Launching Mechanism (17 mm Projectile)
14	2	Barrel heat of the Launching Mechanism (42 mm Projectile)

```
typedef _packed struct
{
    uint16_t reserved;
    uint16_t reserved;
    float reserved;
    uint16_t buffer_energy;
    uint16_t shooter_17mm_1_barrel_heat;
    uint16_t shooter_17mm_2_barrel_heat;
    uint16_t shooter_42mm_barrel_heat;
}power_heat_data_t;
```

Table 2-10 0x0203

Byte Offset	Size	Description
0	4	The x-coordinate of the robot's position; unit: m.
4	4	The y-coordinate of the robot's position; unit: m.
8	4	Direction of the robot's Speed Monitor Module; unit: degree. True north is 0 degrees.

```
typedef _packed struct
{
    float x;
    float y;
    float angle;
}robot_pos_t;
```

Table 2-11 0x0204

Byte Offset	Size	Description
0	1	Robot's HP recovery buff (in percentage; a value of 10 indicates that HP recovery per second is 10% of the maximum HP.)
1	1	Robot's barrel heat cooling rate (in absolute value; a value of 5 indicates 5x cooling rate.)

Byte Offset	Size	Description
2	1	Robot's defense buff (in percentage; a value of 50 indicates a defense buff of 50%.)
3	1	Robot's negative defense buff (in percentage; a value of 30 indicates a defense buff of -30%.)
4	2	Robot's attack buff (in percentage; a value of 50 indicates an attack buff of 50%.)
5	1	Bits 0-4: indicate the robot's remaining energy level (percentage) in hexadecimal format. The remaining energy level is sent only when it is below 50%; otherwise, 0x32 is sent by default. ● Bit 0: takes the value 1 when the remaining energy is $\geq 50\%$; takes the value 0 otherwise. ● Bit 1: takes the value 1 when the remaining energy is $\geq 30\%$; takes the value 0 otherwise. ● Bit 2: takes the value 1 when the remaining energy is $\geq 15\%$; takes the value 0 otherwise. ● Bit 3: takes the value 1 when the remaining energy is $\geq 5\%$; takes the value 0 otherwise. ● Bit 4: takes the value 1 when the remaining energy is $\geq 1\%$; takes the value 0 otherwise.

```
typedef _packed struct
{
    uint8_t recovery_buff;
    uint8_t cooling_buff;
    uint8_t defence_buff;
    uint8_t vulnerability_buff;
    uint16_t attack_buff;
    uint8_t remaining_energy;
}buff_t;
```

Table 2-12 0x0206

Byte Offset	Size	Description
0	1	Bits 0-3: If HP deduction is caused because an Armor Module is attacked by projectiles, hit in a collision, or goes offline, or a Speed Monitor Module goes offline, the 4-bit value indicates the ID of the Armor Module or Speed Monitor Module. If HP deduction is caused by other reasons, the value is 0. Bits 4-7: type of an HP change. ● 0: HP deduction is caused because an Armor Module is attacked by projectiles. ● 1: HP deduction is caused because the Critical Referee System Module goes offline. ● 2: HP deduction is caused because the Initial Launching Speed exceeds the upper limit. ● 3: HP is lost because the Barrel Heat exceeds the upper limit. ● 4: HP deduction is caused because the Chassis Power Consumption Limit is exceeded. ● 5: HP deduction is caused because the Armor Module suffers a collision.

```
typedef _packed struct
{
    uint8_t armor_id : 4;
    uint8_t HP_deduction_reason : 4;
}hurt_data_t;
```



Damage data conveyed by command 0x0206 is determined locally by the robot's Referee System and transmitted in real time. However, whether the robot actually suffers the damage is subject to the rules and depends on the server's ruling.

Table 2-13 0x0207

Byte Offset	Size	Description
0	1	Projectile type. ● 1: 17mm projectile ● 2: 42mm projectile

Byte Offset	Size	Description
1	1	Launching mechanism ID. ● 1: First 17mm launching mechanism ● 2: Second 17mm launching mechanism ● 3: 42mm launching mechanism
2	1	Projectile launching frequency; unit: Hz.
3	4	Initial projectile speed; unit: m/s.

```
typedef _packed struct
{
    uint8_t bullet_type;
    uint8_t shooter_number;
    uint8_t launching_frequency;
    float initial_speed;
}shoot_data_t;
```

Table 2-140x0208

Byte Offset	Size	Description
0	2	17mm projectile allowance.
2	2	42mm projectile allowance.
4	2	Number of remaining Gold Coins.

```
typedef _packed struct
{
    uint16_t projectile_allowance_17mm;
    uint16_t projectile_allowance_42mm;
    uint16_t remaining_gold_coin;
}projectile_allowance_t;
```

Table 2-15 0x0209

Byte Offset	Size	Description
0	4	Meaning of bit value 0 or 1: whether the Buff Point's RFID card is detected. ● Bit 0: own side's Base Buff Point ● Bit 1: own side's Central Elevated Ground Buff Point ● Bit 2: opponent's Central Elevated Ground Buff Point

Byte Offset	Size	Description
		● Bit 3: own side's Trapezoid-Shaped Elevated Ground Buff Point ● Bit 4: opponent's Trapezoid-Shaped Elevated Ground Buff Point ● Bit 5: own side's Terrain Crossing Buff Point (Launch Ramp) (in front of the Launch Ramp near own side) ● Bit 6: own side's Terrain Crossing Buff Point (Launch Ramp) (behind the Launch Ramp near own side) ● Bit 7: opponent's Terrain Crossing Buff Point (Launch Ramp) (in front of the Launch Ramp near the opponent) ● Bit 8: opponent's Terrain Crossing Buff Point (Launch Ramp) (behind the Launch Ramp near the opponent) ● Bit 9: own side's Terrain Crossing Buff Point (off the Central Elevated Ground) ● Bit 10: own side's Terrain Crossing Buff Point (on the Central Elevated Ground) ● Bit 11: opponent's Terrain Crossing Buff Point (off the Central Elevated Ground) ● Bit 12: opponent's Terrain Crossing Buff Point (on the Central Elevated Ground) ● Bit 13: own side's Terrain Crossing Buff Point (off the Road) ● Bit 14: own side's Terrain Crossing Buff Point (on the Road) ● Bit 15: opponent's Terrain Crossing Buff Point (off the Road) ● Bit 16: opponent's Terrain Crossing Buff Point (on the Road) ● Bit 17: own side's Fortress Buff Point ● Bit 18: own side's Outpost Buff Point ● Bit 19: own side's Resupply Zone that does not overlap with the Exchange Zone/RMUL Resupply Zone ● Bit 20: own side's Resupply Zone that overlaps with the Exchange Zone

Byte Offset	Size	Description
		● Bit 21: own side's Large Resource Island Buff Point ● Bit 22: opponent's Large Resource Island Buff Point ● Bit 23: Central Buff Point (for RMUL only) ● Bits 24-31: Reserved bits Note: All RFID cards are active only during an ongoing round. If an RFID card is detected outside the competition, the corresponding value remains 0.

```
typedef _packed struct
{
    uint32_t rfid_status;
}rfid_status_t;
```

Table 2-16 0x020A

Byte Offset	Size	Description
0	1	Current status of the Dart Launching Station. ● 1: closed ● 2: opening or closing ● 0: opened
1	1	Reserved bits
2	2	Remaining competition time when the attack target is changed. Unit: s. If no target change occurs, the value is 0 by default.
4	2	Remaining competition time when the Operator confirms the launch command for the last time. Unit: s. Initial value: 0.

```
typedef _packed struct
{
    uint8_t dart_launch_opening_status;
    uint8_t reserved;
    uint16_t target_change_time;
    uint16_t latest_launch_cmd_time;
}dart_client_cmd_t;
```

Table 2-17 0x020B



The intersection of the site perimeter wall near the Red Team's Official Projectile Supplier is the origin; the orientation of the site's longer edge facing the Blue Team is the positive x-axis direction, while the orientation of the site's shorter edge facing the Red Team's Landing Pad is the positive y-axis direction.

Byte Offset	Size	Description
0	4	The x-axis coordinate of the own side's Hero Robot; unit: m.
4	4	The y-axis coordinate of the own side's Hero Robot; unit: m.
8	4	The x-axis coordinate of the own side's Engineer Robot; unit: m.
12	4	The y-axis coordinate of the own side's Engineer Robot; unit: m.
16	4	The x-axis coordinate of the own side's Standard Robot No. 3; unit: m.
20	4	The y-axis coordinate of the own side's Standard Robot No. 3; unit: m.
24	4	The x-axis coordinate of the own side's Standard Robot No. 4; unit: m.
28	4	The y-axis coordinate of the own side's Standard Robot No. 4; unit: m.
32	4	Reserved bits
36	4	Reserved bits

```
typedef __packed struct
{
    float hero_x;
    float hero_y;
    float engineer_x;
    float engineer_y;
    float standard_3_x;
    float standard_3_y;
    float standard_4_x;
    float standard_4_y;
    float reserved;
    float reserved;
}ground_robot_position_t;
```

Table 2-18 0x020C

Byte Offset	Size	Description	Remarks
0	1	● Bit 0: vulnerability status of opponent's Hero (No.1) ● Bit 1: vulnerability status of opponent's Engineer (No.2) ● Bit 2: vulnerability status of opponent's Infantry (No.3) ● Bit 3: vulnerability status of opponent's Infantry (No.4) ● Bit 4: vulnerability status of opponent's Sentry	The bits take the value 1 if the Tracking Progress of the corresponding robot is ≥ 100 , and 0 if the Tracking Progress is < 100 .

```
typedef _packed struct
{
    uint8_t mark_progress;
}radar_mark_data_t;
```

Table 2-19 0x020D

Byte Offset	Size	Description
0	4	Bits 0-10: the Projectile Allowance successfully exchanged for by Sentry, excluding that obtained through remote exchange. The value at the start of a round is 0. After Sentry successfully exchanges for a specific amount of Projectile Allowance, the value changes to the exchanged Projectile Allowance. Bits 11-14: the number of Sentry's successful remote exchanges for Projectile Allowance. The value at the start of a round is 0. After Sentry successfully exchanges for Projectile Allowance remotely, the value changes to the number of successful remote exchanges for Projectile Allowance. Bits 15-18: the number of Sentry's successful remote HP exchanges. The value at the start of a round is 0. After the Sentry successfully exchanges for HP remotely, the value changes to the number of successful remote HP exchanges. Bit 19: whether Sentry can currently confirm a free respawn. The value is 1 if it can; otherwise, it is 0. Bit 20: whether Sentry can currently exchange for an instant respawn. The value is 1 if it can; otherwise, it is 0. Bits 21-30: Gold Coins required if Sentry chooses to exchange for an instant respawn.

Byte Offset	Size	Description
		Bit 31: Reserved bit.
4	2	Bit 0: whether Sentry is out of combat. The value is 1 if it is; otherwise, it is 0. Bits 1-11: the remaining 17 mm Projectile Allowance that can be exchanged for by the team. Bits 12-15: Reserved bits.

```
typedef _packed struct
{
    uint32_t sentry_info;
    uint16_t sentry_info_2;
} sentry_info_t;
```

Table 2-20 0x020E

Byte Offset	Size	Description
0	1	Bits 0-1: the number of chances for the Radar to trigger the “double vulnerability” effect. The value at the start of a round is 0. Maximum value: 2. Bit 2: whether the “double vulnerability” effect is being triggered for the opponent. ● A value of 0 indicates that the “double vulnerability” effect is not triggered for the opponent. ● A value of 1 indicates that the “double vulnerability” effect is being triggered for the opponent. Bits 3-7: Reserved bits

```
typedef _packed struct
{
    uint8_t radar_info;
} radar_info_t;
```

The robot interaction data is transmitted through regular links. Its data segments include a unified data segment header structure. A data segment header structure consists of the content ID, sender ID, receiver ID, and content data segment. The total length of a robot interaction data packet cannot exceed 127 bytes. After the nine bytes for frame_header, cmd_id, and frame_tail, and the six bytes for the data segment header structure are deducted, the maximum length of a content data segment in a robot interaction data packet is 112 bytes.

The maximum length of data that can be received by a Hero, Engineer, Standard, or Aerial Robot or Dart every 1000 ms is 3720 bytes, while the maximum length of data that can be received by a Radar or a Sentry Robot every 1000 ms is 5120 bytes.

Make sure that the bandwidth is properly configured because there are multiple content IDs but the maximum uplink frequency of the entire cmd_id is 30 Hz.

Table 2-21 0x0301

Byte Offset	Size	Description	Remarks
0	2	Sub-content ID	It needs to be an open sub-content ID.
2	2	Sender ID	It needs to be matched with one's own ID. For more information about the IDs, see the appendix.
4	2	Receiver ID.	- It is used for communication only within one's own team. - The receiver must be an inter-robot communication receiver permitted by the rules. - If the receiver is a player client, the data can be transmitted only to the player client corresponding to the sender. - For more information about the IDs, see the appendix.
6	x	Content data segment.	The maximum value of x is 112.

```
typedef _packed struct
{
    uint16_t data_cmd_id;
    uint16_t sender_id;
    uint16_t receiver_id;
    uint8_t user_data[x];
}robot_interaction_data_t;
```

Sub-content ID	Content Data Segment Length	Function Description
0x0200 - 0x02FF	$x \leq 112$	Inter-robot communication
0x0100	2	A player client deletes graphic layers.

Sub-content ID	Content Data Segment Length	Function Description
0x0101	15	A player client draws one graphic.
0x0102	30	A player client draws two graphics.
0x0103	75	A player client draws five graphics.
0x0104	105	A player client draws seven graphics.
0x0110	45	A player client draws a character graphic.
0x0120	4	Decision-making command of a Sentry.
0x0121	1	Decision-making command of a Radar.

Table 2-22 Sub-content ID: 0x0100

Byte Offset	Size	Description	Remarks
0	1	Delete operation.	● 0: No operation is performed. ● 1: Delete a graphic layer. ● 2: Delete all graphic layers.
1	1	Number of graphic layers.	Number of graphic layers: 0 - 9.

```
typedef _packed struct
{
```

```
    uint8_t delete_type;
```

```
    uint8_t layer;
```

```
}interaction_layer_delete_t;
```

Table 2-23 Sub-content ID: 0x0101

Byte Offset	Size	Description	Remarks
0	3	Graphic name	Used as an index in graphic deletion, revision, and other operations.
3	4	Graphic configuration 1	Bits 0-2: graphic operation ● 0: No operation is performed. ● 1. Add

Byte Offset	Size	Description	Remarks
			● 2: Modify ● 3: Delete Bits 3-5: graphic type ● 0: straight line ● 1: rectangle ● 2: circle ● 3: ellipse ● 4: arc ● 5: floating number ● 6: integer ● 7: character Bits 6-9: number of graphic layers (valid values: 0 to 9) Bits 10-13: color ● 0: Red/Blue (Own side's color) ● 1: yellow ● 2: green ● 3: orange ● 4: purplish red ● 5: pink ● 6: cyan ● 7: black ● 8: white Bits 14-31: The meaning differs according to the drawn graphics, as described in Table 2-24 Graphic Detail Parameters.

Byte Offset	Size	Description	Remarks
7	4	Graphic configuration 2	Bits 0-9: line width. The recommended ratio between font size and line width is 10:1. Bits 10-20: start point/origin's x-coordinate. Bits 21-31: start point/origin's y-coordinate.
11	4	Graphic configuration 3	The meaning differs according to the drawn graphics, as described in Table 2-24 Graphic Detail Parameters.

```
typedef _packed struct
```

```
{
    uint8_t figure_name[3];
    uint32_t operate_tpye:3;
    uint32_t figure_tpye:3;
    uint32_t layer:4;
    uint32_t color:4;
    uint32_t details_a:9;
    uint32_t details_b:9;
    uint32_t width:10;
    uint32_t start_x:11;
    uint32_t start_y:11;
    uint32_t details_c:10;
    uint32_t details_d:11;
    uint32_t details_e:11;
}
```

```
interaction_figure_t;
```

Table 2-24 Graphic Detail Parameters

Type	details_a	details_b	details_c	details_d	details_e
Straight line	-	-	-	x-coordinate of the end point	y-coordinate of the end point
Rectangle	-	-	-	x-coordinate of the diagonal vertex	y-coordinate of the diagonal vertex
Circle	-	-	Radius	-	-

Type	details_a	details_b	details_c	details_d	details_e
Ellipse	-	-	-	Length of the x axis	Length of the y axis
Arc	Start angle	End angle	-	Length of the x axis	Length of the y axis
Floating number	Font size	No effect	Divide the value by 1000 to obtain the actual displayed value.		
Integer	Font size	-	32-bit integer, int32_t		
Character	Font size	Character length	-	-	-

- Meaning of angle value: 0° points at 12 o'clock, drawn in the clockwise direction.
 - Screen position: (0,0) is at the lower left corner of the screen, while (1920,1080) is at the upper right corner.
-  ● Floating number: All integers are 32-bit. For a floating number, the actual displayed value is 1/1000 of the entered value. For example, if the value entered corresponding to details_c, details_d, and details_e is 1234, the actual value displayed on the player's client will be 1.234.
- The graphics may still appear even if the transmitted value exceeds the upper limit of the corresponding data type, but the display quality may be compromised.

Table 2-25 Sub-content ID: 0x0102

Byte Offset	Size	Description	Remarks
0	15	Graphic 1	Same as the 0x0101 data segment.
15	15	Graphic 2	Same as the 0x0101 data segment.

```
typedef _packed struct
{
    interaction_figure_t interaction_figure[2];
}
```

```
}interaction_figure_2_t;
```

Table 2-26 Sub-content ID: 0x0103

Byte Offset	Size	Description	Remarks
0	15	Graphic 1	Same as the 0x0101 data segment.
15	15	Graphic 2	Same as the 0x0101 data segment.
30	15	Graphic 3	Same as the 0x0101 data segment.
45	15	Graphic 4	Same as the 0x0101 data segment.
60	15	Graphic 5	Same as the 0x0101 data segment.

```
typedef _packed struct
{
    interaction_figure_t interaction_figure[5];
}interaction_figure_3_t;
```

Table 2-27 Sub-content ID: 0x0104

Byte Offset	Size	Description	Remarks
0	15	Graphic 1	Same as the 0x0101 data segment.
15	15	Graphic 2	Same as the 0x0101 data segment.
30	15	Graphic 3	Same as the 0x0101 data segment.
45	15	Graphic 4	Same as the 0x0101 data segment.
60	15	Graphic 5	Same as the 0x0101 data segment.
75	15	Graphic 6	Same as the 0x0101 data segment.
90	15	Graphic 7	Same as the 0x0101 data segment.

```
typedef _packed struct
{
    interaction_figure_t interaction_figure[7];
}interaction_figure_4_t;
```

Table 2-28 Sub-content ID: 0x0110

Byte Offset	Size	Description	Remarks
0	2	Data content ID	0x0110
2	2	Sender ID	The sender ID needs to be verified.
4	2	Receiver ID	The receiver ID needs to be verified. Data can be sent only to a player client corresponding to the robot.
6	15	Character configuration	For more information, see the graphic data introduction.
21	30	Character	-

```
typedef _packed struct
{
    graphic_data_struct_t  graptic_data_struct;
    uint8_t data[30];
} ext_client_custom_character_t;
```

Table 2-29 Decision-Making Command of Sentry: 0x0120

Byte Offset	Size	Description	Remarks
0	4	Relevant decision-making commands of a Sentry Robot.	Bit 0: whether the Sentry Robot confirms to revive. - A value of 0 indicates that the Sentry Robot confirms not to revive, even though the Respawn Process of the Sentry Robot is completed. - A value of 1 indicates that the Sentry Robot confirms to revive. The Sentry Robot revives immediately after the Respawn Process is completed. Bit 1: whether the Sentry Robot confirms to exchange for Instant Respawn. - A value of 0 indicates that the Sentry Robot confirms not to exchange for Instant Respawn.

Byte Offset	Size	Description	Remarks
			● A value of 1 indicates that the Sentry Robot confirms to exchange for Instant Respawn. In this case, if the Sentry Robot meets the requirements for Instant Respawn, Gold Coins are immediately consumed for Instant Respawn. Bits 2-12: the projectile allowance to be obtained by a Sentry Robot through exchange. The value at the start of a round is 0. After the value is changed, the Sentry Robot can exchange Gold Coins for projectile allowance in the Restoration Zone. The value must be monotonically increased. Otherwise, the value is considered invalid. Example: The value must be set to 0 at the start of a round. Then, the Sentry Robot can change the value from 0 to X, and a number of X Gold Coins are consumed for exchanging X projectile allowance. Subsequently, the Sentry Robot can change the value from X to X+Y. The rest can be deduced by analogy. Bits 13-16: the number of requests sent by a Sentry Robot to obtain projectile allowance through remote exchange. A value at the start of a round is 0. After the value is changed, the Sentry Robot can request to remotely exchange Gold Coins for projectile allowance. The value must be monotonically increased by 1 at a time. Otherwise, the value is considered invalid. Example: The value must be set to 0 at the start of a round. Then, the Sentry Robot can change the value from 0 to 1, and Gold Coins are consumed for remotely exchanging for projectile allowance. Subsequently, the Sentry Robot can change the value from 1 to 2. The rest can be deduced by analogy. Bits 17-20: the number of requests sent by a Sentry Robot to obtain HP through remote exchange. A value at the start of a round is 0. After the value is changed, the Sentry Robot can request to remotely exchange Gold Coins for HP. The value must be monotonically increased by 1 at a time. Otherwise, the value is considered invalid.

Byte Offset	Size	Description	Remarks
			Example: The value must be set to 0 at the start of a round. Then, the Sentry Robot can change the value from 0 to 1, and Gold Coins are consumed for remotely exchanging for HP. Subsequently, the Sentry Robot can change the value from 1 to 2. The rest can be deduced by analogy. When the Sentry Robot sends these sub-commands, the server processes the sub-commands in sequence from lower bits to higher bits until all sub-commands are processed or no processing can be performed. Example: The number of Gold Coins in the team is 0, and the Sentry Robot is defeated at this time. The value of bit 0 is 1, the value of bit 1 is 1, and the value of bits 2 to 12 is 100 (assuming that the Sentry Robot has not exchanged for projectile allowance before). In this case, the number of Gold Coins in the team is not enough for the Sentry Robot to exchange for Instant Respawn. Therefore, the server ignores subsequent commands and waits for the next group of commands from the Sentry Robot. Bits 21-31: Reserved bits

```
typedef _packed struct
```

```
{
    uint32_t sentry_cmd;
} sentry_cmd_t;
```

Table 2-30 Decision-Making Command of Radar: 0x0121

Byte Offset	Size	Description	Remarks
0	1	Whether the Radar confirms to trigger the “double vulnerability” effect.	The value at the start of a round is 0. The value can be changed for the Radar to request triggering the “double vulnerability” effect. If the Radar has a chance to trigger the “double vulnerability” effect, the effect is triggered. The value must be monotonically increased by 1 at a time. Otherwise, the value is considered invalid. Example: The value at the start of a round is 0. Then, the Radar can change the value from 0 to 1. If the Radar has a chance to trigger the “double vulnerability” effect, the effect is triggered. Subsequently, the Radar can change the value from 1 to 2. The rest can be deduced by analogy. If the “double vulnerability” effect is in effect when the Radar requests to trigger the effect, the effect requested for the second time is triggered after the effect requested for the first time elapses.

```
typedef _packed struct
{
    uint8_t radar_cmd;
} radar_cmd_t;
```

3. Small Map Interaction Data

3.1 Data Transmission by Player Clients

- An Aerial Gimbal Operator can send fixed data to robots through a player client's big map.

The command code is 0x0303, which is transmitted when triggered, at an interval of at least 0.5 seconds.

Transmission method 1:

- ① Tap the avatar of an own side's robot.
- ② (Optional) Press a keyboard key or tap an opponent robot's avatar.
- ③ Tap any location on the Small Map. Through this method, map coordinate data is sent to robots selected by your own team. If an opponent robot's avatar is tapped, the target robot ID will replace the coordinate data.

Transmission method 2:

- ① (Optional) Press a keyboard key or tap an opponent robot's avatar.
- ② Tap any location on the Small Map. Through this method, map coordinate data is sent to all robots of your own team. If an opponent robot's avatar is tapped, the target robot ID will replace the coordinate data.

- An operator of a robot that uses the semiautomatic control method can send fixed data to robots through a player client's big map.

The command code is 0x0303; transmitted when triggered, at an interval of at least 3 seconds.

Transmission method:

- ① (Optional) Press a keyboard key or tap an opponent robot's avatar.
- ② Tap any location on the Small Map. Through this method, map coordinate data is sent to a robot corresponding to the operator. If an opponent robot's avatar is tapped, the target robot ID will replace the coordinate data.

The robot that chooses to use the semiautomatic control method can receive information sent by the Aerial Gimbal Operator and the information sent by a corresponding operator. For the differences between the two information sources, see the description about information sources in the table below.



To reduce the impact of sporadic instability in the robot's serial port receiver on communication, the 0x0303 protocol's sending mechanism is specially designed as follows: After the player's client triggers the first transmission, the server will send the message four more times to the robot at 100 ms intervals, totaling five transmissions. Following this, the server will continuously send the most recent packet at a fixed frequency of 1 Hz until the next transmission is triggered on the player's client. The measurement of time for the continuous message sending following the first transmission is

independent from that for message sending at a fixed frequency of 1 Hz. Teams should consider how to process the same protocol content received multiple times.

Table 3-1 Command Code ID: 0x0303

Byte Offset	Size	Description	Remarks
0	4	The x-axis coordinate of the target position; unit: m.	When the target robot ID is sent, the value is 0.
4	4	The y-axis coordinate of the target position; unit: m.	When the target robot ID is sent, the value is 0.
8	1	The generic key value of the key pressed by the Aerial Gimbal Operator.	When no key is pressed, the value is 0.
9	1	The opponent's robot ID.	When coordinate data is sent, the value is 0
10	2	The information source ID.	For more information about the ID correspondence, see the appendix.

```
typedef _packed struct
{
    float target_position_x;
    float target_position_y;
    uint8_t cmd_keyboard;
    uint8_t target_robot_id;
    uint16_t cmd_source;
}map_command_t;
```

3.2 Data Receiving by Player Clients

A player client's Small Map can receive robot data.

Through regular links, a Radar can send an opponent robot's coordinate data to all of its own side's player clients. The position will be displayed on the Small Maps of all player clients of its own side.

Table 3-2 Command Code ID: 0x0305

Byte Offset	Size	Description	Remarks
0	2	The x-axis coordinate of Hero (Unit: cm)	

Byte Offset	Size	Description	Remarks
2	2	The y-axis coordinate of Hero (Unit: cm)	When the x and y values exceed the boundaries, they are displayed at the corresponding edges. When both x and y are 0, it is deemed that the robot's coordinates are not sent.
4	2	The x-axis coordinate of Engineer (Unit: cm)	
6	2	The y-axis coordinate of Engineer (Unit: cm)	
8	2	The x-axis coordinate of Infantry No. 3 (Unit: cm)	
10	2	The y-axis coordinate of Infantry No. 3 (Unit: cm)	
12	2	The x-axis coordinate of Infantry No. 4 (Unit: cm)	
14	2	The y-axis coordinate of Infantry No. 4 (Unit: cm)	
16	2	The x-axis coordinate of Infantry No. 5 (Unit: cm)	
18	2	The y-axis coordinate of Infantry No. 5 (Unit: cm)	
20	2	The x-axis coordinate of Sentry (Unit: cm)	
22	2	The y-axis coordinate of Sentry (Unit: cm)	

```
typedef _packed struct
```

```
{
    uint16_t hero_position_x;
    uint16_t hero_position_y;
    uint16_t engineer_position_x;
    uint16_t engineer_position_y;
    uint16_t infantry_3_position_x;
    uint16_t infantry_3_position_y;
```

```

uint16_t infantry_4_position_x;
uint16_t infantry_4_position_y;
uint16_t infantry_5_position_x;
uint16_t infantry_5_position_y;
uint16_t sentry_position_x;
uint16_t sentry_position_y;
}map_robot_data_t;

```

Through regular links, a Sentry Robot or a robot that uses semiautomatic control can send route coordinate data to the player client of the corresponding operator. The route will be displayed on the Small Map.

Table 3-3 Command code ID: 0x0307

Byte Offset	Size	Description	Remarks
0	1	1: Go to the target point to attack 2: Go to the target point to defend 3: Move to the target point	-
1	2	The x-axis coordinate at the route starting point, unit: dm.	The lower left corner of the Small Map is the origin. The horizontal right is the positive x-axis direction, and the vertical upward is the positive y-axis direction. The displayed position will zoom in and out according to the site's and Small Map's dimensions. Positions exceeding the boundaries will be displayed on the boundaries.
3	2	The y-axis coordinate at the route starting point; unit: m.	
5	49	The array of x-axis incremental values of route points; unit: dm.	The incremental values are calculated relative to the previous point, resulting in 49 new points in total. The positions of these new points are determined based on the x- and y-axis incremental values.
54	49	The array of y-axis incremental values of route points; unit: dm.	
103	2	Sender ID	It needs to be matched with one's own ID. For more information about the IDs, see the appendix.

```
typedef _packed struct
```

```

{
    uint8_t intention;
    uint16_t start_position_x;
    uint16_t start_position_y;

```

```

int8_t delta_x[49];
int8_t delta_y[49];
uint16_t sender_id;
}map_data_t;

```

A robot can send custom messages to any player client of its own side through a regular link. The message is displayed at a specific position on the player client.

Table 3-4 Command code ID: 0x0308

Byte Offset	Size	Description	Remarks
0	2	Sender ID	The sender ID needs to be verified.
2	2	Receiver ID	The receiver ID needs to be verified. Data can be sent only to a player client of the own side.
4	30	Character	Characters are sent in the UTF-16 encoding format and can be displayed in Chinese. Pay attention to the endianness of data when the data is encoded for transmission.

```

typedef _packed struct
{
uint16_t sender_id;
uint16_t receiver_id;
uint8_t user_data[30];
} custom_info_t;

```

4. VTM Link Data

4.1 Custom Controller and Robot Interaction Data

An operator can use a Custom Controller to send data to corresponding robots through VTM links.

Table 4-1 Command Code ID: 0x0302

Byte Offset	Size	Description
0	30	Custom data

```
typedef _packed struct
{
    uint8_t data[x];
}custom_robot_data_t;
```

Robots can send data to the Custom Controller connected to its Operator's player's client via the VTM link (not applicable to RMUL for now).

Table 4-2 Command Code ID: 0x0309

Byte Offset	Size	Description
0	30	Custom data

```
typedef _packed struct
{
    uint8_t data[x];
}robot_custom_data_t;
```

4.2 Keyboard-Mouse Remote Control Data

The keyboard and mouse remote control data sent via the remote controller is synchronized to the corresponding robot through VTM links.

Table 4-3 Command Code ID: 0x0304

Byte Offset	Size	Description
0	2	x-axis moving speed of the mouse. A negative value indicates a left movement.
2	2	y-axis moving speed of the mouse. A negative value indicates a downward movement.
4	2	Scroll wheel's moving speed of the mouse. A negative value indicates a backward movement.

Byte Offset	Size	Description
6	1	Whether the mouse's left button is pressed. A value of 0 indicates that it is not pressed, and a value of 1 indicates that it is pressed.
7	1	Whether the mouse's right button is pressed. A value of 0 indicates that it is not pressed, and a value of 1 indicates that it is pressed.
8	2	The keyboard key information. Each bit corresponds to a key. A value of 0 indicates that it is not pressed, and a value of 1 indicates that it is pressed: ● Bit 0: W key ● Bit 1: S key ● Bit 2: A key ● Bit 3: D key ● Bit 4: Shift key ● Bit 5: Ctrl key ● Bit 6: Q key ● Bit 7: E key ● Bit 8: R key ● Bit 9: F key ● Bit 10: G key ● Bit 11: Z key ● Bit 12: X key ● Bit 13: C key ● Bit 14: V key ● Bit 15: B key
10	2	Reserved bits

```
typedef _packed struct
{
    int16_t mouse_x;
```

```
int16_t mouse_y;  
int16_t mouse_z;  
int8 left_button_down;  
int8 right_button_down;  
uint16_t keyboard_value;  
uint16_t reserved;  
}remote_control_t;
```

5. Non-Link Data

An operator can use a Custom Controller to operate a player client by simulating a keyboard and a mouse.

Table 5-1 Command Code ID: 0x0306

Byte Offset	Size	Description	Remarks
0	2	Keyboard key value. ● Bits 0-7: value of Key 1 ● Bits 8-15: value of Key 2	● Only the keys made available by the player client are responded to. ● A generic key value is used, and two keys can be simultaneously pressed with no conflict. Any change in key sequence does not alter the effect of the pressed keys. In the absence of any new key information, the pressed status of the last data frame will be maintained.
2	2	● Bits 0-11: mouse's x-axis pixel position ● Bits 12-15: mouse's left-click status	● The position information is represented by absolute pixel values (the resolution used by player clients in the competition is 1920 x 1080, and the coordinates for the screen's upper left corner is (0,0)). ● When the mouse's pressed status is 1, it means the button is pressed; any other value indicates the button is not pressed. This information is responded to only after the mouse icon appears. In the absence of any new mouse information, the player client maintains the mouse information of the last data frame. After the mouse icon disappears, the data is no longer retained.
4	2	● Bits 0-11: mouse y-axis pixel position ● Bits 12-15: mouse right-click status	
6	2	Reserved bits	-



To move and click the mouse once, you need to first send the data frame for the specified position when the mouse is not pressed, then send the data frame obtained when the mouse is pressed at the same position, and finally send the data frame obtained when the mouse is pressed at the same position.

```
typedef _packed struct
{
    uint16_t key_value;
    uint16_t x_position:12;
    uint16_t mouse_left:4;
    uint16_t y_position:12;
    uint16_t mouse_right:4;
    uint16_t reserved;
}custom_client_data_t;
```

Appendix 1: CRC Code Samples

```
//crc8 generator polynomial:G(x)=x8+x5+x4+1
```

```
const unsigned char CRC8_INIT = 0xff;
```

```
const unsigned char CRC8_TAB[256] =
```

```
{
```

```
0x00, 0x5e, 0xbc, 0xe2, 0x61, 0x3f, 0xdd, 0x83, 0xc2, 0x9c, 0x7e, 0x20, 0xa3, 0xfd, 0x1f, 0x41,
```

```
0x9d, 0xc3, 0x21, 0x7f, 0xfc, 0xa2, 0x40, 0x1e, 0x5f, 0x01, 0xe3, 0xbd, 0x3e, 0x60, 0x82, 0xdc, 0x23, 0x7d, 0x9f,
0xc1, 0x42, 0x1c, 0xfe, 0xa0, 0xe1, 0xbf, 0x5d, 0x03, 0x80, 0xde, 0x3c, 0x62, 0xbe, 0xe0, 0x02, 0x5c, 0xdf, 0x81,
0x63, 0x3d, 0x7c, 0x22, 0xc0, 0x9e, 0x1d, 0x43, 0xa1, 0xff, 0x46, 0x18, 0xfa, 0xa4, 0x27, 0x79, 0x9b, 0xc5, 0x84,
0xda, 0x38, 0x66, 0xe5, 0xbb, 0x59, 0x07, 0xdb, 0x85, 0x67, 0x39, 0xba, 0xe4, 0x06, 0x58, 0x19, 0x47, 0xa5,
0xfb, 0x78, 0x26, 0xc4, 0x9a, 0x65, 0x3b, 0xd9, 0x87, 0x04, 0x5a, 0xb8, 0xe6, 0xa7, 0xf9, 0x1b, 0x45, 0xc6,
0x98, 0x7a, 0x24, 0xf8, 0xa6, 0x44, 0x1a, 0x99, 0xc7, 0x25, 0x7b, 0x3a, 0x64, 0x86, 0xd8, 0x5b, 0x05, 0xe7,
0xb9,
```

```
0x8c, 0xd2, 0x30, 0x6e, 0xed, 0xb3, 0x51, 0x0f, 0x4e, 0x10, 0xf2, 0xac, 0x2f, 0x71, 0x93, 0xcd, 0x11, 0x4f, 0xad,
0xf3, 0x70, 0x2e, 0xcc, 0x92, 0xd3, 0x8d, 0x6f, 0x31, 0xb2, 0xec, 0x0e, 0x50, 0xaf, 0xf1, 0x13, 0x4d, 0xce, 0x90,
0x72, 0x2c, 0x6d, 0x33, 0xd1, 0x8f, 0x0c, 0x52, 0xb0, 0xee, 0x32, 0x6c, 0x8e, 0xd0, 0x53, 0x0d, 0xef, 0xb1, 0xf0,
0xae, 0x4c, 0x12, 0x91, 0xcf, 0x2d, 0x73, 0xca, 0x94, 0x76, 0x28, 0xab, 0xf5, 0x17, 0x49, 0x08, 0x56, 0xb4, 0xea,
0x69, 0x37, 0xd5, 0x8b, 0x57, 0x09, 0xeb, 0xb5, 0x36, 0x68, 0x8a, 0xd4, 0x95, 0xcb, 0x29, 0x77, 0xf4, 0xaa,
0x48, 0x16, 0xe9, 0xb7, 0x55, 0x0b, 0x88, 0xd6, 0x34, 0x6a, 0x2b, 0x75, 0x97, 0xc9, 0x4a, 0x14, 0xf6, 0xa8,
```

```
0x74, 0x2a, 0xc8, 0x96, 0x15, 0x4b, 0xa9, 0xf7, 0xb6, 0xe8, 0x0a, 0x54, 0xd7, 0x89, 0x6b, 0x35,
```

```
};
```

```
unsigned char Get_CRC8_Check_Sum(unsigned char *pchMessage,unsigned int dwLength,unsigned char ucCRC8)
```

```
{
```

```
unsigned char ucIndex;
```

```
while (dwLength--)
```

```
{
```

```
ucIndex = ucCRC8^(*pchMessage++);
```

```
ucCRC8 = CRC8_TAB[ucIndex];
```

```
}
```

```
return(ucCRC8);
```

```
}
```

```
/*
```

```
** Descriptions: CRC8 Verify function
```

```
** Input: Data to Verify,Stream length = Data + checksum
```

```
** Output: True or False (CRC Verify Result)
```

```
*/
```

```
unsigned int Verify_CRC8_Check_Sum(unsigned char *pchMessage, unsigned int dwLength)
```

```
{
```

```
unsigned char ucExpected = 0;
```

```
if ((pchMessage == 0) || (dwLength <= 2)) return 0;
```

```
ucExpected = Get_CRC8_Check_Sum (pchMessage, dwLength-1, CRC8_INIT);
```

```
return ( ucExpected == pchMessage[dwLength-1] );
```

```
}
```

```

/*
** Descriptions: append CRC8 to the end of data
** Input: Data to CRC and append,Stream length = Data + checksum
** Output: True or False (CRC Verify Result)
*/
void Append_CRC8_Check_Sum(unsigned char *pchMessage, unsigned int dwLength)
{
    unsigned char ucCRC = 0;
    if ((pchMessage == 0) || (dwLength <= 2)) return;
    ucCRC = Get_CRC8_Check_Sum ( (unsigned char *)pchMessage, dwLength-1, CRC8_INIT);
    pchMessage[dwLength-1] = ucCRC;
}

uint16_t CRC_INIT = 0xffff;
const uint16_t wCRC_Table[256] =
{
    0x0000, 0x1189, 0x2312, 0x329b, 0x4624, 0x57ad, 0x6536, 0x74bf,
    0x8c48, 0x9dc1, 0xaf5a, 0xbed3, 0xca6c, 0xdb5e, 0xe97e, 0xf8f7,
    0x1081, 0x0108, 0x3393, 0x221a, 0x56a5, 0x472c, 0x75b7, 0x643e,
    0x9cc9, 0x8d40, 0xbfdb, 0xae52, 0xdaed, 0xcb64, 0xf9ff, 0xe876,
    0x2102, 0x308b, 0x0210, 0x1399, 0x6726, 0x76af, 0x4434, 0x55bd,
    0xad4a, 0xbcc3, 0x8e58, 0x9fd1, 0xeb6e, 0xfae7, 0xc87c, 0xd9f5,
    0x3183, 0x200a, 0x1291, 0x0318, 0x77a7, 0x662e, 0x54b5, 0x453c,
    0xbdcb, 0xac42, 0x9ed9, 0x8f50, 0xfbef, 0xea66, 0xd8fd, 0xc974,
    0x4204, 0x538d, 0x6116, 0x709f, 0x0420, 0x15a9, 0x2732, 0x36bb,
    0xce4c, 0xdfc5, 0xed5e, 0xfcd7, 0x8868, 0x99e1, 0xab7a, 0xbaf3,
    0x5285, 0x430c, 0x7197, 0x601e, 0x14a1, 0x0528, 0x37b3, 0x263a,
    0xdcd, 0xcf44, 0xfdd5, 0xec56, 0x98e9, 0x8960, 0xbbfb, 0xaa72,
    0x6306, 0x728f, 0x4014, 0x519d, 0x2522, 0x34ab, 0x0630, 0x17b9,
    0xef4e, 0xfec7, 0xcc5c, 0xdd5, 0xa96a, 0xb8e3, 0x8a78, 0x9bf1,
    0x7387, 0x620e, 0x5095, 0x411c, 0x35a3, 0x242a, 0x16b1, 0x0738,
    0xffcf, 0xee46, 0xdcdd, 0xcd54, 0xb9eb, 0xa862, 0x9af9, 0x8b70,
    0x8408, 0x9581, 0xa71a, 0xb693, 0xc22c, 0xd3a5, 0xe13e, 0xf0b7,
    0x0840, 0x19c9, 0x2b52, 0x3adb, 0x4e64, 0x5fed, 0x6d76, 0x7cff,
    0x9489, 0x8500, 0xb79b, 0xa612, 0xd2ad, 0xc324, 0xf1bf, 0xe036,
    0x18c1, 0x0948, 0x3bd3, 0x2a5a, 0x5ee5, 0x4f6c, 0x7df7, 0x6c7e,
    0xa50a, 0xb483, 0x8618, 0x9791, 0xe32e, 0xf2a7, 0xc03c, 0xd1b5,
    0x2942, 0x38cb, 0x0a50, 0x1bd9, 0x6f66, 0x7eef, 0x4c74, 0x5dfd,
    0xb58b, 0xa402, 0x9699, 0x8710, 0xf3af, 0xe226, 0xd0bd, 0xc134,
    0x39c3, 0x284a, 0x1ad1, 0x0b58, 0x7fe7, 0x6e6e, 0x5cf5, 0x4d7c,
    0xc60c, 0xd785, 0xe51e, 0xf497, 0x8028, 0x91a1, 0xa33a, 0xb2b3,

```

```

0x4a44, 0x5bcd, 0x6956, 0x78df, 0x0c60, 0x1de9, 0x2f72, 0x3efb,
0xd68d, 0xc704, 0xf59f, 0xe416, 0x90a9, 0x8120, 0xb3bb, 0xa232,
0x5ac5, 0x4b4c, 0x79d7, 0x685e, 0x1ce1, 0x0d68, 0x3ff3, 0x2e7a,
0xe70e, 0xf687, 0xc41c, 0xd595, 0xa12a, 0xb0a3, 0x8238, 0x93b1,
0x6b46, 0x7acf, 0x4854, 0x59dd, 0x2d62, 0x3ceb, 0x0e70, 0x1ff9,
0xf78f, 0xe606, 0xd49d, 0xc514, 0xb1ab, 0xa022, 0x92b9, 0x8330,
0x7bc7, 0x6a4e, 0x58d5, 0x495c, 0x3de3, 0x2c6a, 0x1ef1, 0x0f78
};

/*
** Descriptions: CRC16 checksum function
** Input: Data to check,Stream length, initialized checksum
** Output: CRC checksum
*/
uint16_t Get_CRC16_Check_Sum(uint8_t *pchMessage,uint32_t dwLength,uint16_t wCRC)
{
    Uint8_t chData;
    if (pchMessage == NULL)
    {
        return 0xFFFF;
    }
    while(dwLength--)
    {
        chData = *pchMessage++;
        (wCRC) = (((uint16_t)(wCRC) >> 8) ^ wCRC_Table[(((uint16_t)(wCRC) ^ (uint16_t)(chData)) & 0x00ff)];
    }
    return wCRC;
}

/*
** Descriptions: CRC16 Verify function
** Input: Data to Verify,Stream length = Data + checksum
** Output: True or False (CRC Verify Result)
*/
uint32_t Verify_CRC16_Check_Sum(uint8_t *pchMessage, uint32_t dwLength)
{
    uint16_t wExpected = 0;
    if ((pchMessage == NULL) || (dwLength <= 2))
    {
        return __FALSE;
    }

```

```

wExpected = Get_CRC16_Check_Sum ( pchMessage, dwLength - 2, CRC_INIT);
return ((wExpected & 0xff) == pchMessage[dwLength - 2] && ((wExpected >> 8) & 0xff) ==
pchMessage[dwLength - 1]);
}

/*
** Descriptions: append CRC16 to the end of data
** Input: Data to CRC and append,Stream length = Data + checksum
** Output: True or False (CRC Verify Result)
*/
void Append_CRC16_Check_Sum(uint8_t * pchMessage,uint32_t dwLength)
{
uint16_t wCRC = 0;
if ((pchMessage == NULL) || (dwLength <= 2))
{
return;
}
wCRC = Get_CRC16_Check_Sum ( (U8 *)pchMessage, dwLength-2, CRC_INIT );
pchMessage[dwLength-2] = (U8)(wCRC & 0x00ff);
pchMessage[dwLength-1] = (U8)((wCRC >> 8)& 0x00ff);

```

Appendix 2: ID Descriptions


The robot IDs are as follows:

- 1: Red Team's Hero Robot
- 2: Red Team's Engineer Robot
- 3/4/5: Red Team's Standard Robot (corresponding to robot IDs 3-5)
- 6: Red Team's Aerial Robot
- 7: Red Team's Sentry Robot
- 8: Red Team's Dart
- 9: Red Team's Radar
- 10: Red Team's Outpost
- 11: Red Team's Base
- 101: Blue Team's Hero Robot
- 102: Blue Team's Engineer Robot
- 103/104/105: Blue Team's Standard Robot (corresponding to robot IDs 3-5)
- 106: Blue Team's Aerial Robot
- 107: Blue Team's Sentry Robot
- 108: Red Team's Dart
- 109: Blue Team's Radar
- 110: Blue Team's Outpost
- 111: Blue Team's Base

The player client IDs are as follows:

- 0x0101: Red Team's Hero Robot player client
- 0x0102: Red Team's Engineer Robot player client
- 0x0103/0x0104/0x0105: Red Team's Standard Robot player client (corresponding to robot IDs 3-5)
- 0x0106: Red Team's Aerial Robot player client
- 0x016A: Blue Team's Aerial Robot player client
- 0x0165: Blue Team's Hero Robot player client
- 0x0166: Blue Team's Engineer Robot player client

- 0x0167/0x0168/0x0169: Blue Team's Standard Robot player client (corresponding to robot IDs 3-5)
- 0x8080: Referee System's server (for sending decision-making commands to Sentry Robots and Radar)



E-mail: robomaster@dji.com

Forum: bbs.robomaster.com

Website: www.robomaster.com

Tel: +86 (0)755 36383255 (GTC+8, 10:30AM-7:30PM, Monday to Friday)

Address: T2, 22F, DJI Sky City, No. 55 Xianyuan Road, Nanshan District, Shenzhen, China