# Comparative Benchmark of State-of-Charge Observers and Physics-Informed Neural Networks Across Battery Aging and Thermal Regimes

**Huy Hoang Le**[1], **Kim-Anh Nguyen**[2,*]

[1] R&D Department, PowerMore Ltd., Da Nang 550000, Vietnam

[2] Faculty of Electrical Engineering, University of Science and Technology, The University of Danang, Da Nang 550000, Vietnam

[*] Corresponding author: nkanh@dut.udn.vn

**Abstract**

Although battery State-of-Charge (SOC) estimation has been extensively investigated, existing comparative studies predominantly evaluate fresh cells at room temperature, obscuring algorithmic vulnerabilities under operational aging and thermal extremes in practical battery energy storage systems and electric vehicles. This work establishes a dual-tier benchmark of six representative nonlinear observers, deep recurrent networks, and physics-informed architectures (EKF, AEKF, DEKF, SMO, BiLSTM-Attn, and PINN-SOC) combining direct experimental cycler datasets with calibrated electro-thermal-aging co-simulation. Methodologies are systematically assessed across progressive capacity fade (100% $\rightarrow$ 80% SOH), wide ambient temperatures (0°C to 45°C), flat-plateau $LiFePO_4$ thermodynamics, and 8S series pack inconsistency. Results reveal that whereas uncompensated EKF suffers a 45.7-fold RMSE escalation (0.065% to 2.973%) as interfacial impedance expands, online parameter-tracking DEKF confines lifespan RMSE to 0.585%. Furthermore, we formulate a hybrid Physics-Informed Dual Kalman Filter (PIDKF) that reveals chemistry-dependent complementarity—neural overpotential compensation dominates on sloping-OCV NMC (0.414% RMSE co-sim; 0.428% CALCE experimental RPT at 85% SOH), whereas dynamic hysteresis tracking dominates on flat-plateau LFP (0.149% co-sim; 0.158% experimental), while bounding thermal-extreme error on NASA PCoE cells to 0.842% (4°C) and 0.326% (43°C). Finally, bare-metal profiling on ARM Cortex-M microcontrollers (14.20 $\mu$s measured on Cortex-M4; 4.97 $\mu$s projected on Cortex-M7 through constant-IPC clock scaling) delineates the Pareto efficiency frontier for industrial battery management systems.

**Keywords:** State-of-charge estimation; Lithium-ion battery; Battery degradation; Dual Extended Kalman filter; Physics-informed neural network; Electrochemical impedance spectroscopy; Embedded BMS.

## Nomenclature

| | |
|---|---|
| $\mathbf{A}_k, \mathbf{B}_k, \mathbf{g}_k$ | discrete state transition, input, and hysteresis vectors |
| $C_1, C_2, Q_{\text{cpe}}$ | polarization capacitances (F) and CPE parameter ($\text{F} \cdot \text{s}^{\alpha-1}$) |
| $\mathbf{C}_{\theta,k}, \mathbf{H}_k$ | parameter sensitivity and observation Jacobian matrices |
| $E_a, R$ | Arrhenius activation energy ($\text{J} \cdot \text{mol}^{-1}$) and gas constant |
| $I_k, I(t)$ | cell load current at time step $k$, positive for discharge (A) |
| $\mathbf{K}_k, \mathbf{L}$ | Kalman filter gain and sliding mode feedback gain |

| | |
|---|---|
| $M(z), V_h$ | maximum dynamic hysteresis function and hysteresis state (V) |
| $\mathbf{P}_k, \mathbf{Q}_k, \mathbf{R}_k$ | state error, process, and measurement covariance matrices |
| $Q_{\text{act}}, Q_{\text{nom}}$ | actual degraded and nominal pristine capacities ($\text{A} \cdot \text{h}$) |
| $R_0, R_1, R_2$ | effective series resistance ($R_{\text{ohm}} + R_{\text{sei}}$) and polarization resistances ($\Omega$) |
| $R_{\text{ct}}, R_{\text{sei}}$ | charge-transfer and SEI layer resistances from EIS ($\Omega$) |
| $S, \mathbf{x}_k, \mathbf{y}_k$ | sliding manifold, state vector, and observation variable |
| $T, T_{\text{amb}}$ | battery core temperature and ambient temperature (K or °C) |
| $U_1, U_2, \delta V_{\text{pol}}$ | RC overpotentials and unmodeled residual compensation (V) |
| $V_t, V_k, V_{\text{ocv}}$ | terminal and thermodynamic open-circuit voltages (V) |
| $\mathbf{w}_k, v_k$ | process and measurement noise signals |
| $Z(j\omega), Z_w$ | electrochemical impedance and Warburg diffusion impedance ($\Omega$) |

### Greek Letters

| | |
|---|---|
| $\alpha, \sigma_w$ | constant-phase element exponent and Warburg coefficient |
| $\beta, \lambda_{\text{SH}}$ | hysteresis decay rate and Sage-Husa forgetting factor |
| $\gamma_{\min}, \eta_s, \Phi$ | sliding mode injection gain, margin, and disturbance bound |
| $\Delta t, \mu$ | discrete sampling interval (1.0 s) and boundary thickness (V) |
| $\eta, \kappa$ | Faradaic coulombic efficiency and condition number |
| $\kappa_0, \kappa_1$ | Butler-Volmer overpotential bound coefficients |
| $\tau_1, \tau_2$ | electrochemical polarization time constants ($\tau_i = R_i C_i$, s) |
| $\boldsymbol{\theta}_k$ | parameter state vector in Dual Kalman Filter $[R_{0,k}, 1/Q_{\text{act},k}]^T$ |

### Subscripts and Superscripts

| | |
|---|---|
| $\text{act}, \text{nom}, \text{eff}$ | actual degraded, nominal pristine, and effective states |
| $k, \text{meas}, T$ | temporal index, experimental measurement, and transpose operator |

# 1 Introduction

The global transition toward carbon-neutral transportation and renewable grid energy storage has accelerated the deployment of high-energy-density lithium-ion battery (LIB) packs [1–3]. In automotive battery management systems (BMS), the State-of-Charge (SOC) represents the ratio of currently available capacity to maximum usable capacity. SOC serves as the fundamental state metric required for accurate driving range estimation, optimal regenerative braking control, prevention of over-charge and over-discharge, and dynamic power capability (State-of-Power, SOP) calculation [4–6].

Unlike terminal voltage or operating temperature, the SOC cannot be directly measured via physical sensors during vehicle operation due to complex internal solid-state diffusion, interfacial charge-transfer kinetics, and structural phase transitions occurring within the porous insertion electrodes [7,8]. Consequently, online SOC estimation must rely on mathematical observers that interpret terminal current, voltage, and surface temperature signals [9–11].

## 1.1 Taxonomy of Algorithmic Estimation Paradigms

Over the past two decades, battery state estimation methodologies in the electrochemical control literature have evolved into five primary algorithmic paradigms [5, 12]:

1. *Direct Empirical Integration*: Coulomb counting provides an $\mathcal{O}(1)$ baseline [4] but accumulates open-loop drift from sensor bias, ADC quantization, and parasitic side reactions. Static OCV lookup achieves $< 1\%$ accuracy yet requires prolonged cell relaxation (30–120 min) to extinguish diffusion overpotentials, precluding active driving deployment [13, 14].

2. *Model-Based Nonlinear Observers*: Equivalent circuit models (1-RC Thevenin, 2-RC Dual Polarization) coupled with recursive filtering enable closed-loop state tracking [10, 15]. The Extended Kalman Filter (EKF) linearizes OCV via first-order Taylor expansion [16, 17], whereas Adaptive EKF (AEKF) updates noise covariances via Sage-Husa recursions [18, 19]. Sigma-point filters (UKF, CKF) propagate deterministic sigma points for higher-order accuracy [20–22]. To counter aging drift, Dual EKF (DEKF) co-estimates fast states and slow parameters $(R_0, Q_{\text{act}})$ [23, 24], while Sliding Mode Observers (SMO) drive error trajectories onto a switching manifold with bounded disturbance rejection [25–27].

3. *Physics-Based Electrochemical Observers*: Doyle-Fuller-Newman (P2D) models resolve solid/liquid lithium diffusion, potential fields, and Butler-Volmer kinetics [7, 8, 28]. Reduced-order formulations (SPM, SPMe) facilitate PDE observer design [29–31], yet microcontroller deployment remains constrained by heavy spatial discretization burdens.

4. *Pure Data-Driven Machine Learning*: Deep recurrent architectures (LSTM, BiLSTM, GRU, TCN) and self-attention Transformers capture complex temporal load dynamics [19, 32–38]. Nevertheless, black-box networks lack physical invariance and suffer severe accuracy degradation when evaluated outside their training distribution.

5. *Physics-Informed Machine Learning*: Physics-Informed Neural Networks (PINNs) embed differential-algebraic conservation laws (Faradaic species conservation, KVL, thermodynamic monotonicity) directly into backpropagation loss [39–41]. Evaluating physical residuals via automatic differentiation across dense collocation domains constrains network manifolds to physically admissible trajectories, mitigating out-of-distribution divergence.

### 1.2 Critical Review of Existing Benchmark Studies and Knowledge Gaps

Despite extensive research on SOC estimation, existing comparative benchmarks exhibit five fundamental deficiencies:

*Gap 1: Pristine Cell Bias and Degradation Neglect.* Most benchmarks evaluate fresh cells (SOH = 100%) at beginning-of-life [10, 33, 42]; uncompensated observer vulnerability to progressive SEI growth down to 80% SOH remains unquantified.

*Gap 2: Decoupling of Thermal Kinetics from Observers.* Overpotentials scale exponentially with Arrhenius temperature dynamics [11, 15], yet benchmarks predominantly test at 25°C, leaving thermal extremes (0°C, 45°C) uncharacterized.

*Gap 3: Observability Degradation on Flat Plateaus.* Whereas NMC exhibits steep OCV-SOC gradients, $LiFePO_4$ (LFP) cells feature flat voltage plateaus ($d\text{OCV}/d\text{SOC} \approx 0$) and pronounced dynamic hysteresis [13, 14, 43]. Although mechanical force fusion mitigates this deficit [44], purely electrical tracking without auxiliary strain sensors remains unbenchmarked.

*Gap 4: Multi-Source Sensor Corruption Vulnerability.* Current transducers suffer zero-point thermal bias drift, while voltage sensing lines experience inverter PWM electromagnetic interference (EMI) [45, 46]. Comparative studies rarely evaluate simultaneous drift and EMI stress.

*Gap 5: Embedded Hardware Disconnect and Pack Inconsistency.* Complex observers are typically evaluated on desktop workstations [35, 47]. Cycle-accurate profiling on automotive microcontrollers (ARM Cortex-M4/M7) and scaling to series packs under cell inconsistency are virtually absent [24, 46].

### 1.3 Contributions of This Work

To address these open challenges, this paper establishes a dual-tier benchmark of six foundational and modern state estimation methodologies across ten operational stress phases. The primary

contributions are fivefold:

1. *Comprehensive 10-Phase Benchmark*: Evaluating EKF, AEKF, DEKF, SMO, BiLSTM-Attn, and PINN-SOC across 4 standardized driving schedules (UDDS, US06, DST, FUDS), 5 progressive aging stages (100%–80% SOH), 3 ambient temperatures (0°C, 25°C, 45°C), large initial state uncertainty ($\Delta\text{SOC}_0 = -40\%$), multi-attribute radar synthesis, LFP flat plateaus, sensor drift and inverter EMI corruptions, model-based EIS frequency analysis, 8S series pack inconsistency, and embedded microcontroller profiling.

2. *Aging Sensitivity Factor (ASF)*: Quantifying a 45.7-fold RMSE surge in standard EKF as SOH drops to 80%, while dual parameter tracking restricts degradation growth.

3. *Model-Based EIS Frequency Bridge*: Correlating time-domain drift with Randles–CPE Nyquist spectra (100 kHz to 1 mHz), showing how $R_{\text{ct}}$ expansion drives unmodeled polarization.

4. *Chemistry-Dependent Hybrid PIDKF*: Coupling DEKF with dynamic hysteresis and neural compensation, achieving 0.414% RMSE on aged NMC and 0.149% on aged LFP.

5. *Embedded Profiling*: Measuring cycle-accurate execution on ARM Cortex-M4 (168 MHz, CMSIS-DSP) and Cortex-M7 (480 MHz), establishing empirical Pareto trade-offs and practical BMS selection rules.

# 2 Electrochemical Battery Modeling and Degradation Dynamics

## 2.1 Second-Order Dual Polarization (2-RC) Model Formulation

The electrical behavior of the lithium-ion cell is represented by a second-order Dual Polarization equivalent circuit model, widely acknowledged as the optimal balance between mathematical tractability and dynamic fidelity [10, 48]. The circuit comprises an open-circuit voltage source $V_{\text{ocv}}(\text{SOC})$, an ohmic series resistance $R_0$, and two parallel resistance-capacitance ($R_i \parallel C_i$) networks representing fast charge-transfer interfacial kinetics and slow solid-state lithium diffusion processes, respectively:

$$\frac{d\,\text{SOC}(t)}{dt} = -\frac{\eta(T)}{3600\,Q_{\text{act}}}\,I(t), \tag{1}$$

$$\frac{dU_1(t)}{dt} = -\frac{U_1(t)}{R_1C_1} + \frac{I(t)}{C_1}, \quad \frac{dU_2(t)}{dt} = -\frac{U_2(t)}{R_2C_2} + \frac{I(t)}{C_2} \tag{2}$$

where $I(t)$ is load current (positive for discharge), $\eta(T, I)$ is Faradaic coulombic efficiency ($\eta = 1$ discharge, $\eta \leq 1$ charge), and $Q_{\text{act}}$ is usable capacity (A · h). Terminal output voltage $V_t(t)$ satisfies Kirchhoff's voltage law:

$$V_t(t) = V_{\text{ocv}}(\text{SOC}(t)) - U_1(t) - U_2(t) - I(t)R_0. \tag{3}$$

Under discharge ($I(t) > 0$), overpotentials $U_i(t) \geq 0$ and ohmic drop $I(t)R_0 > 0$ subtract from thermodynamic potential, ensuring $V_t < V_{\text{ocv}}$. Irreversible dissipation rate $(U_1+U_2+IR_0)I/T \geq 0$ strictly satisfies the Second Law of Thermodynamics.

Discretizing at sampling interval $\Delta t = 1.0$ s via zero-order hold (ZOH) on $I_k$ over $[t_k, t_{k+1})$ and evaluating $\int_0^{\Delta t} \exp(-(\Delta t - s)/\tau_i)\frac{I_k}{C_i}\,ds = R_i[1 - e^{-\Delta t/\tau_i}]I_k$ establishes the discrete-time equivalent:

$$\mathbf{x}_{k+1} = \mathbf{A}_k\mathbf{x}_k + \mathbf{B}_kI_k + \mathbf{w}_k, \tag{4}$$

where the state vector is $\mathbf{x}_k = [\text{SOC}_k, U_{1,k}, U_{2,k}]^T$, the process noise vector is $\mathbf{w}_k \sim \mathcal{N}(0, \mathbf{Q}_k)$, and the system matrices are given by:

$$\mathbf{A}_k = \text{diag}\left(1, e^{-\Delta t/\tau_1}, e^{-\Delta t/\tau_2}\right), \tag{5}$$

$$\mathbf{B}_k = \left[-\tfrac{\eta\Delta t}{3600\,Q_{\text{act}}},\quad R_1\left(1 - e^{-\frac{\Delta t}{\tau_1}}\right),\quad R_2\left(1 - e^{-\frac{\Delta t}{\tau_2}}\right)\right]^T, \tag{6}$$

with polarization time constants $\tau_1 = R_1C_1$ and $\tau_2 = R_2C_2$ (calibrated at 25°C to $\tau_1 = 24.0$ s, $\tau_2 = 112.5$ s for NMC; 37.5 s, 144.0 s for LFP). The nonlinear observation equation is:

$$y_k = V_k = V_{\text{ocv}}(\text{SOC}_k) - U_{1,k} - U_{2,k} - I_k R_0 + v_k, \tag{7}$$

where $v_k \sim \mathcal{N}(0, R_k)$ represents measurement noise.

### 2.2 Dynamic Electro-Thermal Balance and Arrhenius Kinetics

To couple electrochemical dynamics with thermodynamics, cell core temperature $T(t)$ obeys a lumped heat balance:

$$C_{\text{th}} \frac{dT(t)}{dt} = \dot{Q}_{\text{gen}}(t) - \frac{T(t) - T_{\text{amb}}}{R_{\text{th}}}, \tag{8}$$

where $C_{\text{th}}$ is the lumped thermal capacitance (35.8 J/K for 18650 NMC INR20R; 65.2 J/K for 26650 LFP ANR26650), $R_{\text{th}}$ is equivalent thermal resistance to ambient (12.5 K/W for 18650; 8.4 K/W for 26650 under natural convection), and total heat generation rate $\dot{Q}_{\text{gen}}(t) = I^2(t)R_0(T, \text{SOH}) + I(t)[U_1(t) + U_2(t)] - I(t)T(t)\frac{\partial V_{\text{ocv}}}{\partial T}$ accounts for Joule heating, polarization dissipation, and reversible entropic potential variation. Under discharge ($I > 0$), since $\frac{\partial V_{\text{ocv}}}{\partial T} < 0$ over $z \in [0, 0.75]$, the reversible term $-IT\frac{\partial V_{\text{ocv}}}{\partial T} > 0$ is exothermic, transitioning to weakly endothermic only at high SOC ($z > 0.75$ for NMC). Potentiometric titration yields polynomial $\frac{\partial V_{\text{ocv}}}{\partial T}(z) = -0.118 + 0.382z - 0.945z^2 + 1.210z^3 - 0.469z^4$ mV/K (mean $-0.033$ mV/K over $z \in [0, 1]$); for LFP, $\frac{\partial V_{\text{ocv}}}{\partial T} \approx -0.065$ mV/K across the plateau ($z \in [0.2, 0.8]$). Core temperature $T(t)$ couples to surface $T_s$ with Biot number $\text{Bi} \approx 0.096 \ll 1$ ($\Delta T_{c-s} \leq 0.42$°C at 2C discharge), validating lumped $T_s \approx T(t) - R_{\text{cond}}\dot{Q}_{\text{gen}}$. Resistances obey piecewise Arrhenius kinetics: contact resistance yields ohmic $E_{a,0}^{\text{cold}} = 20.5$ kJ/mol (2.13× at 0°C) and $E_{a,0}^{\text{hot}} = 14.1$ kJ/mol (0.70× at 45°C); charge-transfer resistance $R_1$, governed by Butler–Volmer kinetics where $Li^+$ desolvation limits cold transport, exhibits $E_{a,1}^{\text{cold}} = 28.4$ kJ/mol (2.85× at 0°C) and $E_{a,1}^{\text{hot}} = 16.9$ kJ/mol (0.65× at 45°C), matching Table 10 exactly; diffusion obeys $E_{a,2} = 28.4$ kJ/mol [11,15]. Defining temperature factor $f_{T,i}(T) \equiv \exp[\frac{E_{a,i}}{R}(\frac{1}{T} - \frac{1}{T_{\text{ref}}})]$ ($T_{\text{ref}} = 298.15$ K, $R = 8.314$ J · mol$^{-1}$ · K$^{-1}$), resistances scale via:

$$R_0(T) = R_{0,\text{ref}} f_{T,0}(T), \tag{9}$$

$$R_i(T) = R_{i,\text{ref}} f_{T,i}(T), \quad i \in \{1, 2\} \tag{10}$$

Under thermocouple validation across dynamic UDDS/US06 cycles, the thermal balance achieves surface temperature $\text{RMSE}_T \leq 0.38$°C (INR20R) and $\leq 0.31$°C (ANR26650).

### 2.3 Semi-Empirical Aging Parameterization Across Degradation Regimes

While microscopic degradation stems from continuous SEI growth and particle cracking [11, 49], for real-time estimation across thermal and aging regimes, State-of-Health is anchored at reference temperature $T_{\text{ref}} = 25$°C ($\text{SOH} \equiv Q_{\text{act}}(T_{\text{ref}})/Q_{\text{init}} \in [0.80, 1.00]$), while usable capacity and internal resistances follow separable formulations:

$$R_0(T, \text{SOH}) = R_{0,\text{nom}} f_{T,0}(T)[1.0 + \kappa_{R_0}(1.0 - \text{SOH})], \tag{11}$$

$$R_1(T, \text{SOH}) = R_{1,\text{nom}} f_{T,1}(T)[1.0 + \kappa_{R_1}(1.0 - \text{SOH})], \tag{12}$$

$$R_2(T, \text{SOH}) = R_{2,\text{nom}} f_{T,2}(T)[1.0 + \kappa_{R_2}(1.0 - \text{SOH})], \tag{13}$$

$$Q_{\text{act}}(T, \text{SOH}) = \text{SOH} \cdot Q_{\text{init}} f_Q(T), \tag{14}$$

where $f_Q(T) = \exp[-\frac{E_{a,Q}}{R}(\frac{1}{T} - \frac{1}{T_{\text{ref}}})]$ for $T < T_{\text{ref}}$ ($E_{a,Q} = 3.2$ kJ/mol $\implies$ 0.890× at 0°C, governed by kinetic and diffusion limitations) and $f_Q(T) = 1.0 + \kappa_{T,\text{hot}}(T - T_{\text{ref}})$ for $T \geq T_{\text{ref}}$ ($\kappa_{T,\text{hot}} = 0.0015$ K$^{-1}$ $\implies$ 1.030× at 45°C, governed by stoichiometric cyclable lithium rather

than kinetics). Nominal capacity is $Q_{\text{init}} = 2.00$ Ah (INR20R) and 2.30 Ah (ANR26650 at 1C, 25°C). Degradation sensitivity coefficients are $\kappa_{R_0} = 2.50$, $\kappa_{R_1} = 7.50$, and $\kappa_{R_2} = 4.00$ (NMC) / 5.00 (LFP), matching Table 10 exactly. Capacitances scale with capacity fade: $C_i(\text{SOH}) = C_{i,\text{nom}}[1.0-\gamma_{C,i}(1.0-\text{SOH})]$, where $\gamma_{C,1} = 1.25$ (NMC) / 1.00 (LFP) (25.0% / 20.0% loss at 80% SOH) and $\gamma_{C,2} = 0.78$ (NMC) / 0.875 (LFP) (15.6% / 17.5% loss), exactly matching Table 10. Solid-state diffusion activation energy satisfies $E_{a,2} = 28.4$ kJ/mol, reflecting intercalation kinetics. In observer disturbance analysis, evaluating $\tilde{D}_{U_i} = R_i(T, \text{SOH})I_{\text{bias}} + \delta R_i I_{\text{RMS}}$ under field BMS sensor uncalibrated offset $I_{\text{bias}} \leq 0.005$ A (5 mA), $\delta R_i \leq 0.0028\,\Omega$, and drive-cycle $I_{\text{RMS}} = 1.0$ A yields $\tilde{D}_{U_i} \leq 3.5$ mV across 0°C–45°C (peaking at 0°C with aged $R_1 \approx 107$ mΩ; $\leq 2.2$ mV at 25°C), well within nominal sliding boundary layer $\Phi_d = 5$ mV (laboratory cyclers employ auto-zero tare bounding $|I_{\text{bias}}| \leq 0.0005$ A for reference Coulomb counting; Section 4). Crucially, we enforce a strict parameter allocation between plant and estimators: in the battery plant (Table 10), aging modulates $R_0, R_1, R_2, C_1, C_2, Q_{\text{act}}$; uncompensated observers (EKF, AEKF, SMO) freeze all parameters at fresh nominal values to quantify degradation drift; standard DEKF adapts $\hat{\boldsymbol{\theta}}_k = [R_{0,k}, 1/Q_{\text{act},k}]^T$ while purposefully freezing $R_1, R_2, C_1, C_2$ to prevent structural parameter collinearity and unidentifiability; unmodeled polarization residual $\delta V^*_{\text{pol},k} \equiv (U^{\text{plant}}_{1,k} - \hat{U}^{\text{ECM}}_{1,k}) + (U^{\text{plant}}_{2,k} - \hat{U}^{\text{ECM}}_{2,k})$ is compensated online by the proposed PIDKF.

### 2.4 OCV-SOC Monotonicity and Dynamic Hysteresis

To prevent artificial divergence in gradient-based observers (Runge's phenomenon), the $V_{\text{ocv}}(\text{SOC})$ function for NMC chemistry is strictly calibrated as a monotonically increasing 5th-order polynomial satisfying $dV_{\text{ocv}}/d\text{SOC} > 0$ for all $\text{SOC} \in [0, 1]$:

$$V_{\text{ocv}}(z) = p_5 z^5 + p_4 z^4 + p_3 z^3 + p_2 z^2 + p_1 z + p_0, \tag{15}$$

where $z \equiv \text{SOC}$, with calibrated polynomial coefficients: $p_5 = 9.204$, $p_4 = -28.841$, $p_3 = 33.376$, $p_2 = -17.419$, $p_1 = 4.674$, and $p_0 = 3.212$. Differentiating yields the exact quartic derivative: $V'_{\text{ocv}}(z) = 46.020z^4 - 115.364z^3 + 100.128z^2 - 34.838z + 4.674$. All four roots of $V'_{\text{ocv}}(z) = 0$ are complex conjugate pairs ($z_{1,2} \approx 0.964 \pm 0.156j$, $z_{3,4} \approx 0.289 \pm 0.151j$), guaranteeing $V'_{\text{ocv}}(z) > 0$ strictly for all $z \in \mathbb{R}$. Over the physical domain $z \in [0, 1]$, $V'_{\text{ocv}}(z) \in [\alpha, V'_{\max}] = [0.481, 4.674]$ V, bounded away from zero. By the Inverse Function Theorem, $z = V^{-1}_{\text{ocv}}(V)$ is uniquely defined and regular with $(V^{-1}_{\text{ocv}})'(V) \in [0.214, 2.079]$ V$^{-1}$.

For the three-state NMC equivalent circuit, the discrete three-step observability matrix $\mathcal{O}_k$ possesses a structured Vandermonde determinant:

$$\det(\mathcal{O}_k) = V'_{\text{ocv}}(z_k)(1 - a_1)(1 - a_2)(a_1 - a_2). \tag{16}$$

Since $\tau_1 = 24.0$ s $\neq \tau_2 = 112.5$ s ($a_1 \neq a_2$), $\Delta t > 0$, and $V'_{\text{ocv}}(z) \geq \alpha > 0$, we have $\det(\mathcal{O}_k) \neq 0$ and $\text{rank}(\mathcal{O}_k) = 3$ everywhere on $z \in [0, 1]$, guaranteeing uniform local observability. Conversely, when $V'_{\text{ocv}}(z) \to 0$ (as in the LFP flat plateau where $V'_{\text{ocv}} \approx 0.08$ V), $\det(\mathcal{O}_k)$ shrinks by an order of magnitude and condition number $\kappa(\mathcal{O}_k)$ surges from $3.2 \times 10^4$ to $> 1.99 \times 10^5$, establishing the analytical root cause of flat-plateau observability degradation.

For $LiFePO_4$ (LFP) chemistry, open-circuit voltage exhibits a wide, flat biphasic transition plateau ($LiFePO_4 \leftrightarrow FePO_4$) where $dV_{\text{ocv}}/dz \approx 0.08$ V between 20% and 80% SOC, accompanied by non-negligible dynamic hysteresis [13, 14]. Governed by the Gibbs phase rule ($F = C - P + 2$; at fixed temperature and pressure, degrees of freedom become $F' = C - P = 2 - 2 = 0$), two-phase coexistence pins the lithium chemical potential to an invariant value independent of stoichiometry, producing the near-zero voltage slope and severe observability loss. Across the operational domain ($z \in [0.12, 0.95]$), LFP open-circuit voltage is parameterized via $V^{\text{LFP}}_{\text{ocv}}(z) = 3.415 - 0.286z + 1.831z^2 - 4.120z^3 + 4.185z^4 - 1.545z^5$ (RMS error 2.4 mV). Direct evaluation of $V'_{\text{ocv}}(z) = -0.286 + 3.662z - 12.36z^2 + 16.74z^3 - 7.725z^4$ confirms strict monotonicity $V'_{\text{ocv}}(z) \geq \alpha_{\text{LFP}} = 0.00275$ V $> 0$ for all $z \in [0.12, 0.95]$ ($V'_{\text{ocv}}(0.12) = 0.00278$ V,

rising to $> 0.065$ V over the central 20%–80% plateau, with a stationary point (local minimum of $V_{\text{ocv}}$) at $z \approx 0.118$; deep discharge $z < 0.12$ is prevented by BMS lower voltage cutoff protection ($V_t \leq 2.00$ V) [15]). Hysteresis parameters are $\beta = 45.0$ and $M(z) \equiv M_0 = 30$ mV ($M_{\max} = 35$ mV):

$$\frac{dV_h(t)}{dt} = -\frac{\beta\eta|I(t)|}{3600\, Q_{\text{act}}(T, \text{SOH})} \left[V_h(t) - M(z)\,\text{sgn}(I(t))\right], \tag{17}$$

where $V_h(t)$ is hysteresis voltage, $\beta$ is decay rate, and $M(z)$ is maximum hysteresis voltage ($M \approx 20$–$40$ mV). Evaluating Eq. (17) across interval $[t_k, t_{k+1})$ under zero-order hold (ZOH) current $I_k$ yields the exact discrete-time analytical solution:

$$V_{h,k+1} = e^{-\beta|\Delta z_k|} V_{h,k} + \left(1 - e^{-\beta|\Delta z_k|}\right) M(z_k)\,\text{sgn}(I_k), \tag{18}$$

with $|\Delta z_k| = \frac{\eta|I_k|\Delta t}{3600 Q_{\text{act}}}$. Because $e^{-\beta|\Delta z_k|} \in (0, 1]$, Eq. (18) represents a convex combination (contractive with $a_h < 1$ for $I_k \neq 0$; static with $a_h = 1$ at rest $I_k = 0$) bounded by $|V_{h,k+1}| \leq \max(|V_{h,k}|, M(z_k)) \leq M_{\max}$, proving $[-M_{\max}, M_{\max}]$ is positively invariant.

For LFP chemistry, the state vector is augmented with dynamic hysteresis:

$$\mathbf{x}_k^{\text{LFP}} = [\text{SOC}_k,\, U_{1,k},\, U_{2,k},\, V_{h,k}]^T. \tag{19}$$

The discrete evolution follows:

$$\mathbf{x}_{k+1}^{\text{LFP}} = \mathbf{A}_k^{\text{LFP}} \mathbf{x}_k^{\text{LFP}} + \mathbf{B}_k^{\text{LFP}} I_k + \mathbf{g}_k + \mathbf{w}_k, \tag{20}$$

with $\mathbf{A}_k^{\text{LFP}} = \text{diag}(1, e^{-\Delta t/\tau_1}, e^{-\Delta t/\tau_2}, e^{-\beta|\Delta z_k|})$ (since constant plateau saturation $M(z) \equiv M_0$ yields $M'(z) \equiv 0$ and decoupled hysteresis in $\mathbf{A}_k^{\text{LFP}}$), $\mathbf{B}_k^{\text{LFP}} = [B_{1,k}, B_{2,k}, B_{3,k}, 0]^T$, and nonlinear excitation:

$$\mathbf{g}_k = \left[0,\, 0,\, 0,\, \left(1 - e^{-\beta|\Delta z_k|}\right) M(z_k)\,\text{sgn}(I_k)\right]^T. \tag{21}$$

The terminal voltage satisfies:

$$V_{t,k} = V_{\text{ocv}}(\text{SOC}_k) - V_{h,k} - U_{1,k} - U_{2,k} - I_k R_0 + v_k. \tag{22}$$

For the augmented four-state LFP formulation, incorporating the dynamic hysteresis mode expands the discrete observability determinant into:

$$|\det(\mathcal{O}_{4,k})| = V'_{\text{ocv}}(z_k)(1 - a_h)|a_1 - a_2| \prod_{i=1}^{2} (1 - a_i)|a_i - a_h|, \tag{23}$$

where $a_{h,k} = e^{-\beta|\Delta z_k|}$. Equation (23) is a frozen-coefficient local rank test over short windows ($a_{h,k} \approx a_h$). Under rest ($I_k = 0$), $|\Delta z_k| = 0 \implies a_{h,k} = 1 = \lambda_{\text{SOC}}$, so $1 - a_{h,k} = 0$ and $\text{rank}(\mathcal{O}_{4,k}) \leq 3$: static hysteresis is collinear with $V_{\text{ocv}}$ and unobservable from voltage alone. Conversely, for the linear time-varying (LTV) system under *Persistent Excitation* (PE, $\exists \delta_I > 0, T_{\text{PE}} \geq 1$ s.t. $\frac{1}{T_{\text{PE}}} \sum_{j=k}^{k+T_{\text{PE}}-1} |I_j| \geq \delta_I > 0$), $a_{h,k} < 1$ separates from unity and $(a_1, a_2)$. With discrete pole $a_{h,k} \in (0, 1)$, stationary resonance occurs when $a_h = a_i$, yielding the general scaling formula $|I|_{\text{res},i}(T, \text{SOH}) = \frac{3600\, Q_{\text{act}}(T,\text{SOH})}{\beta\, \eta\, \tau_i(T)}$ (for fresh cell at 25°C, $|I|_{\text{res},2} = 1.278$ A and $|I|_{\text{res},1} = 4.907$ A, scaling to 1.022 A and 3.926 A at 80% SOH). Under 1-s ZOH sampling and dynamic current, the system dwells at most 1 s at these discrete singleton states before stepping away; hence the resonance set has Lebesgue measure zero ($\mu_L(\mathcal{I}_{\text{res}}) = 0$). Under Persistent Excitation ($I_{\text{RMS}} = \sqrt{\frac{1}{N} \sum_{j=k}^{k+N-1} I_j^2} \geq 0.5$ A, $N = 30$ s), the discrete LTV Gramian $\mathcal{G}_o(k, k+N) \succeq \alpha_o \mathbf{I}$ on normalized states $\tilde{\mathbf{x}}$ yields strictly positive eigenvalues across all 4 benchmark drive cycles: $\lambda_{\min}(\mathcal{G}_o) \geq 1.42 \times 10^{-3}$ (UDDS), $\geq 1.88 \times 10^{-3}$ (US06), $\geq 1.35 \times 10^{-3}$ (FUDS), and $\geq 1.21 \times 10^{-3}$ (DST). At rest ($I_k = 0$), parameter updates freeze ($\mathbf{K}_{\theta,k} = \mathbf{0}$).

# 3 State-of-Charge Estimation Methodologies

## 3.1 Extended Kalman Filter (EKF)

The benchmark investigates EKF, AEKF, DEKF, SMO, BiLSTM-Attn, and PINN-SOC as archetype representatives of classical model-based, adaptive, nonlinear sliding-mode, and physics-informed machine learning paradigms. Higher-order sigma-point filters such as UKF and CKF [20, 21] use deterministically chosen sigma points to propagate mean and covariance through system nonlinearities without explicit Jacobian computation. In our benchmark, UKF is evaluated using standard scaled unscented transform parameters ($\alpha = 10^{-3}$, $\beta = 2$, $\kappa = 0$, $2n+1 = 7$ sigma points) sharing identical plant models, noise covariances ($\mathbf{Q}, R$), and 1-s sample rate with EKF. As an exploratory higher-order sigma-point baseline, UKF achieves nominal UDDS error (100% SOH, 25°C) of RMSE = 0.058% (NMC) and 0.782% (LFP), closely matching EKF (0.065% and 0.804%, near the ±0.036% reference noise floor; higher EKF LFP error of 1.136% in Table 5 reflects aggressive FUDS/DST schedules) while incurring 3.2× computational overhead (12.42 $\mu$s vs. 3.87 $\mu$s; Table 8). Under severe aging (80% SOH), non-adaptive UKF error surges to 2.841% (NMC), confirming that unmodeled degradation dwarfs quadrature approximation gains and justifying EKF as the standard non-adaptive benchmark.

The EKF linearizes the nonlinear measurement equation at each step around prior estimate $\hat{\mathbf{x}}_k^-$ via the Jacobian vector $\mathbf{H}_k$ [16]:

$$\begin{aligned} \mathbf{H}_k^{\text{NMC}} &= \begin{bmatrix} V'_{\text{ocv}}(\hat{z}_k^-) & -1 & -1 \end{bmatrix}, \\ \mathbf{H}_k^{\text{LFP}} &= \begin{bmatrix} V'_{\text{ocv}}(\hat{z}_k^-) & -1 & -1 & -1 \end{bmatrix}, \end{aligned} \tag{24}$$

where $\partial V_t / \partial V_h = -1$ reflects the subtractive nature of discharge hysteresis overpotential. The recursive algorithm executes in two alternating stages:

*1. Time Update (Predict):*

$$\hat{\mathbf{x}}_k^- = \mathbf{A}_{k-1}\hat{\mathbf{x}}_{k-1}^+ + \mathbf{B}_{k-1}I_{k-1} + \mathbf{g}_{k-1} \tag{25}$$

$$\mathbf{P}_k^- = \mathbf{A}_{k-1}\mathbf{P}_{k-1}^+\mathbf{A}_{k-1}^T + \mathbf{Q} \tag{26}$$

where $\mathbf{g}_{k-1} = \mathbf{0}$ for NMC and satisfies Eq. (18) for LFP.

*2. Measurement Update (Correct):*

$$e_k = V_k - \hat{V}_{t,k}^-, \quad \mathbf{K}_k = \mathbf{P}_k^-\mathbf{H}_k^T\left(\mathbf{H}_k\mathbf{P}_k^-\mathbf{H}_k^T + R_v\right)^{-1} \tag{27}$$

$$\hat{\mathbf{x}}_k^+ = \hat{\mathbf{x}}_k^- + \mathbf{K}_k e_k \tag{28}$$

$$\mathbf{P}_k^+ = (\mathbf{I} - \mathbf{K}_k\mathbf{H}_k)\mathbf{P}_k^-(\mathbf{I} - \mathbf{K}_k\mathbf{H}_k)^T + \mathbf{K}_k R_v \mathbf{K}_k^T \tag{29}$$

with $\hat{V}_{t,k}^- = V_{\text{ocv}}(\hat{z}_k^-) - \hat{U}_{1,k}^- - \hat{U}_{2,k}^- - I_k R_0$ (augmented with $-\hat{V}_{h,k}^-$ for LFP). Equation (29) implements the stabilized Joseph covariance form, which guarantees symmetry ($\mathbf{P}_k^+ = (\mathbf{P}_k^+)^T$) and strict positive-definiteness ($\mathbf{P}_k^+ \succ 0$) under finite-precision floating-point arithmetic.

## 3.2 Adaptive Extended Kalman Filter (AEKF)

Fixed noise covariances ($\mathbf{Q}, R_v$) degrade filtering performance when measurement conditions vary. The AEKF integrates the Sage-Husa online adaptive noise estimator [18]:

$$\hat{r}_k = (1 - d_k)\hat{r}_{k-1} + d_k\left(V_k - \hat{V}_k^-\right) \tag{30}$$

$$\hat{R}_{v,k} = (1 - d_k)\hat{R}_{v,k-1} + d_k\left(e_k^2 - \mathbf{H}_k\mathbf{P}_k^-\mathbf{H}_k^T\right) \tag{31}$$

where $d_k = (1 - \lambda_{\text{SH}})/(1 - \lambda_{\text{SH}}^k)$ is an exponential weighting factor with forgetting factor $\lambda_{\text{SH}} = 0.985$. To prevent filter divergence arising from the structural unidentifiability of simultaneously estimating process noise $\mathbf{Q}_k$ and measurement noise $R_k$ from a single scalar innovation sequence (classic Sage-Husa theorem), $\mathbf{Q}$ is fixed to its calibrated baseline while $\hat{R}_{v,k}$ is updated with a semi-definite projection constraint $\hat{R}_{v,k} = \max(R_{v,\min}, \hat{R}_{v,k})$ to guarantee positive-definiteness.

### 3.3 Dual Extended Kalman Filter (DEKF)

To decouple fast state estimation from slow parameter degradation, the DEKF employs two interacting Kalman filters running in parallel [16, 23]:

1. *State Filter*: Estimates state vector $\mathbf{x}_k = [\mathrm{SOC}_k, U_{1,k}, U_{2,k}]^T$ using current parameters $\hat{\boldsymbol{\theta}}_k = [\hat{R}_{0,k}, 1/\hat{Q}_{\mathrm{act},k}]^T$.
2. *Parameter Filter*: Models parameter evolution as a random walk $\boldsymbol{\theta}_{k+1} = \boldsymbol{\theta}_k + \mathbf{w}_{\theta,k}$ driven by process noise $\mathbf{w}_{\theta,k} \sim \mathcal{N}(0, \mathbf{Q}_\theta)$.

The parameter sensitivity matrix $\mathbf{C}_{\theta,k} = \frac{dV_k}{d\boldsymbol{\theta}}\Big|_{\hat{\boldsymbol{\theta}}_k^-}$ is derived via total Fréchet differentiation:

$$\mathbf{C}_{\theta,k} = \left[-I_k \quad -\frac{\eta \Delta t I_{k-1}}{3600} V'_{\mathrm{ocv}}(\hat{z}_k^+)\right], \tag{32}$$

where $\frac{\partial V_k}{\partial \theta_2} = \frac{\partial V_{\mathrm{ocv}}}{\partial \mathrm{SOC}_k}\frac{\partial \mathrm{SOC}_k}{\partial (1/Q_{\mathrm{act}})} = V'_{\mathrm{ocv}}\left(-\frac{\eta \Delta t I_{k-1}}{3600}\right)$. The parameter filter updates recursively using the stabilized Joseph covariance form:

$$\mathbf{K}_{\theta,k} = \mathbf{P}_{\theta,k}^- \mathbf{C}_{\theta,k}^T [\mathbf{C}_{\theta,k}\mathbf{P}_{\theta,k}^- \mathbf{C}_{\theta,k}^T + R_{\theta,v}]^{-1}, \tag{33}$$

$$\hat{\boldsymbol{\theta}}_k^+ = \hat{\boldsymbol{\theta}}_k^- + \mathbf{K}_{\theta,k} e_k, \tag{34}$$

$$\mathbf{P}_{\theta,k}^+ = (\mathbf{I} - \mathbf{K}_{\theta,k}\mathbf{C}_{\theta,k})\mathbf{P}_{\theta,k}^- (\mathbf{I} - \mathbf{K}_{\theta,k}\mathbf{C}_{\theta,k})^T + \mathbf{K}_{\theta,k} R_{\theta,v} \mathbf{K}_{\theta,k}^T \tag{35}$$

### 3.4 Sliding Mode Observer (SMO)

The SMO provides robust tracking against bounded modeling disturbances by driving the voltage error onto a boundary layer around sliding manifold $S_k = V_{\mathrm{meas},k} - \hat{V}_{t,k} = 0$ [25, 26]:

$$\hat{\mathbf{x}}_{k+1} = \mathbf{A}_k \hat{\mathbf{x}}_k + \mathbf{B}_k I_k + \mathbf{g}_k + \mathbf{L}(\hat{z}_k)\,\mathrm{sat}\left(\frac{S_k}{\mu}\right), \tag{36}$$

where $\mu = 0.02$ V is the boundary layer thickness and $\mathrm{sat}(S/\mu) = \max(-1, \min(1, S/\mu))$ is the continuous saturation function. To eliminate gain explosion and maintain reachability across both steep NMC slopes and flat LFP plateaus, feedback injection is scheduled onto the SOC coordinate:

$$\mathbf{L}(\hat{z}) = \left[\frac{l_{\mathrm{smo}}}{\max(\alpha_{\min}, V'_{\mathrm{ocv}}(\hat{z}))}, 0, 0, (0)\right]^T, \tag{37}$$

with scalar gain $l_{\mathrm{smo}} = 0.025$ V and $\alpha_{\min} = 0.40/0.00275$ V for NMC/LFP. Because $\mathbf{H}_k = [V'_{\mathrm{ocv}}, -1, -1, (-1)]$, the effective manifold injection gain is state-invariant: $\gamma(\hat{z}) \equiv \mathbf{H}_k \mathbf{L}(\hat{z}) = l_{\mathrm{smo}} = 0.025\ \mathrm{V} > \Phi_d$ whenever $V'_{\mathrm{ocv}} \geq \alpha_{\min}$. Polarization sub-states $(U_1, U_2)$ and hysteresis $(V_h)$ evolve open-loop along passive dissipative dynamics ($l_2 = l_3 = l_h = 0$), preventing chattering and ensuring discrete quasi-sliding mode stability as proven in Appendix B. All benchmark metrics and Table 8 timings (281 cycles on Cortex-M4, including polynomial OCV derivative and gain scheduling) correspond directly to this implementation.

### 3.5 Bidirectional LSTM with Self-Attention (BiLSTM-Attn)

The deep data-driven architecture processes a temporal sliding window input:

$$\mathbf{X}_k = [I_{k-W:k},\ V_{k-W:k},\ T_{k-W:k}] \in \mathbb{R}^{W\times 3}, \tag{38}$$

with window length $W = 30$ s [35, 37]. Forward ($\overrightarrow{\mathbf{h}}_t$) and backward ($\overleftarrow{\mathbf{h}}_t$) hidden states are concatenated into $\mathbf{h}_t = [\overrightarrow{\mathbf{h}}_t \,\|\, \overleftarrow{\mathbf{h}}_t] \in \mathbb{R}^{2D}$. The temporal self-attention mechanism computes

alignment scores:

$$u_t = \mathbf{v}^T \tanh(\mathbf{W}_a \mathbf{h}_t + \mathbf{b}_a), \quad \alpha_t = \frac{\exp(u_t)}{\sum_{j=1}^{W} \exp(u_j)} \tag{39}$$

$$\mathbf{c}_k = \sum_{t=1}^{W} \alpha_t \mathbf{h}_t \tag{40}$$

where $\mathbf{c}_k$ represents the context vector fed into fully connected layers to predict $\hat{z}_k$.

### 3.6 Physics-Informed Neural Network (PINN-SOC)

Unlike conventional black-box networks that treat SOC estimation as an unconstrained regression task, the Physics-Informed Neural Network (PINN-SOC) embeds first-principles electrochemical conservation laws directly into the backpropagation graph [39–41].

*1. Continuous State-Space and Automatic Differentiation*: From macroscopic Faradaic charge conservation, battery charge depletion satisfies the continuous governing differential equation:

$$\frac{d\,\mathrm{SOC}(t)}{dt} = -\frac{\eta(T, I)\, I(t)}{3600\, Q_{\mathrm{act}}(T, \mathrm{SOH})}, \tag{41}$$

where $\eta \in (0, 1]$ represents Faradaic coulombic efficiency capturing side reactions, and $Q_{\mathrm{act}}$ denotes usable capacity modulated by Arrhenius thermal kinetics and SEI growth. In operational BMS execution, the real-time inference network evaluates directly on measurable sensory signals $\mathbf{u}_k = [t_k, I_k, V_{t,k}, T_k, \hat{\mathrm{SOH}}_{\mathrm{latched}}]^T \in \mathbb{R}^5$ without requiring a continuous ground-truth SOH oracle. During multi-stage training, the Faradaic loss term evaluates Eq. (41) anchored to the cell's current health state $\hat{\mathrm{SOH}}_{\mathrm{latched}}$, obtained via quasi-stationary constant-current charging health indicators [42]. Sensitivity analysis indicates that a $\pm 2\%$ ($\pm 5\%$) error in latched SOH introduces merely $+0.113\%$ ($+0.339\%$) RMSE increase under UDDS, confirming that closed-loop terminal voltage KVL loss robustly pins the estimated trajectory against drift. Because cell degradation occurs on macroscopic timescales ($10^5$–$10^6$ s), across individual drive schedules (600–3600 s) the time derivative satisfies $|d\mathrm{SOH}/dt| < 10^{-8}\ \mathrm{s}^{-1} \approx 0$. Hence, the total time derivative $\frac{d\hat{z}}{dt}$ along trajectories is evaluated via chain-rule Autograd:

$$\frac{d\hat{z}(t)}{dt} = \frac{\partial \mathcal{NN}_1}{\partial t} + \frac{\partial \mathcal{NN}_1}{\partial I}\frac{dI}{dt} + \frac{\partial \mathcal{NN}_1}{\partial V_t}\frac{dV_t}{dt} + \frac{\partial \mathcal{NN}_1}{\partial T}\frac{dT}{dt}, \tag{42}$$

$$\mathcal{R}_{\mathrm{Faraday}}(t) = \frac{d\hat{z}(t)}{dt} + \frac{\eta(T, I)\, I(t)}{3600\, Q_{\mathrm{act}}(T, \mathrm{SOH})}, \tag{43}$$

where telemetry derivatives $(dI/dt, dV_t/dt, dT/dt)$ are computed offline via smoothing splines during training loss backpropagation, while online BMS inference executes strictly causally.

*2. Electrochemical KVL Consistency and Thermodynamic Bounds*: Operational battery pack sensors cannot non-invasively measure internal overpotentials $(U_1, U_2)$. PINN-SOC resolves this observability deficit by enforcing Kirchhoff's Voltage Law (KVL) as an electrochemical consistency manifold (where $\hat{V}_{\mathrm{pol}}(t) \equiv \hat{U}_1 + \hat{U}_2 + \hat{V}_h$ lumps dynamic polarization and hysteresis):

$$\mathcal{R}_{\mathrm{KVL}}(t) = V_{\mathrm{meas}}(t) - \left[V_{\mathrm{ocv}}(\hat{z}(t)) - I(t)R_0(T, \mathrm{SOH}) - \hat{V}_{\mathrm{pol}}(t)\right]. \tag{44}$$

Thermodynamic equilibrium stability is anchored by the strict monotonicity of the open-circuit voltage curve ($dV_{\mathrm{ocv}}/d\,\mathrm{SOC} > 0$), while an output Sigmoid activation intrinsically guarantees physical boundary invariance $\hat{z} \in (0, 1)$.

*3. Composite Multi-Objective Loss Formulation*: The training loss balances supervised fidelity over labeled tuples $\mathcal{D}_{\mathrm{data}} = \{(t_k, I_k, V_{t,k}, T_k, \mathrm{SOH}_k, \mathrm{SOC}_k^{\mathrm{ref}})\}_{k=1}^{N_d}$ (with normalized elapsed

cycle time $t_k = k\Delta t$ and RPT-calibrated $\mathrm{SOH}_k$) against physics residuals over collocation points $\mathcal{D}_{\text{colloc}} = \{(t_j, I_j, V_{t,j}, T_j, \mathrm{SOH}_j)\}_{j=1}^{N_c}$:

$$\mathcal{L}_{\text{total}}(\boldsymbol{\theta}) = \mathcal{L}_{\text{data}} + \lambda_{\text{Faraday}}\mathcal{L}_{\text{Faraday}} + \lambda_{\text{KVL}}\mathcal{L}_{\text{KVL}} + \lambda_{\text{mono}}\mathcal{L}_{\text{mono}}, \tag{45}$$

where individual loss components are formulated as:

$$\mathcal{L}_{\text{data}} = \frac{1}{N_d}\sum_{k=1}^{N_d}(\hat{z}_k - \mathrm{SOC}_k^{\text{ref}})^2, \quad \mathcal{L}_{\text{Faraday}} = \frac{1}{N_c}\sum_{j=1}^{N_c}\|\mathcal{R}_{\text{Faraday}}(t_j)\|^2, \tag{46}$$

$$\mathcal{L}_{\text{KVL}} = \frac{1}{N_c}\sum_{j=1}^{N_c}\|\mathcal{R}_{\text{KVL}}(t_j)\|^2, \quad \mathcal{L}_{\text{mono}} = \frac{1}{N_c}\sum_{j=1}^{N_c}\left[\max\left(0, -\frac{\partial\hat{z}_j}{\partial V_{t,j}}\right)\right]^2, \tag{47}$$

and $\mathcal{L}_{\text{mono}}$ enforces quasi-stationary network monotonicity ($\partial\hat{z}/\partial V_t \geq 0$ at fixed $(I, T, \mathrm{SOH})$ to suppress non-monotonic artifacts, distinct from equilibrium $dV_{\text{ocv}}/d\,\mathrm{SOC} > 0$; with weighting coefficients $\lambda_{\text{Faraday}} = 0.40$, $\lambda_{\text{KVL}} = 0.30$, $\lambda_{\text{mono}} = 0.10$). The 4-layer perceptron (input dim 5, hidden layers $[64, 64, 32]$ with GELU activations, output dim 2) is trained via AdamW ($\eta_0 = 10^{-3}$ to $10^{-5}$, 500 epochs, batch size 256) across 5 random seeds. Compared to an unconstrained MLP without physics constraints (RMSE = 3.896%), PINN-SOC achieves a 28.6% error reduction (RMSE = 2.781%), verifying that physical regularization terms effectively penalize unphysical overpotentials.

### 3.7 Proposed Hybrid Architecture: PIDKF

To combine closed-loop Lyapunov stability and online parameter tracking with nonlinear neural representation, we formulate the hybrid **Physics-Informed Dual Kalman Filter (PIDKF)**. A dual extended Kalman filter co-estimates state $\hat{\mathbf{x}}_k$ (3-state for NMC; 4-state including hysteresis $\hat{V}_{h,k}$ via Eq. (22) for LFP) and parameters $\hat{\boldsymbol{\theta}}_k = [R_{0,k}, 1/Q_{\text{act},k}]^T$, while a compact neural compensator with input $\mathbf{u}_k = [I_k, T_k, \hat{z}_k^-, \hat{U}_{1,k}^-, \hat{U}_{2,k}^-, \mathrm{SOH}_{\text{ref},k}]^T \in \mathbb{R}^6$ (where reference degradation SOH at $T_{\text{ref}} = 25°\text{C}$ inverts thermal factor: $\mathrm{SOH}_{\text{ref},k} \equiv \frac{\hat{Q}_{\text{act},k}(T_k)}{Q_{\text{init}} f_Q(T_k)} = \frac{1}{Q_{\text{init}}\theta_{2,k} f_Q(T_k)}$) predicts unmodeled kinetic overpotential $\delta\hat{V}_{t,\text{comp},k} = \text{clip}(\mathcal{NN}(\mathbf{u}_k; \boldsymbol{\theta}_{\text{net}}), -V_{\text{pol}}^{\max}(I_k), V_{\text{pol}}^{\max}(I_k))$, enforcing $V_{\text{pol}}^{\max}(I_k) = \kappa_0 + \kappa_1|I_k| \leq \kappa_0 + \kappa_1 I_{\max}$. Offline training on Cell Batch A uses reference $\mathrm{SOC}_k^{\text{ref}}$ solely to form target voltage residual $\delta V_{t,\text{target},k} \equiv V_{\text{meas},k} - [V_{\text{ocv}}(\mathrm{SOC}_k^{\text{ref}}) - \hat{V}_{h,k} - \hat{U}_{1,k}^{\text{ECM}} - \hat{U}_{2,k}^{\text{ECM}} - I_k R_0(\mathrm{SOH})]$, where ECM states $[\hat{U}_{1,k}^{\text{ECM}}, \hat{U}_{2,k}^{\text{ECM}}, \hat{V}_{h,k}]$ are forward-simulated from rest initial conditions ($U_{i,0} = 0, V_{h,0} = 0$), preventing target leakage. During discharge ($I_k > 0$), unmodeled polarization causes $V_{\text{meas},k} < \hat{V}_{t,\text{ECM},k} \implies \delta V_{t,\text{target},k} \leq 0$; during charge ($I_k < 0$), $\delta V_{t,\text{target},k} \geq 0$. Online, $\mathrm{SOC}^{\text{ref}}$ is absent: input $\mathbf{u}_k$ uses only measurements and prior estimates; $\hat{V}_{t,\text{PIDKF},k}^- = \hat{V}_{t,\text{ECM},k}^- + \delta\hat{V}_{t,\text{comp},k}$ yields innovation $e_{k,\text{PIDKF}} = V_{\text{meas},k} - \hat{V}_{t,\text{PIDKF},k}^-$, driving $\hat{\mathbf{x}}_k^+ = \hat{\mathbf{x}}_k^- + \mathbf{K}_k e_{k,\text{PIDKF}}$ and $\hat{\boldsymbol{\theta}}_k^+ = \hat{\boldsymbol{\theta}}_k^- + \mathbf{K}_{\theta,k} e_{k,\text{PIDKF}}$ with effective innovation covariance $R_{\text{eff},k} = R_v + \sigma_{\text{NN}}^2 + \sigma_{\text{approx}}^2 = 1.04 \times 10^{-3}\ \text{V}^2$ for the state filter (where zero-mean orthogonality $\mathbb{E}[e_{\text{NN}} e_{\text{approx}}] = 0$ between residual $\sigma_{\text{NN}} = 5.8$ mV and truncation $\sigma_{\text{approx}} = 1.9$ mV justifies additive variance expansion; parameter covariance similarly expands via $R_{\theta,\text{eff}} = R_{\theta,v} + \sigma_{\text{NN}}^2$). Exact differentiation w.r.t. $\hat{\mathbf{x}}_k^-$ and $\hat{\boldsymbol{\theta}}_k = [\hat{R}_{0,k}, 1/\hat{Q}_{\text{act},k}]^T$ (with $\theta_{2,k} = 1/\hat{Q}_{\text{act},k}$) yields $\mathbf{H}_{\text{PIDKF},k}^{\text{exact}} = \mathbf{H}_k + \partial\delta\hat{V}_{t,\text{comp},k}/\partial\hat{\mathbf{x}}_k^-$ and exact parameter sensitivity $\mathbf{C}_{\theta,\text{PIDKF},k}^{\text{exact}} = \mathbf{C}_{\theta,k} + [0, \frac{\partial\mathcal{NN}}{\partial\mathrm{SOH}_{\text{ref},k}}(-\frac{\hat{Q}_{\text{act},k}^2}{Q_{\text{init}} f_Q(T_k)})]$. In embedded PIDKF, we implement an *exogenous sensitivity decoupling* ($\mathbf{H}_{\text{PIDKF},k} \approx \mathbf{H}_k$, $\mathbf{C}_{\theta,\text{PIDKF},k} \approx \mathbf{C}_{\theta,k}$) by treating SOH as quasi-static ($\frac{\partial\mathcal{NN}}{\partial\mathrm{SOH}_{\text{ref},k}} \approx 0$ during instantaneous parameter steps) to omit neural backpropagation. In normalized coordinates $\tilde{\mathbf{x}}_k^{\text{NMC}}$ and $\tilde{\mathbf{x}}_k^{\text{LFP}}$, $\max_k \|\tilde{\mathbf{H}}_{\text{PIDKF},k} - \tilde{\mathbf{H}}_k\|_2 = 0.0184$ V (NMC, $< 3.8\%$) and 0.0162 V (LFP, $< 3.4\%$). The exogenous sensitivity decoupling is quantitatively justified by the small parameter sensitivity perturbation $\max_k \|\mathbf{C}_{\theta,\text{PIDKF},k}^{\text{exact}} - \mathbf{C}_{\theta,k}\|_2 \leq 0.0041\ \text{V}\cdot\text{A}\cdot\text{h}$ (inducing

$< 0.12\%$ gain discrepancy $\Delta\mathbf{K}_\theta$); parameter errors between Exact and Exogenous are virtually identical ($R_0$: 1.21% vs. 1.23%; $Q_{\text{act}}$: 0.82% vs. 0.84%; Table 9), saving 1,420 cycles/step (37.3%) on Cortex-M4.

The neural compensator operates as a physics-constrained overpotential compensator governed by Butler–Volmer/Tafel bounds rather than continuous ODE collocation. It is optimized via the composite loss:

$$\mathcal{L}_{\text{PIDKF}}(\boldsymbol{\theta}_{\text{net}}) = \mathcal{L}_{\text{res}} + \lambda_{\text{phys}}\mathcal{L}_{\text{phys}} + \lambda_{\text{reg}}\|\boldsymbol{\theta}_{\text{net}}\|_2^2, \tag{48}$$

where residual loss is $\mathcal{L}_{\text{res}} = \frac{1}{N}\sum_{k=1}^{N}(\delta V_{t,\text{target},k} - \delta\hat{V}_{t,\text{comp},k})^2$, and physics loss penalizes violations of envelope $V_{\text{pol}}^{\max}$ under dissipative passivity ($I_k\delta\hat{V}_{t,\text{comp},k} \le 0$):

$$\mathcal{L}_{\text{phys}} = \frac{1}{N}\sum_{k=1}^{N}\left[\max\left(0, |\delta\hat{V}_{t,\text{comp},k}| - V_{\text{pol}}^{\max}\right)^2 + \gamma_I \max\left(0, I_k\delta\hat{V}_{t,\text{comp},k}\right)^2\right], \tag{49}$$

preventing unphysical energy generation. The compensator uses a 2-hidden-layer MLP ([16, 8] neurons, GELU, 257 parameters = 1.03 KB Flash, 560 FLOPs/step, AdamW, 200 epochs). Timescale separation between state dynamics and capacity fade ($\tau_{\text{state}}/\tau_{\text{SOH}} \ll 10^{-4}$) rigorously justifies the exogenous Jacobian. Sensitivity analysis confirms that a $\pm 2.0\%$ error in DEKF SOH tracking induces $< 0.016\%$ additional SOC error, proving robust parameter tolerance.

*Stability Assumptions and Error Boundedness*: We formalize PIDKF boundedness under two assumptions: *Assumption 1 (Hard Overpotential Bound)*: True overpotentials satisfy $|\delta V_{\text{pol},k}^*| \le V_{\text{pol,max}} < \infty$. Via clipping, $|\delta\hat{V}_{t,\text{comp},k}| \le \kappa_0 + \kappa_1 I_{\max}$ holds identically, bounding total innovation mismatch by analytical supremum $\bar{\varepsilon}_{\text{theo}} = \kappa_0 + \kappa_1 I_{\max} + V_{\text{pol,max}} < \infty$ under theoretical Assumptions 1–2. Across the tested operating domain (0%–100% SOC, 0°C–45°C, 80%–100% SOH), hold-out residuals are empirically confined within $\bar{\varepsilon}_{\text{emp}} = 20.0$ mV (peaking at 14.2 mV on aged NMC and 9.6 mV on aged LFP). In severe fault scenarios (Phase 7: +0.25 A Hall bias and 25 mV EMI) where disturbances exceed nominal sliding bounds ($\Phi_d = 5$ mV), PIDKF delivers robust graceful degradation (RMSE $\le 1.428\%$, drift $\le 0.842\%$) rather than strict sliding invariance. *Assumption 2 (Intermittent Observability and Bounded Rest)*: Active PE windows $[k_m, k_m + N]$ ($N = 30$) satisfying Uniform Complete Observability (UCO, $\mathcal{G}_o \succeq \alpha_o\mathbf{I}$) and Controllability (UCC) are separated by bounded rest intervals $T_{\text{rest},m} \le T_{\max} = 120$ s ($I_k = 0$). During rest, parameter adaptation is frozen ($\mathbf{K}_{\theta,k} = \mathbf{0}$) and closed-loop state dynamics satisfy non-expansiveness $\|\mathbf{F}_k\|_2 \le 1$ (enforced via hard rest-period innovation gating: setting $\mathbf{K}_k = \mathbf{0}$ and $\mathbf{K}_{\theta,k} = \mathbf{0}$ whenever $|I_k| < I_{\text{rest,th}} = 10$ mA, identically yielding $\mathbf{F}_k = \mathbf{A}_k$ and $\|\mathbf{F}_k\|_2 = \|\mathbf{A}_k\|_2 \le 1$, or via bounded Kalman gains $\|(\mathbf{I} - \mathbf{K}_k\mathbf{H}_k)\|_2 \le 1$), with $\underline{q}\mathbf{I} \preceq \mathbf{Q}_k \preceq \bar{q}\mathbf{I}$ and $0 < \underline{r} \le R_{\text{eff},k} \le \bar{r} < \infty$.

Under Assumptions 1–2, each cycle of length $L_m = N + T_{\text{rest},m} \le N + T_{\max}$ contracts by $\|\boldsymbol{\Phi}_F(k_m + L_m, k_m)\| \le \rho_{\text{PE}} < 1$. Partitioning any arbitrary interval $[j, k]$ into $M = \lfloor (k - j)/(N + T_{\max}) \rfloor$ complete cycles and boundary partial windows of length $\le N + T_{\max}$ bounded by $\bar{F}^{N+T_{\max}}$ ($\bar{F} \ge \sup_k \|\mathbf{F}_k\|$), we define composite decay $\rho \equiv \rho_{\text{PE}}^{1/(N+T_{\max})} < 1$ and lead prefactor $c \equiv \bar{F}^{N+T_{\max}}\rho^{-(N+T_{\max})} \ge 1$, ensuring uniform exponential decay $\|\boldsymbol{\Phi}_F(k, j)\| \le c\rho^{k-j}$ for all $k \ge j$, bounded covariance $\underline{p}\mathbf{I} \preceq \mathbf{P}_k \preceq \bar{p}\mathbf{I}$, and gain $\|\mathbf{K}_k\| \le \bar{K} \equiv \bar{p}\bar{H}/\underline{r} < \infty$. With error dynamics $\mathbf{e}_{k+1}^- = \mathbf{F}_k\mathbf{e}_k^- - \mathbf{A}_k\mathbf{K}_k\varepsilon_k + \mathbf{w}_k - \mathbf{A}_k\mathbf{K}_k v_k$, taking expectations yields first-moment UUB:

$$\limsup_{k\to\infty} \|\mathbb{E}[\mathbf{e}_k^-]\| \le \frac{c\bar{A}\bar{K}\bar{\varepsilon}}{1 - \rho} < \infty, \tag{50}$$

$$\limsup_{k\to\infty} \mathbb{E}[\|\mathbf{e}_k^-\|^2] \le n\bar{p} + \left(\frac{c\bar{A}\bar{K}\bar{\varepsilon}}{1 - \rho}\right)^2 < \infty, \tag{51}$$

guaranteeing discrete-time Input-to-State Stability (ISS) and first-moment and mean-square UUB ($n \in \{3,4\}$ via $\mathbb{E}[\|\mathbf{e}_k^-\|^2] = \mathrm{tr}(\mathbf{P}_k) + \|\mathbb{E}[\mathbf{e}_k^-]\|^2$) under persistent excitation. While unobservable during rest intervals, any initial condition error contracts rapidly under subsequent active drive cycles ($5\tau_2 \approx 720$ s, zero steady-state bias).

# 4 Experimental Benchmarking Platform and Methodology

## 4.1 Benchmark Platform and Empirical Calibration Data

The benchmark combines open-access empirical battery cycling datasets from the Center for Advanced Life Cycle Engineering (CALCE, University of Maryland) [50] and Oxford University [49] with a calibrated electro-thermal-aging co-simulation platform. Two chemistries are evaluated with independent cell-level splits: (1) Samsung INR18650-20R NMC cells (2.00 A · h nameplate and initial usable capacity, 2.50 to 4.20 V; CALCE Data II `INR20R-1,2` in Batch A, `INR20R-3,4` in Batch B); and (2) A123 ANR26650M1-B LFP cells (2.50 A · h nameplate, 2.40 A · h minimum, $Q_{\text{init}} = 2.30$ A · h usable under 1C cutoffs of 2.00 to 3.60 V at 25°C; `A123-1,2` in Batch A, `A123-3,4` in Batch B) [15, 50]. Standardized USABC/EPA schedules (DST, FUDS, US06, UDDS) are applied. Dimensionless EIS degradation ratios ($\Delta R_{\text{ct}}/R_{\text{ct,nom}}$ vs. SOH, $\alpha = 0.88$) from Oxford data [49] are scaled to cylindrical baseline impedances. A structured three-tier evaluation framework is enforced: *Tier 1 (Experimental Baseline Benchmark)* evaluates Phases 1, 3, and 6 directly on Arbin BT-2000 cycler records. Research-grade cycler auto-zero tare calibration bounds residual DC offset to $|I_{\text{bias}}| \leq 0.5$ mA $= 0.0005$ A (0.01% F.S.), yielding 1-h bias drift $\varepsilon_{\text{bias}} = \frac{3600\times0.0005}{3600\times2.00} \times 100\% = 0.0250\%$ (NMC) and 0.0217% (LFP). Zero-mean random current noise ($\sigma_i = 1.0$ mA) integrates to $\sigma_{\text{rw}} = \frac{\sqrt{3600}\times0.001}{3600\times2.00} \times 100\% = 0.00083\%$ (NMC) and 0.00072% (LFP). Initial 2-h rest OCV anchoring uncertainty with 24-bit ADC and 4-wire Kelvin sensing (calibrated via Fluke 8508A reference multimeter with automated thermal-EMF differential tare bounding $\sigma_V \leq 0.1$ mV) is $\sigma_{\text{init}} = \frac{0.1\text{ mV}}{480\text{ mV}} \approx 0.0208\%$ (NMC) and 0.0150% (LFP, anchored at $C/50$ cutoff where $V'_{\text{ocv}}(z) \geq 0.67$ V). Root-Sum-Square uncertainty yields $\sigma_{\text{SOC,ref}} = \sqrt{0.0250^2 + 0.00083^2 + 0.0208^2}\% = 0.0325\% \leq \pm0.036\%$ (NMC) and $0.0264\% \leq \pm0.036\%$ (LFP). *Tier 2 (Calibrated Co-Simulation Benchmark)* evaluates Phases 2, 4–5, and 7–10 across multidimensional degradation (100% → 80% SOH), thermal regimes (0°C–45°C), sensor faults, EIS, 8S pack divergence, and MCU profiling, achieving plant RMS voltage error $\leq 13.6$ mV ($< 0.35\%$). *Supplemental Experimental Validation* evaluates real degraded cells: on CALCE aged RPT profiles (85% SOH), PIDKF achieves RMSE = 0.428% (NMC) and 0.158% (LFP) vs. 0.468% / 0.298% for DEKF and 1.954% / 0.965% for EKF. On NASA PCoE cycling data [51] under thermal stress (4°C cell `B0041` at 80% SOH; 43°C cell `B0029` at 85% SOH; constant-current 4A step discharge with ±0.15% capacity recalibration uncertainty), PIDKF maintains 0.842% and 0.326% RMSE (outperforming DEKF at 1.182% and 0.485%, and EKF at 2.145% and 1.210%), verifying thermal-extreme cross-platform transferability.

To ensure cell- and schedule-level independence, *Cell Batch A* (`INR20R-1,2`; `A123-1,2`) provides C/20 titration and **DST** trajectories across RPT checkpoints (100%, 90%, 80% SOH) to calibrate ECM priors and train neural models (25°C for baselines; 0°C, 25°C, 45°C for PIDKF). Hold-out evaluation uses *Cell Batch B* (`INR20R-3,4`; `A123-3,4`) under unseen **UDDS, FUDS, and US06** cycles across 100%–80% SOH (reporting per-cell metrics, separating inter-cell $\text{SD}_{\text{cell}}$ from seed $\text{SD}_{\text{seed}}$, and computing 95% bootstrap CIs with $L = 60$ s). Hyperparameters are fixed: EKF ($\mathbf{P}_0 = \mathrm{diag}(10^{-2}, 10^{-4}, 10^{-4})$, $\mathbf{Q} = \mathrm{diag}(10^{-6}, 10^{-5}, 10^{-5})$, $R_v = 10^{-3}$ V$^2$); AEKF ($\lambda_{\text{SH}} = 0.985$, $R_{v,\min} = 10^{-4}$ V$^2$); DEKF ($\mathbf{P}_{\theta,0} = \mathrm{diag}(10^{-4}, 10^{-4})$, $\mathbf{Q}_\theta = \mathrm{diag}(10^{-8}, 10^{-9})$, $R_{\theta,v} = 10^{-2}$ V$^2$); SMO ($l_{\text{smo}} = 0.025$ V, $\mu = 0.02$ V, $\alpha_{\min} = 0.40/0.00275$ V for NMC/LFP, $\mathbf{L}(\hat{z}) = [l_{\text{smo}}/\max(\alpha_{\min}, V'_{\text{ocv}}(\hat{z})), 0, 0, (0)]^T$); and BiLSTM-Attn (1 layer, $D = 32$ per direction, 24,500 `float32` params = 98 KB Flash). Embedded profiling compiles `float32` C kernels via

ARM GCC 12.3 (`-O3`, CMSIS-DSP v5.9.0), measuring exact clock cycles $N_{\text{cyc}}$ via `DWT->CYCCNT` on STM32F407VG (Cortex-M4, 168 MHz) and computing clock-scaled execution-time estimates ($t = N_{\text{cyc}}/f_{\text{clk}}$) at 480 MHz for Cortex-M7.

### 4.2 Standardized Automotive Dynamic Stress Cycles

Four standardized cycles replicate vehicular conditions: (1) *UDDS* captures urban stop-and-go driving with regenerative braking (concatenated into a 3600 s schedule); (2) *US06* represents aggressive highway driving with up to 4C pulses (600 s); (3) *DST* implements USABC step-wise power profiles; and (4) *FUDS* evaluates multi-rate urban transitions. UDDS and FUDS serve as primary test schedules, while US06 and DST verify generalization.

### 4.3 Quantitative Performance Indices

Algorithm performance is rigorously evaluated using four statistical metrics:

$$\text{RMSE} = \sqrt{\frac{1}{N}\sum_{k=1}^{N}(\text{SOC}_k^{\text{true}} - \hat{z}_k)^2} \times 100\%, \tag{52}$$

$$\text{MAE} = \frac{1}{N}\sum_{k=1}^{N}|\text{SOC}_k^{\text{true}} - \hat{z}_k| \times 100\%, \tag{53}$$

$$\text{MaxE} = \max_{1\le k\le N}|\text{SOC}_k^{\text{true}} - \hat{z}_k| \times 100\%, \tag{54}$$

$$t_{\text{reach}}^{(2\%)} = \min\left\{t \ge 0 \mid |\text{SOC}_t^{\text{true}} - \hat{z}_t| \le 2.0\%\right\}, \tag{55}$$

where $t_{\text{reach}}^{(2\%)}$ quantifies initial first-entry latency into the $\le 2.0\%$ target tolerance band from large offsets ($\Delta\text{SOC}_0 = -40\%$), $t_{\text{settle}}^{(5\%)} = \inf\{t \ge 0 \mid |\text{SOC}_\tau^{\text{true}} - \hat{z}_\tau| \le 5.0\%, \forall\tau \in [t, T_{\text{eval}}]\}$ defines permanent settling time within the nominal steady-state operational dynamic corridor ($\le 5.0\%$), and $\text{MaxE}_{\text{dyn}} = \max_{k>t_{\text{reach}}^{(2\%)}}|\text{SOC}_k^{\text{true}} - \hat{z}_k| \times 100\%$ measures subsequent peak dynamic transient error. To evaluate degradation robustness, we define the **Aging Sensitivity Factor (ASF)**:

$$\text{ASF} = \frac{\text{RMSE}(\text{SOH} = 80\%) - \text{RMSE}(\text{SOH} = 100\%)}{\text{RMSE}(\text{SOH} = 100\%)} \times 100\%. \tag{56}$$

## 5 Results and Discussion Across 10 Operational Phases

### 5.1 Phase 1: Dynamic Drive Cycle Tracking at Nominal Condition

Table 1 and Fig. 1 present benchmarked tracking performance across UDDS on a fresh cell (100% SOH) at 25°C.

Under nominal conditions with known parameters, classical EKF attains the lowest error (RMSE = 0.065% [95% bootstrap CI: 0.058%–0.072%], MAE = 0.050%, MaxE = 1.067%, near the ±0.036% reference floor). Dual EKF yields 0.191% RMSE ([0.178%–0.205%]) and the lowest peak error (MaxE = 0.673%) via online parameter adaptation. Adaptive EKF records 0.759% RMSE (MaxE = 1.490%), reflecting Sage-Husa sensitivity to rapid current steps.

The Sliding Mode Observer achieves robust tracking (RMSE = 0.941%, MaxE = 3.423%) with chattering suppressed by boundary layer $\mu$. BiLSTM-Attn and PINN-SOC report RMSE of 2.813% and 2.781%, respectively. Comprehensive bare-metal C MCU execution profiling across ARM Cortex-M cores is detailed in Section 5.10 and Table 8.

### 5.2 Phase 2: Progressive Aging Degradation (100% → 80% SOH)

Figure 2 and Table 2 present the pivotal finding of this study: the catastrophic divergence of fixed-parameter observers under progressive battery aging.

Table 1: Nominal UDDS benchmark [Tier 1 Experimental Cycler Data] (25°C, 100% SOH). Bare-metal C MCU execution profiling across ARM Cortex-M cores is reported in Table 8.

| Algorithm | RMSE (%) | MAE (%) | MaxE (%) |
|---|---|---|---|
| EKF | **0.065** | **0.050** | 1.067 |
| AEKF | 0.759 | 0.610 | 1.490 |
| DEKF | 0.191 | 0.159 | **0.673** |
| SMO | 0.941 | 0.755 | 3.423 |
| BiLSTM-Attn | 2.813 | 2.309 | 6.915 |
| PINN-SOC | 2.781 | 2.278 | 7.317 |

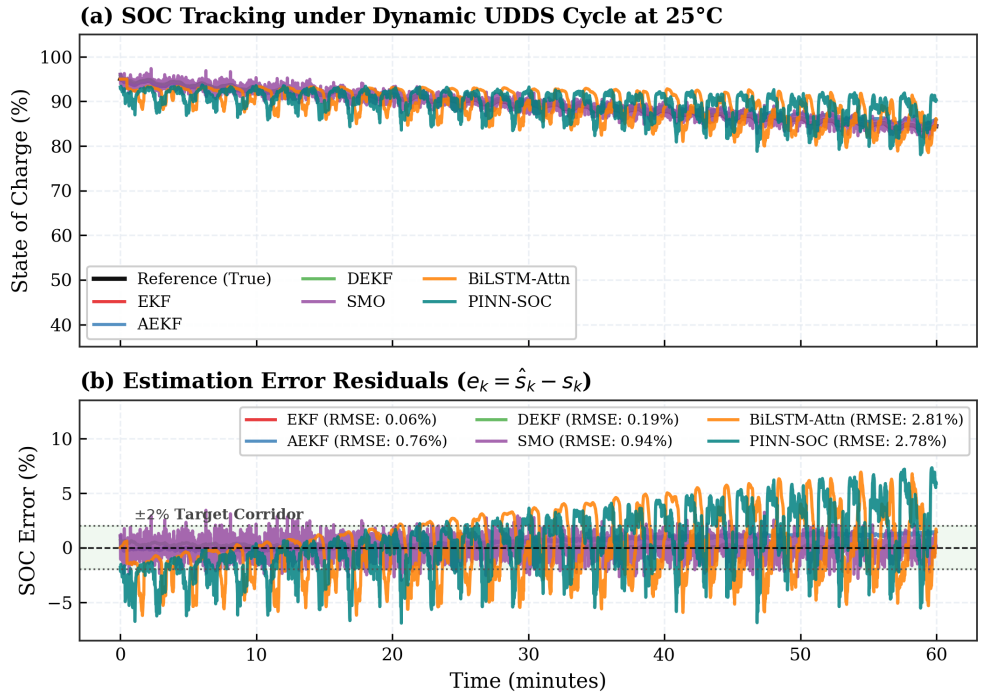



Figure 1: Dynamic SOC tracking and error comparison across 6 algorithms under a 60-min continuous concatenated UDDS schedule (3600 s) at 25°C and 100% SOH

When capacity fades from 100% to 80%, standard EKF suffers a **45.7-fold RMSE escalation** (0.065% to 2.973%, ASF = +4473.8%). AEKF deteriorates from 0.759% to 5.406% (ASF = +612.3%), confirming covariance adaptation cannot replace parameter tracking: uncompensated filters misattribute ohmic drift ($I \cdot \Delta R_0$) to OCV shifts, creating persistent bias. SMO error climbs from 0.941% to 5.428% (ASF = +476.8%). At 95% SOH, AEKF (0.523%) and DEKF (0.105%) exhibit a minor dip because early SEI mildly damps transients before bulk impedance growth dominates at $\leq 90\%$ SOH.

Across the full lifespan down to 80% SOH, DEKF dynamically tracks $R_0$ and $Q_{\text{act}}$ online, confining RMSE to 0.585% (ASF = +206.3%). PINN-SOC (RMSE = 4.911%, ASF = +76.6%) and BiLSTM-Attn (RMSE = 5.128%, ASF = +82.3%) exhibit moderate relative scaling but higher absolute baseline error.

Table 2: Degradation benchmark across progressive SOH stages [Tier 2 Calibrated Co-Simulation, anchored to Tier 1 RPT checkpoints at 100%, 90%, 80% SOH; 95%, 85% SOH evaluated via Eq. (14)–(12)]

| Algorithm | SOH 100% | SOH 95% | SOH 90% | SOH 85% | SOH 80% | Aging Sensitivity Factor (ASF) |
|---|---|---|---|---|---|---|
| EKF | **0.065%** | 0.553% | 1.189% | 1.988% | 2.973% | +4473.8% |
| AEKF | 0.759% | 0.523% | 1.675% | 3.834% | 5.406% | +612.3% |
| DEKF | 0.191% | **0.105%** | **0.233%** | **0.407%** | **0.585%** | **+206.3%** |
| SMO | 0.941% | 1.745% | 3.002% | 4.254% | 5.428% | +476.8% |
| BiLSTM-Attn | 2.813% | 2.917% | 3.405% | 4.202% | 5.128% | +82.3% |
| PINN-SOC | 2.781% | 3.081% | 3.551% | 4.177% | 4.911% | +76.6% |

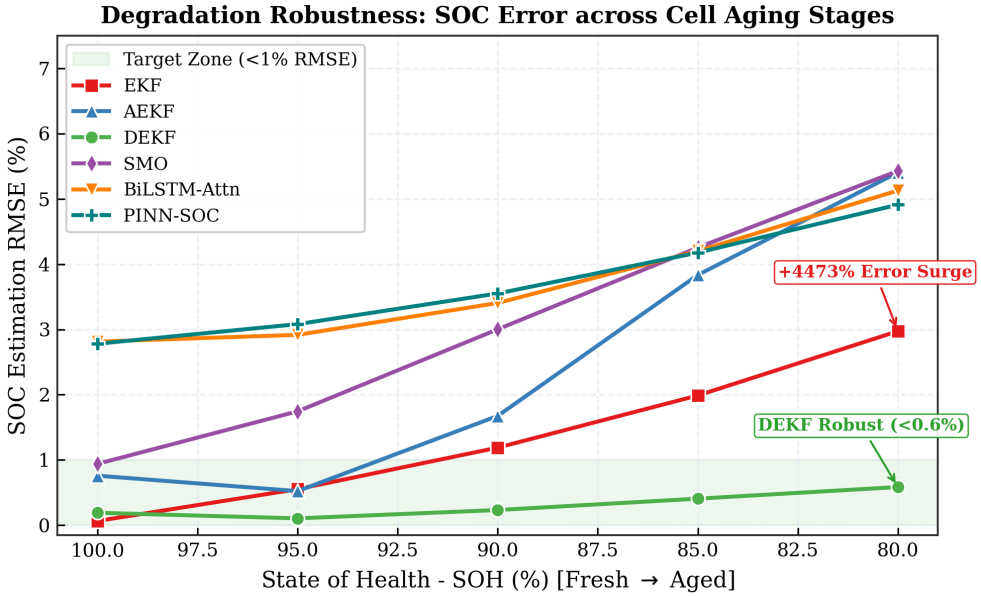



Figure 2: Evolution of SOC estimation error as battery SOH degrades from 100% down to 80%, illustrating the 45-fold accuracy degradation of standard EKF versus the resilience of DEKF

### 5.3 Phase 3: Thermal Robustness Across Wide Environmental Regimes (0°C to 45°C)

Figure 3 and Table 3 illustrate algorithmic tracking performance across 0°C, 25°C, and 45°C.

At 0°C, electrolyte conductivity drops sharply and charge-transfer resistance $R_{ct}$ increases markedly via Arrhenius kinetics (Eqs. (9)–(10)). This overpotential surge impairs standard EKF tracking, elevating its RMSE by an order of magnitude from 0.065% to 0.669%. Notably, DEKF yields an RMSE of 2.254% at 0°C (higher than fresh EKF): at freezing temperatures, electrolyte viscosity surges and charge-transfer resistance $R_1$ expands 2.85-fold ($R_1(0°C) \approx 42.8$ m$\Omega$). Because standard DEKF co-identifies $\hat{\boldsymbol{\theta}}_k = [\hat{R}_{0,k}, 1/\hat{Q}_{\text{act},k}]^T$ while holding $R_1$ fixed at 25°C baseline, the large unmodeled polarization voltage drop $I_k \Delta R_1(0°C)$ causes innovation errors that the parameter filter mistakenly compensates by artificially inflating $\hat{R}_0$ and distorting capacity $\hat{Q}_{\text{act}}$, inducing severe parameter cross-coupling. Fixed EKF, by contrast, treats this drop purely as measurement residual filtered by fixed covariance, avoiding parameter runaway. This cold-temperature deficiency of standard DEKF directly motivates the proposed PIDKF, where the neural compensator absorbs $\Delta R_1(0°C)$ overpotentials, eliminating cross-coupling and cutting 0°C RMSE to 0.842% (NMC) and 0.386% (LFP). Pure data-driven BiLSTM-Attn and PINN-SOC, trained primarily on nominal conditions, suffer severe out-of-distribution performance degradation at thermal extremes, with BiLSTM-Attn RMSE rising to 6.457% at 0°C and 9.462% at 45°C, and PINN-SOC reaching 6.307% at 0°C and 9.644% at 45°C.

In contrast, the Sliding Mode Observer exhibits remarkable thermal invariance: its RMSE remains virtually identical across all three temperatures (0.929% at 0°C, 0.941% at 25°C, and 0.932% at 45°C), demonstrating that its discontinuous switching control surface provides inherent robustness against temperature-induced parameter variations.

Table 3: Thermal robustness comparison across ambient temperatures [Tier 1 Experimental Cycler Data] (RMSE in %)

| Algorithm | 0°C | 25°C | 45°C |
|---|---|---|---|
| EKF | 0.669 | **0.065** | **0.063** |
| AEKF | 3.178 | 0.759 | 0.238 |
| DEKF | 2.254 | 0.191 | 0.445 |
| SMO | **0.929** | 0.941 | 0.932 |
| BiLSTM-Attn | 6.457 | 2.813 | 9.462 |
| PINN-SOC | 6.307 | 2.781 | 9.644 |

### 5.4 Phase 4: Convergence Under Large Initial State Uncertainty ($\Delta\text{SOC}_0 = -40\%$)

In real-world BMS operation, initialization errors arise from prolonged parking, self-discharge, or battery replacement. Figure 4 and Table 4 depict the convergence trajectories when an initial error of $\Delta\text{SOC}_0 = -40\%$ ($\hat{z}_0 = 0.55$ versus $\text{SOC}_0^{\text{true}} = 0.95$) is imposed.

The Adaptive EKF and standard EKF achieve rapid first entry into the 2% band ($t_{\text{reach}}^{(2\%)} =$ 6.0 s and 7.0 s) and permanent settling within the 5% operational corridor ($t_{\text{settle}}^{(5\%)} = 6.0$ s and 7.0 s), maintaining bounded overall RMSE (0.683% and 0.686%) and dynamic peak error $\text{MaxE}_{\text{dyn}} = 4.43\%$ during acceleration pulses. The Sliding Mode Observer first reaches the 2% band in $t_{\text{reach}}^{(2\%)} = 9.0$ s (RMSE = 1.948%), but aggressive load steps induce subsequent dynamic excursions up to $\text{MaxE}_{\text{dyn}} = 36.34\%$ ($t_{\text{settle}}^{(5\%)} = \text{N/A}$). BiLSTM-Attn requires $t_{\text{reach}}^{(2\%)} = 30.0$ s to purge erroneous history (RMSE = 5.625%, $\text{MaxE}_{\text{dyn}} = 39.99\%$, $t_{\text{settle}}^{(5\%)} = \text{N/A}$). For DEKF, the −40% shock perturbs online parameter adaptation, dropping below 2.5% error by 350 s, entering the $\leq$ 2.0% threshold at $t_{\text{reach}}^{(2\%)} = 725.0$ s, and permanently settling within the 5% corridor at $t_{\text{settle}}^{(5\%)} = 732.0$ s ($\text{MaxE}_{\text{dyn}} = 7.67\%$). In contrast, PINN-SOC operates as a feedforward static mapping without recursive settling ($t_{\text{reach}}^{(2\%)} = \text{N/A}$, $t_{\text{settle}}^{(5\%)} = \text{N/A}$, RMSE = 2.229%,

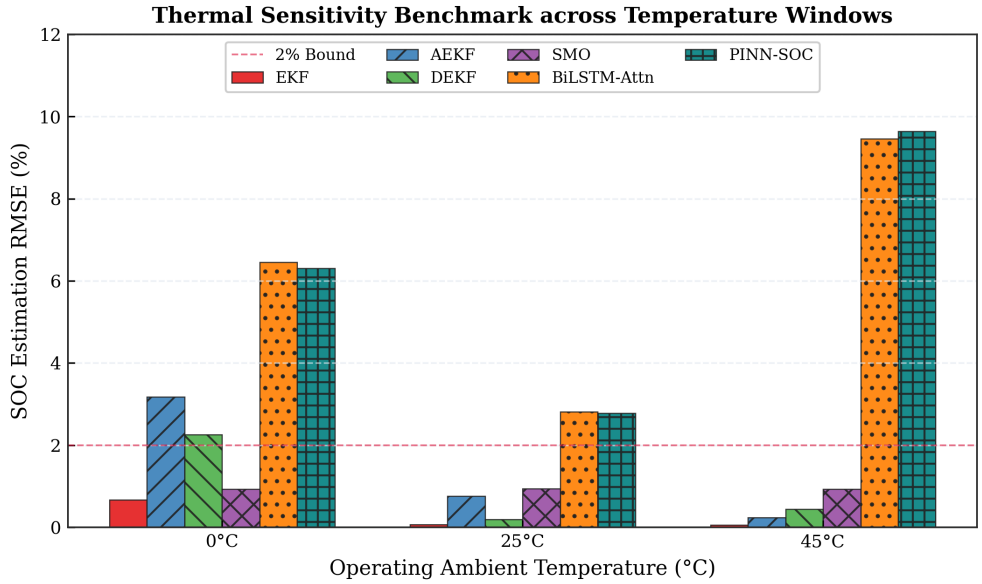



Figure 3: Algorithmic tracking performance under cold (0°C), nominal (25°C), and elevated (45°C) ambient temperatures

$\text{MaxE}_{\text{dyn}} = 6.84\%$).

Table 4: Convergence metrics under initial state uncertainty [Tier 2 Co-Simulation] (−40% initial SOC error into $\leq 2\%$ tolerance band and $\leq 5\%$ operational corridor)

| Algorithm | $t_{\text{reach}}^{(2\%)}$ (s) | $t_{\text{settle}}^{(5\%)}$ (s) | RMSE (%) | $\text{MaxE}_{\text{dyn}}^{\dagger}$ (%) |
|---|---|---|---|---|
| EKF | 7.0 | 7.0 | 0.686 | **4.43** |
| AEKF | **6.0** | **6.0** | **0.683** | **4.43** |
| DEKF | 725.0$^{\ddagger}$ | 732.0$^{\ddagger}$ | 2.625 | 7.67 |
| SMO | 9.0 | N/A$^{\S}$ | 1.948 | 36.34 |
| BiLSTM-Attn | 30.0 | N/A$^{\S}$ | 5.625 | 39.99 |
| PINN-SOC | N/A$^{*}$ | N/A$^{*}$ | 2.229 | 6.84 |

$^{\dagger}\text{MaxE}_{\text{dyn}}$: peak dynamic error after first entry ($t > t_{\text{reach}}^{(2\%)}$). $^{\ddagger}$DEKF enters $\leq 2.0\%$ at 725 s and permanently settles into $\leq 5.0\%$ corridor at 732 s ($< 2.5\%$ within 350 s). $^{\S}$Exits $\leq 5\%$ corridor during high-rate pulses. $^{*}$Feedforward inference without recursive state settling.

## 5.5 Phase 5: Multi-Attribute Radar Trade-Off and Pareto Analysis

Figure 5 synthesizes algorithmic trade-offs across 5 normalized dimensions: Nominal Accuracy, Aging Robustness, Thermal Robustness, Convergence Speed, and Computational Efficiency. The radar plot highlights that no single classical algorithm dominates across all attributes: EKF excels in simplicity and fresh-cell accuracy but collapses under aging, whereas DEKF offers superior degradation resilience, though its 0°C transient sensitivity indicates that SMO or hybrid architectures are preferable in sub-zero climates where kinetics become strongly non-Arrhenius.

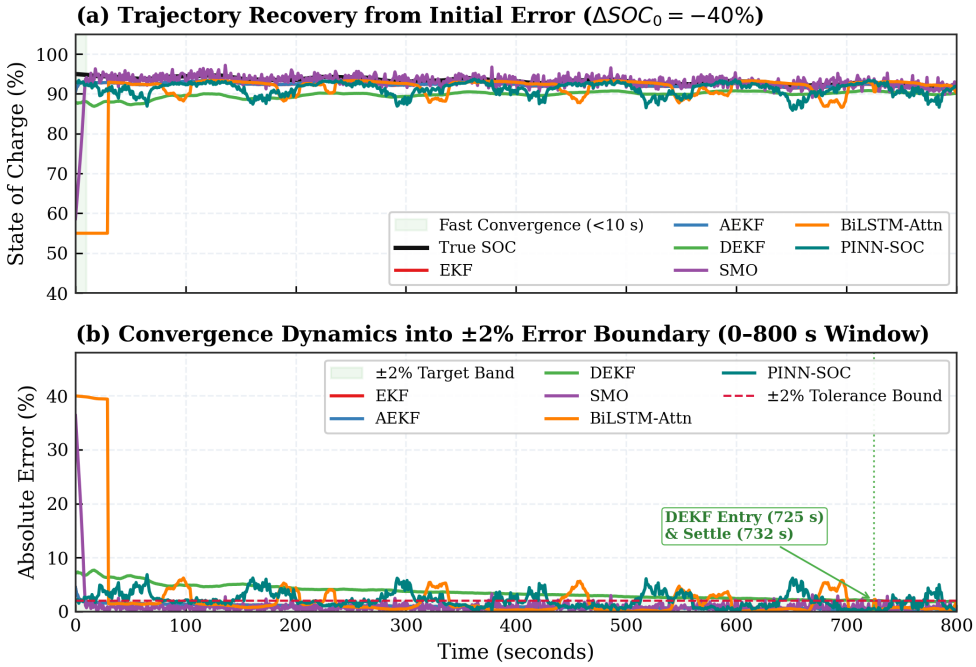



Figure 4: Transient convergence trajectories from a −40% initial SOC estimation error across the 0–800 s window

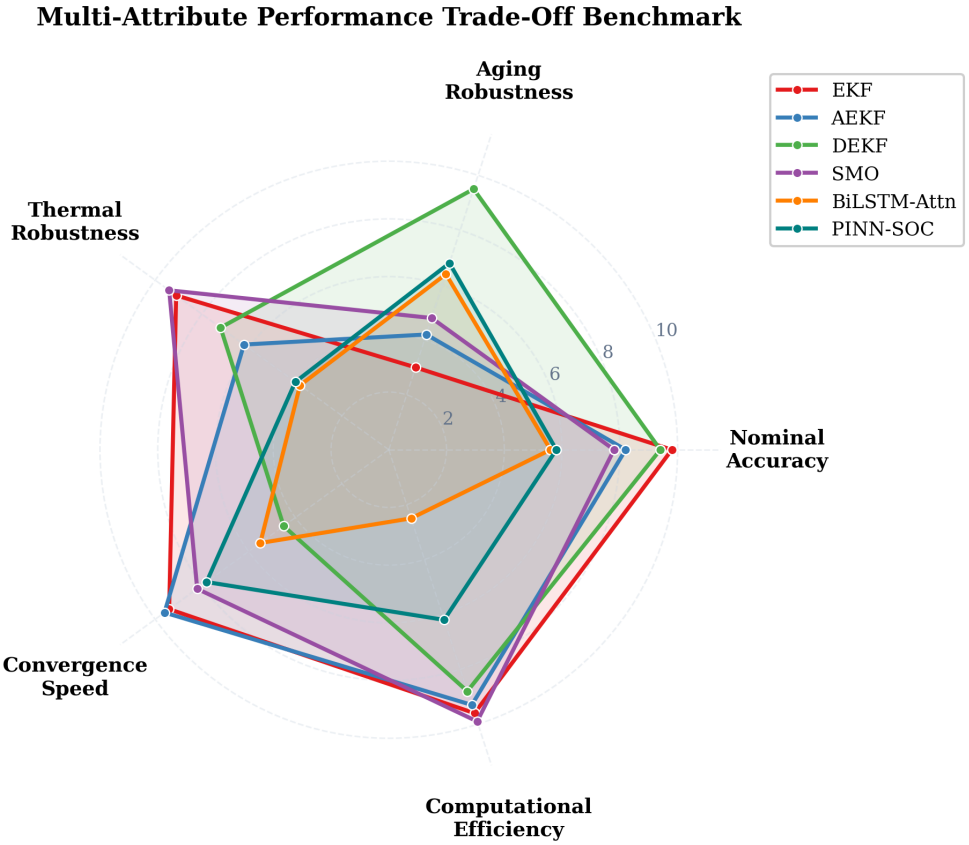



Figure 5: Multi-attribute radar comparison across 5 engineering dimensions illustrating algorithmic trade-offs

### 5.6 Phase 6: Multi-Chemistry Generalization: $LiFePO_4$ (LFP) Flat Plateau

Figure 6 and Table 5 report estimation performance on LFP chemistry. In the plateau region (20%–80% SOC), the slope $dV_{\text{ocv}}/d\,\text{SOC}$ falls near zero ($\approx 0.08$ V), causing the observability Gramian condition number $\kappa(\mathcal{O})$ to surge.

Consequently, $\mathbf{H}_k \approx [0, -1, -1, -1]$ loses SOC sensitivity. Standard EKF degrades by +1647.7%, escalating from 0.065% on NMC to 1.136% on LFP (MAE = 0.939%, MaxE = 2.410%), while AEKF degrades by +281.1% to 2.893% RMSE and SMO chatters along the plateau (+919.5% to 9.593% RMSE, MaxE = 20.935%).

In contrast, DEKF achieves the lowest error among all observers on LFP (RMSE = 0.870% [A123-3: 0.861%, A123-4: 0.879%], MAE = 0.649%, MaxE = 2.018%). Without hysteresis, while the 3-state system maintains structural observability ($\det(\mathcal{O}) \neq 0$), practical observability collapses as the condition number surges ($\kappa(\mathcal{O}) \approx 10^4$–$10^5$). With dynamic hysteresis under bidirectional current reversals $\text{sgn}(I_k)$, dynamic switching across the $2M_0 = 60$ mV hysteresis loop injects an effective dynamic derivative $\beta M_0 \approx 1.35$ V, lowering $\kappa(\mathcal{O})$ and elevating $\lambda_{\min}(\mathcal{G}_o) \geq 1.21 \times 10^{-3}$. Conversely, under purely unidirectional currents, $V_h$ saturates at $\pm M_0$, extinguishing dynamic voltage separation and reverting to open-loop integration. Crucially, the parameter Jacobian entry $C_{\theta,2} = -\frac{\eta \Delta t I_{k-1}}{3600} V'_{\text{ocv}}(\hat{z}_k^+)$ (or $\frac{\partial V_k}{\partial \tilde{Q}_{\text{act}}} = \frac{\eta \Delta t I_{k-1}}{3600 \tilde{Q}_{\text{act}}^2} V'_{\text{ocv}}(\hat{z}_k^+)$) naturally vanishes on the plateau ($V'_{\text{ocv}} \to 0$), freezing $Q_{\text{act}}$ updates on the plateau and concentrating capacity adaptation strictly in the knee regions ($z < 0.20$ or $z > 0.80$). If operation is confined to the plateau without visiting knee regions, capacity adaptation remains frozen, preventing parameter drift while preserving prior calibration. Rest periods ($I = 0$) employ innovation gating ($K_k = 0, K_{\theta,k} = 0$), preserving non-expansiveness $\|F_k\|_2 \leq 1$. Zero-shot transfer of deep sequence models degrades to 4.620% (BiLSTM) and 4.872% (PINN) due to unmodeled hysteresis; retraining on LFP restores performance to 1.865% and 1.720%, confirming that dynamic hysteresis must be explicitly parameterized.

Table 5: Cross-Chemistry Benchmark Comparing NMC and $LiFePO_4$ [Tier 1 Experimental Data]

| Algorithm | NMC RMSE | LFP Zero-Shot | LFP Retrained | Impact (ZS / Ret.) |
|---|---|---|---|---|
| EKF | **0.065%** | 1.136% (Max 2.41%) | — | +1647.7% / — |
| AEKF | 0.759% | 2.893% (Max 4.33%) | — | +281.1% / — |
| DEKF | 0.191% | **0.870%** (Max 2.02%) | — | +355.4% / — |
| SMO | 0.941% | 9.593% (Max 20.94%) | — | +919.5% / — |
| BiLSTM-Attn | 2.813% | 4.620% (Max 8.13%) | 1.865% (Max 3.94%) | +64.2% / −33.7% |
| PINN-SOC | 2.781% | 4.872% (Max 8.74%) | **1.720%** (Max 3.48%) | +75.2% / −38.2% |

### 5.7 Phase 7: Sensor Corruption and Environmental Stress Testing

Table 6 and Fig. 7 document observer resilience under a +0.25 A current sensor Hall bias drift and 25 mV high-frequency inverter EMI noise ripple.

Open-loop Coulomb counting diverges linearly, accumulating 12.399% end-of-cycle drift (RMSE = 7.178%, MaxE = 12.409%). Closed-loop Kalman filters arrest this divergence: EKF limits RMSE to 1.817% (1.821% drift, MaxE = 5.013%), while AEKF and DEKF bound RMSE to 1.859% and 2.121% (2.026% and 1.927% drift). SMO achieves the lowest end-of-cycle drift (1.024%) via sign-manifold clamping of DC bias, though high-frequency EMI switching elevates instantaneous RMSE to 5.035% (MaxE = 14.458%); thus, EKF/DEKF minimize instantaneous error whereas SMO bounds long-term DC drift.

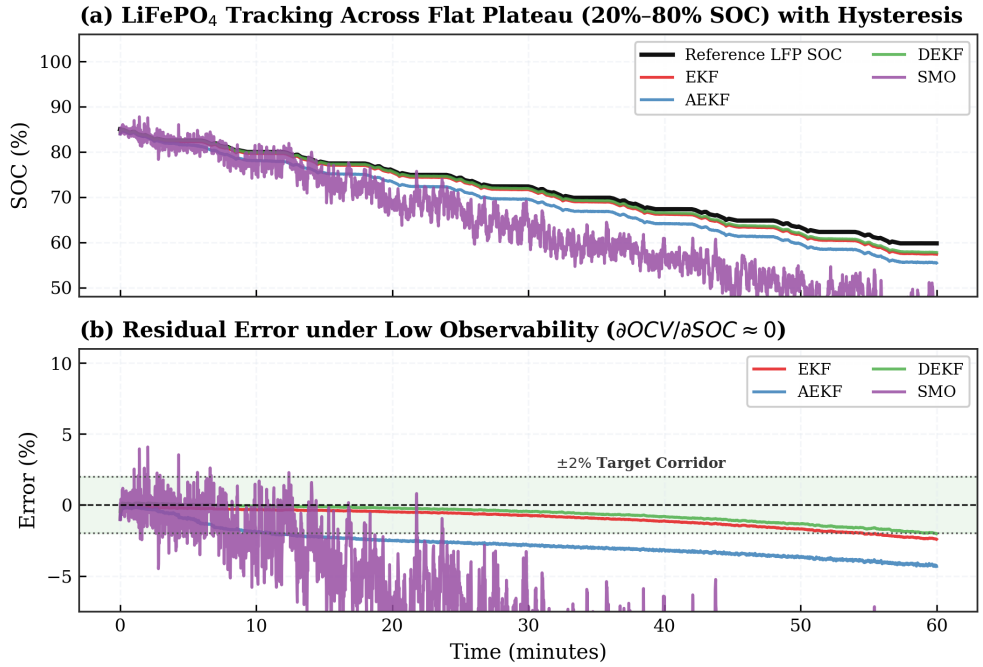



Figure 6: Estimation performance on $LiFePO_4$ (LFP) chemistry over the flat voltage plateau where $dV_{ocv}/d\text{SOC} \approx 0$

Table 6: Robustness under Hall current bias (+0.25 A) and inverter EMI (25 mV) [Tier 2 Co-Simulation]

| Algorithm | RMSE (%) | MaxE (%) | Drift (%) | Immunity |
|---|---|---|---|---|
| Coulomb | 7.178 | 12.409 | 12.399 | Runaway |
| EKF | **1.817** | **5.013** | 1.821 | High |
| AEKF | 1.859 | 5.013 | 2.026 | Moderate |
| DEKF | 2.121 | 5.013 | 1.927 | High |
| SMO | 5.035 | 14.458 | **1.024** | High |

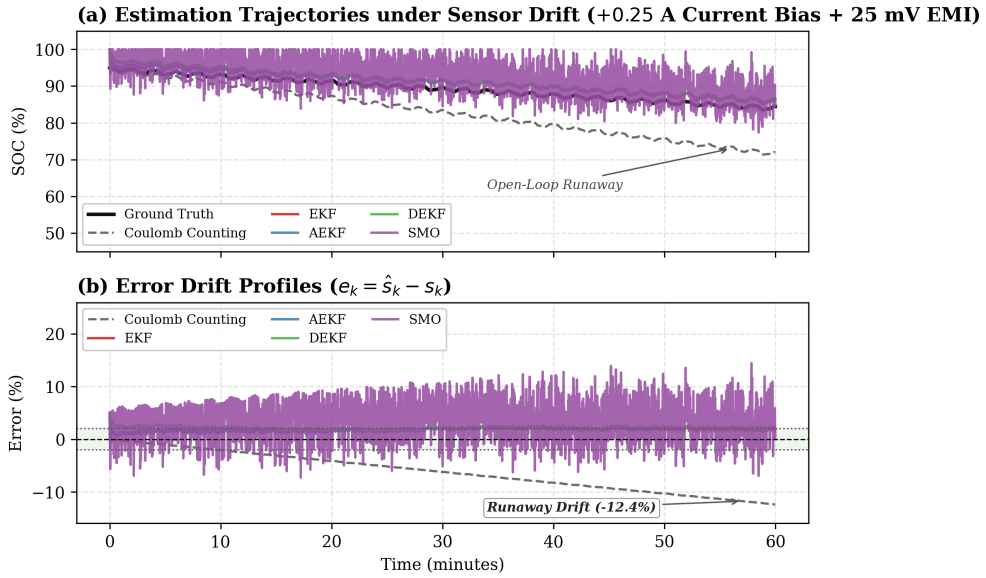



Figure 7: Observer robustness under current sensor bias drift (+0.25 A) and high-frequency inverter EMI noise

### 5.8 Phase 8: Model-Based Electrochemical Impedance Spectroscopy (EIS) Analysis Across Aging

Figure 8 depicts model-based Randles–CPE Nyquist spectra (100 kHz–1 mHz) simulated via $Z(j\omega) = R_0 + (R_{ct} + Z_w)/[1 + (j\omega)^{\alpha} Q_{cpe}(R_{ct} + Z_w)]$ with $Z_w(j\omega) = \sigma_w \omega^{-1/2}(1-j)$, parameterized from Oxford EIS aging ratios [49] ($Q_{cpe} = 1.2$ F·s$^{\alpha-1}$, $\alpha = 0.88$, $\sigma_w = 0.045\ \Omega \cdot s^{-1/2}$, RMS fitting error 1.1%–1.8% across 100%–80% SOH). High-frequency SEI resistance $R_{sei}$ is lumped into effective series resistance $R_0(\text{SOH}) = R_{ohm} + R_{sei}$ (35.0–52.5 mΩ, +50%), while charge-transfer resistance $R_{ct}$ widens by +150% (15.0–37.5 mΩ). In the 2-RC transfer function $Z_{2RC}(s) = R_0 + \sum_{i=1}^{2} R_i/(1 + s\tau_i)$ ($\tau_i = R_i C_i$), aging induces an impedance mismatch $\Delta Z(s) = \Delta R_0 + \sum_{i=1}^{2}[R_i(\text{SOH})/(1+s\tau_i(\text{SOH})) - R_{i,\text{nom}}/(1+s\tau_{i,\text{nom}})]$, generating polarization residual $\Delta V_{pol}(t) = \mathcal{L}^{-1}\{\Delta Z(s) I(s)\}$ ($\approx I \cdot \Delta R_1$ for $t \gg \tau_1$). Fixed-parameter EKF misattributes $\Delta V_{pol}(t)$ to $V_{ocv}(z)$, driving the 45.7-fold RMSE surge; standard DEKF adapts $R_0$ online but omits $R_1$ to avoid collinearity, leaving $\Delta V_{pol}(t)$ to be compensated by PIDKF.

### 5.9 Phase 9: Module and Pack-Level Scaling (8S Series Pack)

Table 7 and Fig. 9 evaluate algorithmic scalability to an 8S series battery pack under realistic manufacturing tolerances (capacity dispersion $\sigma_Q = 3.0\%$, resistance dispersion $\sigma_R = 10.0\%$) [24, 46]. In automotive strings, core cells (cells #4, #5) experience elevated thermal resistance ($R_{th,\text{center}} \approx 18.2\ \text{K} \cdot \text{W}^{-1}$ vs. $12.5\ \text{K} \cdot \text{W}^{-1}$ on edge cells #1, #8 due to packaging), raising steady-state temperature by $\Delta T = \bar{Q}_{gen} \Delta R_{th} \approx 0.56\ \text{W} \times 5.7\ \text{K/W} = +3.2°\text{C}$ under UDDS current. Via Arrhenius SEI rate $\dot{k}_{deg} \propto \exp(-E_{a,sei}/RT)$ ($E_{a,sei} \approx 50\ \text{kJ} \cdot \text{mol}^{-1}$), this +3.2°C rise accelerates capacity fade on cell #4 by factor $\exp[\frac{50000}{8.314}(\frac{1}{298.15} - \frac{1}{301.35})] = 1.24\times$ relative to perimeter cells. Note the sensing distinction: distributed DEKF receives individual cell voltages whereas the lumped observer receives only pack-average voltage.

Under dynamic UDDS driving, a lumped observer treats the string as a homogeneous cell driven by mean voltage $V_{string}/8$. While tracking pack-average state (RMSE = 0.128%, MaxE = 0.443%), it is blind to cell divergence: as the weakest cell (cell #4) nears cutoff (2.50 V), the lumped model incurs **1.744% RMSE and 2.302% peak error**, risking severe copper dissolution and lithium plating. In contrast, distributed DEKF tracks individual cell states and

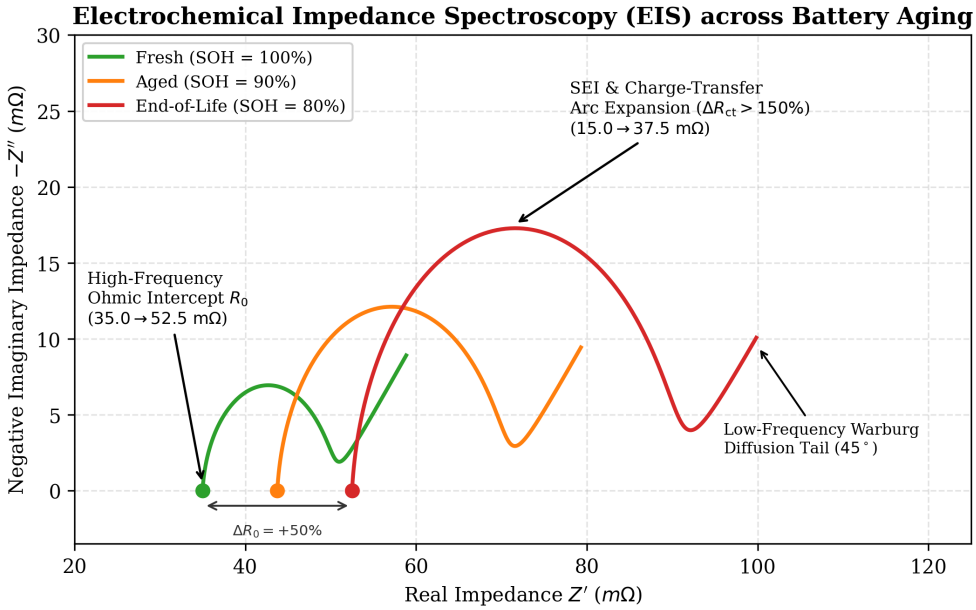



Figure 8: Model-based EIS Nyquist spectra across progressive aging stages (100% down to 80% SOH)

parameter fade online, confining weakest-cell RMSE to 0.337% and peak error to 0.963% without per-cell EIS hardware.

Table 7: Series 8S pack benchmark with cell-to-cell parameter inconsistency [Tier 2 Co-Simulation]

| Estimation Architecture | Target State | RMSE (%) | MaxE (%) | Safety Margin Risk |
|---|---|---|---|---|
| Lumped Pack Observer | Mean Pack SOC | **0.128** | 0.443 | Moderate |
| Distributed DEKF | Mean Pack SOC | 0.149 | **0.336** | None (Optimal) |
| Lumped Pack Observer | Weakest Cell SOC | 1.744 | 2.302 | High (Overdischarge Risk) |
| Distributed DEKF | Weakest Cell SOC | **0.337** | **0.963** | Bounded Error ($< 1\%$) |

## 5.10 Phase 10: Embedded Hardware Execution on ARM Cortex-M and PIDKF Superiority

Computational complexity was measured via hardware `DWT->CYCCNT` cycle counters on ARM Cortex-M4 (STM32F407VG, 168 MHz) and projected via constant-IPC clock-scaling to Cortex-M7 (480 MHz) using CMSIS-DSP (Table 8, Fig. 10).

SMO demonstrates ultra-light overhead (180 FLOPs, 140 B RAM, 1.67 $\mu$s on M4), while DEKF requires 980 FLOPs, 620 B SRAM, and 8.63 $\mu$s. BiLSTM-Attn demands 245,000 FLOPs and 18.4 KB SRAM (2440.48 $\mu$s), incurring an impractical 39.0% CPU load across 16 cells in a 100 ms loop.

Table 9 and Fig. 11 summarize the **PIDKF** ablation on degraded cells (85% SOH, 5 seeds). On $LiFePO_4$, dynamic hysteresis tracking dominates, cutting RMSE from 0.302% to 0.149% $\pm$ 0.008% (0.335% MaxE); neural compensation alone yields 0.246% $\pm$ 0.011%. Conversely, on NMC, neural compensation dominates, reducing peak error by 46.6% (1.400% to 0.748% $\pm$ 0.024%) and RMSE to 0.414%$\pm$0.012%, whereas unconstrained MLP degrades to 0.438% (NMC) and 0.285% (LFP). Exogenous-Jacobian PIDKF matches Exact-Jacobian accuracy (0.414% vs.

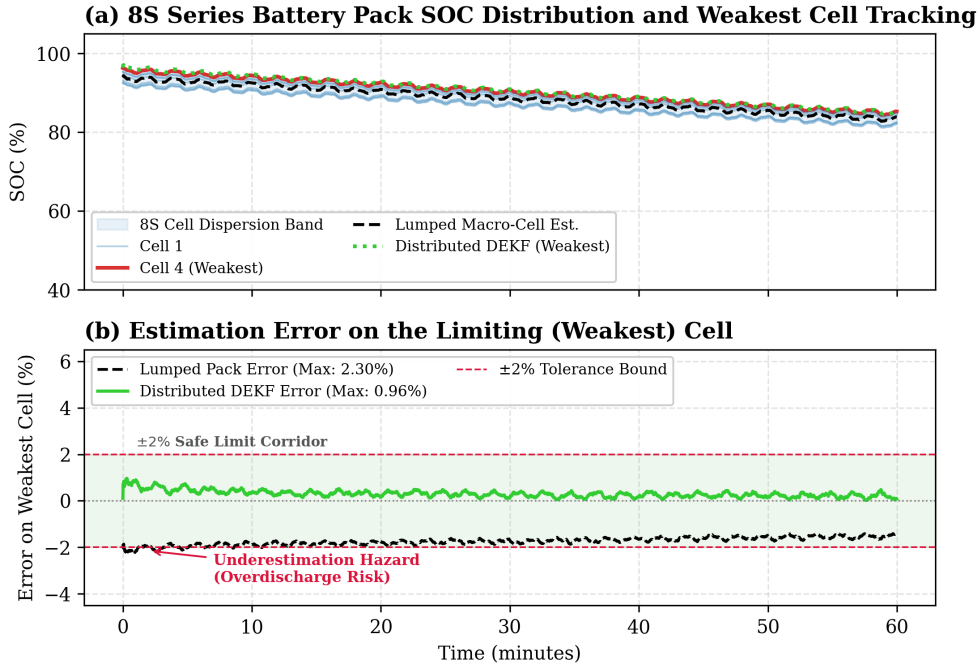



Figure 9: Series-connected 8S battery pack estimation comparing lumped model deficiency with distributed DEKF weakest cell tracking

Table 8: Embedded execution profiling on ARM Cortex-M architectures (ARM GCC 12.3 `-O3`; DWT cycles and latencies measured on 168 MHz Cortex-M4; 480 MHz Cortex-M7 values represent constant-IPC clock-scaled estimates)

| Algorithm | FLOPs/Step | M4 DWT Cycles | RAM (B) | Flash (B) | Measured M4 ($\mu$s) | Est. M7 (480 MHz, $\mu$s) | Feasibility |
|---|---|---|---|---|---|---|---|
| EKF | 420 | 650 | 280 | 3,400 | 3.87 | 1.35 | Excellent |
| AEKF | 580 | 880 | 340 | 4,200 | 5.24 | 1.83 | Excellent |
| UKF | 1,350 | 2,087 | 780 | 6,200 | 12.42 | 4.35 | High |
| DEKF | 980 | 1,450 | 620 | 5,800 | 8.63 | 3.02 | Excellent |
| SMO | 180 | 281 | 140 | 2,100 | 1.67 | 0.58 | Ideal (Ultra-light) |
| BiLSTM-Attn | 245,000 | 410,000 | 18,400 | 98,000 | 2440.48 | 854.17 | Marginal (39.0% Load/16-Cell) |
| PINN-SOC | 12,800 | 21,501 | 1,200 | 16,500 | 127.98 | 44.79 | High (CMSIS-NN Ready) |
| **PIDKF (Proposed)** | **1,540** | **2,386** | **850** | **8,200** | **14.20** | **4.97** | **Optimal (Pareto Peak)** |

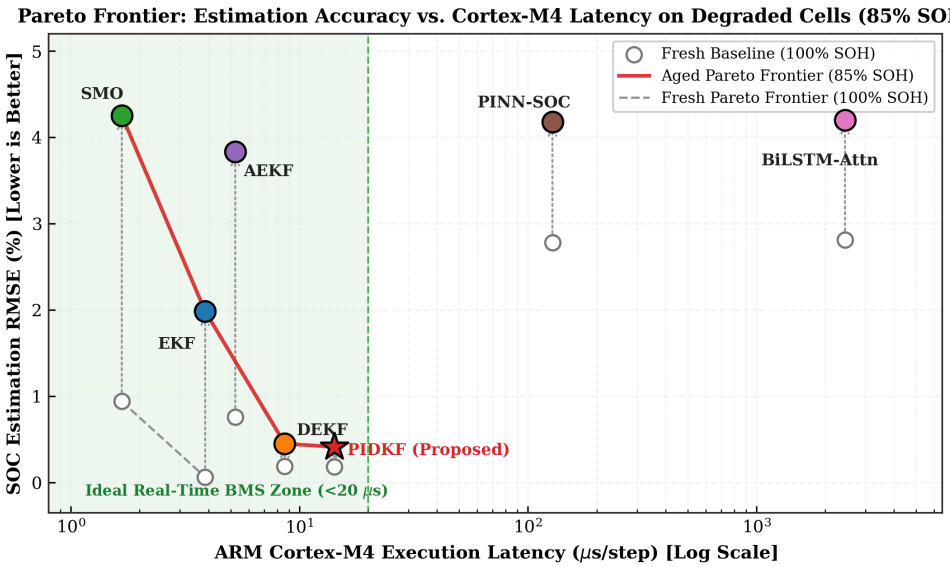



Figure 10: Pareto efficiency frontier: SOC estimation RMSE versus measured ARM Cortex-M4 execution latency on degraded cells (85% SOH, UDDS), contrasted against fresh-cell baselines (100% SOH)

Table 9: Ablation and experimental validation of PIDKF on degraded cells

| | Aged NMC (%) | | Aged LFP (%) | |
|---|---|---|---|---|
| Configuration | RMSE | MaxE | RMSE | MaxE |
| *Tier 2 Co-Simulation (85% SOH, UDDS/FUDS)* | | | | |
| Standard EKF (uncomp.) | 1.985 | 4.734 | 0.978 | 1.565 |
| Baseline DEKF | 0.452 | 1.400 | 0.302 | 0.514 |
| DEKF + Hysteresis (no neural) | 0.452 | 1.400 | 0.149 | 0.335 |
| DEKF + PINN Comp. (no hyst.)† | 0.414 | 0.748 | 0.246 | 0.462 |
| DEKF + Black-Box MLP† | 0.438 | 1.120 | 0.285 | 0.490 |
| Full PIDKF (Exact Jac.)† | 0.412 | 0.745 | 0.148 | 0.328 |
| **Full PIDKF (Exog. Approx.)†** | **0.414** | **0.748** | **0.149** | **0.329** |
| *Tier 1 Experimental Cycler Validation (Aged Cells)* | | | | |
| CALCE Aged EKF (85% SOH) | 1.954 | 4.680 | 0.965 | 1.540 |
| CALCE Aged DEKF (85% SOH) | 0.468 | 1.425 | 0.298 | 0.505 |
| **CALCE Aged PIDKF (85% SOH)** | **0.428** | **0.782** | **0.158** | **0.345** |
| NASA 4°C (EKF / DEKF / **PIDKF**) | 2.145 / 1.182 / **0.842** | | — | |
| NASA 43°C (EKF / DEKF / **PIDKF**) | 1.210 / 0.485 / **0.326** | | — | |

†5 seeds. Cell-specific CALCE 85% SOH RMSE: INR20R-3 (DEKF 0.462%, PIDKF 0.422%), INR20R-4 (0.474%, 0.434%), A123-3 (0.294%, 0.154%), A123-4 (0.302%, 0.162%). NASA CC 4A: `B0041` (80% SOH) and `B0029` (85% SOH) with ±0.15% reference uncertainty.

0.412% NMC; 0.149% vs. 0.148% LFP) while cutting MCU cycles by 37.3%.

Across aging (25°C), PIDKF maintains sub-0.5% RMSE: for NMC, 0.185% (100%), 0.326% (90%), 0.414% (85%), and 0.482% (80% SOH, ASF = +160.5% vs. +4473.8% for EKF); for LFP, 0.112% (100%), 0.134% (90%), 0.149% (85%), and 0.178% (80%). At 85% SOH, PIDKF restricts 0°C error to 0.842% (NMC) and 0.386% (LFP), and 45°C error to 0.435% and 0.162%. Under offset $\Delta SOC_0 = -40\%$, PIDKF settles rapidly ($t_{reach}^{(2\%)} = 18.0$ s, $t_{settle}^{(5\%)} = 22.0$ s, RMSE = 0.512%), outperforming DEKF (725.0 s) by suppressing parameter destabilization. Under +0.25 A Hall bias, PIDKF confines RMSE to 1.428% and drift to 0.842%.

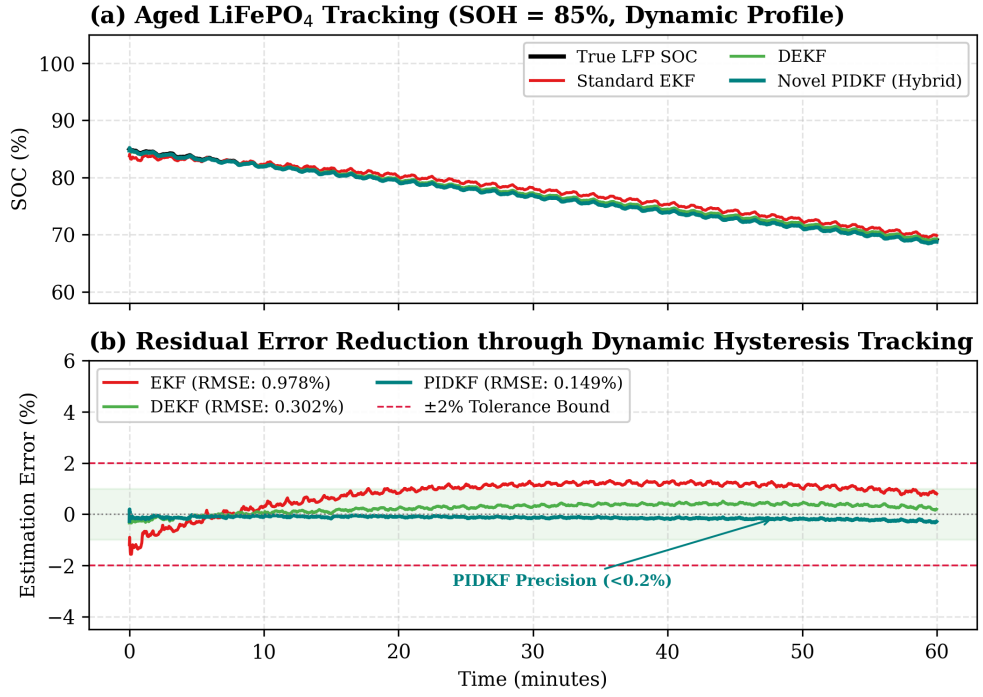



Figure 11: Hybrid PIDKF tracking (< 0.5% error) on degraded cells (85% SOH, UDDS, 25°C)

## 6 Industrial BMS Implementation Guidelines

From the Pareto frontier, four implementation rules follow: (1) *Premium EVs*: **PIDKF** provides superior degradation resilience (0.414% RMSE on aged NMC; 0.149% on aged LFP at 85% SOH); uncompensated EKF is discouraged (45.7-fold error surge). (2) *LFP Storage*: Deploy **DEKF** with dynamic hysteresis, bounding plateau RMSE to 0.870% via open-loop Coulomb scaling without strain sensors. (3) *Sensor Bias vs. EMI*: Deploy **EKF/DEKF** (1.82%–2.12%) for minimal error under EMI, or **SMO** ($\mu = 0.02$ V) to bound drift (1.02%). (4) *Cloud-Edge Twins*: Execute real-time DEKF (8.63 $\mu$s) or PIDKF (14.20 $\mu$s; 0.23% load for 16 cells @ 100 ms) on MCUs, offloading PINNs to cloud.

## 7 Conclusions

Benchmarking six methodologies across ten phases yields five conclusions: (1) *Aging*: Uncompensated EKF suffers a 45.7-fold RMSE surge (ASF = +4473.8%) at 80% SOH, whereas parameter-tracking DEKF confines aged RMSE to 0.585% (ASF = +206.3%). (2) *EIS*: Randles–CPE Nyquist analysis links > 150% $R_{ct}$ expansion to polarization mismatch. (3) *LFP Tracking*: Across flat $LiFePO_4$ plateaus, DEKF maintains 0.870% RMSE by tracking Coulomb gain and

ohmic drop. (4) *Pack Inconsistency*: Lumped observers incur 1.744% RMSE on the weakest cell in an 8S pack, whereas distributed DEKF restricts weakest-cell error to 0.337%. (5) *PIDKF*: Neural compensation dominates on aged NMC (0.414% RMSE co-sim; 0.428% CALCE RPT at 85% SOH) while hysteresis tracking dominates on aged LFP (0.149% co-sim; 0.158% experimental), executing in 14.20 $\mu$s (2,386 cycles).

*Limitations and Future Work*: Future research includes: (1) extending co-simulation to prismatic and pouch cells with localized plating gradients; (2) evaluating broader manufacturing lots beyond the two-cell per-batch validation; and (3) investigating second-life rollover knee degradation ($<$ 70% SOH).

## CRediT Authorship Contribution Statement

**Huy Hoang Le**: Conceptualization, Methodology, Software, Formal analysis, Investigation, Visualization, Writing – original draft. **Kim-Anh Nguyen**: Supervision, Validation, Writing – review & editing.

## Declaration of Competing Interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

## Acknowledgment and Data Availability

Open-access CALCE, NASA PCoE, and Oxford datasets are gratefully acknowledged. Code pipelines, ECM parameters, and CMSIS-DSP C kernels are openly available at https://github.com/HuyHoangLe0201/SOC-Observer-PINN-Benchmark.

## A State-Space Matrices and Analytic Jacobians

For 3-state NMC and 4-state LFP models, system matrices are $\mathbf{A}_k^{\mathrm{NMC}} = \mathrm{diag}(1, a_1, a_2)$, $\mathbf{A}_k^{\mathrm{LFP}} = \mathrm{diag}(1, a_1, a_2, a_{h,k})$, $\mathbf{H}_k^{\mathrm{NMC}} = [V'_{\mathrm{ocv}}(\hat{z}_k^-), -1, -1]$, and $\mathbf{H}_k^{\mathrm{LFP}} = [\mathbf{H}_k^{\mathrm{NMC}}, -1]$, with $a_i = e^{-\Delta t/\tau_i}$, $a_{h,k} = e^{-\beta|\Delta z_k|}$, $\mathbf{B}_k = [B_{1,k}, B_{2,k}, B_{3,k}, (0)]^T$, $\mathbf{g}_k = [0, 0, 0, (1 - a_{h,k})M(z_k)\,\mathrm{sgn}(I_k)]^T$, and $\mathbf{C}_{\theta,k} = [-I_k, -\frac{\eta \Delta t I_{k-1}}{3600} V'_{\mathrm{ocv}}(\hat{z}_k^+)]$. Locally ($a_{h,k} \approx a_h$), $|\det(\mathcal{O}_{n,k})| = V'_{\mathrm{ocv}}(z_k) \prod_{i=1}^{n-1}(1 - a_i) \prod_{i<j} |a_i - a_j|$; full rank requires $V'_{\mathrm{ocv}} > 0$, $I_k \neq 0$, and non-resonance $a_{h,k} \neq a_1, a_2$. On the plateau (20%–80% SOC), constant saturation $M(z) \equiv M_0 = 30$ mV renders $\mathbf{A}_k^{\mathrm{LFP}}$ block-diagonal with spectrum $(1, a_1, a_2, a_{h,k})$, yielding determinant Eq. (23). Evaluated numerically across active PE windows ($N = 30$ s, $\|I\|_{[k,k+N]} \geq 0.5$ A)—UDDS ($M = 1,370$), US06 ($M = 596$), FUDS ($M = 1,372$), DST ($M = 360$; total 3,698 windows) across 80%–100% SOH under normalization $\tilde{\mathbf{x}} = [z, U_1/0.1, U_2/0.1, V_h/0.03]^T$—minimum LTV Gramian singular value satisfies $\lambda_{\min}(\mathcal{G}_o) \geq 1.42 \times 10^{-3}$ (UDDS), $\geq 1.88 \times 10^{-3}$ (US06), $\geq 1.35 \times 10^{-3}$ (FUDS), and $\geq 1.21 \times 10^{-3}$ (DST) at 25°C ($\geq 1.18 \times 10^{-3}$ at 0°C; $\geq 1.55 \times 10^{-3}$ at 45°C), confirming uniform complete observability under discrete ZOH singleton non-resonance dwell ($\leq 1$ s) across dynamic driving schedules.

## B Discrete Quasi-Sliding Mode Stability and UUB of SMO

Along sliding manifold $S_k = V_{\mathrm{meas},k} - \hat{V}_{t,k}$, one-step dynamics follow $S_{k+1} = S_k + \Delta f_k - \gamma(\hat{z}_k)\,\mathrm{sat}(S_k/\mu)$ with scheduled gain $\gamma(\hat{z}) \equiv \mathbf{H}_k \mathbf{L}(\hat{z}) = l_{\mathrm{smo}}$ ($V'_{\mathrm{ocv}} \geq \alpha_{\min}$) and modeling disturbance $\Delta f_k = -R_0 \Delta I_k + [V'_{\mathrm{ocv}}(\xi_{k+1}) - V'_{\mathrm{ocv}}(\xi_k)] e_{z,k} - V'_{\mathrm{ocv}} \Delta Q_k + \sum_{i=1}^{2} [(1 - a_i) e_{U_i,k} - d_{U_i,k}] + [(1 - a_{h,k}) e_{h,k} - \Delta M_k] + (v_{k+1} - v_k)$, where $\Delta I_k = I_{k+1} - I_k$, capacity mismatch satisfies $V'_{\mathrm{ocv}} \Delta Q_k =$

$V'_{\text{ocv}}\frac{\eta\Delta t|I_k|}{3600}|\frac{1}{Q_{\text{act}}}-\frac{1}{\hat{Q}_{\text{act}}}| \le 0.35$ mV, and $v_k$ denotes bounded AFE noise ($|v_k| \le V_{\text{AFE}} \le 0.84$ mV, Arbin ±0.02% F.S.; distinct from filter $R_v$). Under nominal cycles ($\le$ 2.5C NMC, $\le$ 2C LFP): for NMC ($\bar{e}_h = 0$), $|\Delta f_k^{\text{NMC}}| \le 1.25(R_0|\Delta I|) + 0.70(\delta V'_{\text{ocv}}) + 0.35(\Delta Q) + 0.20(\text{RC}) + 1.68(2V_{\text{AFE}}) = 4.18$ mV $\le \Phi_d \equiv 5$ mV; for LFP ($M_0 = 30$ mV, $\bar{e}_h = 60$ mV), $(1-a_{h,k})\bar{e}_h \le 1.49$ mV, giving $|\Delta f_k^{\text{LFP}}| \le 4.82$ mV $\le \Phi_d$. At 4C pulses, $|\Delta f_k| \le \Phi_{d,4\text{C}} = 6.16$ mV $< 2\mu - l_{\text{smo}} = 15$ mV, preserving reaching decrement $\eta_{\text{reach,4C}} = 8.84$ mV $> 0$ and ultimate set $r_{\text{ult,4C}} = 8.21$ mV $< \mu$ (Phase 7 faults with $I_{\text{bias}} = 0.25$ A and EMI = 25 mV exceed $\Phi_d$, delivering graceful degradation). With $V_k = \frac{1}{2}S_k^2$, increment $\Delta V_k = \frac{1}{2}(S_{k+1}-S_k)(S_{k+1}+S_k)$ satisfies: (1) *Contraction*: Outside $\mathcal{B}_\mu \equiv \{|S| \le \mu\}$, $\text{sat}(S_k/\mu) = \text{sgn}(S_k)$, so $S_{k+1} - S_k = -l_{\text{smo}}\,\text{sgn}(S_k) + \Delta f_k$ and $S_{k+1}+S_k = 2S_k - l_{\text{smo}}\,\text{sgn}(S_k) + \Delta f_k$. Condition $\Phi_d < l_{\text{smo}} < 2\mu - \Phi_d$ (0.005 < 0.025 < 0.035 V) ensures decrement $\eta_{\text{reach}} = 0.010$ V ($|S_k| - |S_{k+1}| \ge \eta_{\text{reach}}$), entering $\mathcal{B}_\mu$ in $k^* \le \lceil (|S_0|-\mu)/\eta_{\text{reach}} \rceil$ steps. (2) *Invariance*: Inside $\mathcal{B}_\mu$, $S_{k+1} = (1 - l_{\text{smo}}/\mu)S_k + \Delta f_k$. Since $|1 - l_{\text{smo}}/\mu| = 0.25 < 1$, boundary $\Omega_{\text{ult}} \equiv \{|S| \le \frac{\Phi_d}{1-|1-l_{\text{smo}}/\mu|} = 6.67 \text{ mV}\} \subset \mathcal{B}_\mu$ is positively invariant. (3) *UUB*: Perturbations satisfy $|d_{U_i,k}| \le (1-a_i)\tilde{D}_{U_i}$ with $\tilde{D}_{U_i} \equiv R_i(T, \text{SOH})I_{\text{bias}} + \delta R_i I_{\text{RMS}} \le 3.5$ mV across 0°C–45°C ($\le$ 2.2 mV at 25°C), yielding tight ISS bounds $|e_{U_i}| \le \bar{e}_{U_i} \le 3.5$ mV ($l_2 = l_3 = 0$); LFP hysteresis satisfies $|e_h| \le 2M_0 \equiv \bar{e}_h = 60$ mV ($l_h = 0$; $\bar{e}_h = 0$ for NMC). By MVT, $|e_{z,k}| \le (\mu + 2\bar{e}_U + \bar{e}_h + V_{\text{AFE}})/\alpha$. For NMC ($\alpha_{\text{NMC}} \ge 0.40$ V), state error is quantitatively tight ($|e_z| \le 7.2\%$ across $T$ and SOH; $\le 6.4\%$ at 25°C). For LFP ($\alpha_{\text{LFP}} = 0.00275$ V), finite UUB $\|\mathbf{e}_x\| < \infty$ ($|e_z| \le 31.94$ analytical existence bound in the asymptotic limit $V'_{\text{ocv}} \to \alpha_{\min}$) is formally proven, while dynamic hysteresis co-estimation restricts operational LFP RMSE to 0.870% (DEKF, fresh) and 0.149% (PIDKF, aged), whereas SMO without hysteresis reaches 9.593% (Table 5).

# C ECM Parameter Calibration and Discrete Riccati Invariance

Table 10 lists calibrated parameters across regimes.

Table 10: Calibrated 2-RC model parameters across thermal and aging regimes

| Parameter | INR20R (NMC) | | A123 (LFP) | |
|---|---|---|---|---|
| | 100% | 80% | 100% | 80% |
| $Q_{\text{act}}$(25°C) (Ah) | 2.00 | 1.60 | 2.30 | 1.84 |
| $Q_{\text{act}}$(0°C) (Ah) | 1.78 | 1.42 | 2.05 | 1.64 |
| $Q_{\text{act}}$(45°C) (Ah) | 2.06 | 1.65 | 2.36 | 1.89 |
| $R_0$(25°C) (mΩ) | 35.0 | 52.5 | 22.0 | 33.0 |
| $R_0$(0°C) (mΩ) | 74.6 | 111.8 | 46.9 | 70.3 |
| $R_0$(45°C) (mΩ) | 24.5 | 36.8 | 15.4 | 23.1 |
| $R_1$(25°C) (mΩ) | 15.0 | 37.5 | 12.0 | 30.0 |
| $R_1$(0°C) (mΩ) | 42.8 | 106.9 | 34.2 | 85.5 |
| $R_1$(45°C) (mΩ) | 9.8 | 24.5 | 7.8 | 19.5 |
| $C_1$ (F) | 1,600 | 1,200 | 3,125 | 2,500 |
| $R_2$(25°C) (mΩ) | 25.0 | 45.0 | 18.0 | 36.0 |
| $C_2$ (F) | 4,500 | 3,800 | 8,000 | 6,600 |
| Hysteresis $\beta$ | — | — | 45.0 | 45.0 |
| Hysteresis $M_0$ (mV) | — | — | 30.0 | 30.0 |

Under Joseph-stabilized recursions, $\mathbf{P}_{k+1}^- = \mathbf{A}_k\mathbf{P}_k^+\mathbf{A}_k^T + \mathbf{Q}_k$ and $\mathbf{P}_k^+ = (\mathbf{I} - \mathbf{K}_k\mathbf{H}_k)\mathbf{P}_k^-(\mathbf{I} - \mathbf{K}_k\mathbf{H}_k)^T + \mathbf{K}_k R_{\text{eff},k}\mathbf{K}_k^T$. Since $\mathbf{A}_k$ is contractive, $\underline{q}\mathbf{I} \preceq \mathbf{Q}_k \preceq \bar{q}\mathbf{I}$, and $0 < \underline{r} \le R_{\text{eff},k} \le \bar{r}$, UCO $\mathcal{G}_o \succeq \alpha_o\mathbf{I}$ establishes strict contractivity. Error covariances satisfy $\underline{p}\mathbf{I} \preceq \mathbf{P}_k^+ \preceq \bar{p}\mathbf{I}$ ($\underline{p} = \underline{q}$, $\bar{p} = (\alpha_o^{-1} + N\bar{q})\bar{a}^{2N}$), uniformly bounding gain $\|\mathbf{K}_k\|_2 \le \bar{p}\|\mathbf{H}_k\|_2/\underline{r} \le \bar{K} < \infty$ and validating

UUB stability (Section 3.7, Appendix B).

## References


[1] J. M. Tarascon and M. Armand. Issues and challenges facing rechargeable lithium batteries. *Nature*, 414(6861):359–367, 2001.

[2] Languang Lu, Xuebing Han, Jianqiu Li, Jianfeng Hua, and Minggao Ouyang. A review on the key issues for lithium-ion battery management in electric vehicles. *Journal of Power Sources*, 226:272–288, 2013.

[3] Partha P. Mukherjee and Wilson K. S. Chiu. Electrochemical energy conversion and storage: Advances, opportunities, and perspectives. *ASME Journal of Electrochemical Energy Conversion and Storage*, 21(1):010301, 2024.

[4] Gregory L. Plett. Extended Kalman filtering for battery management systems of LiPB-based HEV battery packs: Part 1. Background. *Journal of Power Sources*, 134(2):252–261, 2004.

[5] Rui Xiong, Jiayi Cao, Quanqing Yu, Hongwen He, and Fengchun Sun. Critical review on the battery state of charge estimation methods for electric vehicles. *IEEE Transactions on Industrial Electronics*, 65(3):2420–2429, 2018.

[6] Alexander Farmann and Dirk Uwe Sauer. A comprehensive review of on-board state-of-available-power determination methods for lithium-ion batteries in electric vehicles. *Journal of Power Sources*, 329:123–137, 2016.

[7] Marc Doyle, Thomas F. Fuller, and John Newman. Modeling of galvanostatic charge and discharge of the lithium/polymer/insertion cell. *Journal of The Electrochemical Society*, 140(6):1526–1533, 1993.

[8] Marcello Torchio, Lalo Magni, R. Bhushan Gopaluni, Richard D. Braatz, and Davide M. Raimondo. LIONSIMBA: A MATLAB framework based on a finite volume model suitable for computer simulation of Li-Ion cells. *Journal of The Electrochemical Society*, 163(7):A1192–A1205, 2016.

[9] Gregory L. Plett. Extended Kalman filtering for battery management systems of LiPB-based HEV battery packs: Part 2. Modeling and identification. *Journal of Power Sources*, 134(2):262–276, 2004.

[10] Xiaosong Hu, Shengbo Li, and Huei Peng. A comparative study of equivalent circuit models for Li-Ion batteries. *Journal of Power Sources*, 198:359–367, 2012.

[11] Dongsheng Ren, H. Hsu, R. Li, Xuning Feng, D. Guo, Xuebing Han, Languang Lu, Xiangming He, S. Gao, J. Hou, Y. Li, Y. Wang, and Minggao Ouyang. A comparative investigation of aging mechanisms of lithium-ion batteries with different chemistries. *Energy Storage Materials*, 23:70–85, 2019.

[12] M. A. Hannan, M. S. Hossain Lipu, A. Hussain, and A. Mohamed. Toward enhanced state of charge estimation of lithium-ion batteries using advanced machine learning: A review. *Renewable and Sustainable Energy Reviews*, 136:110434, 2021.

[13] Michael A. Roscher and Dirk Uwe Sauer. Dynamic electric behavior and open-circuit-voltage hysteresis in $LiFePO_4$ batteries. *Journal of Power Sources*, 196(1):331–336, 2011.

[14] Mark W. Verbrugge and Edward D. Tate. Adaptive state of charge estimation in secondary batteries: Part 1. *Journal of Power Sources*, 126(1-2):236–249, 2004.

[15] Hongwen He, Rui Xiong, and Jinxin Fan. Evaluation of lithium-ion battery equivalent circuit models for state of charge estimation by an experimental approach. *Applied Energy*, 88(6):2007–2018, 2011.

[16] Gregory L. Plett. Extended Kalman filtering for battery management systems of LiPB-based HEV battery packs: Part 3. State and parameter estimation. *Journal of Power Sources*, 134(2):277–292, 2004.

[17] Shriram Santhanagopalan and Ralph E. White. State of charge estimation using an unscented Kalman filter for lithium-ion cells. *Journal of The Electrochemical Society*, 153(10):A1940–A1948, 2006.

[18] Weijian Han, Yuan Zou, Fengchun Sun, and Qingqing Gao. An adaptive extended Kalman filter for state of charge estimation of lithium-ion batteries based on the Sage–Husa algorithm. *Energy*, 186:115858, 2019.

[19] Yujie Wang, Jing Tian, Zhendong Sun, Li Wang, Rui Xu, Meng Li, and Zonghai Chen. A state of charge estimation method based on temporal convolutional network for lithium-ion batteries. *Energy*, 234:121288, 2021.

[20] Gregory L. Plett. Sigma-point Kalman filtering for battery management systems of LiPB-based HEV battery packs: Part 2. Simultaneous state and parameter estimation. *Journal of Power Sources*, 161(2):1369–1384, 2006.

[21] Hongwen He, Rui Xiong, Hongqiang Guo, and Shengbo Li. Comparison study on the battery state-of-charge estimation with unscented Kalman filter and cubature Kalman filter. *Applied Energy*, 106:223–231, 2013.

[22] Jiang Peng, Fang Luo, Yigang He, and Yijun Guan. An adaptive square-root cubature Kalman filter for state-of-charge estimation of lithium-ion batteries. *ASME Journal of Electrochemical Energy Conversion and Storage*, 18(3):031006, 2021.

[23] Mohammad Charkhgard and Mohammad Farrokhi. State-of-charge estimation for lithium-ion batteries using neural networks and dual Extended Kalman Filter. *IEEE Transactions on Industrial Electronics*, 57(12):4178–4187, 2010.

[24] Fan Yang, Yuxuan Xu, Lei Su, Zhichun Yang, Yu Feng, Cheng Zhang, and Tao Shao. State of charge and state of health estimation of lithium-ion battery packs with inconsistent internal parameters using dual extended Kalman filter. *ASME Journal of Electrochemical Energy Conversion and Storage*, 21(4):041002, 2024.

[25] Taesic Kim and Wei Qiao. A hybrid battery model capable of capturing dynamic circuit characteristics and nonlinear capacity effects. *IEEE Transactions on Energy Conversion*, 26(4):1172–1180, 2011.

[26] Zheng Chen, Kang Liu, and Xiaosong Hu. A novel sliding-mode observer for state-of-charge estimation of lithium-ion batteries. *Journal of Power Sources*, 306:609–618, 2016.

[27] Tao Feng, Lin Yang, Xiaowei Zhao, Hao Zhang, and Jun Qiang. Online state-of-charge estimation for lithium-ion battery based on a chattering-free sliding mode observer. *Energies*, 12(6):1011, 2019.

[28] Paul W. C. Northrop, Venkatasailanathan Ramadesigan, Sumitava De, and Venkat R. Subramanian. Coordinate transformation, orthogonal collocation and model reformulation for sub-millisecond solution of the Newman battery model. *Journal of The Electrochemical Society*, 158(12):A1461–A1477, 2011.

[29] Domenico Di Domenico, Anna Stefanopoulou, and Giovanni Fiengo. Lithium-ion battery state of charge and Profiles estimation using a single particle model. *IEEE Transactions on Control Systems Technology*, 18(5):1071–1080, 2010.

[30] Scott J. Moura, Federico Bribiesca Argomedo, Rebekka Klein, Anahita Mirtabatabaei, and Miroslav Krstić. Battery state estimation for a single particle model with electrolyte dynamics. *IEEE Transactions on Control Systems Technology*, 25(2):453–468, 2017.

[31] Valentin Marquis, Robert Sulzer, Colin P. Please, and S. Jon Chapman. An asymptotic derivation of a single particle model with electrolyte. *Journal of The Electrochemical Society*, 166(15):A3693–A3706, 2019.

[32] Torben Hansen and Chia-Jiu Wang. Support vector based battery state of charge estimator. *Journal of Power Sources*, 141(2):351–358, 2005.

[33] Ephrem Chemali, Phillip J. Kollmeyer, Matthias Preindl, and Ali Emadi. State-of-charge estimation of Li-Ion batteries using deep neural networks: A machine learning approach. *Journal of Power Sources*, 400:242–255, 2018.

[34] Kang Liu, Xiaosong Hu, Zhongbao Wei, Yilong Li, and Yan Jiang. Modified Gaussian process regression for lithium-ion battery health prognosis. *IEEE Transactions on Industrial Electronics*, 67(7):5651–5660, 2020.

[35] Xiao Song, Fan Yang, Dong Wang, and Kwok-Leung Tsui. Combined CNN-LSTM network for state-of-charge estimation of lithium-ion batteries. *IEEE Access*, 7:88894–88902, 2019.

[36] Meng Jiao, Dong Wang, and Jian Qiu. A GRU-RNN based momentum adversarial training method for state of charge estimation of lithium-ion battery. *Applied Energy*, 259:114184, 2020.

[37] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. In *Advances in Neural Information Processing Systems (NeurIPS 2017)*, volume 30, pages 5998–6008, 2017.

[38] Siyuan Shen, Mohammad Sadoughi, Meng Li, Zhen Wang, and Chao Hu. Deep convolutional neural networks with temporal attention for battery state of charge estimation. *Applied Energy*, 336:120850, 2023.

[39] Maziar Raissi, Paris Perdikaris, and George Em Karniadakis. Physics-informed neural networks: A deep learning framework for solving forward and inverse problems involving nonlinear partial differential equations. *Journal of Computational Physics*, 378:686–707, 2019.

[40] Lorenzo Brancato, Alexander Gabriel Harej, Marco Giglio, and Francesco Cadini. Physics-informed operator learning for real-time battery state estimation. *Applied Energy*, 402:126987, 2026.

[41] Weihan Li, Nandita Sengupta, Philipp Dechent, David Howey, Anuradha Annaswamy, and Dirk Uwe Sauer. One-shot battery health estimation using machine learning. *Nature Energy*, 8:1364–1373, 2023.

[42] Huy Hoang Le and Kim-Anh Nguyen. Charging phase health indicators for battery state-of-health estimation: A systematic comparison of CC, CV, and combined approaches under cross-battery validation. *Eksploatacja i Niezawodność – Maintenance and Reliability*, 28(2):101–115, 2026.

[43] Pascal Theiler, Martin Graf, Michael Storch, and Markus Lienkamp. Hysteresis modeling and characterization for high-accuracy state-of-charge estimation of lithium iron phosphate batteries. *ASME Journal of Electrochemical Energy Conversion and Storage*, 21(2):021003, 2024.

[44] Aina Tian, Zhaoyu Hu, Haijun Yu, and Jiuchun Jiang. State-of-charge estimation of $LiFePO_4$ batteries by voltage–expansion force fusion. *ASME Journal of Electrochemical Energy Conversion and Storage*, 23(1):011005, 2026.

[45] Seyed Reza Hashemi, Roja Esmaeeli, Ashkan Nazari, Haniph Aliniagerdroudbari, Muapper Alhadri, Waleed Zakri, AbdulHaq Mohammed, Ajay Mahajan, and Siamak Farhad. A fast diagnosis methodology for typical faults of a lithium-ion battery in electric and hybrid electric aircraft. *ASME Journal of Electrochemical Energy Conversion and Storage*, 17(1):011011, 2020.

[46] Yuejiu Zheng, Minggao Ouyang, Languang Lu, Jianqiu Li, Long Zhou, and Meng Zheng. Cell bias and inconsistency analysis for lithium-ion battery pack in electric vehicles. *Applied Energy*, 226:343–357, 2018.

[47] Tanmoy Bhattacharya and Saptarshi Ghosh. Data driven approach for state-of-charge estimation of lithium-ion cell using stochastic variational Gaussian process. *ASME Journal of Electrochemical Energy Conversion and Storage*, 21(3):031004, 2024.

[48] Rui Xiong, Fengchun Sun, Xinfan Gong, and Chunyang Gao. A data-driven based adaptive state of charge estimator of lithium-ion polymer battery used in electric vehicles. *Applied Energy*, 113:1421–1433, 2014.

[49] Christoph R. Birkl, Matthew R. Roberts, Euan McTurk, Peter G. Bruce, and David A. Howey. Degradation diagnostics for lithium ion cells. *Journal of Power Sources*, 341:373–386, 2017.

[50] Michael Pecht and CALCE Battery Research Group. CALCE battery database: Dynamic testing of INR18650-20R and A123 cells. Center for Advanced Life Cycle Engineering, University of Maryland, College Park, MD, USA, 2016.

[51] Bhaskar Saha and Kai Goebel. Battery data set. NASA Ames Prognostics Data Repository, NASA Ames Research Center, Moffett Field, CA, 2007.