


Telegram formats


The figures contained in the following text don't show sequences (Request ---> Acknowledge or response), but telegram formats of equal category (Hamming distance HD=4, fixed length with/without Data field and variable length), i.e. different acknowledge or response telegrams can follow the request telegrams (see Chapter 5).

Formats with fixed length of the information field without data field


A) Format of the request telegram (Request-Frame):

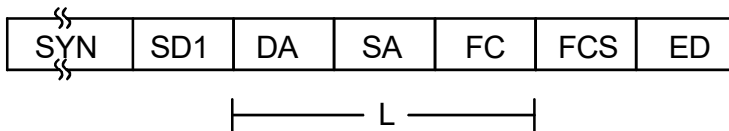

B) Format of the acknowledgement frame:



C) Format of the short acknowledgement



SYN = Synchronisation bits, min. 33 bit idle state

SD1 = Start byte 1 (Start Delimiter), Code: 10H

DA = Destination address

SA = Source address

FC = Frame Control

FCS = Frame Check Sequence

ED = End Delimiter, Code: 16H

L = Length of information field, fixed number of Bytes L = 3

SC = Single character, Code: E5H

Fig. Frame format with fixed length without data field