

## Assignment-4

Team ID	PNT2022TMID06138
Project Name	Signs with Smart Connectivity for Better Road Safety

### Question:

Write code and connections in wokwi for the ultrasonic sensor. Whenever the distance is less than 100 cms send an "alert" to the IBM cloud and display in the device recent events.

### Solution:

```
#include <WiFi.h>//library for wifi
#include <PubSubClient.h>//library for MQTT

#define ECHO_GPIO 12
#define TRIGGER_GPIO 13
#define MAX_DISTANCE_CM 100 // Maximum of 5 meters
#include <Ultrasonic.h>

Ultrasonic ultrasonic(13, 12);
int distance;

void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength);

//-----credentials of IBM Accounts-----

#define ORG "e4jrbo"//IBM ORGANITION ID
#define DEVICE_TYPE "SignsWithSmartConnectivity"//Device type mentioned in ibm
watson IOT Platform
#define DEVICE_ID "12345"//Device ID mentioned in ibm watson IOT Platform
#define TOKEN "1234567890" //Token
String data3;
float h, t;

//----- Customise the above values -----
char server[] = ORG".messaging.internetofthings.ibmcloud.com";// Server Name
char publishTopic[] = "iot-2/evt/Data/fmt/json";// topic name and type of
event perform and format in which data to be send
char subscribetopic[] = "iot-2/cmd/command/fmt/String";// cmd REPRESENT
command type AND COMMAND IS TEST OF FORMAT STRING
char authMethod[] = "use-token-auth";// authentication method
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;//client id
```

```

//-----
WiFiClient wifiClient; // creating the instance for wificlient
PubSubClient client(server, 1883, callback, wifiClient); //calling the
predefined client id by passing parameter like server id,portand
wificredential

void setup()// configureing the ESP32
{
    Serial.begin(115200);
    delay(10);
    Serial.println();
    wificonnect();
    mqttconnect();
}

void loop()// Recursive Function
{
    distance = ultrasonic.read(CM);
    if (distance < 100) {
        Serial.print("Distance in CM: ");
        Serial.println(distance);
        PublishData(distance);
        delay(1000);
        if (!client.loop()) {
            mqttconnect();
        }
    }

    delay(1000);
}

/*.....retrieving to
Cloud.....*/

void PublishData(float temp) {
    mqttconnect();//function call for connecting to ibm
    /*
        creating the String in in form JSon to update the data to ibm cloud
    */
    String payload = "{\"Alert Distance\":\"";
    payload += temp;
    payload += "\"}";

    Serial.print("Sending payload: ");

```

```

    Serial.println(payload);

    if (client.publish(publishTopic, (char*) payload.c_str())) {
        Serial.println("Publish ok");// if it successfully upload data on the cloud
        then it will print publish ok in Serial monitor or else it will print publish
        failed
    } else {
        Serial.println("Publish failed");
    }
}

void mqttconnect() {
    if (!client.connected()) {
        Serial.print("Reconnecting client to ");
        Serial.println(server);
        while (!client.connect(clientId, authMethod, token)) {
            Serial.print(".");
            delay(500);
        }

        initManagedDevice();
        Serial.println();
    }
}

void wificonnect() //function definition for wificonnect
{
    Serial.println();
    Serial.print("Connecting to ");

    WiFi.begin("Wokwi-GUEST", "", 6);//passing the wifi credentials to establish
the connection
    while (WiFi.status() != WL_CONNECTED) {
        delay(500);
        Serial.print(".");
    }
    Serial.println("");
    Serial.println("WiFi connected");
    Serial.println("IP address: ");
    Serial.println(WiFi.localIP());
}

void initManagedDevice() {
    if (client.subscribe(subscribetopic)) {
        Serial.println((subscribetopic));
        Serial.println("subscribe to cmd OK");
    } else {
        Serial.println("subscribe to cmd FAILED");
    }
}

```

```


}
}

void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{

    Serial.print("callback invoked for topic: ");
    Serial.println(subscribetopic);
    for (int i = 0; i < payloadLength; i++) {
        //Serial.print((char)payload[i]);
        data3 += (char)payload[i];
    }
    Serial.println("data: " + data3);
    if (data3 == "lighton")
    {
        Serial.println(data3);
    }
    else
    {
        Serial.println(data3);
    }
    data3 = "";
}

```

## EXECUTION:

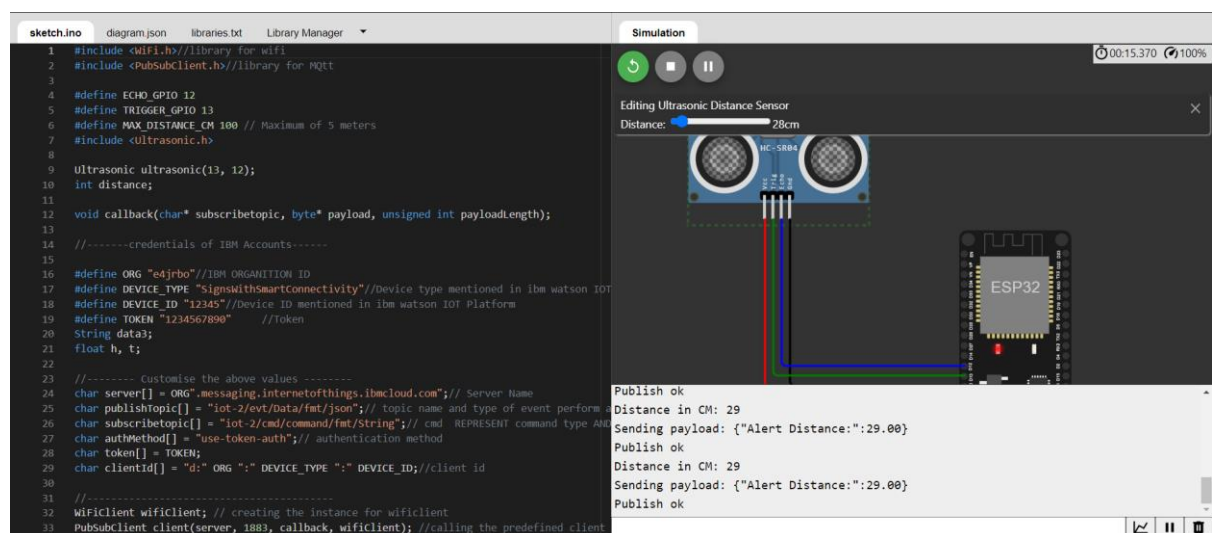

## SIMULATION LINK:

<https://wokwi.com/projects/348281557104984660>

IBM CLOUD OUTPUT:

<input type="checkbox"/>	Device ID	Status	Device Type	Class ID	Date Added	Descriptive Location
▼	<input type="checkbox"/> 12345	<span>Connected</span>	SignsWithSmartConnectivity	Device	Nov 14, 2022 10:30 AM	→ ...
Identity    Device Information <u>Recent Events</u> State    Logs    ✕						
The recent events listed show the live stream of data that is coming and going from this device.						
Event	Value	Format	Last Received			
Data	{"Alert Distance":-89}	json	a few seconds ago			
Data	{"Alert Distance":-89}	json	a few seconds ago			
Data	{"Alert Distance":-89}	json	a few seconds ago			
Data	{"Alert Distance":-68}	json	a few seconds ago			
Data	{"Alert Distance":-68}	json	a few seconds ago			