

Delivery of Sprint-2

| | |
|--------------|--|
| DATE | 9 November 2022 |
| TEAM ID | PNT2022TMID30690 |
| PROJECT NAME | SMART WASTE MANAGEMENT FOR METROPOLITAN CITIES-IOT |

Code for Data Transfer from
Sensors

```
#include <WiFi.h>                                // library for wifi
#include <PubSubClient.h>                        // library for
MQTT#include <LiquidCrystal_I2C.h>
LiquidCrystal_I2C lcd(0x27, 20, 4);

//..... credentials of IBM Accounts .....

#define ORG "9gbe4w"                            // IBM organisation id
#define DEVICE_TYPE "SWMSMC"                    // Device type mentioned in ibm watson iot platform
#define DEVICE_ID "ibmproject"                  // Device ID mentioned in ibm watson iot platform
#define TOKEN "sUNA41tG6-Pq)0rk5X"             // Token

//..... customise above values .....

char server[] = ORG ".messaging.internetofthings.ibmcloud.com"; // server name
char publishTopic[] = "iot-2/evt/data/fmt/json";
char topic[] = "iot-2/cmd/led/fmt/String";           // cmd Represent type and command is test format of strings
char authMethod[] = "use-token-auth";                // authentication method char token[] =
TOKEN;char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID; //Client id

//.....

WiFiClient wifiClient;                            // creating instance for
wificlientPubSubClient client(server, 1883, wifiClient);

#define ECHO_PIN 12
#define TRIG_PIN 13
float dist;

void setup()
{
  Serial.begin(115200);
  pinMode(LED_BUILTIN,
  OUTPUT);pinMode(TRIG_PIN,
  OUTPUT
);pinMode(ECHO_PIN, INPUT);
  //pir pin
  pinMode(4,
  INPUT);

  //ledpins
  pinMode(23,
  OUTPUT);pinMode(2,
  OUTPUT); pinMode(4,
  OUTPUT);
  pinMode(15, OUTPUT);

  lcd.init();
  lcd.backlight();
  lcd.setCursor(1,
  0);
```

```

lcd.print("");
wifiConnect();
mqttConnect();
}

float readcmCM()
{
    digitalWrite(TRIG_PIN, LOW);
    delayMicroseconds(2);
    digitalWrite(TRIG_PIN, HIGH);
    delayMicroseconds(10);
    digitalWrite(TRIG_PIN, LOW); int
    duration = pulseIn(ECHO_PIN,
    HIGH);return duration * 0.034 / 2;
}

void loop()
{

    lcd.clear();

    publishData(
    );delay(500);
    if (!client.loop())
    {
        mqttConnect();                // function call to connect to IBM
    }
}

/*.....retrieving to cloud.....*/

void wifiConnect()
{
    Serial.print("Connecting to ");
    Serial.print("Wifi");
    WiFi.begin("Wokwi-GUEST", "",
    6);
    while (WiFi.status() != WL_CONNECTED)
    {
        delay(500);
Serial.print(".");
    }
    Serial.print("WiFi connected, IP address: ");
    Serial.println(WiFi.localIP());
}

void mqttConnect()
{
    if (!client.connected())
    {
        Serial.print("Reconnecting MQTT client to ");
Serial.println(server); while (!client.connect(clientId,
authMethod, token))
        {
            Serial.print(".");
            delay(500);
        }
        initManagedDevice();
        Serial.println();
    }
}

void initManagedDevice()
{
    if (client.subscribe(topic))

```

```

    {
        Serial.println("IBM subscribe to cmd OK");
    }
else
{
    Serial.
    p
    rintln("s
    ubscrib
    e to
    cmd
    FAILED
    "
    );
}
}
void publishData()
{
    float cm = readcmCM();

    if(digitalRead(34)) //PIR motion detection
    {
        Serial.println(" Motion Detected");
        Serial.println("Lid      Opened");
        digitalWrite(15, HIGH);
    }
    else
    {
        digitalWrite(15, LOW);
    }

    if(digitalRead(34)== true)
    {
        if(cm <= 100) //Bin level detection
        {
            digitalWrite(2, HIGH);
            Serial.println("High Alert!!!,Trash bin is about to be full");
            Serial.println("Lid
            Closed");lcd.print("Full!
            Don't use"); delay(2000);
            lcd.clear();
            digitalWrite(4, LOW);
            digitalWrite(23,
            LOW);
        }
        else if(cm > 150 && cm < 250)
        {
            digitalWrite(4, HIGH);
            Serial.println("Warning!!,Trash is about to cross 50% of bin level");
            digitalWrite(2, LOW);    digitalWrite(23, LOW);
        }
        else if(cm > 250 && cm <=400)
        {
            digitalWrite(23,
            HIGH)
            ;Serial.println("Bin is available");
            digitalWrite(2,LOW);
            digitalWrite(4, LOW);
        }
        delay(10000);
        Serial.println("Lid Closed");
    }
    else
    {
        Serial.println("No motion detected");
    }
}


```

```
}
```

```
    if(cm <= 100)
    {
        digitalWrite(21,HIGH);
        String payload = "{ \"High
        Alert!!\": \"\"";payload += cm; payload
        += "left\" }";
        Serial.print("\n");
        Serial.print("Sending payload:
        ");Serial.println(payload);
        if (client.publish(publishTopic, (char*) payload.c_str())) // if data is uploaded to cloud successfully,prints publish ok or prints publish failed
        {
            Serial.println("Publish OK");
        }
    }
    if(cm <= 250)
    {
        digitalWrite(22,HIGH);
        String payload = "{ \"Warning!!\": \"\"";
        payload += dist; payload += "left\"
        }";
        Serial.print("\n");
        Serial.print("Sending distance: "); Serial.println(cm);
        if(client.publish(publishTopic, (char*) payload.c_str()))
        {
            Serial.println("Publish OK");
        }
        else
        {
            Serial.println("Publish FAILED");
        }
    }

    float inches = (cm / 2.54); //print on LCD
    lcd.setCursor(0,0); lcd.print("Inches"); lcd.setCursor(4,0); lcd.setCursor(12,0);
    lcd.print("cm");lcd.setCursor(1,1); lcd.print(inches, 1); lcd.setCursor(11,1); lcd.print(cm,
    1); lcd.setCursor(14,1); delay(1000); lcd.clear();
}
```

Connection Diagram

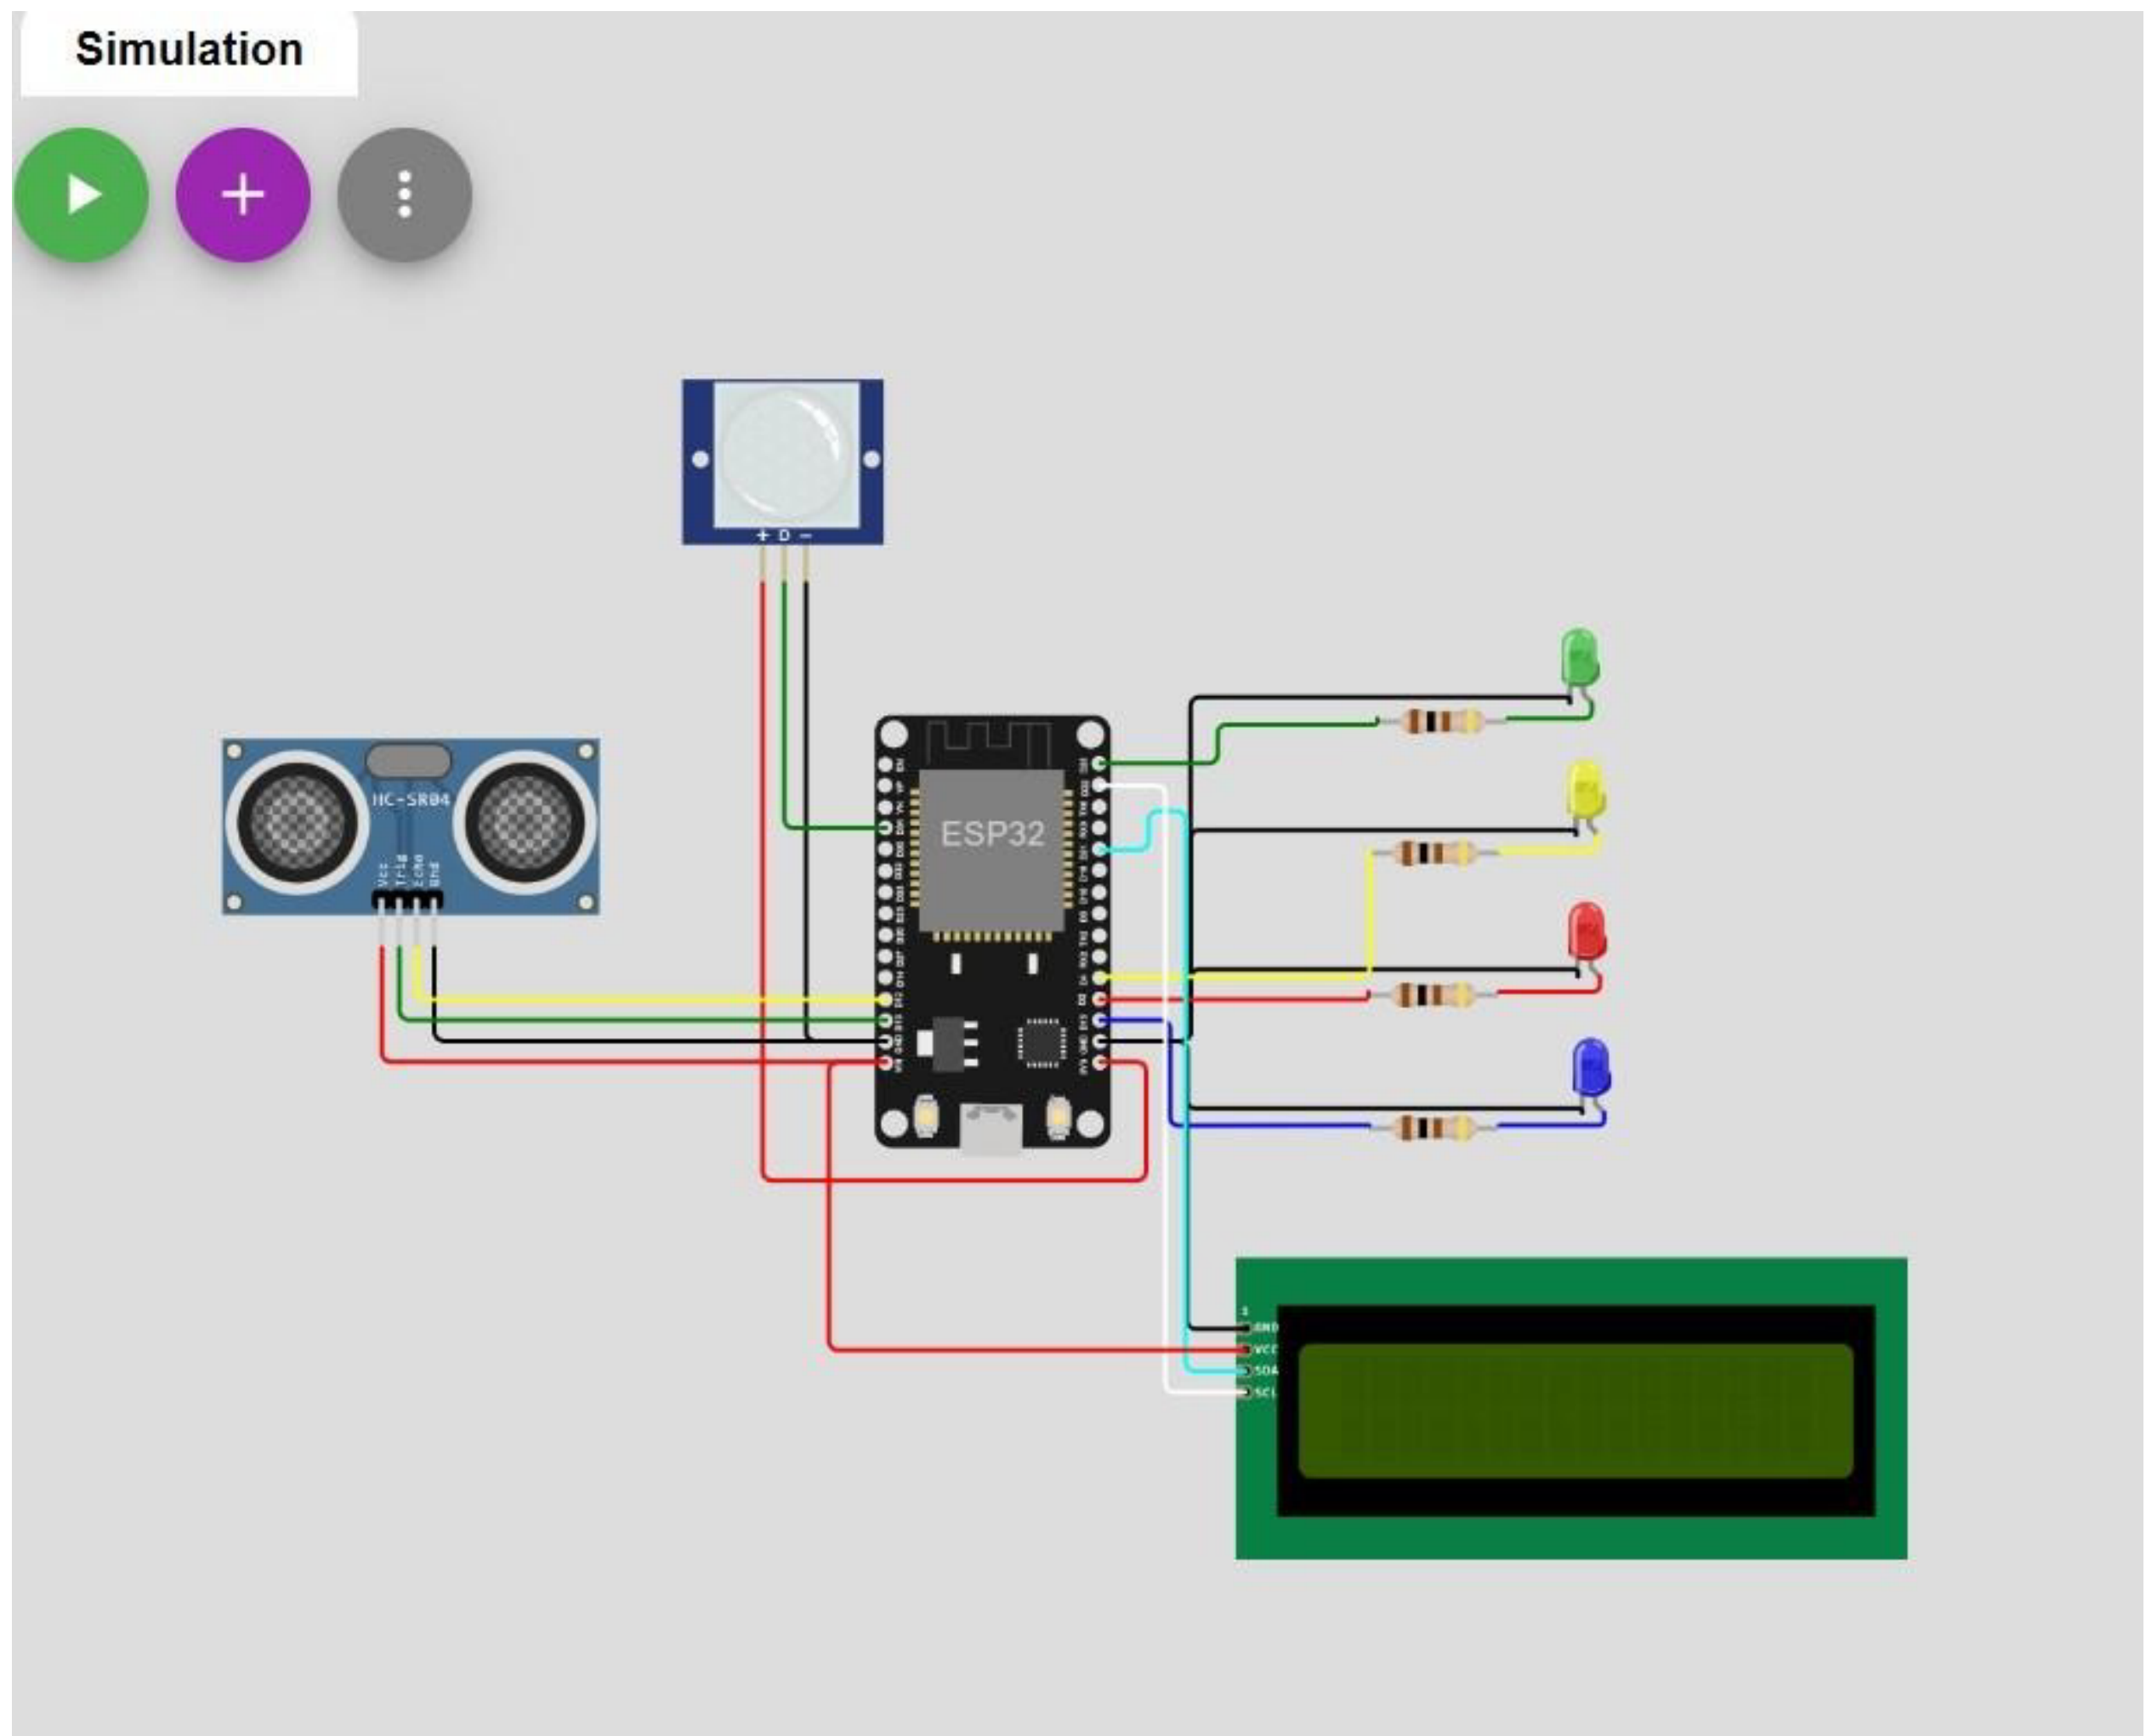

Link :

<https://wokwi.com/projects/347376419979919956>