Industry-specific intelligent fire management system

SRM VALLIAMMAI ENGINEERING COLLEGE, KATTANKULATHUR

Project Report

K.Sivaramakrishnan

A.Shobika Sri

R.Subashini

N.Vishnu Vardan

Team ID: PNT2022TMID21836

Title **Page No**

1.Introduction

1.1 Project Overview

The smart fire management system includes a gas, flame, and temperature sensor to detect any environmental changes. Based on the temperature readings and if any gases are present the exhaust fans are powered ON. If any flame is detected the sprinklers will be switched on automatically. Emergency alerts are notified to the authorities and the Fire station.

1.2 Purpose

- To give a detect the status of the room with IoT devices
- To turn on sprinkler and exhaust fan when there is accident
- To detect the flow of water
- To send and store the temperature status in a cloud storage
- To give a easy management system on dashboard
- To give a overview of what's happening to the user
- To send a sms to the authorities when there is a fire accident

2.Literature survey

2.1 Existing Problem

The situation is not ideal because the fire management system in houses and industries are not very reliable, efficient, cost-effective and does not have any advanced processing and does not have any features like an automatic alert system for admin and authorities and in many buildings . They are using older fire safety systems that doesn't can even activate the sprinkler system and all of they don't communicate with each other properly to prevent false alarm also monitor the entire system using applications.

2.2 Reference

https://pdfs.semanticscholar.org/f3e7/a7c0cf2d448be592421045033506e845e6c2.pdf

https://www.mdpi.com/2224-2708/7/1/11

2.3 Problem Statement Definition

The fire management system in houses and industries are not very reliable ,efficient, cost effective and does not have any advance processing and does not have any features like automatic alert system for admin and authorities and in many buildings there are using older fire safety system that doesn't can even activate the sprinkler system and all of they don't communicate with each other properly to prevent false alarm also monitor the entire system using a applications .

3.Ideation and Proposed solution

3.1 Empathy map canvas

- An empathy map is a simple, easy-to-digest visual that captures knowledge about a user's behaviours and attitudes
- It is a useful tool to helps teams better understand their users.Creating an effective solution requires understanding the true problem and the person who is experiencing it
- The exercise of creating the map helps participants consider things from the user's

perspective along with his or her goals and challenges.

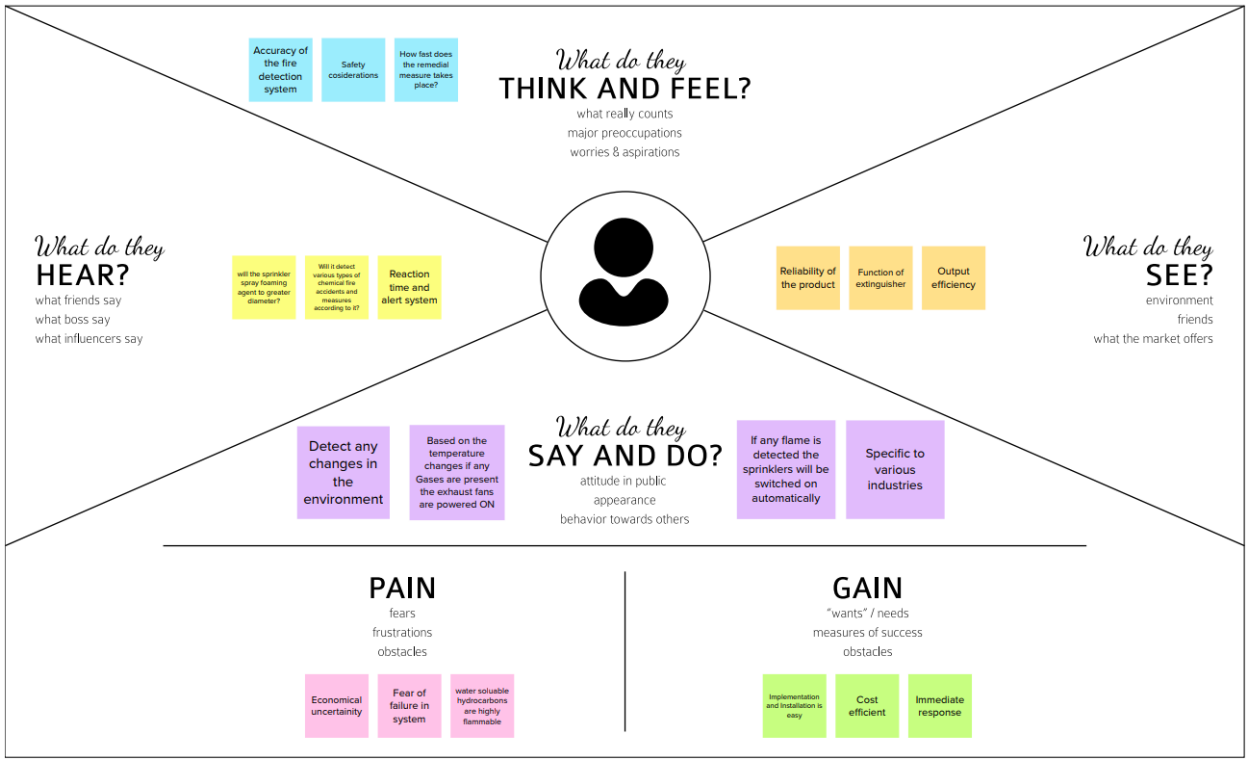

3.2 Ideation and Brainstorming step 1: Team Gathering,

Collaboration and Select the Problem Statement

Team was gathered in mural app for collaboration

The team members are

- K.Sivaramakrishnan
- A.Shobika Sri
- R.Subashini
- N.Vishnu Vardan

step 2:Brainstorm, Idea Listing and Grouping

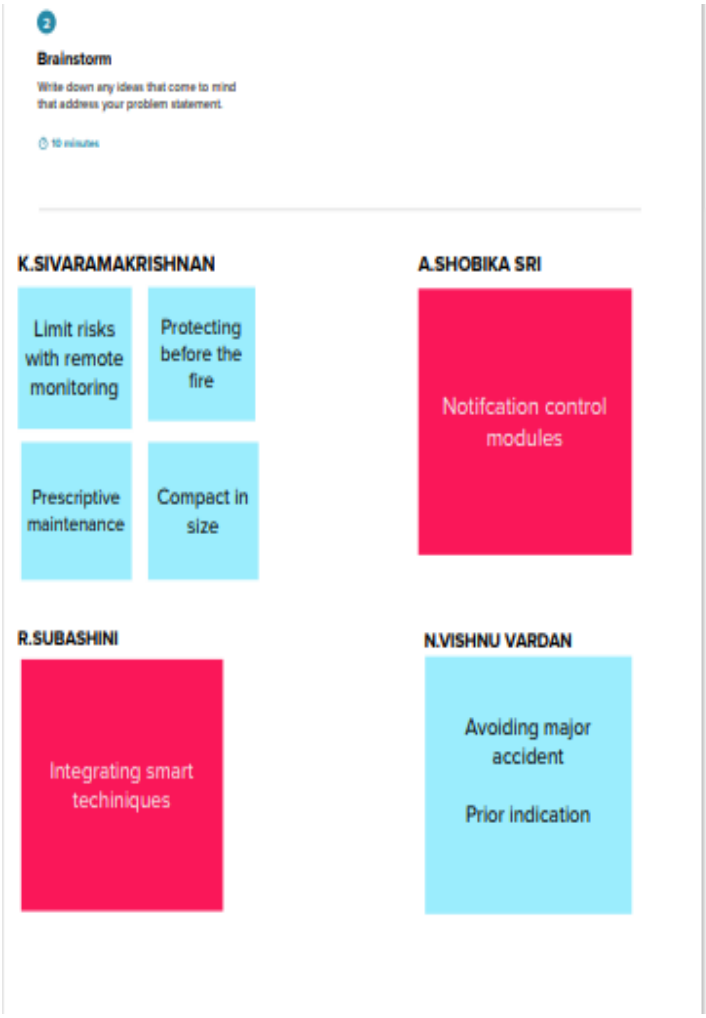

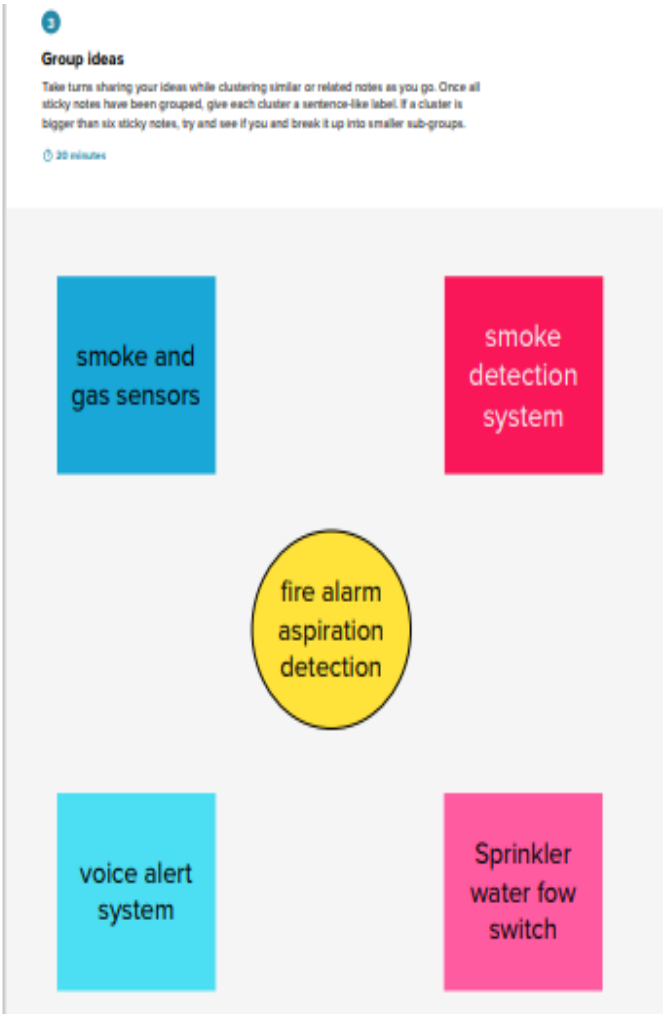

step3:Idea Prioritization

4

Prioritize

Your team should all be on the same page about what's important moving forward. Place your ideas on this grid to determine which ideas are important and which are feasible.

35 minutes

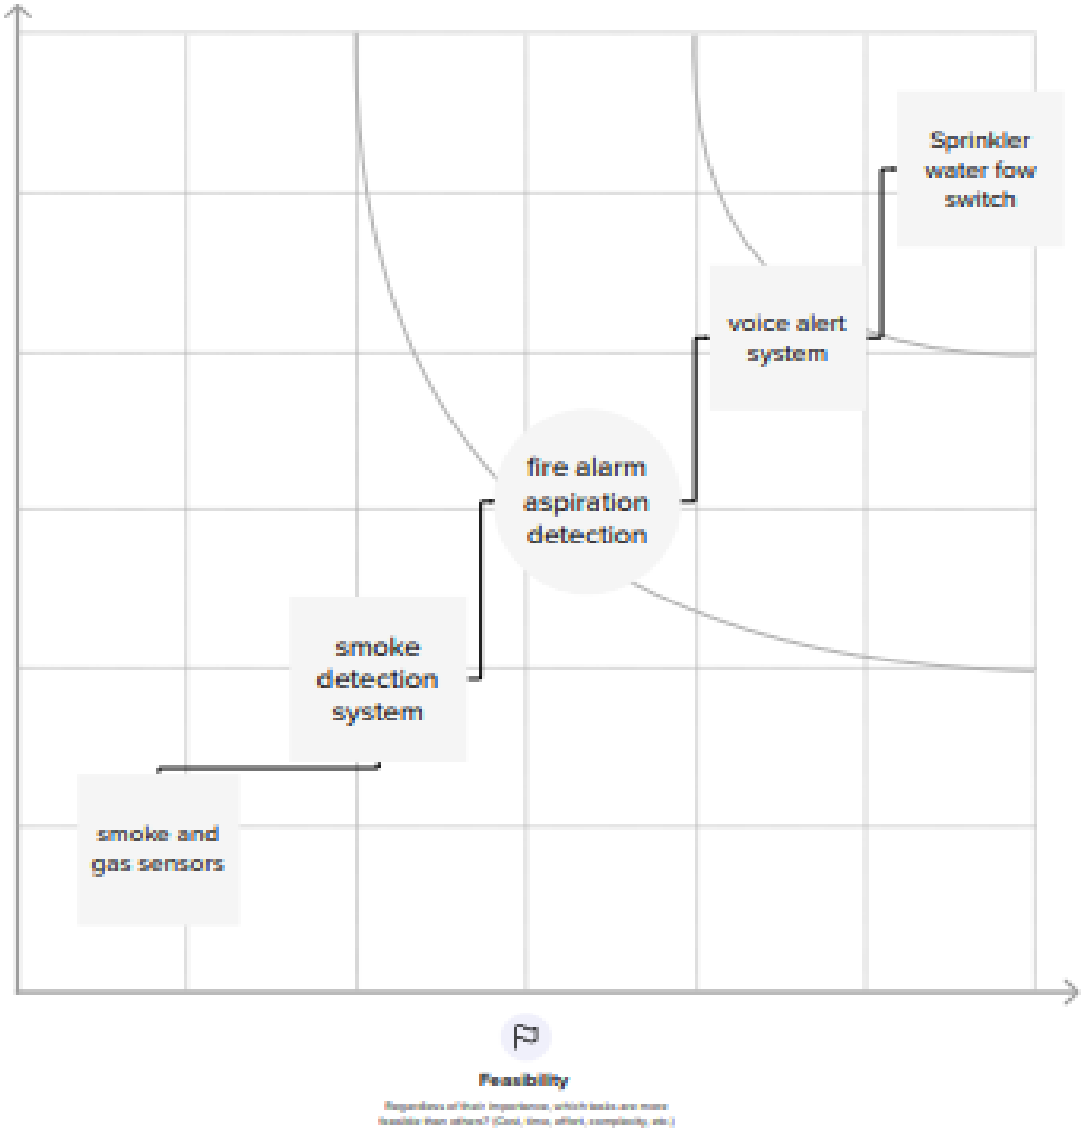

3.3 Proposed Solution

Team ID	PNT2022TMID21836
Project Name	Industry-specific Intelligent Fire Management System
Maximum Marks	2 Marks

Proposed Solution:

S.No.	Parameter	Description
1.	Problem Statement (Problem to be solved)	To provide an efficient Fire alert system , so that people can be notified and take immediate actions to avoid the effects of fire.
2.	Idea / Solution description	Solution is to monitor the leakage of fire in several locations using sensors such as Temperature sensors, will be integrated to monitor and predict the fire accidents before the incidents
3.	Novelty / Uniqueness	By using this we can prevent wokers/employees from fire accidents and avoid large scale machinery damages
4.	Social Impact / Customer Satisfaction	Using this system, we can monitor the presence of increase in temperature/fire leakage and take actions before the accident i.e., prevent the accident from occurring.
5.	Business Model (Revenue Model)	• Cost efficiency • Highly secured
6.	Scalability of the Solution	High Scalability Provides by using different sensors such as Temperature sensor, Gas and flame sensor and usage of sprinkler based on type of fire accident.

3.4 Proposed solution fit

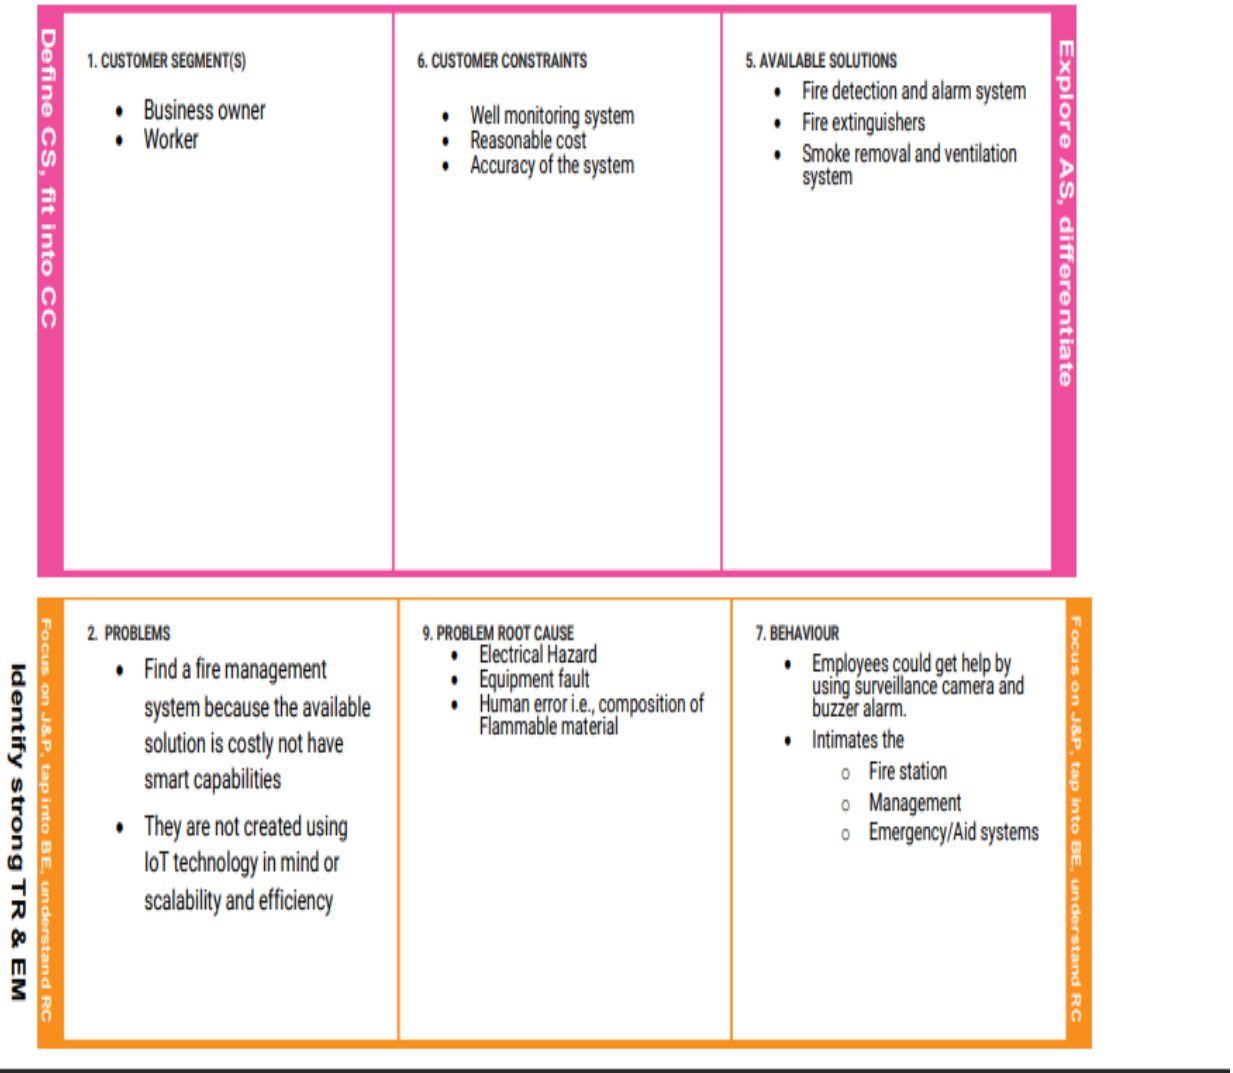

4. Requirement analysis

4.1 Functional Requirements

- A functional requirement defines a function of a system or its component, where a function is
- described as a specification of behaviour between inputs and outputs.
- It specifies “what should the software system do?”
- Defined at a component level
- Usually easy to define
- Helps you verify the functionality of the software

FR No.	Functional Requirement (Epic)	Sub Requirement (Story / Sub-Task)
FR-1	User Registration	Registration through Form Registration through Gmail Registration through LinkedIN
FR-2	User Confirmation	Confirmation via Email Confirmation via OTP
FR-3	Actuation function	Activation of sprinklers. Turning ON the exhaust Fan
FR-4	Notification	Sending SMS with location to the fire station. Sending SMS to the authorities.

4.2 Non Functional Requirements

- A non-functional requirement defines the quality attribute of a software system
- It places constraint on “How should the software system fulfil the functional requirements?”
- It is not mandatory
- Applied to system as a whole
- Usually more difficult to define
- Helps you verify the performance of the software

FR No.	Non-Functional Requirement	Description
NFR-1	**Usability**	Ease of use and longevity of the system.
NFR-2	**Security**	Software remains secured in the face of attacks.
NFR-3	**Reliability**	High accuracy.
NFR-4	**Performance**	Faster response.
NFR-5	**Availability**	Availability of the systems for institutions, restaurants and other public places.
NFR-6	**Scalability**	It accommodates easy modification for various requirements.

5. Project Design

5.1 Dataflow Diagram

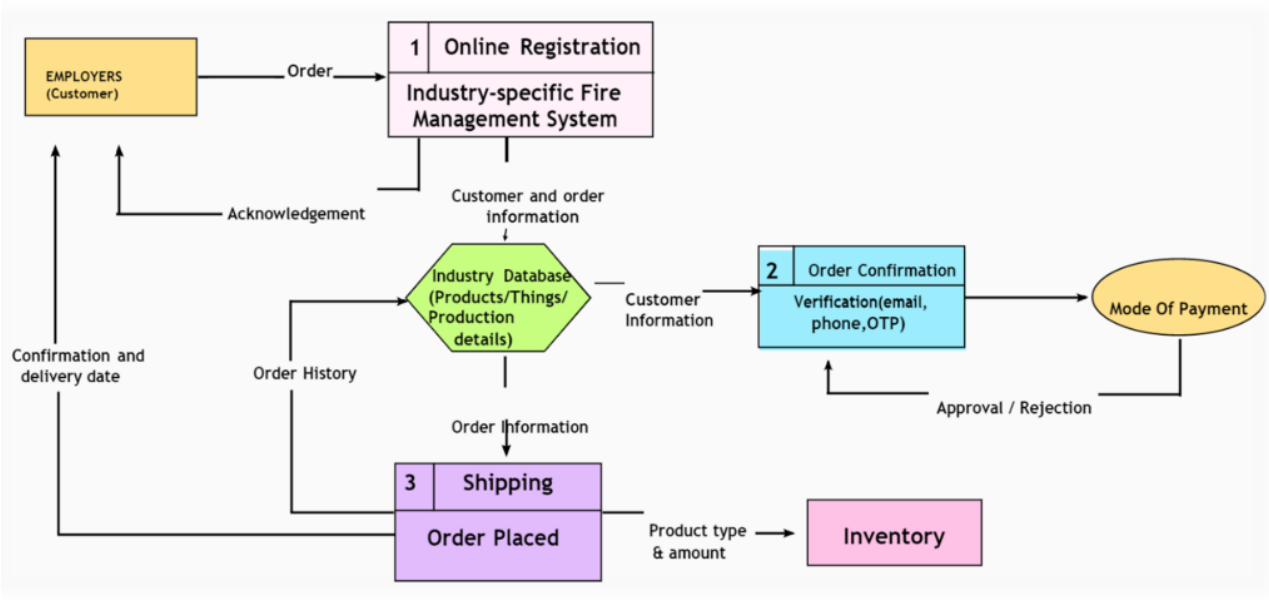

5.2 Solution and Technical architecture

Solution Architecture

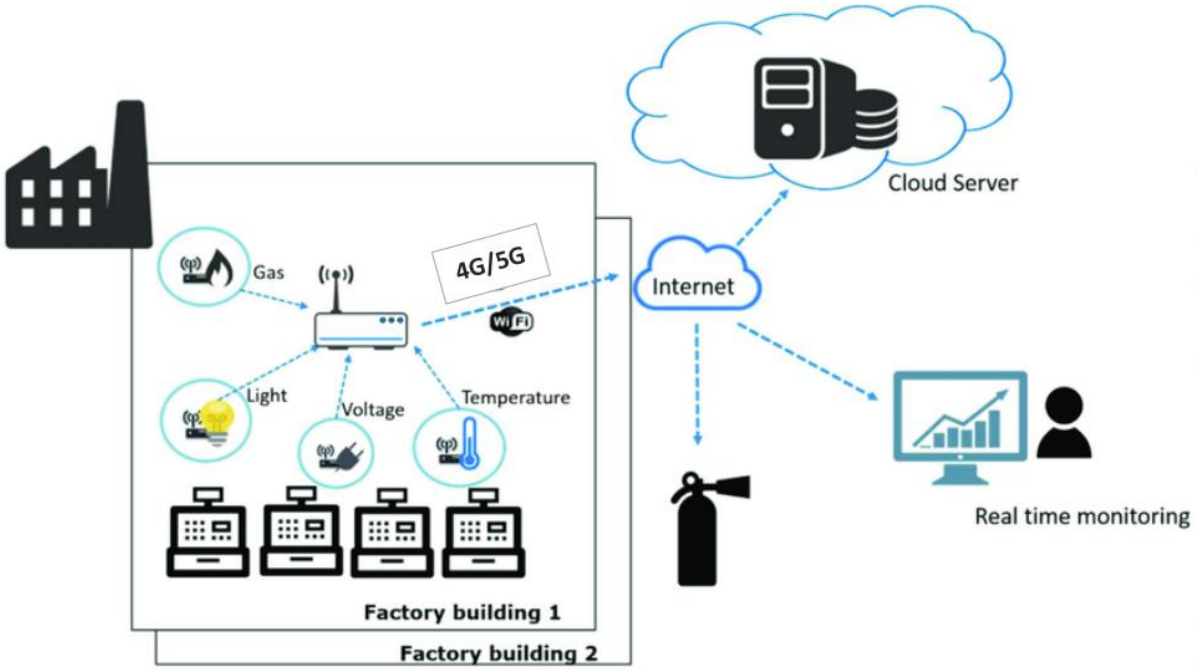

Technical Architecture

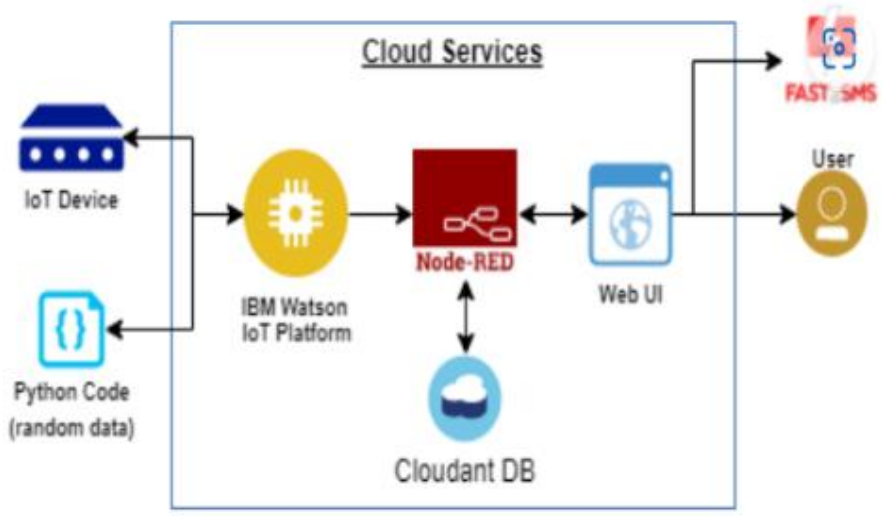

5.3 User stories

User Type	Functional Requirement (Epic)	User Story Number	User Story / Task	Acceptance criteria	Priority	Release
Customer (Web user)	Monitor The Environment	USN-1	User can monitor the sensor data receiving from the microprocessor	User Can See the dashboard with sensor information	Medium	Sprint 4
	Turn on or off the sprinkler and exhaust fan.	USN-2	User can turn on / off exhaust fan and sprinkler if need in that circumstance	Can turn on / off the sprinkler and exhaust fan	Medium	Sprint 4
	Authentication	USN-2	User needed to be authenticated while turning on/off the exhaust and sprinkler system	Authenticate the user for USN-2 Fuctionality	Medium	Sprint 4
Sensing	Sensing The Environment	-USN 3	Need to Sense the environment using the sensors attached to the microprocessor	Getting Data from the sensors	High	Sprint 1
Extinguish	Actuators	USN 4	If the sensors sense the fire then the immediate next step is to turn on the exhaust fan and the sprinkler system	Extinguishing the fire	High	Sprint 1
Data	Sending data to ibm Watson Hot platform	USN 5	All the sensor Data received from the microprocessor are send to the IBM Watson Lot platform	Showing in the Watson Dashboard	Medium	Sprint 2
	Node-red	USN 6	Sending the data to further process in the cloud for storing and alert purpose		High	Sprint 3
	Data Storing	USN 7	All the sensor values are stored in an cloud database	Storing the data	Low	Sprint 3
Notification	Event notification	USN 8	FIre alertMessage will send to fire department	Notifying the authorities	High	Sprint 4

6. Project design and planning

6.1 Sprint planning and estimation

Sprint	Functional Requirement (Epic)	User Story Number	User Story / Task	Story Points	Priority	Team Members
Sprint-1	Sensing	USN-3	Sensing the surrounding environment using the sensors	2	High	Sivaramakrishnan, Shobika Sri
Sprint-1	Extinguish	USN-4	Turning on the exhaust fan as well as the fire sprinkler system in cause of fire	2	High	Subashini, Vishnu Vardan
Sprint-2	Sending Data to the IBM Watson IoT platform	USN-5	Sending the data of the sensor form the microcontroller to the IBM Watson IoT platform	1	Medium	Shobika Sri, Vishnu Vardan
Sprint-3	Node-red	USN-6	Sending the data from the IBM Watson to the node-red for further process the data	3	High	Sivaramakrishnan, Subashini
	Storing of sensor data	USN-7	Storing the received sensor data in a cloud Database	1	Low	Shobika Sri, Subashini
Sprint-4	Monitoring the environment	USN 1	User can monitor the situation of the environment from a dashboard that displays sensor information about the environment	1	Medium	Sivaramakrishnan, Vishnu Vardan
	Turn on/off the exhaust and sprinkler system	USN 2	User can turn of the Exhaust fan as well as the sprinkler system if need in that situation	2	Medium	Shobika Sri, Subashini, Sivaramakrishnan, Vishnu Vardan
	Event Notification	USN 8	Sending an alert SMS to the fire authority in case of fire	2	High	Shobika Sri, Subashini, Sivaramakrishnan, Vishnu Vardan

6.2 Sprint delivery schedule

Sprint	Total Story Points	Duration	Sprint Start Date	Sprint End Date (Planned)	Story Points Completed (as on Planned End Date)	Sprint Release Date (Actual)
Sprint-1	4	6 Days	24 Oct 2022	29 Oct 2022	4	29 Oct 2022
Sprint-2	1	6 Days	31 Oct 2022	05 Nov 2022	1	05 Nov 2022
Sprint-3	4	6 Days	07 Nov 2022	12 Nov 2022	4	12 Nov 2022
Sprint-4	5	6 Days	14 Nov 2022	19 Nov 2022	5	19 Nov 2022

6.3 Reports from JIRA

Sprint 1

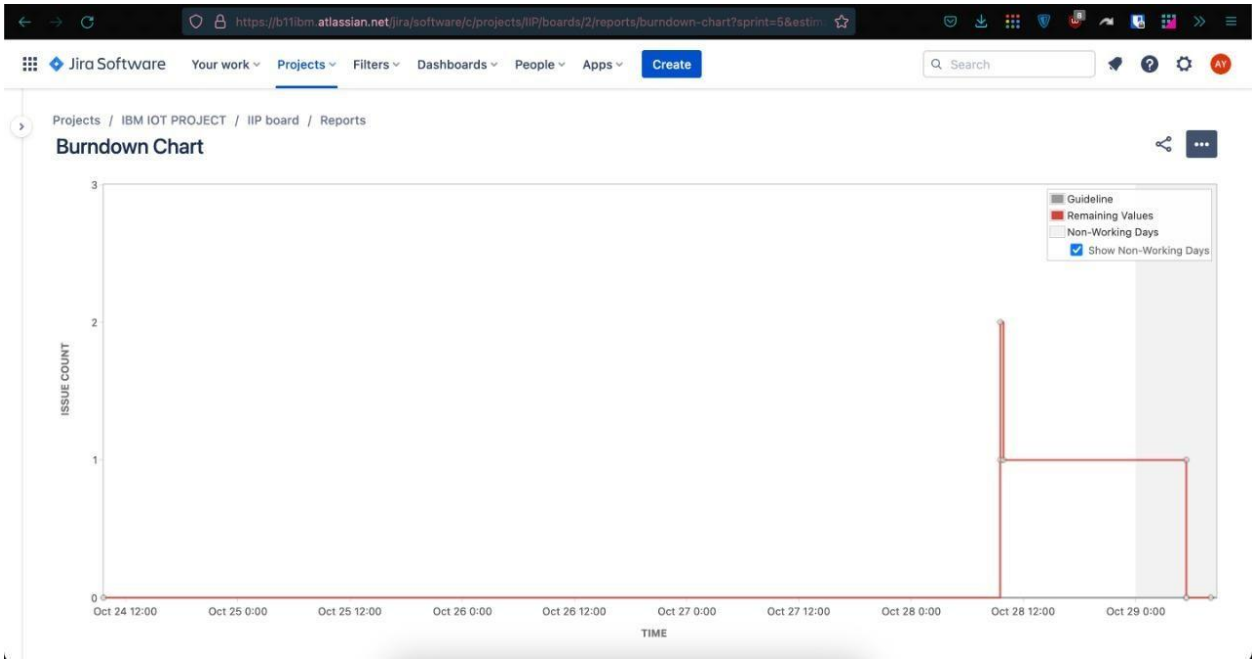

Sprint 2

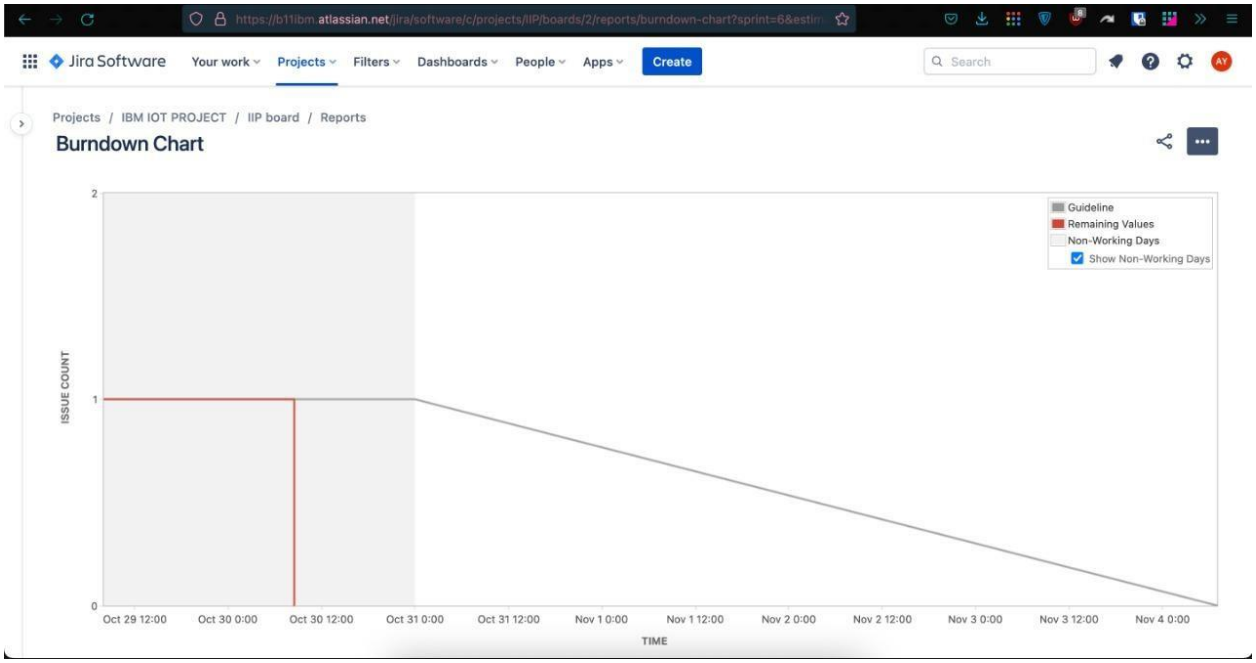

Sprint 3

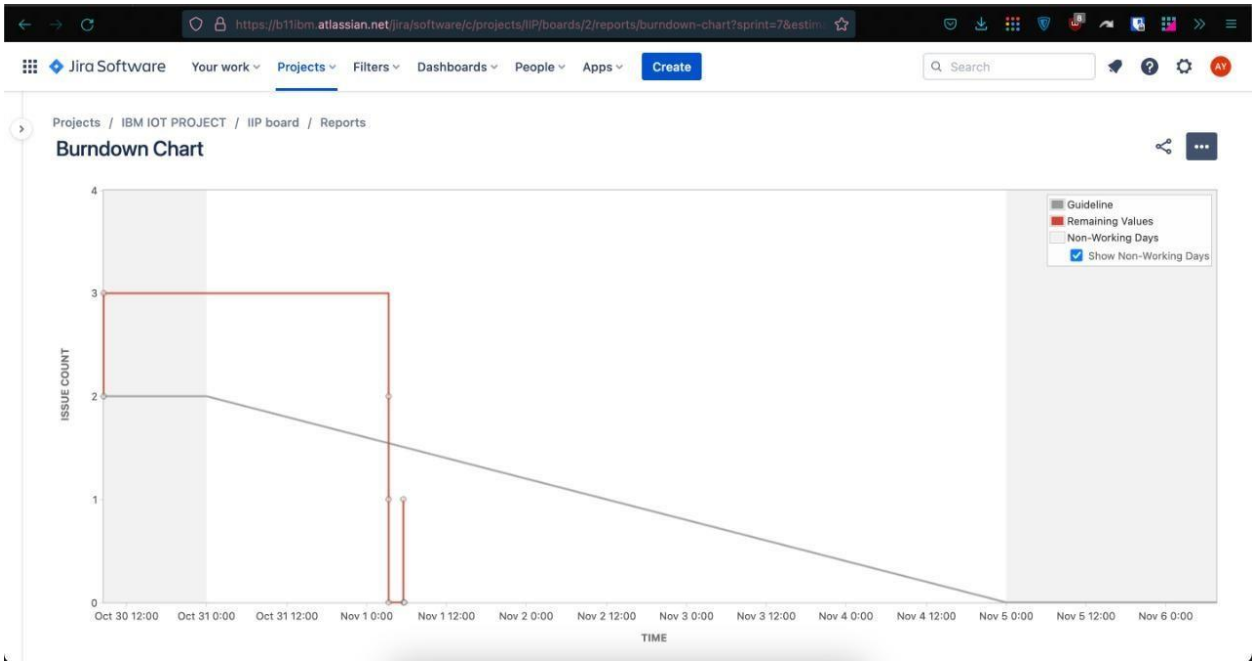

Sprint 4

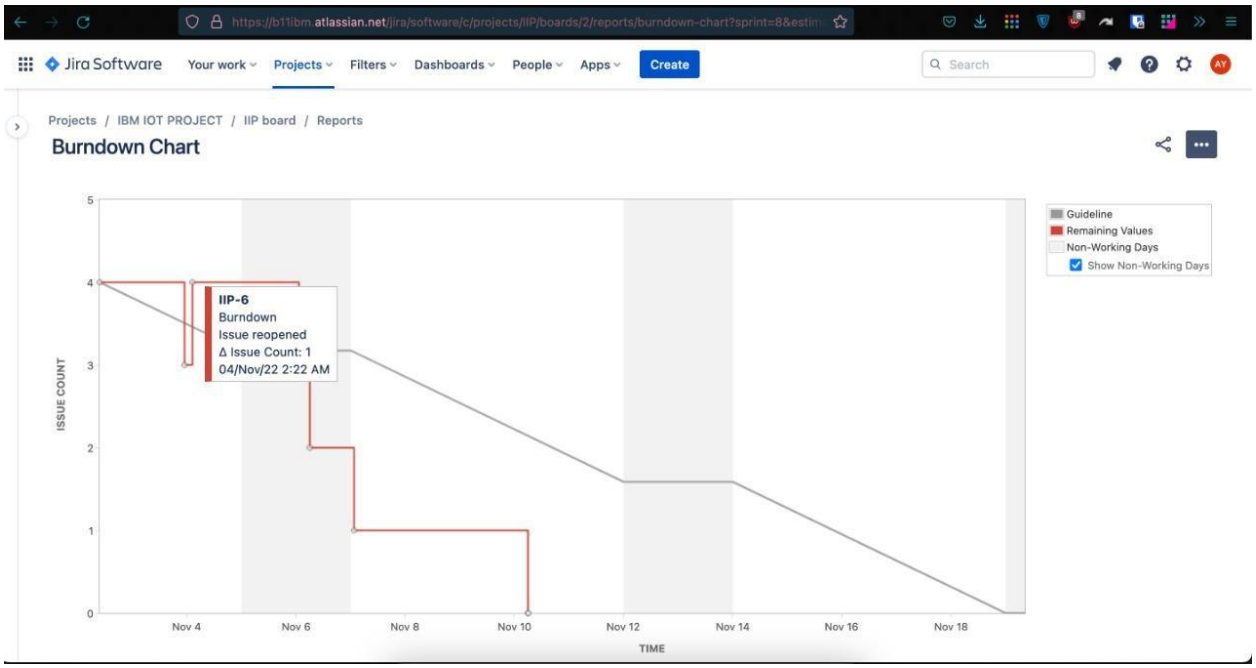

7.Coding and Solutioning

Feature 1 : False alarm checking

```
if(temp < 45 ){ if(flame > 650 ){

    accidentstatus = "Need Auditing";

    if(canfanoperate) isfanon = true;

    else isfanon = false; issprinkon =

    false;

    }
    else if(flame <= 10){ accidentstatus =

      "nothing happened"; isfanon = false;

      issprinkon = false;

    }
```

```
}else if(temp >= 45 && temp <= 55 ){
  if(flame <=650 && flame >100 ){

    if(cansprinkoperate) issprinkon
    = true; else issprinkon =
    false; accidentstatus =
    "moderate"; if(gas > 160 &&
    canfanoperate ){ isfanon =
    true; } else{ isfanon = false;
    } } else if(flame <= 100 && flame
  > 10){ if(cansprinkoperate)
  issprinkon = true; else issprinkon =
  false; isfanon = false;
    accidentstatus = "moderate";
  }

}else if(temp > 55){ if(flame > 650){
  gas = 500 + rand()%500;
  accidentstatus = "severe";
  if(cansprinkoperate) issprinkon =
  true; else issprinkon = false;
  if(canfanoperate) isfanon = true;
  else isfanon = false; } else if(flame
  < 650 && flame > 400 ){ gas = 300 +
  rand()%500; accidentstatus =
  "severe"; if(cansprinkoperate)
  issprinkon = true; else issprinkon =
  false;
```

```
    if(canfanoperate)
    isfanon = true; else
      isfanon = false;

  }
} else { accidentstatus = "Need moderate
Auditing"; isfanon = false; issprinkon =
false;
}



if(issprinkon){ if(flow){
  sprinkstatus = "working";
  } else{ sprinkstatus = "not
  working";
  } } else
if(!issprinkon){
sprinkstatus = "ready";
} else { sprinkstatus = "something's
wrong";
}
```

Explanation

- This set of code checks for false alarm
- It also sets the current status
- This also handles the permission management of whether a device would work or not

Feature 2

```
void PublishData(float temp, int gas ,int flame ,int
flow,bool isfanon,bool issprinkon) { mqttconnect();

  String payload = "{\"temp\":"; payload +=

  temp; payload += "," "\"gas\":"; payload

  += gas; payload += "," "\"flame\":";

  payload += flame; payload += ","

  "\"flow\":"; payload +=

  ((flow)?"true":"false"); payload += ","

  "\"isfanon\":"; payload +=

  ((isfanon)?"true":"false"); payload += ","

  "\"issprinkon\":"; payload +=

  ((issprinkon)?"true":"false"); payload +=

  "," "\"cansentalert\":"; payload +=

  ((cansentalert)?"true":"false"); payload

  += "," "\"accidentstatus\":"; payload +=

  "\""+accidentstatus+"\""; payload += ","

  "\"sprinkstatus\":"; payload +=

  "\""+sprinkstatus+"\""; payload += "}";

  if (client.publish(publishTopic, (char*) payload.c_str())) {

    Serial.println("Publish ok");// if it sucessfully upload data on the

  } else {

    Serial.println("Publish failed");

  }}
```

Explanation

- It sends the data to IBM IoT Watson platform

Feature 3

```
void callback(char* subscribetopic, byte* payload, unsigned
int payloadLength) { Serial.print("callback invoked for topic:
"); Serial.println(subscribetopic); for (int i = 0; i <
payloadLength; i++) { data3 += (char)payload[i];
  } Serial.println("data: "+ data3); const char *s
  =(char*) data3.c_str();double pincode = 0;
  if(mjson_get_number(s, strlen(s), "$.pin", &pincode)){
  if(((int)pincode)==137153){ const char *buf; int len;
        if (mjson_find(s, strlen(s), "$.command", &buf, &len))
        { String command(buf,len);
          if(command=="\"cantfan\""){
                      canfanoperate = !canfanoperate;
          } else if(command=="\"cantsprink\""){
          cansprinkoperate = !cansprinkoperate;
          }else if(command=="\"sentalert\""){
            resetcooldown();
          } }  } }
  data3="";
;}
```

Explanation

- The action taken by the user is received as a command and stored in a buffer. The event in the device is done according to the command
- It checks for a secret encrypted pin for performing that event

8. TESTING

8.1 Testcases

Test case ID	Feature Type	Component	Test Scenario	Pre-Requisite	Steps To Execute	Test Data	Expected Result	Actual Result	Status	Commnets	TC for Automation(Y/N)	BUG ID	Executed By
Sensor_001	Functional	Microcontroller	Sensor data is properly taken	The connections to the circuit	1.Open the simulator in wokwi.	Random values generated ,	Get the values and print it in the	Working as	Pass		N		Akshaya
Sensor_002	Functional	Microcontroller	Sensor data is parsed as json	The microcontroller should	1.Open the simulator in wokwi.	Random values generated ,	Get the values and print it in the	Working as	Pass		N		Karthick
Work_001	Functional	Microcontroller	To check for fake alarm	The sensor values are taken	1.Simulate the device(do a practical	Random values generated ,	Accident status is properly updated	Working as	Pass		N		Ajin
Work_002	Functional	Microcontroller and	The data should be sent to IBM	The device setup is completed	1.Start the simulation in wokwi.	Random values generated ,	The values are shown in recent	Working as	Pass		N		Akshaya
Work_003	Functional	Node-red	The data should be sent to	The necessary packages	1.Login to node red editor	values got from the iot	The debug area should show the	Working as	Pass		N		Yoonus
Work_004	Functional	Node-red	Verify that the json data is parsed	A configured node-red with	1.Login to node red editor	values got from the iot	the debug menu shows the output	Working as	Pass		N		Yoonus
Database_001	Storage	Cloudant	The received data is stored in database in a key value pair	The node red is connected with cloudant node	1.login to cloudant dashboard. 2.create new database. 3. connect the database with node red and then give the database name in required field	values got from the iot device	After sending the data the data is stored in cloudant	Working as expected	Pass		N		Karthick
SMS_001	API	sms API	The sms is sent when there is fire alert	The node red should be configured to send a post request	1.Simualte the fire in the simulator(if real hardware is used real fire is used). 2.or click the sent alert button in	"Fire alert at xyz industries Hurry" And the trigger inputs	sms receiving to the given phonenum	Working as expected	Pass		N		Ajin
Work_005	Functional	UI	Even at times of emergency sometimes manual control is required	the dashboard interaction elements is connected to the node-red	1. in the dashboard enter the correct pin 2.click the action to be done	The action by user	manual command system works only	Working as expected	Pass		N		yoonus
Auth_001	Functional	UI	Verify that the correct pin is entered	text filed is given in dashboard to enter pin	1.The correct pin is entered 2.then necessary action is required	1234	command is sent successfull	working as expected	Pass		N		Akshaya
Auth_002	Functional	UI	Verify that it handles when wrong pin is entered	text filed is given in dashboard to enter pin	1.The correct pin is entered 2.then necessary action is required	141324 63363 1 001 fds	Show a message that the entered pin is wrong	Working as expected	Pass		N		Karthick
SMS_002	Functional	Microcontroller	Verify that the message is not sent continuously when there is fire it sends a message then waits for 10 minutes even after that if the fire exists it sends again	the sms funtionality should be implemented	1.Simulate a fire accident scenario 2.or click the send alert button on the dashboard 3.wait for the message to be sent	the event is simulated or triggered	The service should not spam continuous messages to authorities as fire won't be down within fraction of seconds	Working as expected	Pass		N		Ajin

8.2UAT

Defect analysis

Resolution	Severity 1	Severity 2	Severity 3	Severity 4	Subtotal
By Design	9	0	2	1	12
External	0	0	1	0	1
Fixed	19	24	25	14	82
Not Reproduced	0	0	2	0	2
Skipped	0	0	0	0	0
Won't Fix	0	0	0	0	0
Totals	28	24	30	15	97

Test case analysis

Section	Total Cases	Not Tested	Fail	Pass
Client Application	4	0	0	4
Security	2	0	0	2
Exception Reporting	11	0	0	11
Final Report Output	5	0	0	5

9. Results

9.1 performance metrics

CPU usage

The micro version of c++ is make the best use of the CPU. For every loop the program runs in O(1) time, neglecting the network and communication. The program sleeps for every 1 second for better communication with MQTT. As the program takes O(1) time and the compiler optimizes the program during compilation there is less CPU load for each cycle. The upcoming instructions are on the stack memory, so they can be popped after execution.

Memory usage :

The sensor values , networking data are stored in sram of the ESP32 . It's a lot of data because ESP32 has only limited amount of memory (520 KB) .For each memory cycle the exact addresses are overwritten with new values to save memory and optimal execution of the program

Error rates :

The errors rates are very low as the backend and dashboard is handled with node-red.The exceptions are handled in a proper way as it does not affect the usability of the system

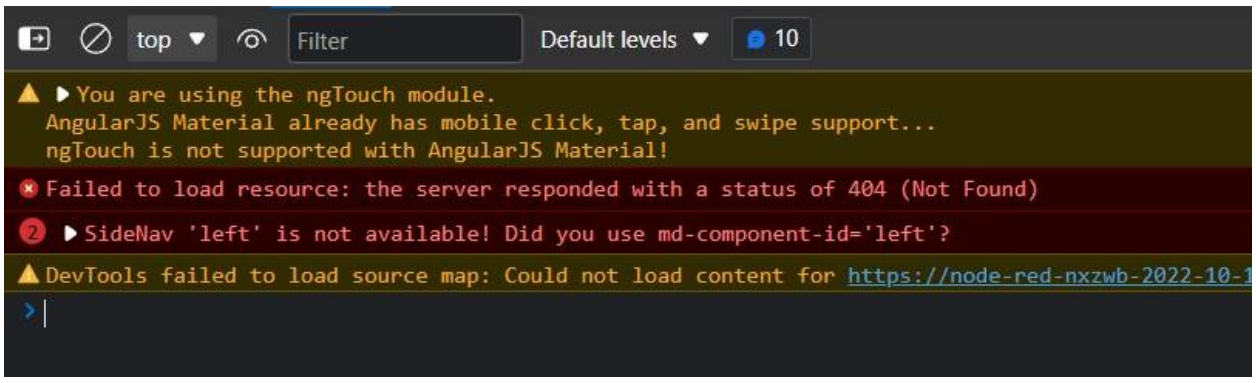

Latency and Response Time :

The DOM handling of the received data is optimal and latency is low .After the DOM is loaded the entire site is loaded to the browser



The server also responses quickly . The average time of response is respectable

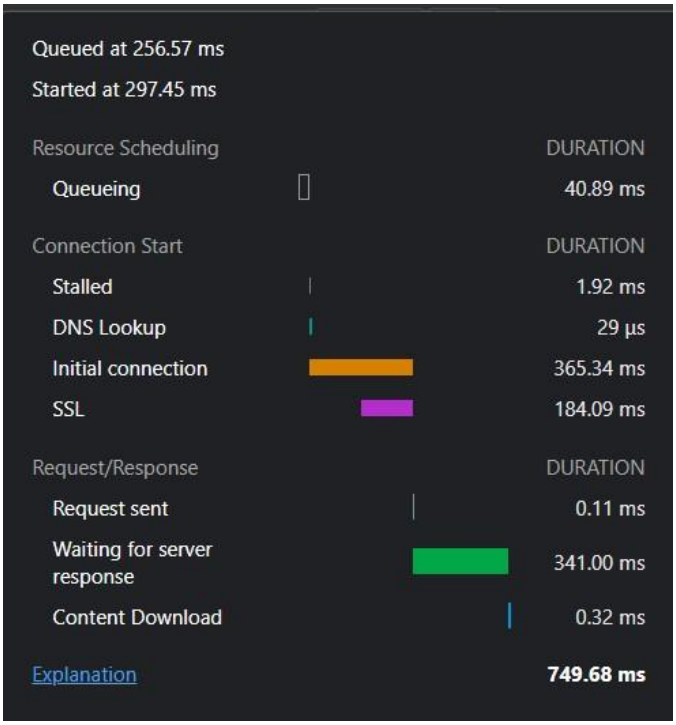

For the data sent from the IoT device (considering the sleep of one second from the IoT), the response is much quicker .We can easily see the delay caused by the sleep function

The average time is well over optimal value

Average time = $(5ms + 2600ms)/2$

= 1302.5

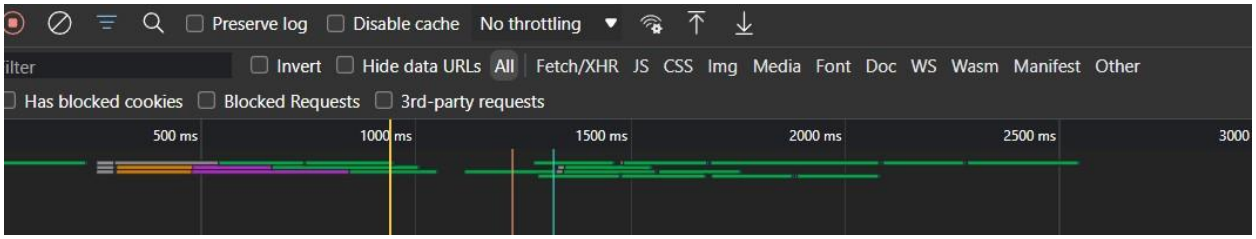

Garbage collection:

In the server-side garbage collection is done by the Node framework.In the IoT device , c++ does not have any garbage collection features . But it is not necessary in this scenario as the memory is used again for storing the data . Any dangling pointer or poorly handled address space is not allocated.

10.Advantages and Disadvantages

Advantages

- Active monitoring for gas leakage and fire breakout
- Automatic alerting of admin as well as fire authorities using SMS
- Automatically turning on/off sprinkler as well as exhaust fan
- Authentication is required to turn on/off of sprinkler and exhaust fan as well as sending SMS alert manually
- It automatically detect false fire breakout reducing unnecessary panic
- by using flow sensors we can confirm that the sprinkler system is working as it intended
- All device status can be shown in a dashboard
- Users can see the dashboard using a web application

Disadvantages

- Always need to connect with the internet **[Only to Send the SMS alert]**
- If the physical device is damaged the entire operation is collapsed
- Need large database since many data is stored in cloud database every second

11.CONCLUSION

So in conclusion our problem premise is solved using Iot devices by creating a smart management system that solves many inherent problems in the traditional fire management system like actively monitoring for fire breakouts as well as gas leakage and sending SMS alerts to the admin as well as to the fire authorities .

12. FUTURE SCOPE

The existing devices can be modified to work in different specialized environment as well as scale to house use to big labs[Since fire accidents can cause major loss in human lives in homes to big industries] as well as it can be used in public places , vehicles.

13.APPENDIX

Esp32 - Microcontroller :

ESP32 is a series of low-cost, low-power system on a chip microcontrollers with integrated Wi-Fi and dual-mode Bluetooth

Memory: 320 KiB SRAM

CPU: Tensilica Xtensa LX6 microprocessor @ 160 or 240 MHz

Power: 3.3 V DC

Manufacturer: Espressif Systems

Predecessor: ESP8266

Sensors :

DHT22 - Temperature and Humidity sensor

The DHT22 is a basic, low-cost digital temperature and humidity sensor. It uses a capacitive humidity sensor and a thermistor to measure the surrounding air and spits out a digital signal on the data pin (no analog input pins needed).

Flow Sensors

A flow sensor (more commonly referred to as a “flow meter”) is an electronic device that measures or regulates the flow rate of liquids and gasses within pipes and tubes.

MQ5 - Gas sensor

Gas sensors (also known as gas detectors) are electronic devices that detect and identify different types of gasses. They are commonly used to detect toxic or explosive gasses and measure gas concentration.

Flame sensors

A flame-sensor is one kind of detector which is mainly designed for detecting as well as responding to the occurrence of a fire or flame. The flame detection response can depend on its fitting

Source code:

```
#include <WiFi.h>//library for wifi

#include <PubSubClient.h>//library for MQtt

#include "DHT.h"// Library for dht11

#include <cstdlib>

#include <time.h>

#include <mjson.h>

#define DHTPIN 15     // what pin we're connected to

#define DHTTYPE DHT22   // define type of sensor DHT 11

DHT dht (DHTPIN, DHTTYPE);// creating the instance by passing pin
and typr of dht connected



void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength); //-------credentials of IBM Accounts------

#define ORG "l7agks"

#define DEVICE_TYPE "raspberrypi"

#define DEVICE_ID "0612"

#define TOKEN "123456789"



String data3 = "";
String accidentstatus =""; String sprinkstatus = ""; float

temp =0; bool isfanon = false; bool issprinkon = false; bool

cansprinkoperate = true; bool canfanoperate = true; bool

cansentalert = false; int gas = 0; int flame = 0; int flow =

0; long int cooldown= 600; char server[] = ORG
```

```
".messaging.internetofthings.ibmcloud.com"; char

publishTopic[] = "iot-2/evt/data/fmt/json"; char

subscribetopic[] = "iot-2/cmd/command/fmt/String"; char

authMethod[] = "use-token-auth"; char token[] = TOKEN; char

clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;

//-------------------------------------------

WiFiClient wifiClient; // creating the instance for wificlient

PubSubClient client(server, 1883, callback ,wifiClient); //calling
the predefined client id by passing parameter like server id,portand
wificredential void setup()// configureing the ESP32

{ Serial.begin(115200);

  dht.begin();

  //if real gas sensor is used make sure the senor is heated up for
acurate readings

  /*

    - Here random values for readings and stdout were used to show
the

      working  of the devices as physical or simulated devices are
not available.

  */ delay(10);

  Serial.println()

  ; wificonnect();

  mqttconnect();

}
```

```
void loop()
{ temp = dht.readTemperature();
  //setting a random seed (only for random values not in real life
scenarios) srand(time(0)); //initial variable activities like
declaring , assigning gas = rand()%400;
  int flamereading = rand()%1024; flame =
  map(flamereading,0,1024,0,1024); int
  flow = ((rand()%100)>50?1:0);
  //find the accident status 'cause fake alert may be caused by some
mischief activities if(temp < 45 ){ if(flame > 650 ){ accidentstatus
= "Need Auditing"; if(canfanoperate) isfanon = true; else isfanon =
false; issprinkon = false;
    } else if(flame <= 10){ accidentstatus
    = "nothing happened"; isfanon =
    false; issprinkon = false;
    }

  }
```

```
else if(temp >= 45 && temp <= 55 ){ if(flame
  <=650 && flame >100 ){


if(cansprinkoperate)


      issprinkon = true; else
    issprinkon = false;
    accidentstatus = "moderate";
    if(gas > 160 && canfanoperate
    ){ isfanon = true; } else{
    isfanon = false;
    } } else if(flame <= 100 && flame
  > 10){ if(cansprinkoperate)
  issprinkon = true; else issprinkon =
  false; isfanon = false;
  accidentstatus = "moderate";
  }


}
```

```
else if(temp > 55){
  if(flame > 650){ gas =
  500 + rand()%500;
  accidentstatus =
  "severe";
  if(cansprinkoperate)
  issprinkon = true; else
  issprinkon = false;
  if(canfanoperate) isfanon
  = true; else isfanon =
  false; } else if(flame <
  650 && flame > 400 ){ gas
  = 300 + rand()%500;
  accidentstatus =
  "severe";
  if(cansprinkoperate)
  issprinkon = true; else
  issprinkon = false;
  if(canfanoperate) isfanon
  = true; else isfanon =
  false;


  }
}
```

```
else { accidentstatus = "Need moderate

Auditing"; isfanon = false; issprinkon =

false;

} if(issprinkon){ if(flow){

sprinkstatus = "working";

  } else{ sprinkstatus = "not

  working";

  } } else

if(!issprinkon){

sprinkstatus = "ready";

} else { sprinkstatus = "something's

wrong";

}
```

```
  PublishData(temp,gas,flame,flow,isfanon,issprinkon);  //a  cooldown
  period is set as the values and situations are random in real life
  sceanarios    the    time    can    be    reduced    or    neclected
  if(accidentstatus=="severe"  &&  cooldown  >=  600){  cooldown  =  0;
  sendalert();   PublishData(temp,gas,flame,flow,isfanon,issprinkon);
  cansentalert = false;
  } if(cooldown >
  999999){ cooldown =
  601;
  } delay(1000);
  ++cooldown; if
  (!client.loop()) {
  mqttconnect();
  }
}
/*.....retrieving to
Cloud.....*/
void PublishData(float temp, int gas ,int flame ,int flow,bool
isfanon,bool issprinkon) { mqttconnect();//function call for
connecting to ibm
  /*
     creating the String in in form JSon to update the data to ibm
cloud
  */
  String payload = "{\"temp\":"; payload += temp; payload +=
  "," "\"gas\":"; payload += gas; payload += "," "\"flame\":";
```

```
  payload += flame; payload += "," "\"flow\":"; payload +=
  ((flow)?"true":"false"); payload += "," "\"isfanon\":";
  payload += ((isfanon)?"true":"false"); payload += ","
  "\"issprinkon\":"; payload += ((issprinkon)?"true":"false");
  payload += "," "\"cansentalert\":"; payload +=
  ((cansentalert)?"true":"false"); payload += ","
  "\"accidentstatus\":"; payload += "\""+accidentstatus+"\"";
  payload += "," "\"sprinkstatus\":"; payload +=
  "\""+sprinkstatus+"\""; payload += "}"; if
  (client.publish(publishTopic, (char*) payload.c_str())) {
    Serial.println("Publish ok");// if it sucessfully upload data on
the cloud then it will print publish ok in Serial monitor or else it
will print publish failed

  } else {
    Serial.println("Publish failed");
  } } void mqttconnect() {
if (!client.connected()) {
    Serial.print("Reconnecting client to ");
    Serial.println(server); while
    (!!!client.connect(clientId, authMethod, token)) {
    Serial.print("."); delay(500);
    }
     initManagedDevice()
     ; Serial.println();
```

```
  }  }  void  wificonnect()  //function  defination  for
wificonnect
{
  Serial.println();
  Serial.print("Connecting to ");
  WiFi.begin("Wokwi-GUEST", "", 6); while
  (WiFi.status() != WL_CONNECTED) {
  delay(100);
    Serial.print(".");
  }
  Serial.println("");
  Serial.println("WiFi connected");
  Serial.println("IP address: ");
  Serial.println(WiFi.localIP()); } void
initManagedDevice() { if
(client.subscribe(subscribetopic)) {
    Serial.println((subscribetopic));
    Serial.println("subscribe to cmd OK");
  } else {
    Serial.println("subscribe to cmd FAILED");
  }
} //handles commands from user
side
void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength) {
```

```
  Serial.print("callback invoked for topic: ");

  Serial.println(subscribetopic); for (int i =

  0; i < payloadLength; i++) { data3 +=

  (char)payload[i];

  }
  Serial.println("data: "+ data3); const char *s

  =(char*) data3.c_str(); double pincode = 0;

  if(mjson_get_number(s, strlen(s), "$.pin", &pincode)){

  if(((int)pincode)==137153){ const char *buf; int len;

        if (mjson_find(s, strlen(s), "$.command", &buf, &len)) //
And print it

        {

          String command(buf,len);

          if(command=="\"cantfan\""){

            //this works when there is gas sensor reads high value
and if there should be a

            //manual trigger else it will be automate

            canfanoperate = !canfanoperate;

          } else if(command=="\"cantsprink\""){

          cansprinkoperate = !cansprinkoperate;

          }else if(command=="\"sentalert\""){

            //this works when there is accident status is severe and
if there should be a

            //manual trigger else it will be automate

            resetcooldown();

          }
        }
```

```
    } }
  data3="";
} void
resetcooldown(){
cooldown = 0;
} //sent alert request to node-
red void sendalert(){
cansentalert = true; cooldown =
0;
}
```

Github Link : https://github.com/IBM-EPBL/IBM-Project-18751-1659689286

Demo Video : https://www.youtube.com/watch?v=JN44xH6iLdI&t=2s