

Assignment -4

Assignment Date	30 October 2022
Student Name	KAMMAATTCHI
Student Roll Number	PNT2022TMID02410
Maximum Marks	2 Marks

Question-1:

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100 cms send "alert" to ibm cloud and display in device recent events.

The image shows the Wokwi IDE interface with a C++ sketch for an ESP32 microcontroller connected to an HC-SR04 ultrasonic sensor. The sketch includes the necessary libraries for WiFi and MQTT, defines the sensor pins (trig=5, echo=18), and configures an MQTT client to connect to the IBM Watson IoT platform. The code sends an "alert" message to the topic "ultrasonic/cmd/test/fmt/String" when the measured distance is less than 100 cm. The simulation view on the right shows the physical connection of the sensor to the ESP32 board.

```
1 #include<WiFi.h> //library for wifi
2 #include<PubSubClient.h> //library for MQTT
3 void callback(char* subscribetopic, byte* payload,unsigned int payloadlength);
4 //-----credentials of IBM Account-----
5 #define ORG "izyy6o" // IBM ORGANIZATION ID
6 #define DEVICE_TYPE "iotdeviceproject" //DEVICE TYPE MENTIONED IN IOT WATSON PLATFORM
7 #define DEVICE_ID "229714" //DEVICE ID MENTIONED IN IOT WATSON PLATFORM
8 #define TOKEN "24681012" //Token
9 String data3;
10 float dist;
11 //-----customize the above value-----
12 char server[] = ORG ".messaging.internetofthings.ibmcloud.com"; //server name
13 char publishTopic[] = "ultrasonic/evt/Data/fmt/json"; //topic name and type of event per
14 | and format in which data to be send*/
15 char subscribetopic[] = "ultrasonic/cmd/test/fmt/String"; //cmd REPRESENT Command tupe a
16 COMMAND IS TEST OF FORMAT STRING*/
17 char authMethod[] = "use-token-auth"; //authentication method
18 char token[] = TOKEN;
19 char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID; //CLIENT ID
20 //-----
21 WiFiClient wifiClient; // creating an instance for wificlient
22 PubSubClient client(server, 1883, callback, wifiClient); //calling the predefined cl
23 by passing parameter like server id,portand wificredential*/
24 int LED = 4;
25 int trig = 5;
26 int echo = 18;
27 void setup()
28 {
29   Serial.begin(115200);
30   pinMode(trig, OUTPUT);
31   pinMode(echo, INPUT);
32   pinMode(LED, OUTPUT);
```

WOKWI

SAVE

SHARE

Docs

sketch.ino

diagram.json

libraries.txt

Library Manager

Simulation

```

32 pinMode(LED,OUTPUT);
33 delay(10);
34 wifiConnect();
35 mqttConnect();
36 }
37 void loop()//recursive function
38 {
39   digitalWrite(trig,LOW);
40   digitalWrite(trig,HIGH);
41   delayMicroseconds(10);
42   digitalWrite(trig,LOW);
43   float dur=pulseIn(echo,HIGH);
44   float dist=(dur * 0.0343)/2;
45   Serial.print("distance in cm");
46   Serial.println(dist);
47   PublishData(dist);
48   delay(1000);
49   if (!client.loop()){
50     mqttConnect();
51   }
52 }
53 .....retriving to cloud.....
54 void PublishData(float dist){
55   mqttConnect();//function call for connecting to ibm
56   /*creating the string in form of JSON to update the data to ibm cloud*/
57   String object;
58   if(dist<100)
59   {
60     digitalWrite(LED,HIGH);
61     Serial.println("no object is near");
62     object="Near";
63   }

```

WOKWI

SAVE

SHARE

sketch.ino

diagram.json

libraries.txt

Library Manager

Simulation

```

63 }
64 else
65 {
66   digitalWrite(LED,LOW);
67   Serial.println("no object found");
68   object="No";
69 }
70 String payload="{\"distance\":";
71 payload +=dist;
72 payload +="," " \"object\":\"";
73 payload += object;
74 payload += "\";";
75
76 Serial.print("Sending payload: ");
77 Serial.println(payload);
78 if(client.publish(publishtopic, (char*) payload.c_str())){
79   Serial.println("Publish ok");// if its sucessfully upload data on the cloud then
80   publish ok in serial monitor or else it will print publish failed"/
81 } else{
82   Serial.println("Publish failed");
83 }
84 }
85 void mqttConnect(){
86   if(!client.connected()){
87     Serial.print("Reconnecting client to ");
88     Serial.println(server);
89     while(!client.connect(clientid,authMethod, token)){
90       Serial.print(".");
91       delay(500);
92     }
93   }
94   initManagedDevice();
95   Serial.println();

```

WOKWI
SAVE
SHARE
Docs

sketch.ino

diagram.json

libraries.txt

Library Manager

```

93   initManagedDevice();
94   Serial.println();
95   }
96   }
97   void wificonnect()//function definition for wificonnect
98   {
99       Serial.println();
100      Serial.print("Connecting to ");
101      WiFi.begin("Wokwi.GUEST", ""); //PASSING THE WIFI CREDENTIALS TO ESTABLISH CONNE
102      while (WiFi.status() != WL_CONNECTED){
103          delay(500);
104          Serial.print(".");
105      }
106      Serial.println("");
107      Serial.println("WiFi connected");
108      Serial.println("IP address");
109      Serial.println(WiFi.localIP());
110  }
111  void initManagedDevice(){
112      if(client.subscribe(subscribetopic)){
113          Serial.println((subscribetopic));
114          Serial.println("subscribe to cmd OK");
115      }else{
116          Serial.println("subscribe to cmd failed");
117      }
118  }
119  void callback(char* subscribetopic,byte*payload,unsigned int payloadlength)
120  {
121      Serial.print("callback invoked for topic: ");
122      Serial.println(subscribetopic);
123      for(int i=0; i< payloadlength; i++){
124          //Serial.print((char)payload[i]);
125          data3 +=(char)payload[i];

```

Simulation

WOKWI
SAVE
SHARE
Docs

sketch.ino

diagram.json

libraries.txt

Library Manager

```

111  }
112  void initManagedDevice(){
113      if(client.subscribe(subscribetopic)){
114          Serial.println((subscribetopic));
115          Serial.println("subscribe to cmd OK");
116      }else{
117          Serial.println("subscribe to cmd failed");
118      }
119  }
120  void callback(char* subscribetopic,byte*payload,unsigned int payloadlength)
121  {
122      Serial.print("callback invoked for topic: ");
123      Serial.println(subscribetopic);
124      for(int i=0; i< payloadlength; i++){
125          //Serial.print((char)payload[i]);
126          data3 +=(char)payload[i];
127      }
128      //Serial.println("dta: "+ data3);
129      //if(data3=="Near")
130      //{
131      //    //Serial.println(data3);
132      //    //digitalWrite(LED,HIGH);
133      //}
134      //else
135      //{
136      //    //Serial.println(data3);
137      //    //digitalWrite(LED,LOW);
138      //}
139      data3="";

```

Simulation

DATA SENT TO IBM CLOUD ON NO OBJECT DETECTED

Browser Action Device Types Interfaces

Add Device

DISTANCEDETECT Disconnected ULTRASON Device Oct 20, 2022 9:46 AM

Identity Device Information Recent Events State Logs

The latest event is listed along with the stream of data that is received and pushed from this device.


Event	Value	Format	Last Received
Data	["distance":79.66,"object":"Near"]	json	a few seconds ago
Data	["distance":79.64,"object":"Near"]	json	a few seconds ago
Data	["distance":79.66,"object":"Near"]	json	a few seconds ago
Data	["distance":79.64,"object":"Near"]	json	a few seconds ago
Data	["distance":79.66,"object":"Near"]	json	a few seconds ago

Items per page: 50 1-2 of 2 items

1 of 1 page

WHEN OBJECT DETECTED BY ULTRASONIC DETECTOR SENSOR

Simulation

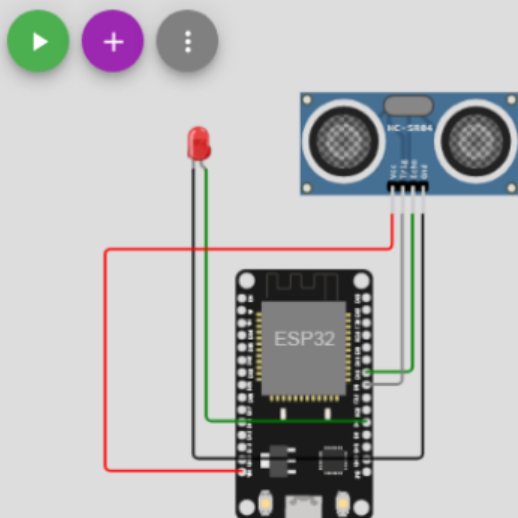

```
no object found
Sending payload: {"distance":141.21,"object":"No"}
Publish ok
Distancein cm141.21
no object found
Sending payload: {"distance":141.21,"object":"No"}
Publish ok
```

