

## ASSIGNMENT-4

Date	23 October 2022
TeamID	PNT2022TMID49507
Name	KARTHIKA.S
Student roll number	923819106021
Maximum Marks	2Marks

### Question1:

Write code and connections in work for ultrasonic sensor. Whenever distance is less than 100cms send "alert" to ibm cloud and display in device recent events.

### CODE:

```
1  #include <Wifi.h> //library for wifi
2  #include <PubSubClient.h> //library for MQTT
3
4
5  void callback(char* subscribetopic, byte* payload, unsigned int payloadLength);
6
7  //-----credentials of IBM Accounts-----
8
9  #define ORG "4hn0jp" //IBM ORGANITION ID
10 #define DEVICE_TYPE "ULTRASON" //Device type mentioned in ibm watson IOT Platform
11 #define DEVICE_ID "DISTANCEDETECT" //Device ID mentioned in ibm watson IOT Platform
12 #define TOKEN "wuo5s7PR)ZSegV&Rx" //Token
13 String data3;
14 float dist;
15
16
17 //----- Customise the above values -----
18 char server[] = ORG ".messaging.internetofthings.ibmcloud.com"; // Server Name
19 char publishTopic[] = "iot-2/evt/Data/fmt/json"; // topic name and type of event perform and format in which data to be send
20 char subscribetopic[] = "iot-2/cmd/test/fmt/String"; // cmd REPRESENT command type AND COMMAND IS TEST OF FORMAT STRING
21 char authMethod[] = "use-token-auth"; // authentication method
22 char token[] = TOKEN;
23 char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID; //client id
24
25
26 //-----
27 WiFiClient wificlient; // creating the instance for wificlient
28 PubSubClient client(server, 1883, callback ,wificlient); //calling the predefined client id by passing parameter like server id,portand wificredential
29
30 int LED = 4;
31 int trig = 5;
32 int echo = 18;
33 void setup()
34 {
35   Serial.begin(115200);
```

esp32-blink.ino • diagram.json • libraries.txt • Library Manager ▼

```
36  pinMode(trig,OUTPUT);
37  pinMode(echo,INPUT);
38  pinMode(LED, OUTPUT);
39  delay(10);
40  wificonnect();
41  mqttconnect();
42  }
43  void loop()// Recursive Function
44  {
45
46      digitalWrite(trig,LOW);
47      digitalWrite(trig,HIGH);
48      delayMicroseconds(10);
49      digitalWrite(trig,LOW);
50      float dur = pulseIn(echo,HIGH);
51      float dist = (dur * 0.0343)/2;
52      Serial.print ("Distancein cm");
53      Serial.println(dist);
54
55
56      PublishData(dist);
57      delay(1000);
58      if (!client.loop()) {
59          mqttconnect();
60      }
61  }
62
63
64
65  /*.....retrieving to Cloud.....*/
66
67  void PublishData(float dist) {
68      mqttconnect();//function call for connecting to ibm
69      /*
70      |   creating the String in in form JSON to update the data to ibm cloud
```

```

70      // creating the String in in form JSON to update the data to ibm cloud
71      */
72      String object;
73      if (dist <100)
74      {
75          digitalWrite(LED,HIGH);
76          Serial.println("object is near");
77          object = "Near";
78      }
79      else
80      {
81          digitalWrite(LED,LOW);
82          Serial.println("no object found");
83          object = "No";
84      }
85
86      String payload = "{\"distance\":";
87      payload += dist;
88      payload += ", \" \"object\":";
89      payload += object;
90      payload += "\"}";
91
92
93      Serial.print("Sending payload: ");
94      Serial.println(payload);
95
96
97
98

```

```

esp32-blink.ino  diagram.json  libraries.txt  Library Manager
98
99      if (client.publish(publishTopic, (char*) payload.c_str())) {
100          Serial.println("Publish ok");// if it sucessfully upload data on the cloud then it will print publish ok in Serial monitor or else it will print publish failed
101      } else {
102          Serial.println("Publish failed");
103      }
104
105  }
106  void mqttconnect() {
107      if (!client.connected()) {
108          Serial.print("Reconnecting client to ");
109          Serial.println(server);
110          while (!client.connect(clientId, authMethod, token)) {
111              Serial.print(".");
112              delay(500);
113          }
114
115          initManagedDevice();
116          Serial.println();
117      }
118  }
119  void wificonnect() //function defination for wificonnect
120  {
121      Serial.println();
122      Serial.print("connecting to ");
123
124      Wifi.begin("wokwi-GUEST", "", 6);//passing the wifi credentials to establish the connection
125      while (Wifi.status() != WL_CONNECTED) {
126          delay(500);
127          Serial.print(".");
128      }
129      Serial.println("");
130      Serial.println("Wifi connected");
131      Serial.println("IP address: ");
132      Serial.println(Wifi.localIP());

```

esp32-blink.ino • diagram.json • libraries.txt • Library Manager ▾

```
123
124   WiFi.begin("Wokwi-GUEST", "", 6); //passing the wifi credentials to establish the connection
125   while (WiFi.status() != WL_CONNECTED) {
126       delay(500);
127       Serial.print(".");
128   }
129   Serial.println("");
130   Serial.println("WiFi connected");
131   Serial.println("IP address: ");
132   Serial.println(WiFi.localIP());
133 }
134
135 void initManagedDevice() {
136     if (client.subscribe(subscribetopic)) {
137         Serial.println((subscribetopic));
138         Serial.println("subscribe to cmd OK");
139     } else {
140         Serial.println("subscribe to cmd FAILED");
141     }
142 }
143
144 void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
145 {
146
147     Serial.print("callback invoked for topic: ");
148     Serial.println(subscribetopic);
149     for (int i = 0; i < payloadLength; i++) {
150         //Serial.print((char)payload[i]);
151         data3 += (char)payload[i];
152     }
153
154     // Serial.println("data: " + data3);
155     // if(data3=="Near")
156     // {
157     // Serial.println(data3);
158     // digitalWrite(LED_BUILTIN, HIGH);
159 }
```

esp32-blink.ino ●


diagram.json ●

libraries.txt ●

Library Manager ▼

```
142 }
143
144 void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
145 {
146
147     Serial.print("callback invoked for topic: ");
148     Serial.println(subscribetopic);
149     for (int i = 0; i < payloadLength; i++) {
150         //Serial.print((char)payload[i]);
151         data3 += (char)payload[i];
152     }
153
154     // Serial.println("data: "+ data3);
155     // if(data3=="Near")
156     // {
157     // Serial.println(data3);
158     // digitalWrite(LED,HIGH);
159
160     // }
161
162     // else
163     // {
164     // Serial.println(data3);
165     // digitalWrite(LED,LOW);
166
167     // }
168     data3="";
169
170
171 }
```


## OUTPUT:

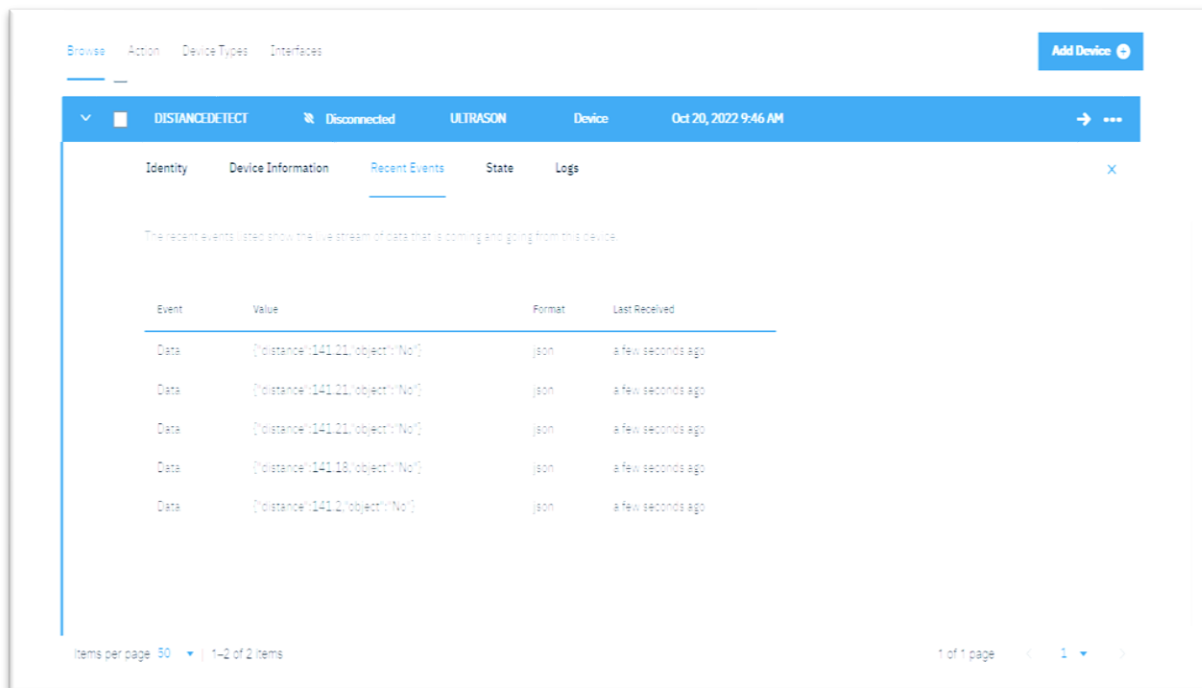

The screenshot shows the IBM Watson IoT Platform interface. At the top, there are tabs for 'Browse', 'Action', 'Device Types', and 'Interfaces'. Below these, a blue header bar displays the device name 'DISTANCEDETECT', its status 'Disconnected', type 'ULTRASON', and location 'Device'. The date and time 'Oct 20, 2022 9:46 AM' are also shown. The main content area has tabs for 'Identity', 'Device Information', 'Recent Events', 'State', and 'Logs'. The 'Recent Events' tab is selected, showing a table of events. The table has columns for 'Event', 'Value', 'Format', and 'Last Received'. There are five rows of data, all showing a distance of 141.21 and an object status of 'No'. The events are listed as 'Data' and are in 'json' format. The last received time for all events is 'a few seconds ago'. At the bottom, there is a pagination bar showing 'Items per page 50' and '1-2 of 2 items'.

Event	Value	Format	Last Received
Data	{\"distance\":141.21,\"object\":\"No\"}	json	a few seconds ago
Data	{\"distance\":141.21,\"object\":\"No\"}	json	a few seconds ago
Data	{\"distance\":141.21,\"object\":\"No\"}	json	a few seconds ago
Data	{\"distance\":141.21,\"object\":\"No\"}	json	a few seconds ago
Data	{\"distance\":141.21,\"object\":\"No\"}	json	a few seconds ago

Data send to the IBMcloud device when the object is far

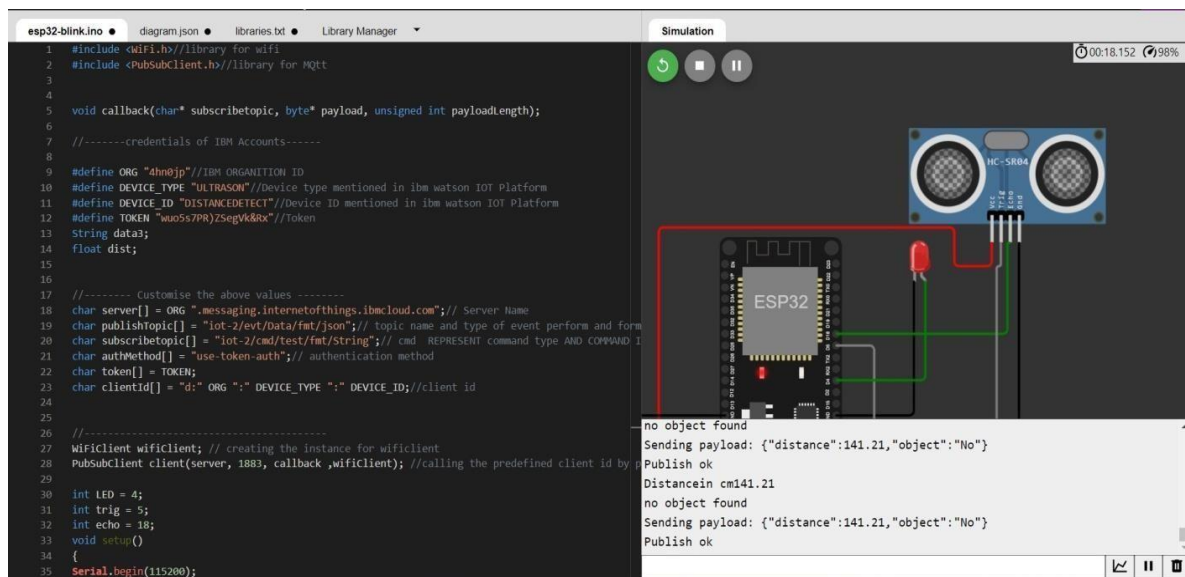

The screenshot shows the Arduino IDE with a code editor on the left and a simulation window on the right. The code is for an ESP32 device connected to an HC-SR04 ultrasonic sensor. The code defines the sensor's pin configuration and sets up the communication with the IBM Watson IoT Platform. The simulation window shows the physical components: an ESP32 microcontroller, an HC-SR04 ultrasonic sensor, and a red LED. The simulation output shows the device sending a payload to the IoT platform when the object is far (distance 141.21 cm) and not found when the object is close (distance 141.21 cm).

```
1 #include <WiFi.h> //library for wifi
2 #include <PubSubClient.h> //library for MQTT
3
4
5 void callback(char* topic, byte* payload, unsigned int payloadLength);
6
7 //-----credentials of IBM Accounts-----
8
9 #define ORG "alm0jp" //IBM ORGANIZATION ID
10 #define DEVICE_TYPE "ULTRASON" //Device type mentioned in ibm watson IOT Platform
11 #define DEVICE_ID "DISTANCEDETECT" //Device ID mentioned in ibm watson IOT Platform
12 #define TOKEN "wuo5s7PR)2SegV&8x" //Token
13 String data;
14 float dist;
15
16 //----- Customise the above values -----
17
18 char server[] = ORG ".messaging.internetofthings.ibmcloud.com"; // Server Name
19 char publishTopic[] = "iot-2/evt/Data/fmt/json"; // topic name and type of event perform and form
20 char subscribeTopic[] = "iot-2/cmd/test/fmt/String"; // cmd REPRESENT command type AND COMMAND ID
21 char authMethod[] = "use-token-auth"; // authentication method
22 char token[] = TOKEN;
23 char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID; //client id
24
25 //-----
26
27 WiFiClient wifiClient; // creating the instance for wifiClient
28 PubSubClient client(server, 1883, callback, wifiClient); //calling the predefined client id by
29
30 int LED = 4;
31 int trig = 5;
32 int echo = 18;
33 void setup()
34 {
35   Serial.begin(115200);
```

## Data sent to the IBMCloud Device when the object is near

The screenshot shows the IBM Cloud IoT Platform interface for a device named 'DISTANCEDETECT'. The device is currently 'Disconnected'. The 'Recent Events' tab is selected, displaying a table of data points. The table has four columns: 'Event', 'Value', 'Format', and 'Last Received'. All events are of type 'Data' and contain the JSON payload '{"distance":79.66,"object":"Near"}'. The 'Format' column shows 'json' and the 'Last Received' column shows 'a few seconds ago'. The interface also includes a top navigation bar with 'Browse', 'Action', 'Device Types', and 'Interfaces', and a right-hand 'Add Device' button.

Event	Value	Format	Last Received
Data	{"distance":79.66,"object":"Near"}	json	a few seconds ago
Data	{"distance":79.64,"object":"Near"}	json	a few seconds ago
Data	{"distance":79.66,"object":"Near"}	json	a few seconds ago
Data	{"distance":79.64,"object":"Near"}	json	a few seconds ago
Data	{"distance":79.66,"object":"Near"}	json	a few seconds ago

## When object is near to the ultrasonic sensor

The screenshot shows a Wokwi simulation of an ESP32 microcontroller connected to an HC-SR04 ultrasonic sensor. The sensor is connected to the ESP32's pins: VCC to 5V, GND to GND, Trig to pin 4, and Echo to pin 5. A red LED is connected to pin 2 (Trig) and pin 1 (GND). The simulation is running, and the console output shows the following sequence of events:

```
object is near
Sending payload: {"distance":97.82,"object":"Near"}
Publish ok
Distance in cm 97.82
object is near
Sending payload: {"distance":97.82,"object":"Near"}
Publish ok
```