

ASSIGNMENT -4

TEAM ID:PNT2022TMID04739

ROLL NO: 737819ECR217

QUESTION - 4:

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100 cms send "alert" to ibm cloud and display in device recent events. Upload document with wokwi share link and images of ibm cloud.

CODE:

```
#include <WiFi.h>
#include <PubSubClient.h>
#include <ArduinoJson.h>

WiFiClient wifiClient;

#define ORG "1bk1kq"
#define DEVICE_TYPE "abcd"
#define DEVICE_ID "rasp"
#define TOKEN "12345678"
#define speed 0.034

char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/abcd_1/fmt/json";
char topic[] = "iot-2/cmd/home/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
PubSubClient client(server, 1883, wifiClient);
void publishData();

const int trigpin=5;
const int echopin=18;
String command;
String data="";
String lat="14.167589";
String lon="80.248510";
String name="point2";
```

```

String icon="";

long duration;
int dist;

void setup()
{
    Serial.begin(115200);
    pinMode(trigpin, OUTPUT);
    pinMode(echopin, INPUT);
    wifiConnect();
    mqttConnect();
}

void loop() {

    publishData();
    delay(500);

    if (!client.loop()) {
        mqttConnect();
    }
}

void wifiConnect() {
    Serial.print("Connecting to "); Serial.print("Wifi");
    WiFi.begin("Wokwi-GUEST", "", 6);
    while (WiFi.status() != WL_CONNECTED) {
        delay(500);
        Serial.print(".");
    }
    Serial.print("WiFi connected, IP address: ");
    Serial.println(WiFi.localIP());
}

void mqttConnect() {
    if (!client.connected()) {
        Serial.print("Reconnecting MQTT client to "); Serial.println(server);
        while (!client.connect(clientId, authMethod, token)) {
            Serial.print(".");
            delay(1000);
        }
        initManagedDevice();
        Serial.println();
    }
}

void initManagedDevice() {

```

```


    if (client.subscribe(topic)) {
        Serial.println(client.subscribe(topic));
        Serial.println("subscribe to cmd OK");
    } else {
        Serial.println("subscribe to cmd FAILED");
    }
}

void publishData()
{
    digitalWrite(trigpin, LOW);
    digitalWrite(trigpin, HIGH);
    delayMicroseconds(10);
    digitalWrite(trigpin, LOW);
    duration=pulseIn(echopin, HIGH);
    dist=duration*speed/2;

    if(dist<100){
        dist=100-dist;
        icon="fa-trash";
    }else{
        dist=0;
        icon="fa-trash-o";
    }
    DynamicJsonDocument doc(1024);
    String payload;
    doc["Name"]=name;
    doc["Latitude"]=lat;
    doc["Longitude"]=lon;
    doc["Icon"]=icon;
    doc["FillPercent"]=dist;
    serializeJson(doc, payload);
    delay(3000);
    Serial.print("\n");
    Serial.print("Sending payload: ");
    Serial.println(payload);
    if (client.publish(publishTopic, (char*) payload.c_str())) {
        Serial.println("Publish OK");
    } else {
        Serial.println("Publish FAILED");
    }
}

```

CONNECTIONS:

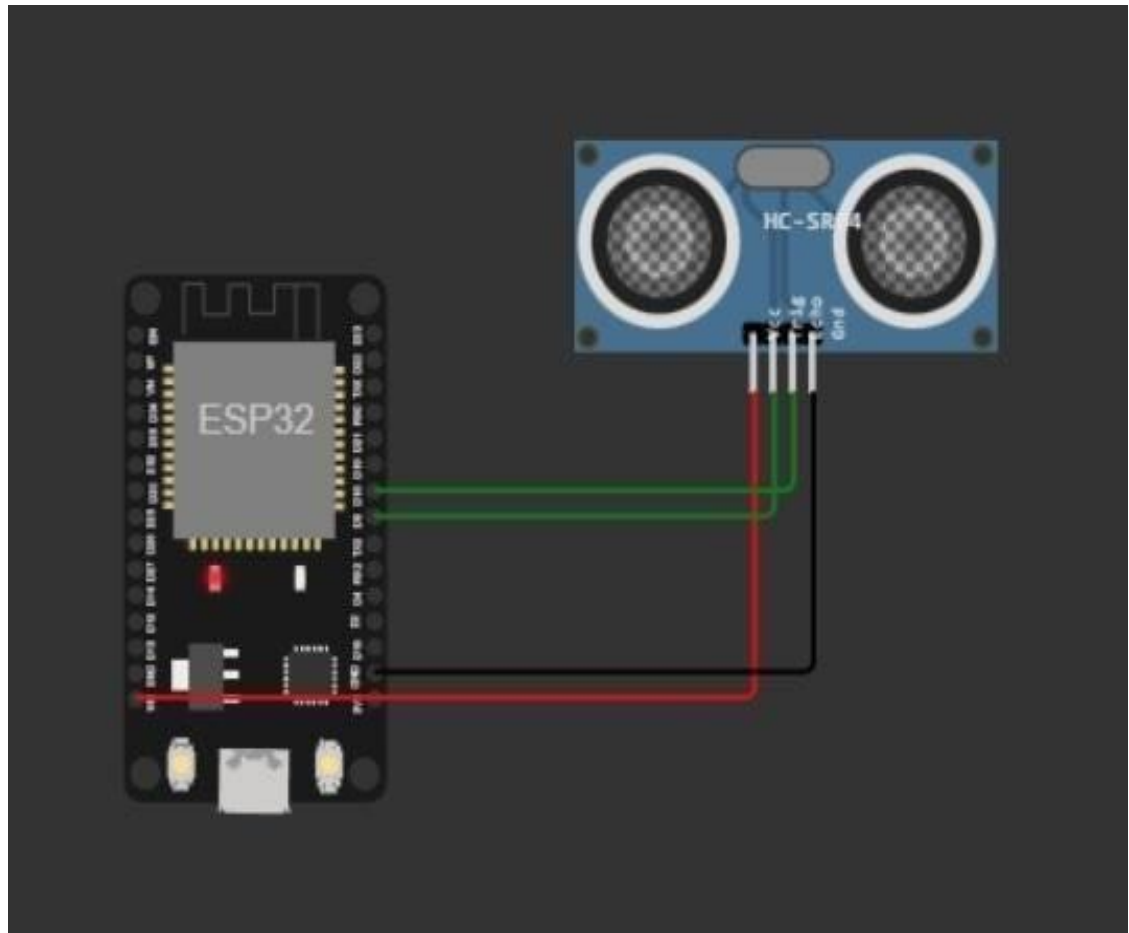

OUTPUT:

The screenshot displays the Wokwi IoT simulator interface. On the left, a code editor shows the following C++ code:

```
1 #include <WiFi.h>
2 #include <PubSubClient.h>
3 #include <ArduinoJson.h>
4
5 WiFiClient wificlient;
6
7 #define ORG "1bk1kq"
8 #define DEVICE_TYPE "abcd"
9 #define DEVICE_ID "rasp"
10 #define TOKEN "12345678"
11 #define speed 0.034
12
13 char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
14 char publishTopic[] = "iot-2/evt/abcd_1/fmt/json";
15 char topic[] = "iot-2/cmd/home/fmt/String";
16 char authMethod[] = "use-token-auth";
17 char token[] = TOKEN;
18 char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
19 PubSubClient client(server, 1883, wificlient);
20 void publishData();
21
22 const int trigpin=5;
23 const int echopin=18;
24 String command;
25 String data="";
26 String lat="14.167589";
27 String lon="80.248510";
28 String name="point2";
29 String icon="";
30
31 long duration;
32 int dist;
33
```

The simulation window on the right shows a virtual environment with an ESP32 microcontroller and an HC-SR04 ultrasonic sensor connected by wires. Above the simulation are controls for running, pausing, and restarting the simulation, along with a timer showing 00:05.832 and a battery level of 101%.

The console output at the bottom of the simulation window shows the following messages:

```
Connecting to Wifi...Wifi connected, IP address: 10.10.0.2
Reconnecting MQTT client to 1bk1kq.messaging.internetofthings.ibmcloud.com
1
subscribe to cmd OK
```

The bottom of the image shows a Windows taskbar with the date 09-11-2022 and time 13:52.