

ASSIGNMENT 1

MAHENDRA ENGINEERING COLLEGE FOR WOMEN


NAME: KEERTHANA.B

CLASS:4 YEAR ECE

SUBJECT:IBM

REGISTER NO:611419106032

DESIGN PART

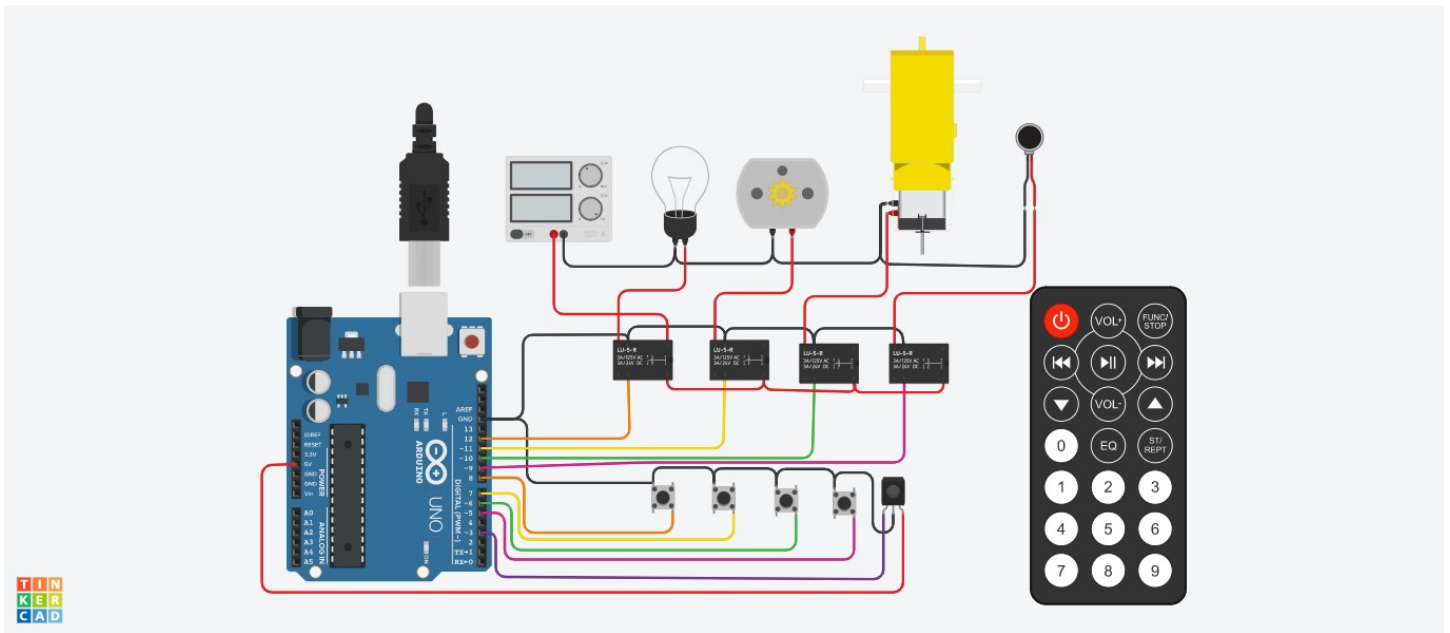

CODING PART

```
#include <SPI.h>
```

```
#include <Wire.h>
```

```
#include <IRremote.h>
```

```
const int relay_1 = 12;
```

```
const int relay_2 = 11;
```

```
const int relay_3 = 10;
```

```
const int relay_4 = 9;
```

```
const int mswitch_1 = 8;
```

```
const int mswitch_2 = 7;
```

```
const int mswitch_3 = 6;
```

```
const int mswitch_4 = 5;
```

```
int RECV_PIN = 3;
```

```
IRrecv irrecv(RECV_PIN);
```

```
decode_results results;
```

```
int toggleState_1 = 0;
```

```
int toggleState_2 = 0;
```

```
int toggleState_3 = 0;
```

```
int toggleState_4 = 0;
```

```
void setup() {
```

```
    Serial.begin(9600);
```

```
    irrecv.enableIRIn();
```

```
    pinMode(relay_1, OUTPUT);
```

```
    pinMode(relay_2, OUTPUT);
```

```
    pinMode(relay_3, OUTPUT);
```

```
pinMode(relay_4, OUTPUT);
```

```
pinMode(mswitch_1, INPUT_PULLUP);
```

```
pinMode(mswitch_2, INPUT_PULLUP);
```

```
pinMode(mswitch_3, INPUT_PULLUP);
```

```
pinMode(mswitch_4, INPUT_PULLUP);
```

```
}
```

```
void relayOnOff(int relay){
```

```
    switch(relay){
```

```
        case 1:
```

```
            if(toggleState_1 == 0){
```

```
                digitalWrite(relay_1, HIGH); // turn on relay 1
```

```
                toggleState_1 = 1;
```

```
            }
```

```
        else{
```

```
            digitalWrite(relay_1, LOW); // turn off relay 1
```

```
            toggleState_1 = 0;
```

```
        }
```

```
        delay(100);
```

```
    break;
```

```
    case 2:
```

```
        if(toggleState_2 == 0){
```

```
            digitalWrite(relay_2, HIGH); // turn on relay 2
```

```
            toggleState_2 = 1;
```

```
        }
```

```
    else{  
        digitalWrite(relay_2, LOW); // turn off relay 2  
        toggleState_2 = 0;  
    }  
    delay(100);  
break;  
case 3:  
    if(toggleState_3 == 0){  
        digitalWrite(relay_3, HIGH); // turn on relay 3  
        toggleState_3 = 1;  
    }else{  
        digitalWrite(relay_3, LOW); // turn off relay 3  
        toggleState_3 = 0;  
    }  
    delay(100);  
break;  
case 4:  
    if(toggleState_4 == 0){  
        digitalWrite(relay_4, HIGH); // turn on relay 4  
        toggleState_4 = 1;  
    }  
    else{  
        digitalWrite(relay_4, LOW); // turn off relay 4  
        toggleState_4 = 0;  
    }  
    delay(100);  
break;
```

```
    default : break;
  }

}
```

```
void loop() {

  if (digitalRead(mswitch_1) == LOW){
    delay(200);
    relayOnOff(1);
  }
  else if (digitalRead(mswitch_2) == LOW){
    delay(200);
    relayOnOff(2);
  }
  else if (digitalRead(mswitch_3) == LOW){
    delay(200);
    relayOnOff(3);
  }
  else if (digitalRead(mswitch_4) == LOW){
    delay(200);
    relayOnOff(4);
  }

  if (irrecv.decode(&results)) {
    switch(results.value){
```

```
case 0xFD08F7:
    relayOnOff(1);
break;
case 0xFD8877:
    relayOnOff(2);
break;
case 0xFD48B7:
    relayOnOff(3);
break;
case 0xFD28D7:
    relayOnOff(4);
break;
default : break;
}
irrecv.resume();
}
}
```