




182 MONO PERC SOLAR CELL PIRANHA_PTYPE_M10_BI-FACIAL

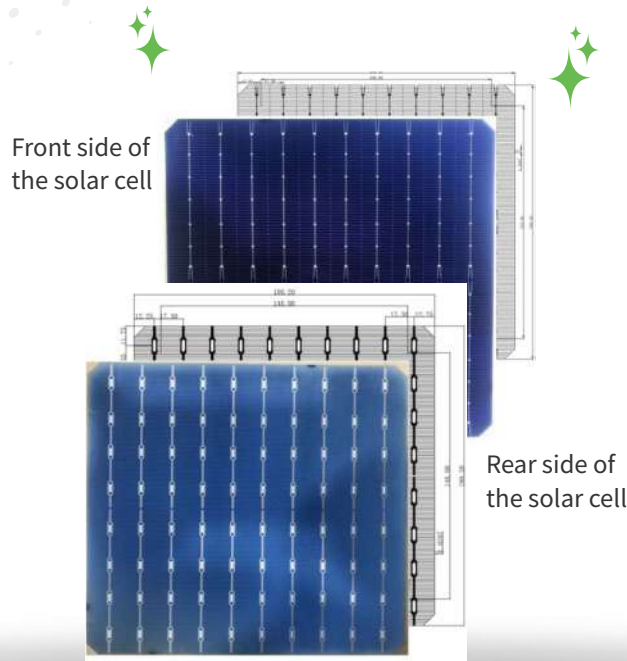


ILLUMINATING THE FUTURE, ONE CELL AT A TIME

- Ultra-efficient solar cell with anisotropically etched surface, Bi-facial light receiving structure & half cut design helps in improving the generating capacity of the module.
- Front 8 rear electrode pattern design improves the mechanical load of the module.
- The narrow design of the rear busbar reduces the shading rate & improves the double-sided rate of the module.
- Anti-PID performance to ensure the stability of the module power.



MECHANICAL DATA AND DESIGN

Model	PEPPL_PIRANHA_P TYPE_M10_BI-FACIAL	Front side (-)	10*0.08 mm \pm 0.03 mm busbars (Silver) 152 fingers, Silicon Oxide + Silicon Nitride compound anti-reflection coating (PID-free)
Product	182_10BB_152F Bifacial Mono PERC Solar Cell	Back side (+)	Passivated Layer (AlOx, SiO ₂ & SiNx) The rear electrode is composed of 10 busbar, 1.4 \pm 0.3 mm wide soldering pads
Code	PEPPL_BI_M10_10BB-1	Center to center Bus-bar distance	17.30 \pm 0.15 mm
Format	182 mm x 182 mm \pm 0.25 mm		
Thickness	170 μ m \pm 17.5		
Diagonal	247 mm \pm 0.25 mm		

182 MONO PERC SOLAR CELL PIRANHA_PTTYPE_M10_BI-FACIAL

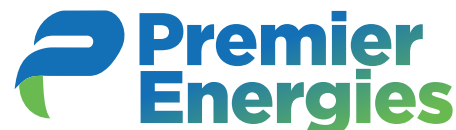


PEPPL_M10,10BB-152F-PRINTING PATTERNS

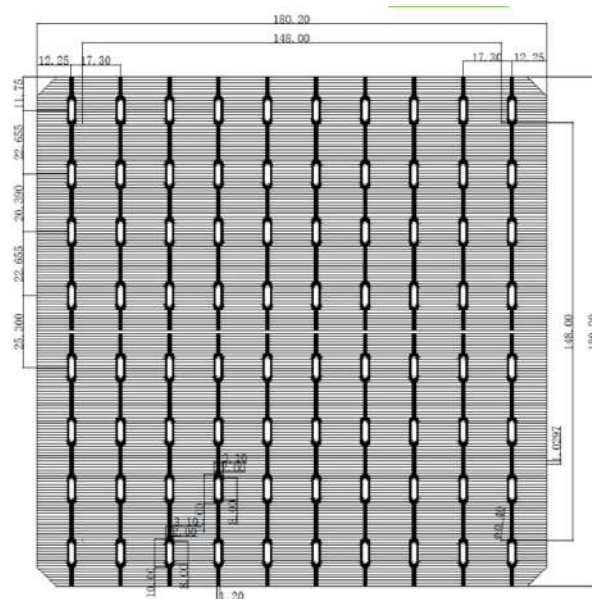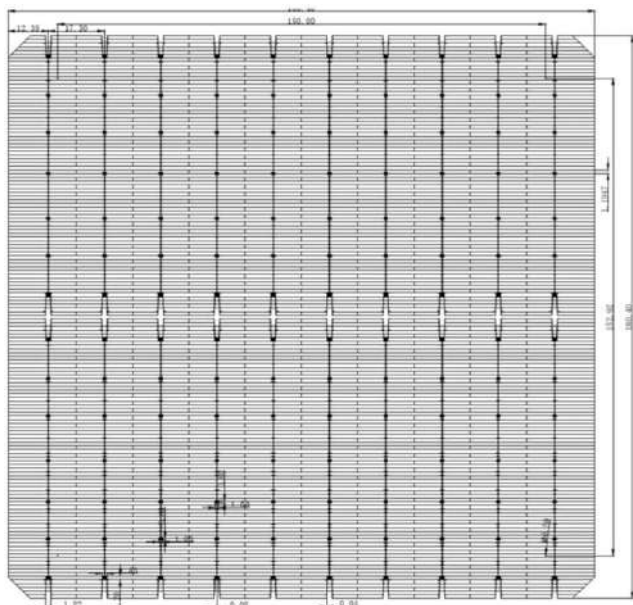

ELECTRICAL CHARACTERISTICS (STC*)

EFF. CLASS %	EFF. RANGE	PMPP(W)	VMPP(V)	IMPP(A)	VOC(V)	ISC(A)	FF(%)
23.3	23.30-23.40	7.69	0.607	12.67	0.691	13.41	83.00
23.2	23.20-23.30	7.66	0.605	12.66	0.689	13.41	82.93
23.1	23.10-23.20	7.63	0.603	12.65	0.688	13.39	82.86
23.0	23.00-23.10	7.59	0.601	12.64	0.686	13.37	82.8
22.9	22.90-23.00	7.56	0.599	12.62	0.685	13.34	82.73
22.8	22.80-22.90	7.53	0.597	12.62	0.684	13.32	82.66
22.7	22.70-22.80	7.49	0.595	12.58	0.683	13.3	82.48
22.6	22.60-22.70	7.46	0.593	12.58	0.682	13.29	82.32
22.5	22.50-22.60	7.43	0.591	12.58	0.681	13.28	82.11
22.4	22.40-22.50	7.40	0.589	12.56	0.68	13.28	81.97
22.3	22.30-22.40	7.36	0.587	12.54	0.678	13.27	81.81
22.2	22.20-22.30	7.33	0.585	12.54	0.677	13.26	81.71
22.1	22.10-22.20	7.30	0.583	12.52	0.675	13.25	81.59
22.00	22.00-22.10	7.26	0.58	12.51	0.674	13.24	81.4
21.9	21.90-22.00	7.23	0.579	12.50	0.673	13.23	81.23
21.8	21.80-21.90	7.20	0.577	12.48	0.672	13.21	81.09
21.7	21.70-21.80	7.16	0.575	12.46	0.671	13.2	80.88
21.6	21.60-21.70	7.13	0.573	12.44	0.669	13.2	80.73
21.5	21.50-21.60	7.10	0.571	12.44	0.668	13.19	80.59
21.4	21.40-21.50	7.07	0.569	12.42	0.667	13.18	80.46
21.3	21.30-21.40	7.03	0.567	12.40	0.665	13.15	80.35
21.2	21.20-21.30	7.00	0.566	12.38	0.664	13.13	80.24
21.1	21.10-21.20	6.97	0.564	12.36	0.663	13.11	80.12
21.0	21.00-21.10	6.93	0.562	12.33	0.662	13.08	80.03

(Q1) Forward voltage with light

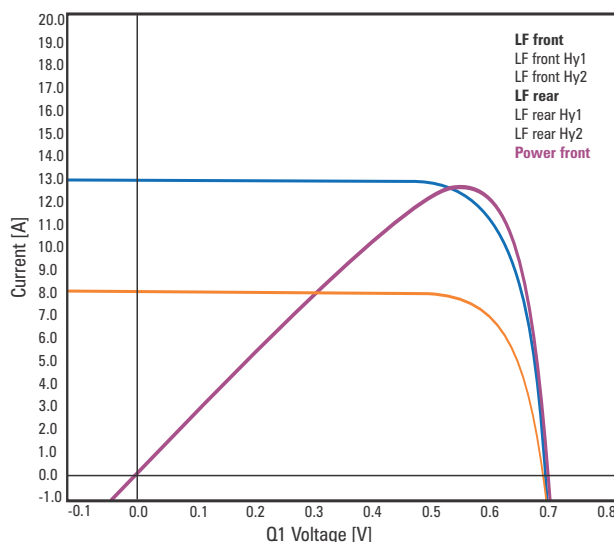

Temperature Coefficient

TK Voltage: -0.32mV/K
TK Current: 0.04 mA/K
TK Power: -0.38%/K

*Standard Testing condition

Light Intensity: $\pm 1000 \pm 5 \text{ W/m}^2$
Light Spectrum: AM1.5
Temperature: $25 \pm 2^\circ \text{C}$

COLOR CLASSIFICATION

3Color shades, Light Blue, Medium Blue & Dark Blue

LIGHT INTENSITY DEPENDENCE

Ratio of V_{mp} (I_{mp}) at reduced intensity to I_{mp} (V_{mp}) at 1000 W/m^2

PROCESS RECOMMENDATION

Solder joint	Copper ribbons coated with 60%Sn and 40%Pb
Solderability	Peel strength Min > 1.0N/mm

INTENSITY(W/M ²)	VMPP	IMPP
1000	1.00	1.00
800	0.99	0.80
600	0.98	0.60
200	0.92	0.20

For more details, please contact:

PREMIER ENERGIES PHOTOVOLTAIC PVT. LTD.
sales@premierenergies.com | premierenergies.com

The specification and key features contained in this datasheet may deviate slightly from our actual products due to the on-going innovation and product enhancement, Premier Energies reserves the right to make necessary adjustment to the information described herein at any time without further notice.