




SOLAR PV MODULE

132 HALF CUT CELL 640-670 W

BIFACIAL DUAL GLASS

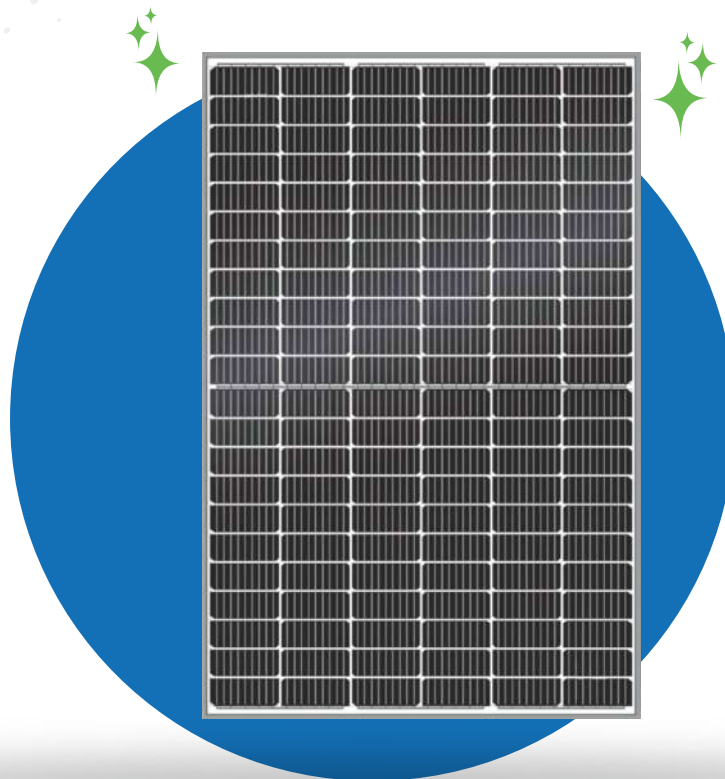

TRANSITION TO A BRIGHTER TOMORROW

Assembled with high-efficiency multi-busbar PERC cell, the half-cell configuration of the modules offers the advantage of higher power output, better temperature-dependent performance, reduced shading effect on the energy generation, lower risk of hot spot, as well as enhanced tolerance for mechanical loading.

CERTIFICATION

IEC 62804 (PID)

IEC 61701 (Salt Mist)

IEC 61726 (Ammonia)

IEC 61853-1 & 2 (Panfile & IAM)

IEC 62782 (DMLT)

IEC 60068 (Sand & Dust)

LID, LETID

IEC 62759 (Transportation)


CEC, INMETRO, CE



SOLAR PV MODULE

132 HALF CUT CELL 640-670 W

BIFACIAL DUAL GLASS

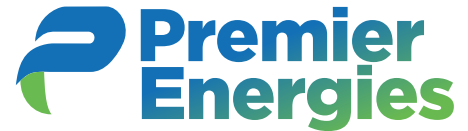

ELECTRICAL CHARACTERISTICS(STC)

MODULE TYPE	PE-645G12HGB	PE-650G12HGB	PE-655G12HGB	PE-660G12HGB	PE-665G12HGB	PE-670G12HGB
Maximum Power (Pmp)	645	650	655	660	665	670
Open Circuit Voltage (Voc)	45.15	45.32	45.54	45.76	45.98	46.15
Short Circuit Current (Isc)	18.26	18.29	18.32	18.34	18.37	18.41
Maximum Power Voltage (Vmp)	37.29	37.46	37.65	37.85	38.03	38.20
Maximum Power Current (Imp)	17.30	17.36	17.40	17.44	17.49	17.54
Module Efficiency (nm)	20.76	20.92	21.09	21.25	21.41	21.57
Power Tolerance	(-0,+5W)					
Maximum System Voltage	1500V(UL & IEC)					
Maximum Series Fuse Rating	30 Amp					

*STC Irradiance 1000W/m², Module Temperature 25°C and AM 1.5 Measuring Tolerance: ±3%

ELECTRICAL CHARACTERISTICS(NOCT)

MODULE TYPE	PE-645G12HGB	PE-650G12HGB	PE-655G12HGB	PE-660G12HGB	PE-665G12HGB	PE-670G12HGB
Maximum Power (Pmp)	474	478	482	485	489	493
Open Circuit Voltage (Voc)	43.12	42.70	42.90	43.0	43.20	43.40
Short Circuit Current (Isc)	14.68	14.75	14.79	14.83	14.87	14.91
Maximum Power Voltage (Vmp)	35.45	34.90	35.10	35.20	35.40	35.60
Maximum Power Current (Imp)	13.39	13.98	14.01	14.05	14.10	14.16
Module Efficiency (nm)	15.27	15.39	15.51	15.63	15.75	15.87

*NOCT- Irradiance 800 W/m², AM 1.5, Ambient Temperature 20°C and Wind speed 1m/s Measuring Tolerance: ±3%

BIFACIAL GAIN (70±10%)	PE-645G12HGB	PE-650G12HGB	PE-655G12HGB	PE-660G12HGB	PE-665G12HGB	PE-670G12HGB
10% Power Pmp	709.5	715.0	720.0	726.0	731.5	737.0
20% Power Pmp	774.0	780.0	786.0	792.0	798.0	804.0
30% Power Pmp	838.5	845.0	851.5	858.0	864.5	871.0

- Bifacial gains depends on the power plant design and albedo of installation site
- Power Bifaciality = Pmax(Rear)/Pmax(Front) and Pmax Front are tested under STC




TEMPERATURE CHARACTERISTICS

Pmax Temperature Coefficient	-0.35%/°C
Voc Temperature Coefficient	-0.27%/°C
Isc Temperature Coefficient	0.04%/°C
Operating Temperature	-40°C To + 85°C
Nominal Operating Cell Temperature	42 ± 3° C

Product Certificates*

IEC 61215, 61730/ INMETRO

UL 61730/IEC 61701/IEC 62716/IEC 60068-2-68

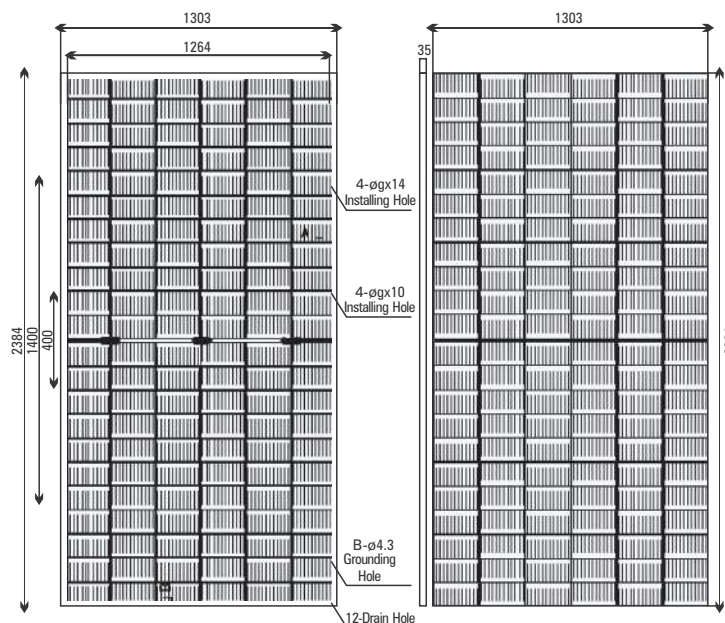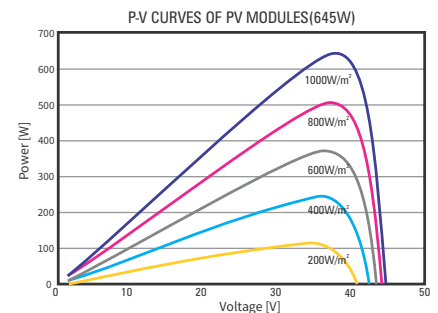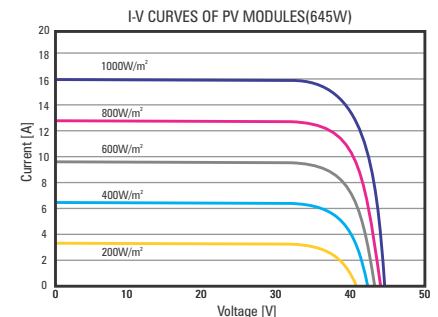

MECHANICAL SPECIFICATIONS

External Dimensions	2384(±2mm) x 1303 (±2mm) x 35(±1mm)
Weight	38 (± 3%) Kg
Solar Cells	12BB, Mono PERC-crystalline 105mm x 210 mm
Front Glass	2.0 mm, High Transmission, Low Iron, Tempered Glass
Rear Glass	2.0 mm Heat Strengthened Glass
Frame	Anodized Aluminium Alloy
Junction Box	3Split, Ip68Rated
Connector	MC4 Compatible
Mechanical Load	5400 Pa For Snow Load, 2400 Pa Wind Load
Fire Performance	TYPE 29 (UL 61730) Or Class C (IEC 61730)
Output Cable	4.0 mm ² Landscape : (-) 1400 mm and (+) 1400 mm in Length or Customized Length

PACKING CONFIGURATION

Container	20' GP	40'HQ
Pieces per pallet	31	31
Pallets per container	8	17
Pieces per container	248	527

30 YEAR POWER WARRANTY **12** YEAR PRODUCT WORKMANSHIP WARRANTY

FIRST YEAR DEGRADATION < 2.0%

YEAR 2-30 POWER DEGRADATION 0.45%

For more details, please contact:

PREMIER ENERGIES PHOTOVOLTAIC PVT. LTD.
sales@premierenergies.com | premierenergies.com

The specification and key features contained in this datasheet may deviate slightly from our actual products due to the on-going innovation and product enhancement, Premier Energies reserves the right to make necessary adjustment to the information described herein at any time without further notice.