


SPRINT-I SIMULATON CREATION

Date	24 th NOVEMBER 2022
Team ID	PNT2022TMID29330
Project Name	Gas Leakage Monitoring and Alerting System

Connect Sensor with Python Code:

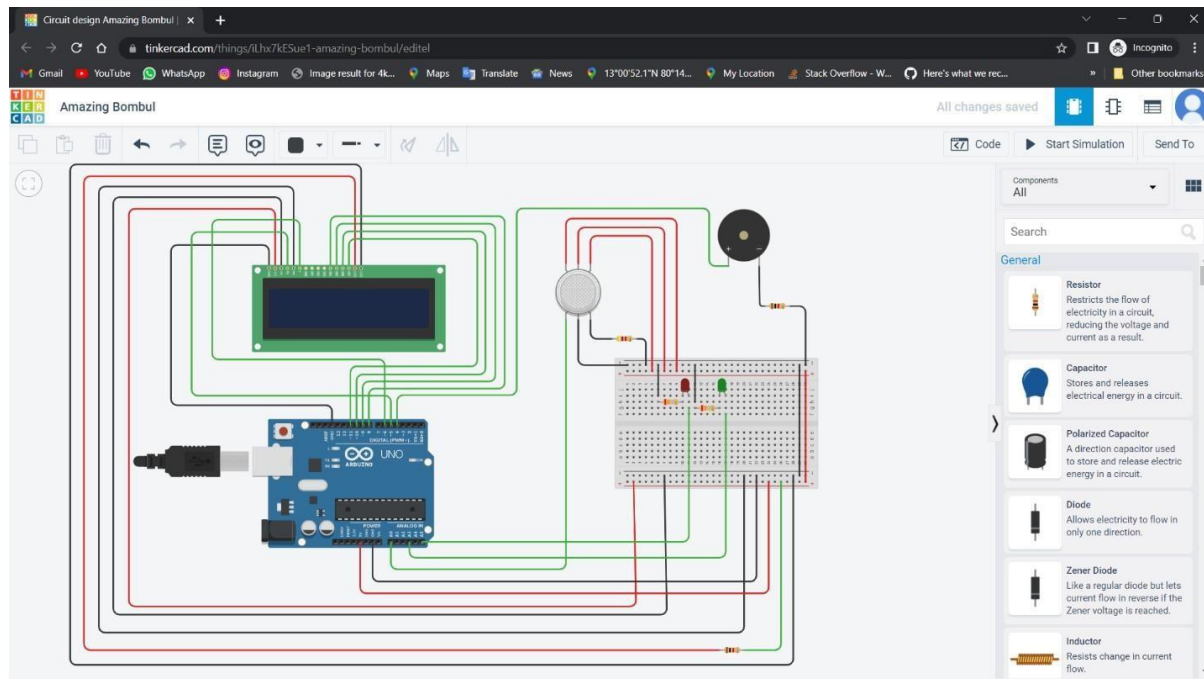

CODE:

```
#include <LiquidCrystal.h>
LiquidCrystal lcd(5,6,8,9,10,11);

int redled = A5;
int greenled = A3;
int buzzer = 4;
int sensor = A0;
int sensorThresh = 400;

void setup()
{
  pinMode(redled, OUTPUT);
  pinMode(greenled,OUTPUT);
  pinMode(buzzer,OUTPUT);
  pinMode(sensor,INPUT);
  Serial.begin(9600);
  lcd.begin(16,2);
}

void loop()
{
  int analogValue = analogRead(sensor);
  Serial.println(analogValue);
  if(analogValue>sensorThresh)
  {
    digitalWrite(redled,HIGH);
    digitalWrite(greenled,LOW);
    tone(buzzer,1000,10000);
    lcd.clear();
    lcd.setCursor(0,1);
    lcd.print("ALERT");
    Serial.print("ALERT");
  }
}
```

```
    delay(1000);
    lcd.clear();
    lcd.setCursor(0,1);
    lcd.print("EVACUATE");
    Serial.println(" -- EVACUATE");
    delay(1000);
}
else
{
    digitalWrite(greenled,HIGH);
    digitalWrite(redled,LOW);
    noTone(buzzer);
    lcd.clear();
    lcd.setCursor(0,0);
    lcd.print("SAFE");
    Serial.print("SAFE");
    delay(1000);
    lcd.clear();
    lcd.setCursor(0,1);
    lcd.print("ALL CLEAR");
    Serial.println(" -- ALL CLEAR");
    delay(1000);

}

}
```

OUTPUT:

