

Name: Suguna. K

Reg. No: 611419104087

Degree & Branch: B. E, Final Year - Computer Science and Engineering

College: Mahendra Engineering College For Women

Assignment - 4

Task - 1:

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100 cms send "alert" to ibm cloud and display in device recent events. Upload document with wokwi share link and images of ibm cloud

Solution:

Program:

```
#include <WiFi.h> //library for wifi #include
<PubSubClient.h> //library for MQTT
#define TRIG_PIN 2 // ESP32 pin GPIO23 connected to Ultrasonic Sensor's TRIG pin #define ECHO_PIN 4 //
ESP32 pin GPIO22 connected to Ultrasonic Sensor's ECHO pin #define DHTTYPE DHT11 // define type of sensor
DHT 11

void callback(char* subscribetopic, byte* payload, unsigned int payloadLength);

//-----credentials of IBM Accounts-----

#define ORG "Narenkumar" IBM ORGANITION ID
#define DEVICE_TYPE "NightGamer01" //Device type mentioned in ibm watson IOT Platform #define
DEVICE_ID "1234" //Device ID mentioned in ibm watson IOT Platform #define TOKEN "123456789"
//Token
String data3;
float duration_us, distance_cm;

char server[] = ORG ".messaging.internetofthings.ibmcloud.com"; // Server Name
char publishTopic[] = "iot-2/evt/Data/fmt/json"; // topic name and type of event perform and format in which data to be send
char subscribetopic[] = "iot-2/cmd/test/fmt/String"; // cmd REPRESENT command type AND COMMAND IS TEST OF
FORMAT STRING
char authMethod[] = "use-token-auth"; // authentication method char token[] =
TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID; //client id

// -----
WiFiClient wifiClient; // creating the instance for wificlient
PubSubClient client(server, 1883, callback, wifiClient); //calling the predefined client id by passing parameter like server
id, port and wificredential
```

```

void setup()// configureing the ESP32
{
    Serial.begin(115200);
    pinMode(TRIG_PIN, OUTPUT);
    pinMode(ECHO_PIN, INPUT);
    delay(10);
    Serial.println();
    wificonnect();
    mqttconnect();
}

void loop()// Recursive Function
{
    digitalWrite(TRIG_PIN, HIGH);
    delayMicroseconds(10);
    digitalWrite(TRIG_PIN, LOW);
    // measure duration of pulse from ECHO pin duration_us =
    pulseIn(ECHO_PIN, HIGH);
    // calculate the distance distance_cm = 0.017 *
    duration_us;
    // print the value to Serial Monitor
    Serial.print("distance: ");
    Serial.print(distance_cm); Serial.println(" cm");
    delay(500);
    if(distance_cm<100){
        PublishData(distance_cm);
    }
    delay(1000);
    if (! client.loop())
    { mqttconnect();
    }
}

/*.....retrieving to Cloud.....*/

void PublishData(float distance_cm)
{
    mqttconnect();//function call for connecting to ibm
    /*
        creating the String in in form JSon to update the data to ibm cloud
    */
    String payload = "{\"Alert\":\"OM\""; payload += ", "
    "\"Distance_cm\":\""; payload += distance_cm;
    payload += "\"}";

    Serial.print("Sending payload: ");
    Serial.println(payload);

    if (client.publish(publishTopic, (char*) payload.c_str())) {

```

```

    Serial.println("Publish ok"); // if it successfully upload data on the cloud then it will print publish ok in Serial
    monitor or else it will print publish failed
  } else {
    Serial.println("Publish failed");
  }
}

```

```

void mqttconnect()
{
  if (! client.connected())
  {
    Serial.print("Reconnecting client to ");
    Serial.println(server);
    while (! ! client.connect(clientId, authMethod, token))
    {
      Serial.print(client.connect(clientId, authMethod, token));
      Serial.print(".");
      delay(500);
    }
    initManagedDevice();
    Serial.println();
  }
}

```

```

void wificonnect() //function defination for wificonnect
{
  Serial.println(); Serial.print("Connecting to ");

  WiFi.begin("Wokwi-GUEST", "", 6); //passing the wifi credentials to establish the connection
  while (WiFi.status() != WL_CONNECTED)
  { delay(500);
    Serial.print(".");
  }
  Serial.println(""); Serial.println("WiFi
connected"); Serial.println("IP address: ");
  Serial.println(WiFi.localIP());
}


```

Output of Program:



Wokwi Project Link:

<https://wokwi.com/projects/346763330007859794>

Wokwi Website Screenshot :

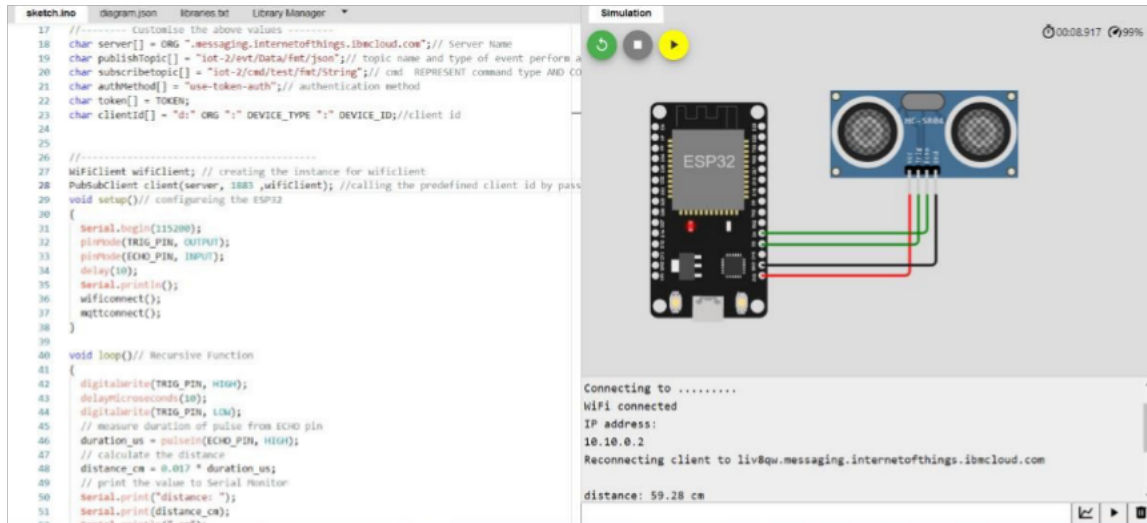

IBM Cloud Screenshot :

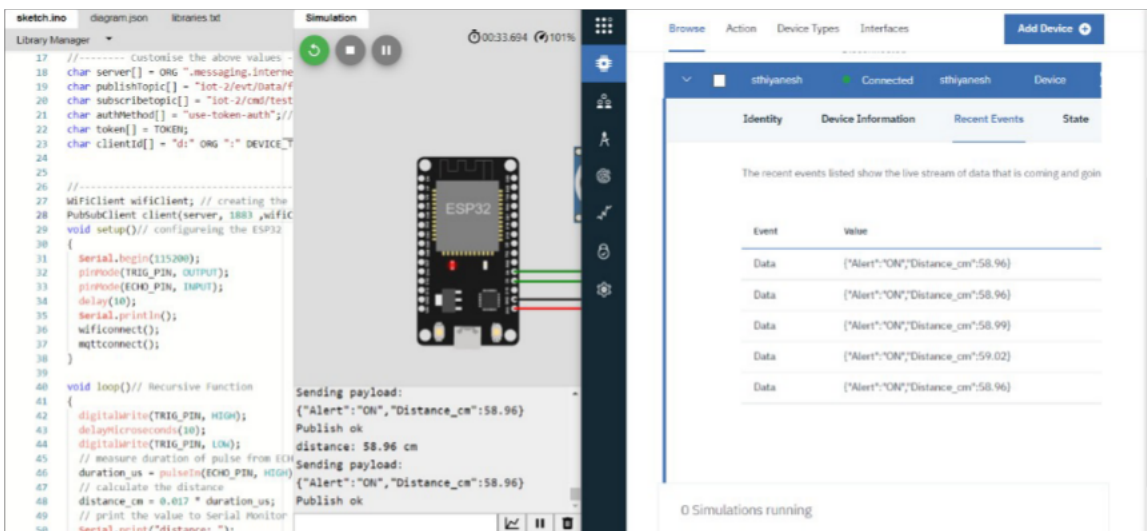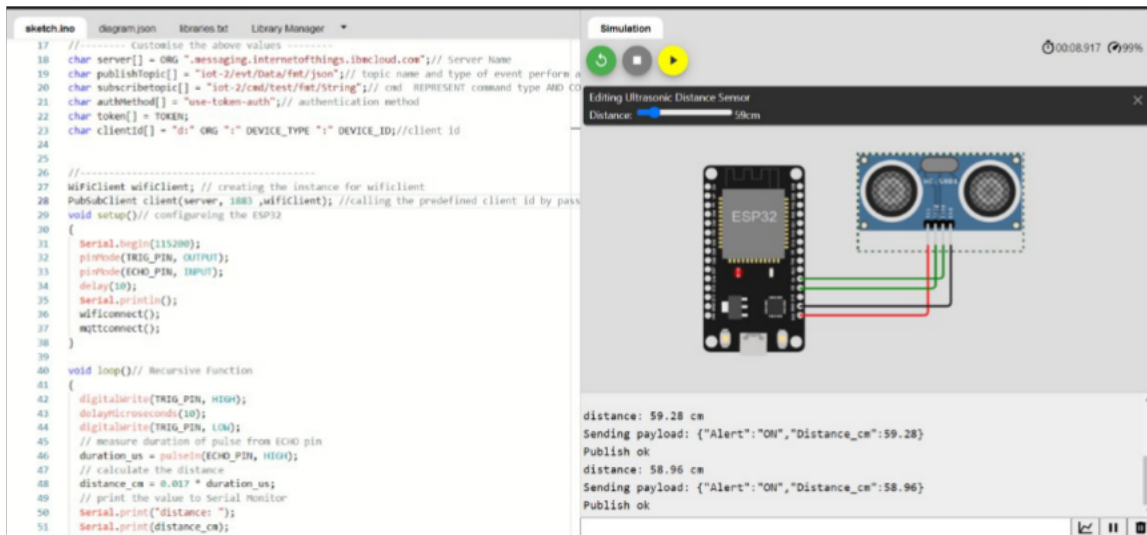

Explanation of Program :

Initially, we have imported the <Wifi.h> and <PubSubClient.h> header files as they are needed to connect wifi and MQTT Protocol. Then, Define Trigger pin and Echo pin values where the ultrasonic sensor is connected with ESP32 module. Then, Define the IBM Account Credentials such as ORG, Device_Type, Device_ID and Token. Also define the server, publishTopic, SubscribeTopic, authMethod, Token and ClientID. Create Object for WifiClient and PubSubClient.

Then, Start the void Setup() Function, Begin the Serial Monitor and set PinMode of Trigger Pin as Output and Echo Pin as Input and call wificonnect() and mqttconnect() to initialize wifi and mqtt Connection and Define their methods to make the Connection.

Then, Begin the void loop() function, digitalWrite HIGH to Trigger Pin and create a delay of 10 microseconds and write back LOW. Then, use pulseIn() function with Echo Pin to calculate the Duration and calculate the distance. If the Distance is less than 100cm call PublishData() Function to publish the Data to IoT Watson Device.

Finally, Define the PublishData() function with message as parameter. Then Define string that contains the payload with the message to be sent in the Json Format. Call Client.publish() function with publishTopic and payload as parameter. Also define the wificonnect() and mqttconnect() to make initial connection with wifi and mqtt connection.