

ASSIGNMENT 4

Ultrasonic sensor simulation in Wokwi

Team ID-PNT2002TMID43096

Question :

Write a code and connections in wokwi for the ultrasonic sensor. Whenever the distance is less than 100cms send an "Alert" to IBM cloud and display in the device recent events.

Code:

```
#include <WiFi.h>
#include <PubSubClient.h>
void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength);
//-----credentials of IBM Accounts-----
#define ORG "kotoq5"//IBM ORGANITION ID
#define DEVICE_TYPE "ESP32"//Device type mentioned in ibm watson IOT Platform
#define DEVICE_ID "12345"//Device ID mentioned in ibm watson IOT Platform
#define TOKEN "12345678" //Token
String data3;
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/Data/fmt/json";
char subscribetopic[] = "iot-2/cmd/test/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":"
DEVICE_ID; WiFiClient wifiClient;
PubSubClient client(server, 1883, callback ,wifiClient);
const int trigPin = 5;
const int echoPin = 18;
#define SOUND_SPEED 0.034
long duration;
```

```

float distance;
void setup() {
  Serial.begin(115200);
  pinMode(trigPin, OUTPUT);
  pinMode(echoPin, INPUT);
  wificonnect();
  mqttconnect();
}
void loop()
{
  digitalWrite(trigPin, LOW);
  delayMicroseconds(2);
  digitalWrite(trigPin, HIGH);
  delayMicroseconds(10);
  digitalWrite(trigPin, LOW);
  duration = pulseIn(echoPin, HIGH);
  distance = duration * SOUND_SPEED/2;
  Serial.print("Distance (cm): ");
  Serial.println(distance);
  if(distance<100)
  {
    Serial.println("ALERT!!");
    delay(1000);
    PublishData(distance);
    delay(1000);
    if (!client.loop()) {
      mqttconnect();
    }
  }
  delay(1000);
}
void PublishData(float dist) {
  mqttconnect();
  String payload = "{\"Distance\":\"";
  payload += dist;
  payload += "\",\"ALERT!!\":\"\"Distance less than 100cms\"";
}

```

```

payload += "}";
Serial.print("Sending payload: ");
Serial.println(payload);

if (client.publish(publishTopic, (char*) payload.c_str())) {
    Serial.println("Publish ok");
} else {
    Serial.println("Publish failed");
}
}

void mqttconnect() {
    if (!client.connected()) {
        Serial.print("Reconnecting client to ");
        Serial.println(server);
        while (!client.connect(clientId, authMethod, token))
        { Serial.print(".");
          delay(500);
        }
    }
    initManagedDevice();
    Serial.println();
}

void wificonnect()
{
    Serial.println(); Serial.print("Connecting to ");
    WiFi.begin("Wokwi-GUEST", "", 6); while (WiFi.status() !=
    WL_CONNECTED) { delay(500);
    Serial.print(".");
    }
    Serial.println(""); Serial.println("WiFi
    connected"); Serial.println("IP address: ");
    Serial.println(WiFi.localIP());
}

void initManagedDevice() {
    if (client.subscribe(subscribetopic)) {
        Serial.println((subscribetopic)); Serial.println("subscribe to

```

```

cmd OK");
} else {
Serial.println("subscribe to cmd FAILED");
}
}
void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength) {
Serial.print("callback invoked for topic: ");
Serial.println(subscribetopic);
for (int i = 0; i < payloadLength; i++) {
//Serial.print((char)payload[i]);
data3 += (char)payload[i];
}
Serial.println("data: "+ data3);
data3="";
}

```

Diagram.json:

```

{
  "version": 1,
  "author": "sweetysharon",
  "editor": "wokwi",
  "parts": [
    { "type": "wokwi-esp32-devkit-v1", "id": "esp", "top": -4.67, "left": -114.67, "attrs": {} },
    { "type": "wokwi-hc-sr04", "id": "ultrasonic1", "top": 15.96, "left": 89.17, "attrs": {} }
  ],
  "connections": [
    [ "esp:TX0", "$serialMonitor:RX", "", [] ],
    [ "esp:RX0", "$serialMonitor:TX", "", [] ],
    [
      "esp:VIN",
      "ultrasonic1:VCC",
      "red",

```

```


    [ "h-37.16", "v-178.79", "h200", "v173.33", "h100.67" ]
  ],
  [ "esp:GND.1", "ultrasonic1:GND", "black", [ "h39.87", "v44.04", "h170" ]
  ], [ "esp:D5", "ultrasonic1:TRIG", "green", [ "h54.54", "v85.07", "h130.67"
  ] ], [ "esp:D18", "ultrasonic1:ECHO", "green", [ "h77.87", "v80.01", "h110"
  ] ]
]
}

```

WokWI simulation link:

<https://wokwi.com/projects/346668149803844179>

Circuit Diagram:

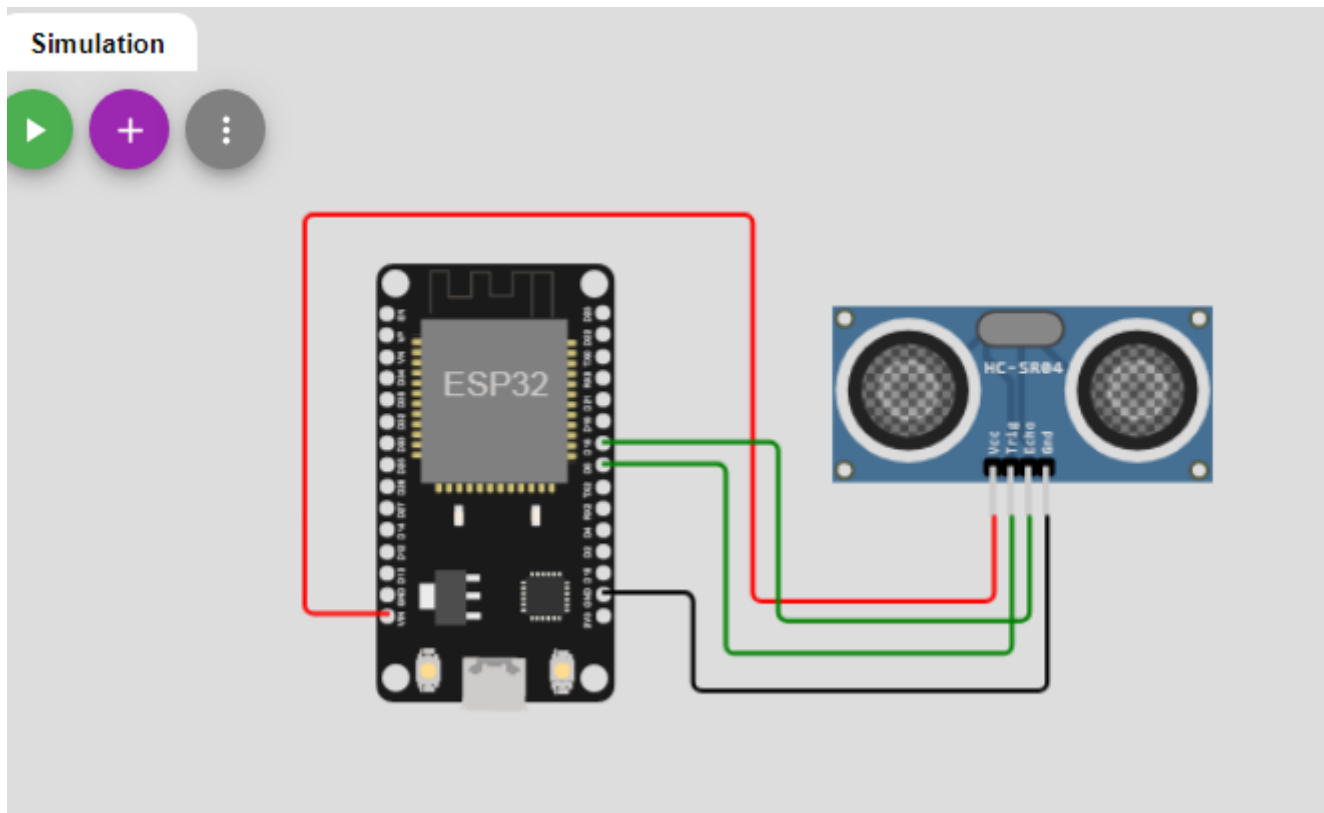


Output:

Wokwi output:

```
Connecting to ....
WiFi connected
IP address:
10.10.0.2
Reconnecting client to ytluse.messaging.internetofthings.ibmcloud.com
iot-2/cmd/test/fmt/5string
subscribe to cmd OK

Distance (cm): 399.92
Distance (cm): 399.96
Distance (cm): 399.94
Distance (cm): 399.98
Distance (cm): 399.94
Distance (cm): 399.92
Distance (cm): 399.94
```

IBM cloud output:

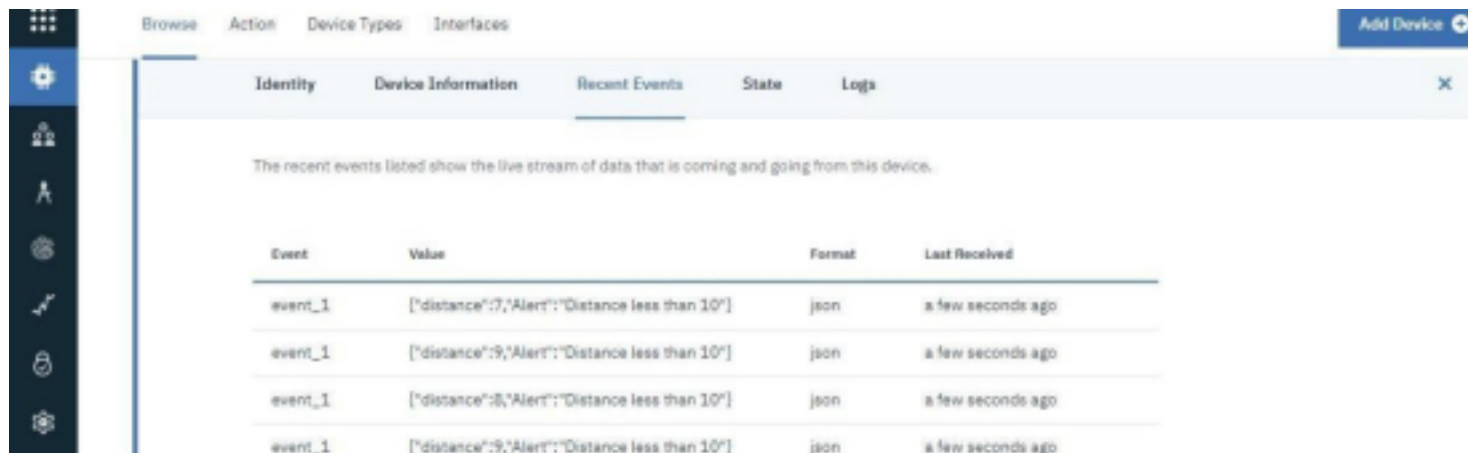

The screenshot shows the IBM IoT Platform console interface. On the left is a dark sidebar with icons for navigation. The top navigation bar includes 'Browse', 'Action', 'Device Types', and 'Interfaces', along with an 'Add Device' button. The main content area is titled 'Recent Events' and contains a table of device events. The table has four columns: 'Event', 'Value', 'Format', and 'Last Received'. It displays four rows of data, all with the event name 'event_1' and a JSON value containing distance and alert information. The format for all events is 'json', and they were all received 'a few seconds ago'.

Event	Value	Format	Last Received
event_1	["distance":7,"Alert":"Distance less than 10"]	json	a few seconds ago
event_1	["distance":9,"Alert":"Distance less than 10"]	json	a few seconds ago
event_1	["distance":8,"Alert":"Distance less than 10"]	json	a few seconds ago
event_1	["distance":9,"Alert":"Distance less than 10"]	json	a few seconds ago