Assignment – 4

Date	**02 November 2022**
Team ID	**PNT2022TMID33851**
Project Name	**Real Time River Water Quality Monitoring and Control System**

QUESTION:

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100 cms send "alert" to ibm cloud and display in device recent events.

CODE:

```
#include <WiFi.h>

#include <PubSubClient.h>

void callback(char* subscribetopic, byte* payload, unsigned
int

payloadLength);

//-------credentials of IBM Accounts------

#define ORG "u9pz01"//IBM ORGANITION ID
```

```
#define DEVICE_TYPE "ultrasensor"//Device type mentioned in ibm watson IOT Platform

#define DEVICE_ID "123"//Device ID mentioned in ibm watson IOT Platform

#define TOKEN "12345678" //Token

String data3;

char server[] = ORG ".messaging.internetofthings.ibmcloud.com";

char publishTopic[] = "iot-2/evt/Data/fmt/json";

char subscribetopic[] = "iot-2/cmd/test/fmt/String";

char authMethod[] = "use-token-auth";

char token[] = TOKEN;

char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;

WiFiClient wifiClient;

PubSubClient client(server, 1883, callback ,wifiClient);

const int trigPin = 5;

const int echoPin = 18;

#define SOUND_SPEED 0.034

long duration;
```

```
float distance;
void setup() {
Serial.begin(115200);
pinMode(trigPin, OUTPUT);
pinMode(echoPin, INPUT);
wificonnect();
mqttconnect();
}
void loop()
{
digitalWrite(trigPin, LOW);
delayMicroseconds(2);
digitalWrite(trigPin, HIGH);
delayMicroseconds(10);
digitalWrite(trigPin, LOW);
duration = pulseIn(echoPin, HIGH);
distance = duration * SOUND_SPEED/2;
Serial.print("Distance (cm): ");
```

```
Serial.println(distance);
if(distance<100)
{
Serial.println("ALERT!!");
delay(1000);
PublishData(distance);
delay(1000);
if (!client.loop()) {
mqttconnect();
}
}
delay(1000);
}
void PublishData(float dist) {
mqttconnect();
String payload = "{\"Distance\":";
payload += dist;
payload += ",\"ALERT!!\":""\"Distance less than 100cms\"";
```

```
payload += "}";
Serial.print("Sending payload: ");
Serial.println(payload);

if (client.publish(publishTopic, (char*) payload.c_str())) {
Serial.println("Publish ok");
} else {
Serial.println("Publish failed");
}
}
void mqttconnect() {
if (!client.connected()) {
Serial.print("Reconnecting client to ");
Serial.println(server);
while (!!!client.connect(clientId, authMethod, token)) {
Serial.print(".");
delay(500);
}
```

```
initManagedDevice();
Serial.println();
}
}
void wificonnect()
{
Serial.println();
Serial.print("Connecting to ");
WiFi.begin("Wokwi-GUEST", "", 6);
while (WiFi.status() != WL_CONNECTED) {
delay(500);
Serial.print(".");
}
Serial.println("");
Serial.println("WiFi connected");
Serial.println("IP address: ");
Serial.println(WiFi.localIP());
}
```

```
void initManagedDevice() {
if (client.subscribe(subscribetopic)) {
Serial.println((subscribetopic));
Serial.println("subscribe to cmd OK");
} else {
Serial.println("subscribe to cmd FAILED");
}
}
void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{
Serial.print("callback invoked for topic: ");
Serial.println(subscribetopic);
for (int i = 0; i < payloadLength; i++) {
//Serial.print((char)payload[i]);
data3 += (char)payload[i];
}
Serial.println("data: "+ data3);
data3="";
```

}

SCHEMATIC/CIRCUIT DIAGRAM:

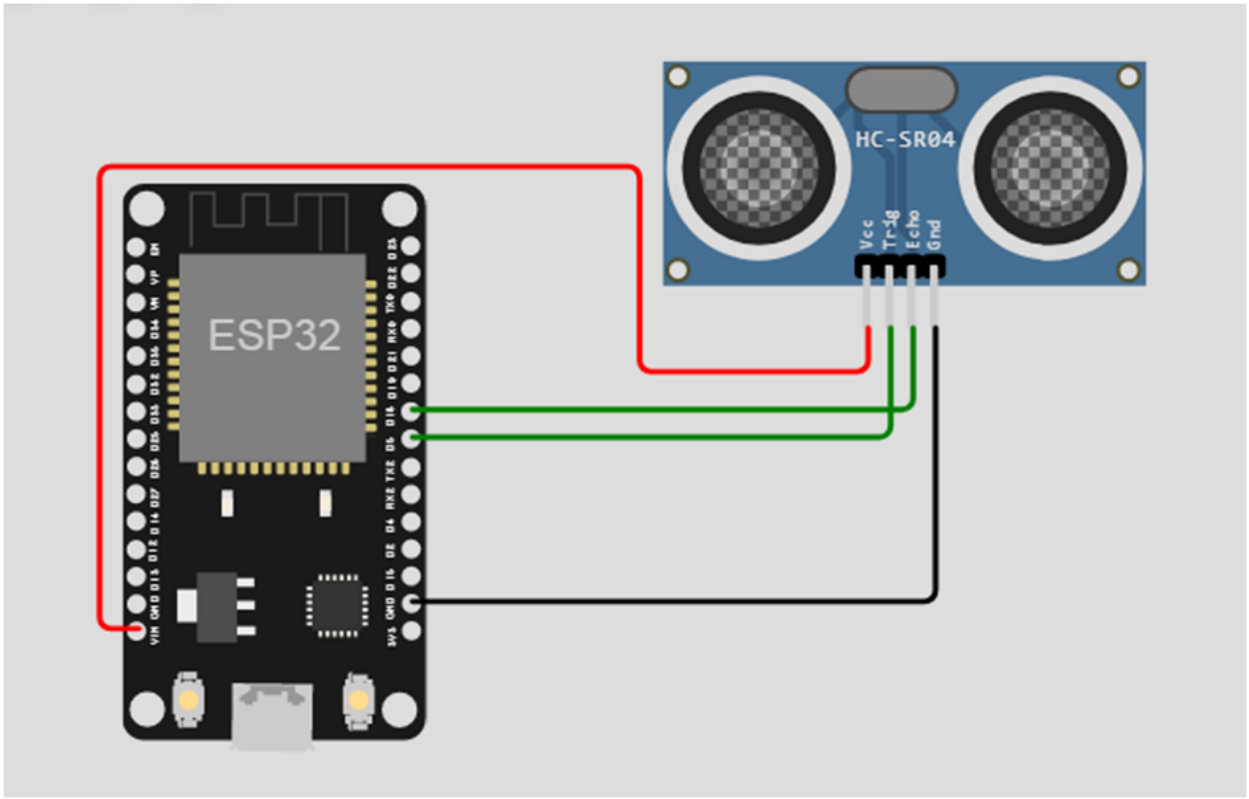

IBM CLOUD OUTPUT:

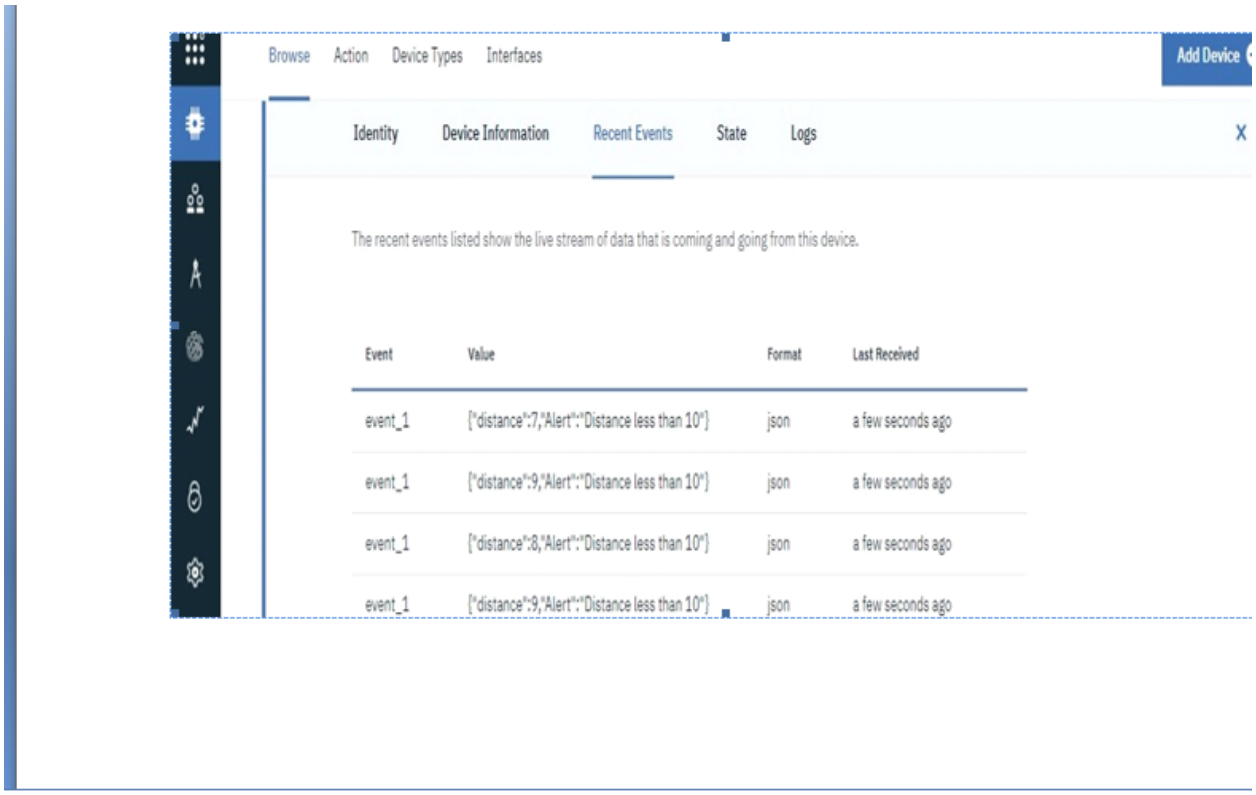

WOKWI LINK:

https://wokwi.com/projects/346500826401866324