

## Assignment -4

<b>ASSIGNMENT DATE</b>	<b>05 NOV 2022</b>
<b>STUDENT NAME</b>	<b>V.DIVESH</b>
<b>STUDENT ROLL NO</b>	<b>920819106016</b>
<b>MAXIMUM MARK</b>	<b>2 MARKS</b>

### Question-1:

Write code and connections in wokwi for the ultrasonic sensor. Whenever the distance is less than 100 cms send an "alert" to the IBMcloud and display in the device recent events. Upload document with wokwi share link and images of IBM cloud.

## Program:

```
#include <WiFi.h>
#include <PubSubClient.h>
void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength);
//-----credentials of IBM Accounts-----
#define ORG "6b73zo"//IBM ORGANITION ID
#define DEVICE_TYPE "NodeMCU"//Device type mentioned in ibm watson IOT
Platform
#define DEVICE_ID "12345"//Device ID mentioned in ibm watson IOT Platform
#define TOKEN "12345678" //Token
String data3;
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/Data/fmt/json";
char subscribetopic[] = "iot-2/cmd/test/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
WiFiClient wifiClient;
PubSubClient client(server, 1883, callback ,wifiClient);
const int trigPin = 5;
const int echoPin = 18;
#define SOUND_SPEED 0.034
long duration;
float distance;
void setup() {
  Serial.begin(115200);
  pinMode(trigPin, OUTPUT);
  pinMode(echoPin, INPUT);
  wificonnect();
  mqttconnect();
}
void loop()
{
  digitalWrite(trigPin, LOW);
  delayMicroseconds(2);
  digitalWrite(trigPin, HIGH);
  delayMicroseconds(10);
  digitalWrite(trigPin, LOW);
  duration = pulseIn(echoPin, HIGH);
  distance = duration * SOUND_SPEED/2;
  Serial.print("Distance (cm): ");
  Serial.println(distance);
  if(distance<100)
  {
    Serial.println("ALERT!!");
    delay(1000);
    PublishData(distance);
    delay(1000);
    if (!client.loop()) {
```

```

mqttconnect();
}
}
delay(1000);
}
void PublishData(float dist) {
mqttconnect();
String payload = "{\"Distance\":";
payload += dist;
payload += ", \"ALERT!!\": \"\" \"Distance less than 100cms\"";
payload += "}";
Serial.print("Sending payload: ");
Serial.println(payload);

if (client.publish(publishTopic, (char*) payload.c_str())) {
Serial.println("Publish ok");
} else {
Serial.println("Publish failed");
}
}
void mqttconnect() {
if (!client.connected()) {
Serial.print("Reconnecting client to ");
Serial.println(server);
while (!client.connect(clientId, authMethod, token)) {
Serial.print(".");
delay(500);
}
initManagedDevice();
Serial.println();
}
}
void wificonnect()
{
Serial.println();
Serial.print("Connecting to ");
WiFi.begin("Wokwi-GUEST", "", 6);
while (WiFi.status() != WL_CONNECTED) {
delay(500);
Serial.print(".");
}
Serial.println("");
Serial.println("WiFi connected");
Serial.println("IP address: ");
Serial.println(WiFi.localIP());
}
void initManagedDevice() {
if (client.subscribe(subscribetopic)) {
Serial.println((subscribetopic));
Serial.println("subscribe to cmd OK");
} else {
Serial.println("subscribe to cmd FAILED");
}
}


```

```

}
}
void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength)
{
    Serial.print("callback invoked for topic: ");
    Serial.println(subscribetopic);
    for (int i = 0; i < payloadLength; i++) {
        //Serial.print((char)payload[i]);
        data3 += (char)payload[i];
    }
    Serial.println("data: "+ data3);
    data3="";
}

```

Simulation of wokwi code:

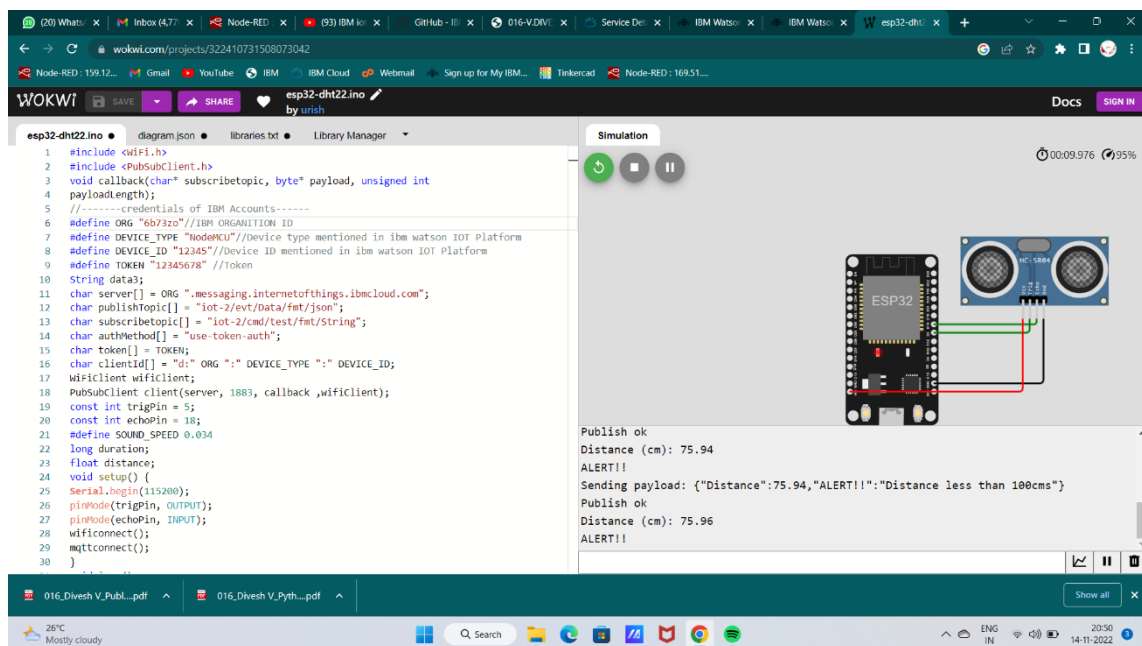

Result:

The screenshot displays the IBM Watson IoT Platform dashboard. The top navigation bar includes links for Browse, Action, Device Types, and Interfaces. A search bar is present, and a 'Device Simulator' toggle is visible. The main content area shows a table of devices. The first device, ID 12345, is 'Connected' and is a 'NodeMCU' device. Below the table, the 'Recent Events' tab is selected, showing a live stream of data. The event log contains one entry with the following details:

Event	Value	Format	Last Received
Data	{"Distance":75.94,"ALERT!":"Distance less than ...	json	a few seconds ago

At the bottom of the dashboard, it indicates '0 Simulations running'. The Windows taskbar at the very bottom shows the system clock as 20:58 on 14-11-2022.

Wokwi link:

<https://wokwi.com/projects/322410731508073042>