

Assignment -4

Distance Detection Using Ultrasonic Sensor

Assignment Date	25 October 2022
Student Name	Santhosh Kumar V
Student Roll Number	622119105089
Maximum Marks	2 Marks

Question-1:

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100 cms send "alert" to IBM cloud and display in device recent events.

WOKWI LINK: <https://wokwi.com/projects/346502216516895315>

CODE:

```
#include <WiFi.h> //library for wifi
#include <PubSubClient.h> //library for MQTT

void callback(char* subscribetopic, byte* payload, unsigned int payloadLength);

//-----credentials of IBM Accounts-----

#define ORG "f59trs" //IBM ORGANITION ID
#define DEVICE_TYPE "ultrasonicsensor" //Device type mentioned in ibm watson IOT Platform
#define DEVICE_ID "distancedetection" //Device ID mentioned in ibm watson IOT Platform
#define TOKEN "AIGMGaaF01nawa1QA3" //Token
String data3;
float dist;

//----- Customise the above values -----
char server[] = ORG ".messaging.internetofthings.ibmcloud.com"; //Server Name
char publishTopic[] = "iot-2/evt/Data/fmt/json"; // topic name and type of event perform
and format in which data to be send
char subscribetopic[] = "iot-2/cmd/test/fmt/String"; //
cmd REPRESENT command type AND COMMAND IS TEST OF FORMAT STRING
char authMethod[] = "use-token-auth"; // authentication method
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID; //clientid

//
WiFiClient wifiClient; // creating the instance for wifi client
```

```

PubSubClient client(server, 1883, callback ,wifiClient);
//calling the predefined client id by passing parameter likeserver id,portand
wificredential

int LED = 4; int
trig = 5; int echo =
18;void setup()
{
  Serial.begin(115200);
  pinMode(trig,OUTPUT);
  pinMode(echo,INPUT);
  pinMode(LED, OUTPUT);
  delay(10); wificonnect();
  mqttconnect();
}
void loop()// Recursive Function
{

  digitalWrite(trig,LOW);
  digitalWrite(trig,HIGH);
  delayMicroseconds(10);
  digitalWrite(trig,LOW);
  float dur = pulseIn(echo,HIGH);float dist
  = (dur * 0.0343)/2; Serial.print
  ("Distancein cm");Serial.println(dist);


  PublishData(dist);
  delay(1000);
  if (!client.loop()) {
    mqttconnect();
  }
}

/* .....retrieving to
Cloud. .... */

void PublishData(float dist) { mqttconnect();//function call for connecting
to ibm
/*
  creating the String in in form JSon to update the data toibm cloud
*/
String object;

```

```

if (dist <100)
{
    digitalWrite(LED,HIGH);
    Serial.println("object is near");object =
    "Near";
}
else
{
    digitalWrite(LED,LOW); Serial.println("no
    object found");object = "No";
}

String payload = "{\"distance\":";payload +=
dist;
payload += "," " \"object\":\":";payload +=
object;
payload += "\"}";

Serial.print("Sending payload: ");
Serial.println(payload);

if (client.publish(publishTopic, (char*) payload.c_str())) {
    Serial.println("Publish ok");// if it sucessfully upload dataon the cloud then it will
print publish ok in Serial monitor or else it will print publish failed
} else {
    Serial.println("Publish failed");
}
}

void mqttconnect() {
    if (!client.connected()) { Serial.print("Reconnecting
    client to ");Serial.println(server);
    while (!!!client.connect(clientId, authMethod, token)) {
        Serial.print(".");
        delay(500);
    }

    initManagedDevice();
    Serial.println();
}
}

```

```

void wificonnect() //function defination for wificonnect
{
    Serial.println(); Serial.print("Connecting
to ");

    WiFi.begin("Wokwi-GUEST", "", 6); //passing the wifi credentialsto establish the
connection
    while (WiFi.status() != WL_CONNECTED) {
        delay(500);
        Serial.print(".");
    }
    Serial.println(""); Serial.println("WiFi
connected"); Serial.println("IP address: ");
    Serial.println(WiFi.localIP());
}

void initManagedDevice() {
    if (client.subscribe(subscribetopic)) { Serial.println((subscribetopic));
        Serial.println("subscribe to cmd OK");
    } else {
        Serial.println("subscribe to cmd FAILED");
    }
}

void callback(char* subscribetopic, byte* payload, unsigned intpayloadLength)
{
    Serial.print("callback invoked for topic: ");
    Serial.println(subscribetopic);
    for (int i = 0; i < payloadLength; i++) {
        //Serial.print((char)payload[i]);data3 +=
        (char)payload[i];
    }

    // Serial.println("data: "+ data3);
    // if(data3=="Near")
    // {
    // Serial.println(data3);
    // digitalWrite(LED,HIGH);

    // }

    // else
    // {
    // Serial.println(data3);

```

```

// digitalWrite(LED,LOW);

// }
data3="";

}

```

OUTPUT:

When object is not near to the ultrasonic sensor

sketch.ino

diagram.json

libraries.txt

Library Manager

```

1  #include <WiFi.h> //library for wifi
2  #include <PubSubClient.h> //library for MQTT
3
4
5  void callback(char* subscribtopic, byte* payload, unsigned int payloadLength);
6
7  //-----credentials of IBM Accounts-----
8
9  #define ORG "f59trs" //IBM ORGANITION ID
10 #define DEVICE_TYPE "ultrasonicsensor" //Device type mentioned in ibm watson IOT Platform
11 #define DEVICE_ID "distancedetection" //Device ID mentioned in ibm watson IOT Platform
12 #define TOKEN "ALGMGaaF01nawa1QA3" //Token
13 String data3;
14 float dist;
15
16
17 //----- Customise the above values -----
18 char server[] = ORG ".messaging.internetofthings.ibmcloud.com"; // Server Name
19 char publishTopic[] = "iot-2/evt/Data/fmt/json"; // topic name and type of event perform and
20 char subscribtopic[] = "iot-2/cmd/test/fmt/String"; // cmd REPRESENT command type AND COMM
21 char authMethod[] = "use-token-auth"; // authentication method
22 char token[] = TOKEN;
23 char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID; //client id
24
25
26 //-----
27 WiFiClient wifiClient; // creating the instance for wificlient
28 PubSubClient client(server, 1883, callback ,wifiClient); //calling the predefined client id
29
30 int LED = 4;
31 int trig = 5;
32 int echo = 18;
33 void setup()

```

Simulation

00:05.682

99%

no object found
Sending payload: {"distance":403.45,"object":"No"}
Publish ok
Distancein cm233.00
no object found
Sending payload: {"distance":233.00,"object":"No"}
Publish ok

Data sent to the IBM cloud device when the object is far

The screenshot displays the IBM Cloud IoT Dashboard interface. At the top, there are navigation tabs: 'Browse', 'Action', 'Device Types', and 'Interfaces'. A blue header bar contains the device name 'distancedetection', its status 'Connected', the device type 'ultrasonicsensor', and the timestamp 'Oct 19, 2022 11:56 AM'. Below this, a tabbed interface shows 'Identity', 'Device Information', 'Recent Events' (selected), 'State', and 'Logs'. A message states: 'The recent events listed show the live stream of data that is coming and going from this device.' A table follows with columns 'Event', 'Value', 'Format', and 'Last Received'. It lists five 'Data' events, each with a JSON value: '{"distance":235.02,"object":"No"}', in 'json' format, received 'a few seconds ago'. At the bottom left, it says 'Items per page 50 | 1-1 of 1 item'. At the bottom right, a box indicates '0 Simulations running'.

Browse Action Device Types Interfaces Add Device +

distancedetection Connected ultrasonicsensor Device Oct 19, 2022 11:56 AM

Identity Device Information Recent Events State Logs X


The recent events listed show the live stream of data that is coming and going from this device.

Event	Value	Format	Last Received
Data	{"distance":235.02,"object":"No"}	json	a few seconds ago
Data	{"distance":235.02,"object":"No"}	json	a few seconds ago
Data	{"distance":235.02,"object":"No"}	json	a few seconds ago
Data	{"distance":235.02,"object":"No"}	json	a few seconds ago
Data	{"distance":235.02,"object":"No"}	json	a few seconds ago

Items per page 50 | 1-1 of 1 item

0 Simulations running

When object is nearer to the ultrasonic sensor

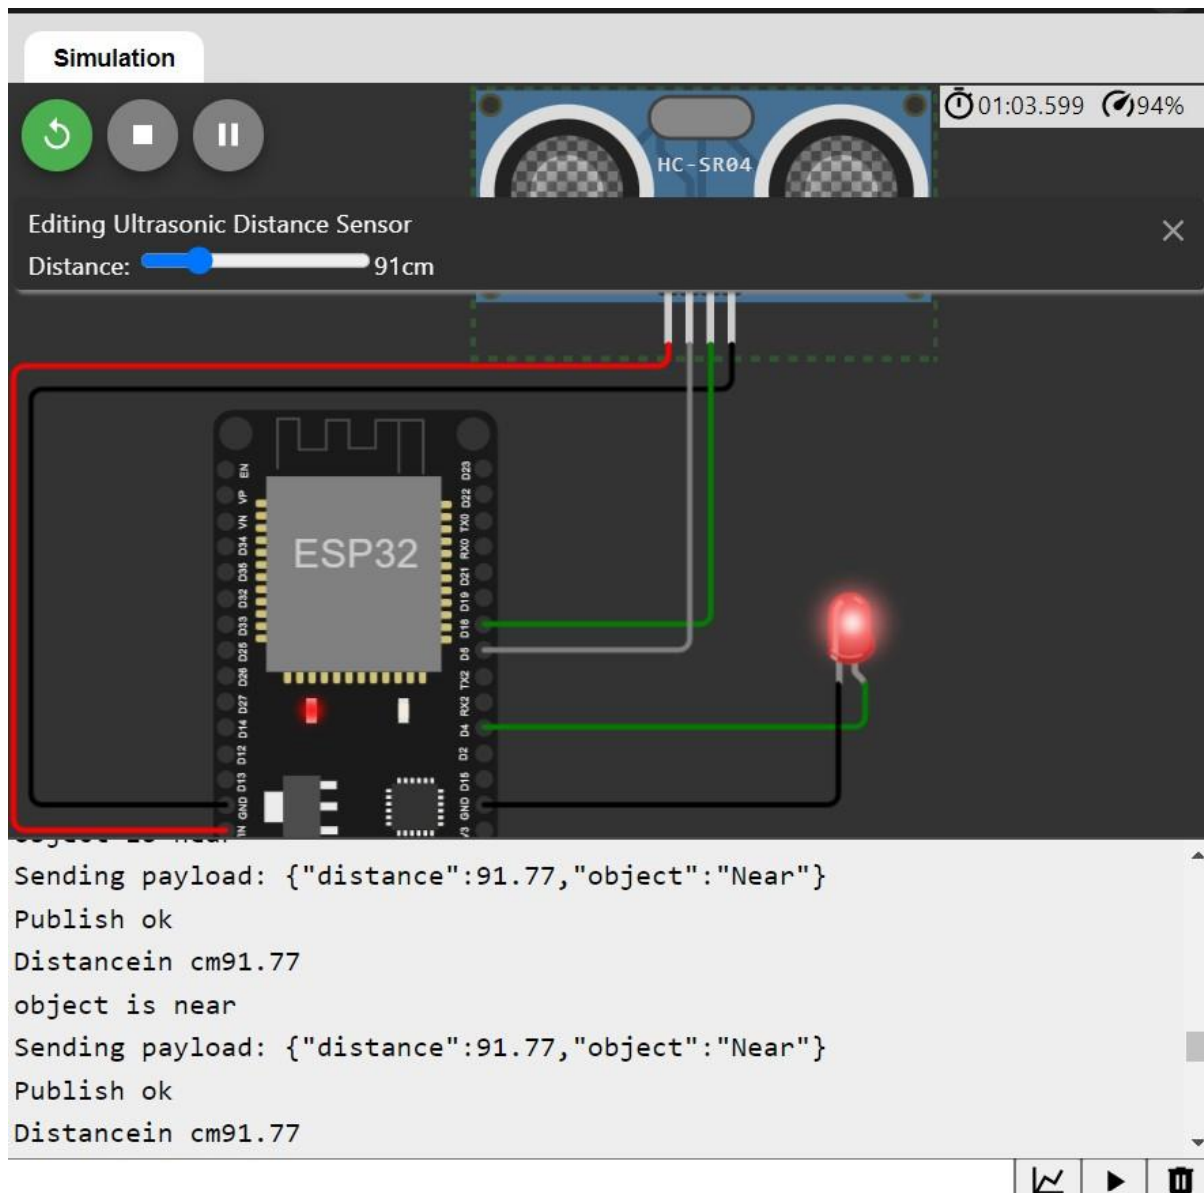

Data sent to the IBM cloud device when the object is near

The screenshot displays the IBM Cloud IoT Platform console. On the left is a dark sidebar with navigation icons. The top navigation bar includes 'Browse', 'Action', 'Device Types', and 'Interfaces', along with an 'Add Device' button. The main content area shows a table of devices. The device 'distancedetection' is highlighted, showing it is 'Connected' and of type 'ultrasonicsensor'. Below the device list, a modal window titled 'Recent Events' is open, showing a live stream of data. The data is presented in a table with columns for Event, Value, Format, and Last Received. The events are JSON objects containing distance and object status information.

Event	Value	Format	Last Received
Data	{"distance":91.77,"object":"Near"}	json	a few seconds ago
Data	{"distance":91.75,"object":"Near"}	json	a few seconds ago
Data	{"distance":91.77,"object":"Near"}	json	a few seconds ago
Data	{"distance":91.79,"object":"Near"}	json	a few seconds ago
Data	{"distance":91.8,"object":"Near"}	json	a few seconds ago

0 Simulations running

