

Assignment -4
Distance Detection Using Ultrasonic Sensor

Assignment Date	19 October 2022
Student Name	Mr. Mohammed Fazil
Student Roll Number	110119106018
Maximum Marks	2 Marks

Question-1:

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100 cms send "alert" to ibm cloud and display in device recent events.

CODE:

```
#include <WiFi.h> //library for wifi
#include <PubSubClient.h> //library for MQTT

void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength);

//-----credentials of IBM Accounts-----

#define ORG "f59trs" //IBM ORGANITION ID
#define DEVICE_TYPE "ultrasonicsensor" //Device type mentioned in
ibm watson IOT Platform
#define DEVICE_ID "distancedetection" //Device ID mentioned in ibm
watson IOT Platform
#define TOKEN "ALGMGaaF01nawa1QA3" //Token
String data3;
float dist;

//----- Customise the above values -----
char server[] = ORG ".messaging.internetofthings.ibmcloud.com"; //
Server Name
char publishTopic[] = "iot-2/evt/Data/fmt/json"; // topic name and
type of event perform and format in which data to be send
char subscribetopic[] = "iot-2/cmd/test/fmt/String"; //
cmd REPRESENT command type AND COMMAND IS TEST OF FORMAT STRING
char authMethod[] = "use-token-auth"; // authentication method
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID; //client
id

//
WiFiClient wifiClient; // creating the instance for wificlient
```

```

PubSubClient client(server, 1883, callback ,wifiClient);
//calling the predefined client id by passing parameter like
server id,portand wificredential

int LED = 4;
int trig = 5;
int echo = 18;
void setup()
{
  Serial.begin(115200);
  pinMode(trig,OUTPUT);
  pinMode(echo,INPUT);
  pinMode(LED, OUTPUT);
  delay(10);
  wificonnect();
  mqttconnect();
}
void loop()// Recursive Function
{

  digitalWrite(trig,LOW);
  digitalWrite(trig,HIGH);
  delayMicroseconds(10);
  digitalWrite(trig,LOW);
  float dur = pulseIn(echo,HIGH);
  float dist = (dur * 0.0343)/2;
  Serial.print ("Distancein cm");
  Serial.println(dist);

  PublishData(dist);
  delay(1000);
  if (!client.loop()) {
    mqttconnect();
  }
}

/*.....retrieving to
Cloud..... */

void PublishData(float dist) {
  mqttconnect();//function call for connecting to ibm
  /*
    creating the String in in form JSon to update the data to
    ibm cloud
  */
  String object;

```

```

if (dist <100)
{
    digitalWrite(LED,HIGH);
    Serial.println("object is near");
    object = "Near";
}
else
{
    digitalWrite(LED,LOW);
    Serial.println("no object found");
    object = "No";
}

String payload = "{\"distance\":";
payload += dist;
payload += "," " \"object\":";
payload += object;
payload += "\"}";

Serial.print("Sending payload: ");
Serial.println(payload);

if (client.publish(publishTopic, (char*) payload.c_str())) {
    Serial.println("Publish ok");// if it sucessfully upload data
on the cloud then it will print publish ok in Serial monitor or
else it will print publish failed
} else {
    Serial.println("Publish failed");
}
}

void mqttconnect() {
    if (!client.connected()) {
        Serial.print("Reconnecting client to ");
        Serial.println(server);
        while (!!!client.connect(clientId, authMethod, token)) {
            Serial.print(".");
            delay(500);
        }

        initManagedDevice();
        Serial.println();
    }
}

```

```

void wificonnect() //function defination for wificonnect
{
    Serial.println();
    Serial.print("Connecting to ");

    WiFi.begin("Wokwi-GUEST", "", 6); //passing the wifi credentials
to establish the connection
    while (WiFi.status() != WL_CONNECTED) {
        delay(500);
        Serial.print(".");
    }
    Serial.println("");
    Serial.println("WiFi connected");
    Serial.println("IP address: ");
    Serial.println(WiFi.localIP());
}

void initManagedDevice() {
    if (client.subscribe(subscribetopic)) {
        Serial.println((subscribetopic));
        Serial.println("subscribe to cmd OK");
    } else {
        Serial.println("subscribe to cmd FAILED");
    }
}

void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength)
{
    Serial.print("callback invoked for topic: ");
    Serial.println(subscribetopic);
    for (int i = 0; i < payloadLength; i++) {
        //Serial.print((char)payload[i]);
        data3 += (char)payload[i];
    }

    // Serial.println("data: "+ data3);
    // if(data3=="Near")
    // {
    // Serial.println(data3);
    // digitalWrite(LED,HIGH);

    // }

    // else
    // {
    // Serial.println(data3);

```

```

// digitalWrite(LED,LOW);

// }
data3="";

}

```

OUTPUT :

When object is not near to the ultrasonic sensor

The screenshot displays the Wokwi IDE interface. On the left, the 'sketch.ino' file contains the following code:

```

1 #include <WiFi.h> //library for wifi
2 #include <PubSubClient.h> //library for MQTT
3
4
5 void callback(char* subscribetopic, byte* payload, unsigned int payloadLength);
6
7 //-----credentials of IBM Accounts-----
8
9 #define ORG "f59trs" //IBM ORGANIZATION ID
10 #define DEVICE_TYPE "ultrasonicsensor" //Device type mentioned in ibm watson IOT Platform
11 #define DEVICE_ID "distancedetection" //Device ID mentioned in ibm watson IOT Platform
12 #define TOKEN "ALGMGaaF01nawa1QA3" //Token
13 String data3;
14 float dist;
15
16
17 //----- Customise the above values -----
18 char server[] = ORG ".messaging.internetofthings.ibmcloud.com"; // Server Name
19 char publishTopic[] = "iot-2/evt/Data/fmt/json"; // topic name and type of event perform and
20 char subscribetopic[] = "iot-2/cmd/test/fmt/String"; // cmd REPRESENT command type AND COMM
21 char authMethod[] = "use-token-auth"; // authentication method
22 char token[] = TOKEN;
23 char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID; //client id
24
25
26 //-----
27 WiFiClient wificlient; // creating the instance for wificlient
28 PubSubClient client(server, 1883, callback, wificlient); //calling the predefined client id
29
30 int LED = 4;
31 int trig = 5;
32 int echo = 18;
33 void setup()

```

On the right, the 'Simulation' tab shows a visual representation of the circuit. An ESP32 microcontroller is connected to an HC-SR04 ultrasonic sensor. The sensor's VCC pin is connected to the ESP32's 5V pin, GND to GND, TRIG to pin 5, and ECHO to pin 18. A red LED is also connected to the ESP32's 5V and GND pins.

The simulation output log shows the following sequence of events:

- no object found
- Sending payload: {"distance":403.45,"object":"No"}
- Publish ok
- Distance in cm 233.00
- no object found
- Sending payload: {"distance":233.00,"object":"No"}
- Publish ok

Data sent to the IBM cloud device when the object is far

The screenshot shows the IBM Watson IoT Platform dashboard. The top navigation bar includes 'Browse', 'Action', 'Device Types', and 'Interfaces'. A sidebar on the left contains icons for various IoT functions. The main content area displays a device named 'distancedetection' with a status of 'Connected' and a sensor type of 'ultrasonicsensor'. The device was last updated on 'Oct 19, 2022 11:56 AM'. Below this, the 'Recent Events' tab is active, showing a live stream of data. The data is presented in a table with columns for 'Event', 'Value', 'Format', and 'Last Received'. The table contains five rows of data, all with the same JSON value: '{"distance":235.02,"object":"No"}'. The format for all events is 'json', and they were all received 'a few seconds ago'. At the bottom of the dashboard, it indicates '0 Simulations running' and 'Items per page 50 | 1-1 of 1 item'.

IBM Watson IoT Platform

Browse Action Device Types Interfaces

distancedetection Connected ultrasonicsensor Device Oct 19, 2022 11:56 AM

Identity Device Information Recent Events State Logs


The recent events listed show the live stream of data that is coming and going from this device.

Event	Value	Format	Last Received
Data	{"distance":235.02,"object":"No"}	json	a few seconds ago
Data	{"distance":235.02,"object":"No"}	json	a few seconds ago
Data	{"distance":235.02,"object":"No"}	json	a few seconds ago
Data	{"distance":235.02,"object":"No"}	json	a few seconds ago
Data	{"distance":235.02,"object":"No"}	json	a few seconds ago

0 Simulations running

Items per page 50 | 1-1 of 1 item

When object is nearer to the ultrasonic sensor

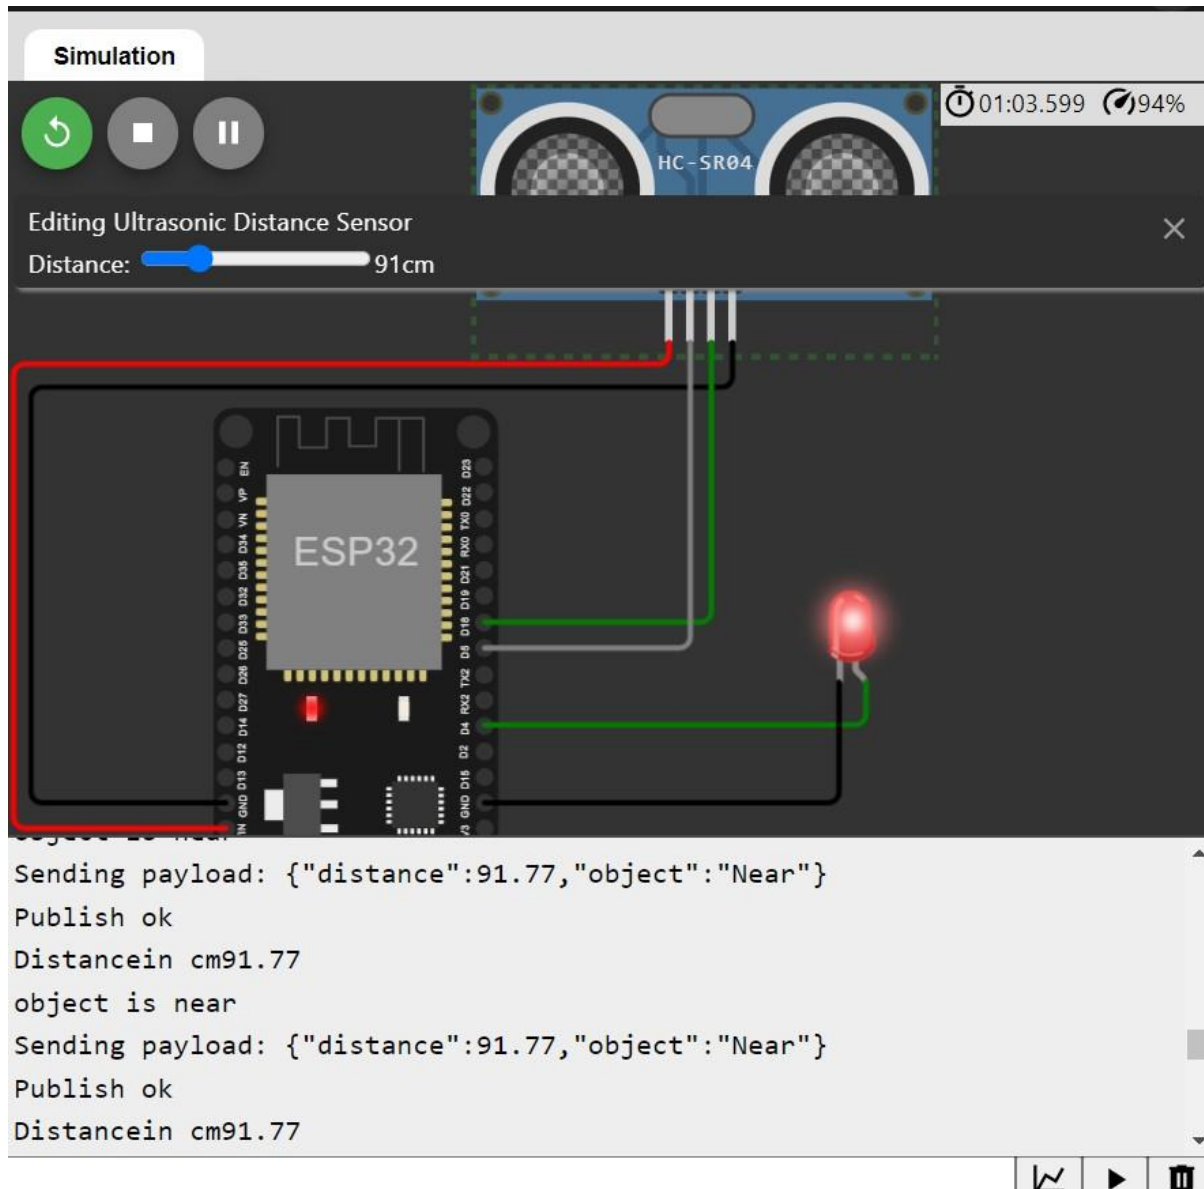

Data sent to the IBM cloud device when the object is near

The screenshot displays the IBM Watson IoT Platform interface. At the top, the browser address bar shows the URL: <https://f59trs.internetofthings.ibmcloud.com/dashboard/devices/browse>. The page title is "IBM Watson IoT Platform".

The main navigation bar includes "Browse", "Action", "Device Types", and "Interfaces". A search icon is present next to "Browse". A blue button labeled "Add Device" with a plus icon is on the right.

The device list table shows the following information:

Device ID	Status	Device Type	Class ID	Date Added	Descriptive Location
distancedetection	Connected	ultrasonicsensor	Device	Oct 19, 2022 11:56 AM	

Below the device list, the "Recent Events" tab is selected. The tab bar includes "Identity", "Device Information", "Recent Events", "State", and "Logs".

The "Recent Events" section contains the text: "The recent events listed show the live stream of data that is coming and going from this device."

The events table displays the following data:

Event	Value	Format	Last Received
Data	{"distance":91.77,"object":"Near"}	json	a few seconds ago
Data	{"distance":91.75,"object":"Near"}	json	a few seconds ago
Data	{"distance":91.77,"object":"Near"}	json	a few seconds ago
Data	{"distance":91.79,"object":"Near"}	json	a few seconds ago
Data	{"distance":91.8,"object":"Near"}	json	a few seconds ago

At the bottom right, a status box indicates "0 Simulations running".

