SPRINT-1

PROJECT	**INDUSTRY-SPECIFIC INTELLIGENT FIRE MANAGEMENT SYSTEM**
TEAM ID	**PNT2022TMID34516**

PROGRAM

```
#include "DHTesp.h"
#include <cstdlib>
#include <time.h>

const int DHT_PIN = 15;

bool is_exhaust_fan_on = false;
bool is_sprinkler_on = false;

float temperature  = 0;

int gas_ppm = 0;
int flame = 0;
int flow = 0;

String flame_status = "";
String accident_status = "";
String sprinkler_status = "";

DHTesp dhtSensor;
```

```
void setup() {
  Serial.begin(99900);

  /**** sensor pin setups ****/
  dhtSensor.setup(DHT_PIN, DHTesp::DHT22);
  //if real gas sensor is used make sure the senor is heated up for acurate readings
  /*
    - Here random values for readings and stdout were used to show the
      working  of the devices as physical or simulated devices are not
      available.
  */
}

void loop() {

  TempAndHumidity  data = dhtSensor.getTempAndHumidity();

  //setting a random seed
  srand(time(0));

  //initial variable activities like declaring , assigning
  temperature  = data.temperature;
  gas_ppm = rand()%1000;
  int flamereading = rand()%1024;
  flame = map(flamereading,0,1024,0,1024);
  int flamerange = map(flamereading,0,1024,0,3);
  int flow = ((rand()%100)>50?1:0);

  //set a flame status based on how close it is.....
  switch (flamerange) {
  case 2:    // A fire closer than 1.5 feet away.
```

```
  flame_status = "Close Fire";
  break;
case 1:    // A fire between 1-3 feet away.
  flame_status = "Distant Fire";
  break;
case 0:    // No fire detected.
  flame_status = "No Fire";
  break;
}

//toggle the fan according to gas in ppm in the room
if(gas_ppm > 100){
  is_exhaust_fan_on = true;
}
else{
  is_exhaust_fan_on = false;
}

//find the accident status 'cause fake alert may be caused by some mischief activities
if(temperature < 40 && flamerange ==2){
  accident_status = "need auditing";
  is_sprinkler_on = false;
}
else if(temperature < 40 && flamerange ==0){
  accident_status = "nothing found";
  is_sprinkler_on = false;
}
else if(temperature > 50 && flamerange == 1){
  is_sprinkler_on = true;
  accident_status = "moderate";
}
```

```
else if(temperature > 55 && flamerange == 2){
  is_sprinkler_on = true;
  accident_status = "severe";
}else{
  is_sprinkler_on = false;
  accident_status = "nil";
}


//send the sprinkler status
if(is_sprinkler_on){
  if(flow){
    sprinkler_status = "working";
  }
  else{
    sprinkler_status = "not working";
  }
}
else if(is_sprinkler_on == false){
  sprinkler_status = "now it shouldn't";
}
else{
  sprinkler_status = "something's wrong";
}

//Obivously the output.It is like json format 'cause it will help us for future sprints
String out = "{\n\t\"senor_values\":{";
out+="\n\t\t\"gas_ppm\":"+String(gas_ppm)+",";
out+="\n\t\t\"temperature\":"+String(temperature,2)+",";
out+="\n\t\t\"flame\":"+String(flame)+",";
out+="\n\t\t\"flow\":"+String(flow)+",\n\t}";
```

```
  out+="\n\t\"output\":{";
  out+="\n\t\t\"is_exhaust_fan_on\":"+String((is_exhaust_fan_on)?"true":"false")+",";
  out+="\n\t\t\"is_sprinkler_on\":"+String((is_sprinkler_on)?"true":"false")+",";
  out+="\n\t}";
  out+="\n\t\"messages\":{";
  out+="\n\t\t\"fire_status\":"+flame_status+",";
  out+="\n\t\t\"flow_status\":"+sprinkler_status+",";
  out+="\n\t\t\"accident_status\":"+accident_status+",";
  out+="\n\t}";
  out+="\n}";
  Serial.println(out);

  delay(1000);
}
```

DIAGRAM.JSON:

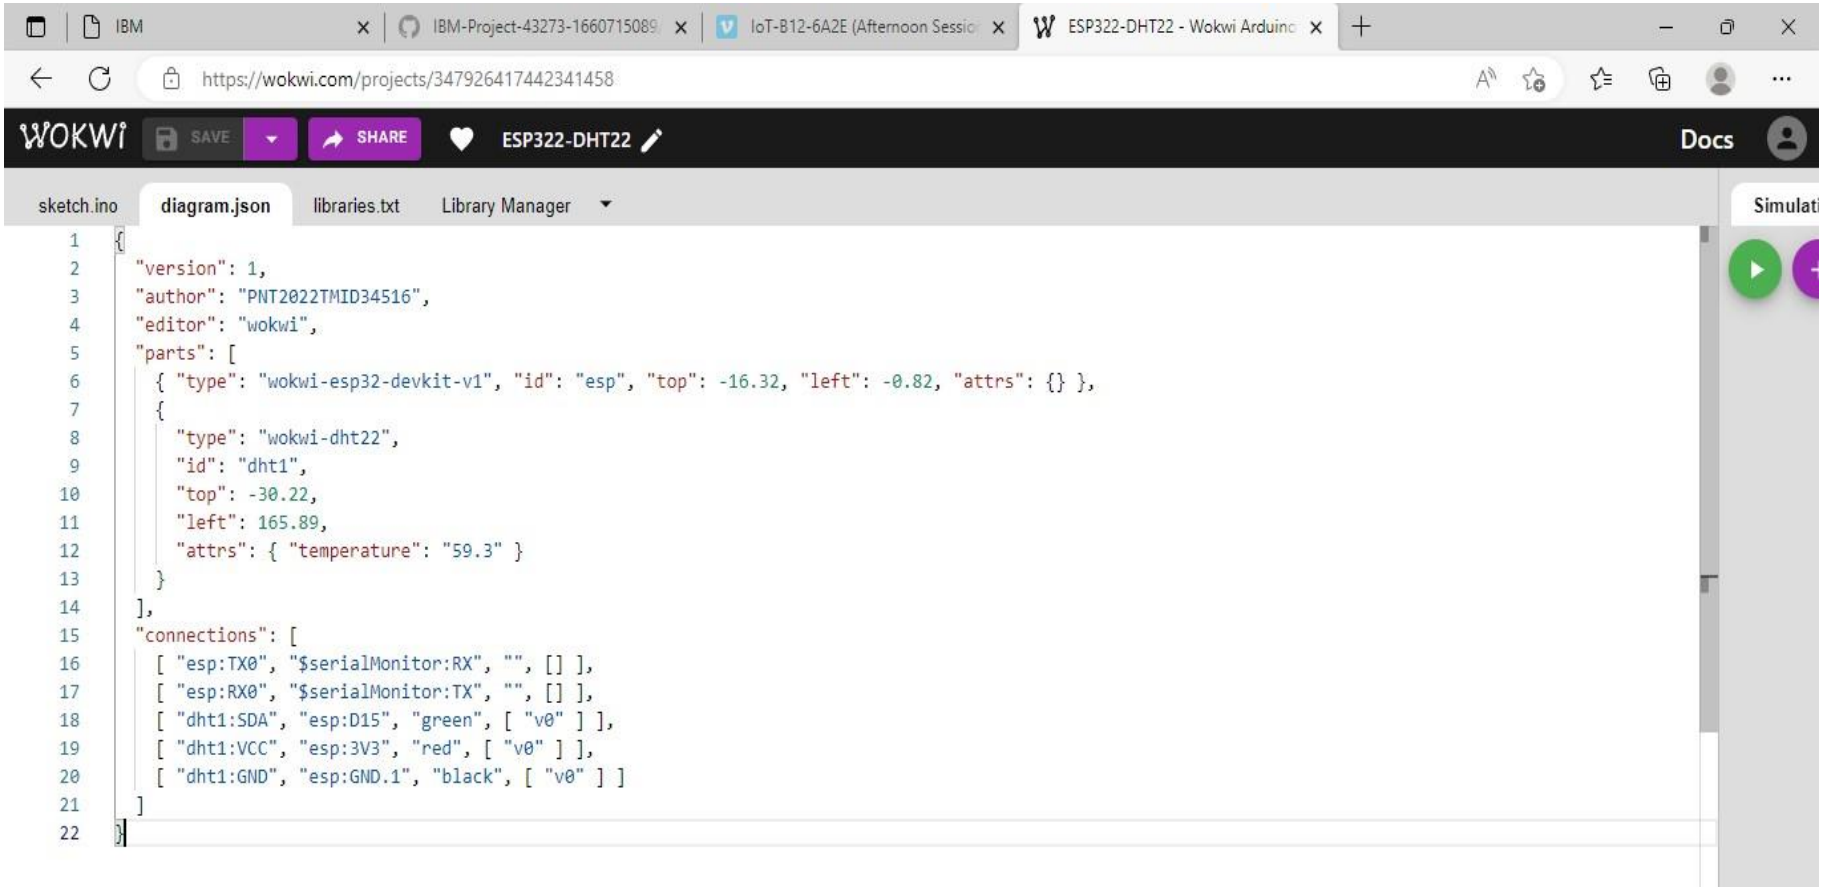

LIBRARIES TEXT:

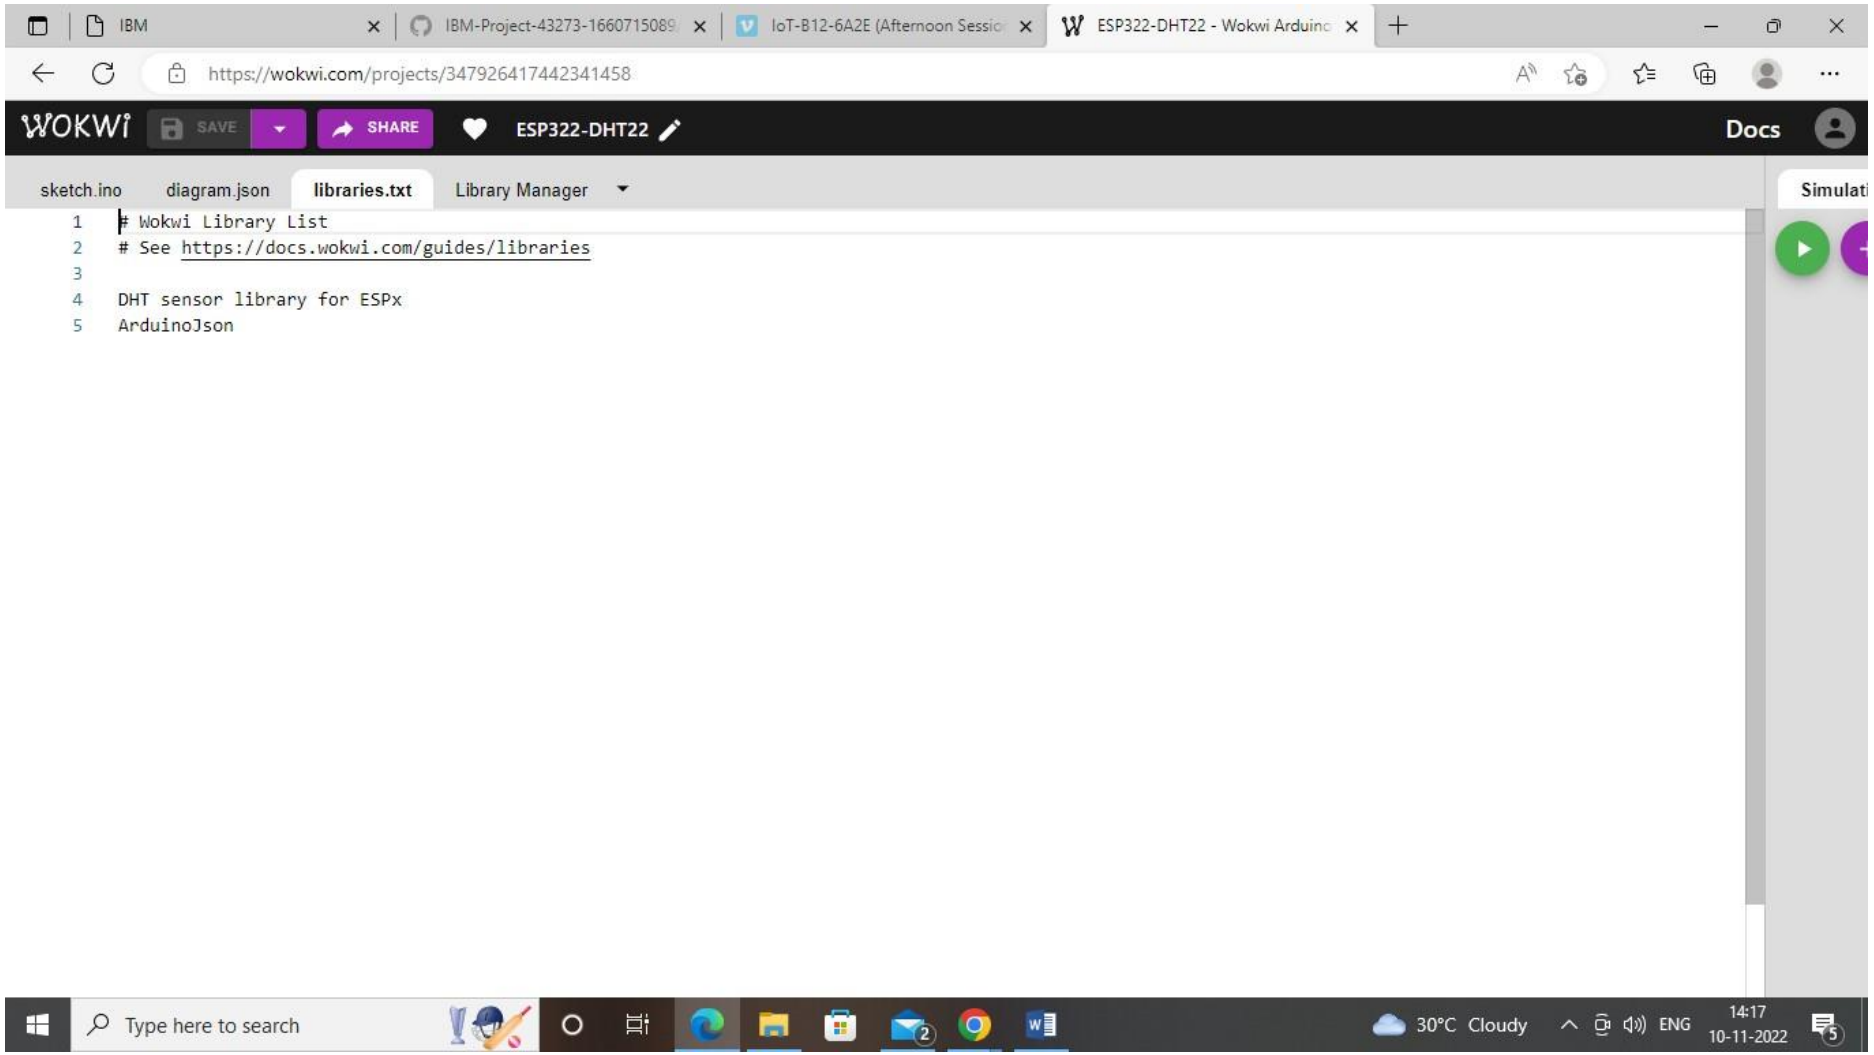

CIRCUIT:

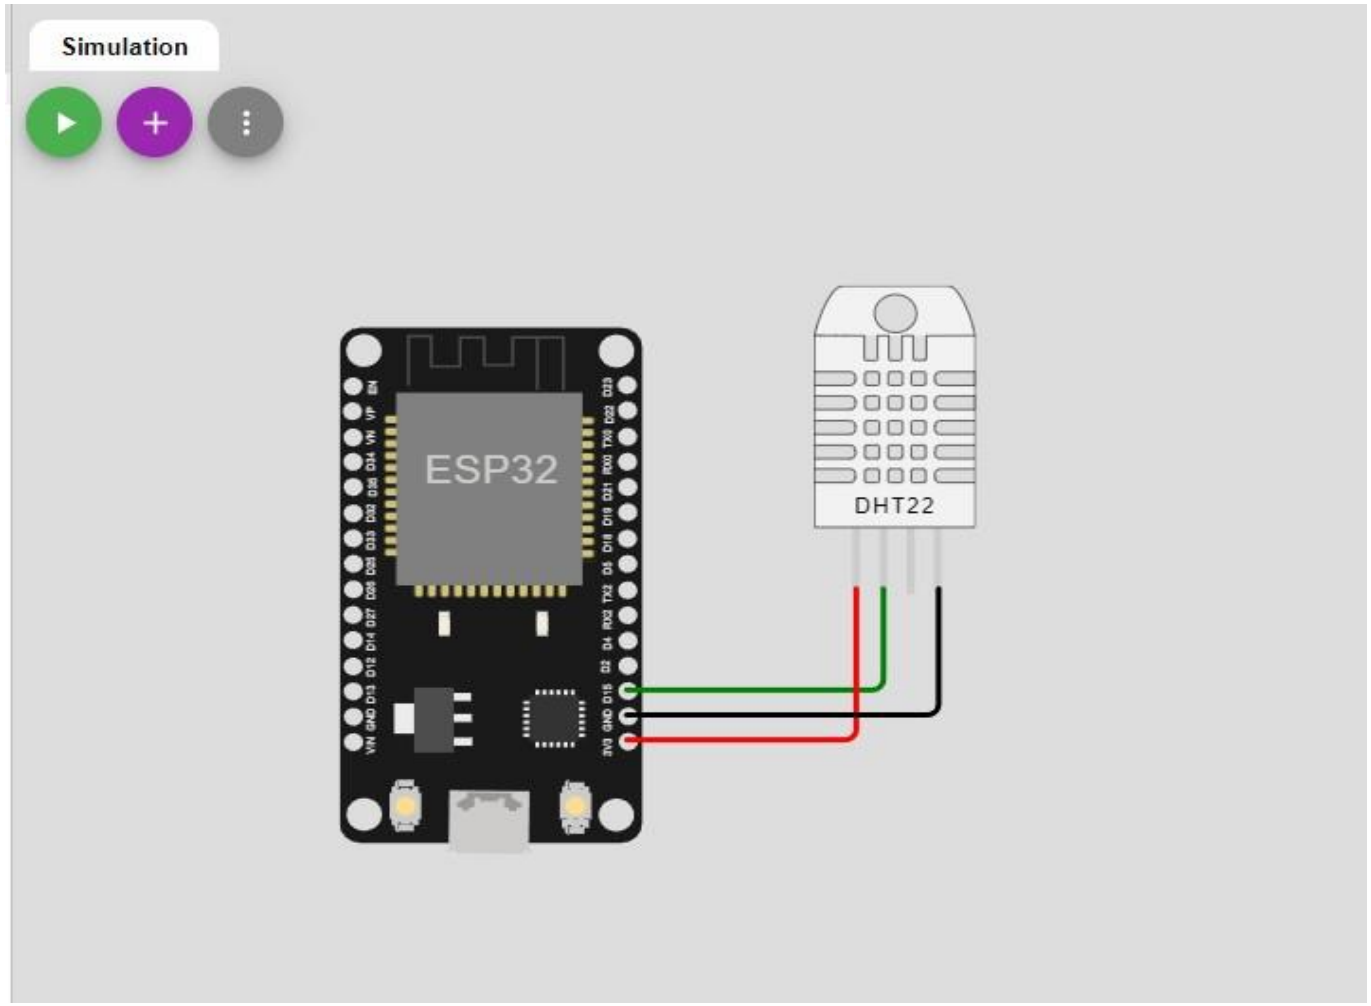

OUTPUT:

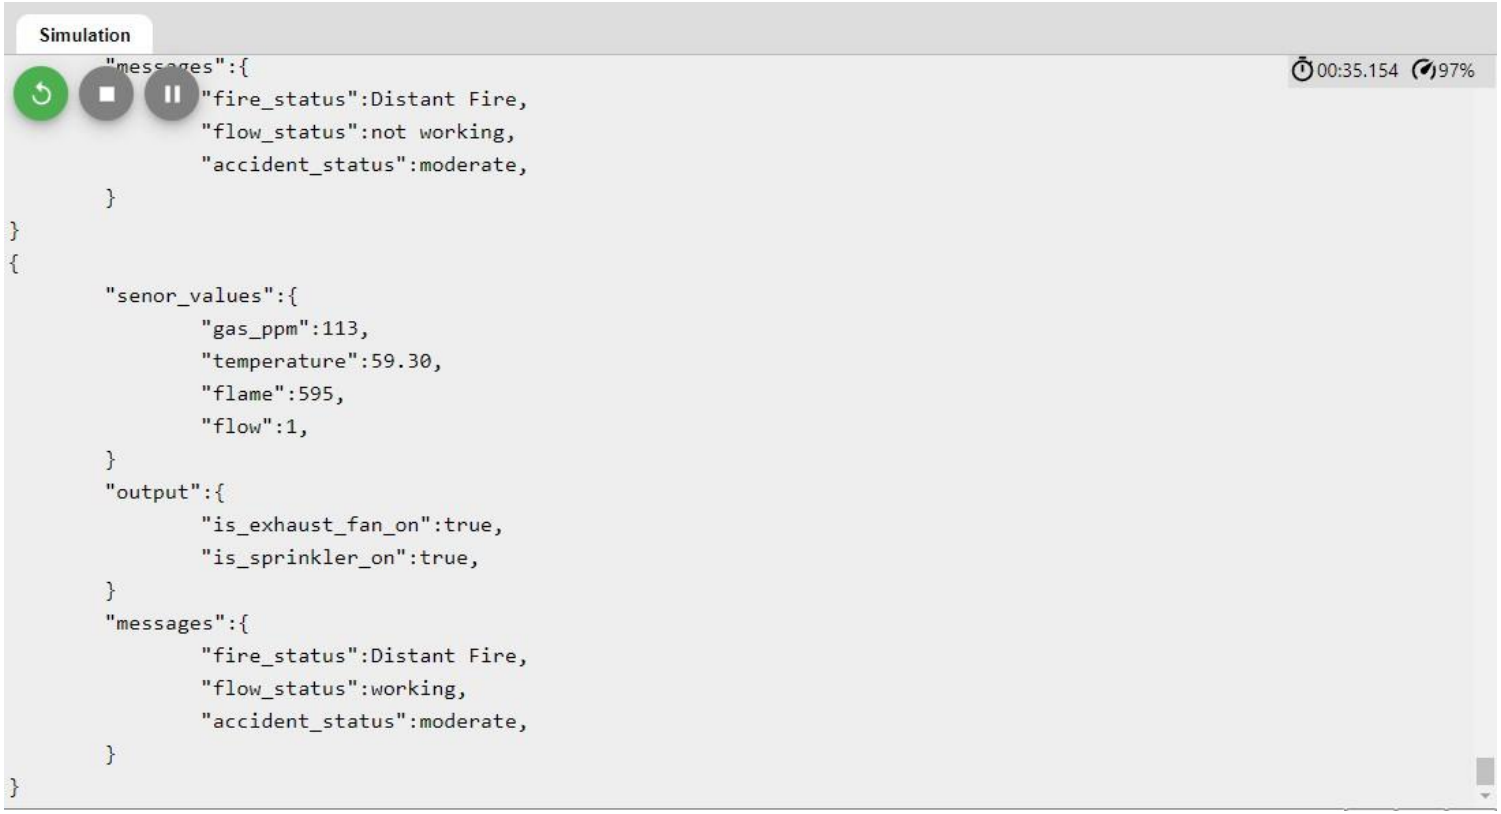

WOKWI LINK:

https://wokwi.com/projects/347926417442341458