ASSIGNMENT-4
DISTANCE DETECTION USING ULTRASONIC SENSOR

Date	20 October 2022
Team ID	PNT2022TMID25288
Maximum Marks	2 Marks

Question1 :

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100 cms send "alert" to ibm cloud and display in device recent events.

CODE :

```
1   #include <WiFi.h>//library for wifi
2   #include <PubSubClient.h>//library for MQtt
3
4
5   void callback(char* subscribetopic, byte* payload, unsigned int payloadLength);
6
7   //-------credentials of IBM Accounts------
8
9   #define ORG "4hn0jp"//IBM ORGANITION ID
10  #define DEVICE_TYPE "ULTRASON"//Device type mentioned in ibm watson IOT Platform
11  #define DEVICE_ID "DISTANCEDETECT"//Device ID mentioned in ibm watson IOT Platform
12  #define TOKEN "wuo5s7PR)ZSegVk&Rx"//Token
13  String data3;
14  float dist;
15
16
17  //-------- Customise the above values --------
18  char server[] = ORG ".messaging.internetofthings.ibmcloud.com";// Server Name
19  char publishTopic[] = "iot-2/evt/Data/fmt/json";// topic name and type of event perform and format in which data to be send
20  char subscribetopic[] = "iot-2/cmd/test/fmt/String";// cmd  REPRESENT command type AND COMMAND IS TEST OF FORMAT STRING
21  char authMethod[] = "use-token-auth";// authentication method
22  char token[] = TOKEN;
23  char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;//client id
24
25
26  //-----------------------------------------
27  WiFiClient wifiClient; // creating the instance for wificlient
28  PubSubClient client(server, 1883, callback ,wifiClient); //calling the predefined client id by passing parameter like server id,portand wificredential
29
30  int LED = 4;
31  int trig = 5;
32  int echo = 18;
33  void setup()
34  {
35  Serial.begin(115200);
```

```
36    pinMode(trig,OUTPUT);
37    pinMode(echo,INPUT);
38    pinMode(LED, OUTPUT);
39    delay(10);
40    wificonnect();
41    mqttconnect();
42    }
43    void loop()// Recursive Function
44    {
45
46     digitalWrite(trig,LOW);
47      digitalWrite(trig,HIGH);
48      delayMicroseconds(10);
49      digitalWrite(trig,LOW);
50      float dur = pulseIn(echo,HIGH);
51      float dist = (dur * 0.0343)/2;
52      Serial.print ("Distancein cm");
53      Serial.println(dist);
54
55
56      PublishData(dist);
57      delay(1000);
58      if (!client.loop()) {
59        mqttconnect();
60      }
61    }
62
63
64
65    /*.................................retrieving to Cloud.............................*/
66
67    void PublishData(float dist) {
68      mqttconnect();//function call for connecting to ibm
69      /*
70         creating the String in in form JSon to update the data to ibm cloud
```

```
70          creating the String in in form JSon to update the data to ibm cloud
71      */
72      String object;
73      if (dist <100)
74      {
75          digitalWrite(LED,HIGH);
76          Serial.println("object is near");
77          object = "Near";
78      }
79      else
80      {
81          digitalWrite(LED,LOW);
82          Serial.println("no object found");
83          object = "No";
84      }
85
86      String payload = "{\"distance\":";
87      payload += dist;
88      payload += "," "\"object\":\"";
89      payload += object;
90      payload += "\"}";
91
92
93      Serial.print("Sending payload: ");
94      Serial.println(payload);
95
96
97
98
```

esp32-blink.ino ●   diagram.json ●   libraries.txt ●   Library Manager ▾

```
98
99      if (client.publish(publishTopic, (char*) payload.c_str())) {
100         Serial.println("Publish ok");// if it sucessfully upload data on the cloud then it will print publish ok in Serial monitor or else it will print publish failed
101     } else {
102         Serial.println("Publish failed");
103     }
104
105  }
106  void mqttconnect() {
107     if (!client.connected()) {
108         Serial.print("Reconnecting client to ");
109         Serial.println(server);
110         while (!!!client.connect(clientId, authMethod, token)) {
111             Serial.print(".");
112             delay(500);
113         }
114
115         initManagedDevice();
116         Serial.println();
117     }
118  }
119  void wificonnect() //function defination for wificonnect
120  {
121     Serial.println();
122     Serial.print("Connecting to ");
123
124     WiFi.begin("Wokwi-GUEST", "", 6);//passing the wifi credentials to establish the connection
125     while (WiFi.status() != WL_CONNECTED) {
126         delay(500);
127         Serial.print(".");
128     }
129     Serial.println("");
130     Serial.println("WiFi connected");
131     Serial.println("IP address: ");
132     Serial.println(WiFi.localIP());
```

```
123
124      WiFi.begin("Wokwi-GUEST", "", 6);//passing the wifi credentials to establish the connection
125      while (WiFi.status() != WL_CONNECTED) {
126        delay(500);
127        Serial.print(".");
128      }
129      Serial.println("");
130      Serial.println("WiFi connected");
131      Serial.println("IP address: ");
132      Serial.println(WiFi.localIP());
133    }
134
135    void initManagedDevice() {
136      if (client.subscribe(subscribetopic)) {
137        Serial.println((subscribetopic));
138        Serial.println("subscribe to cmd OK");
139      } else {
140        Serial.println("subscribe to cmd FAILED");
141      }
142    }
143
144    void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
145    {
146
147      Serial.print("callback invoked for topic: ");
148      Serial.println(subscribetopic);
149      for (int i = 0; i < payloadLength; i++) {
150        //Serial.print((char)payload[i]);
151        data3 += (char)payload[i];
152      }
153
154    //   Serial.println("data: "+ data3);
155    //   if(data3=="Near")
156    //   {
157    // Serial.println(data3);
```

```
142    }
143
144    void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
145    {
146
147      Serial.print("callback invoked for topic: ");
148      Serial.println(subscribetopic);
149      for (int i = 0; i < payloadLength; i++) {
150        //Serial.print((char)payload[i]);
151        data3 += (char)payload[i];
152      }
153
154    //   Serial.println("data: "+ data3);
155    //   if(data3=="Near")
156    //   {
157    // Serial.println(data3);
158    // digitalWrite(LED,HIGH);
159
160    //   }
161
162    //   else
163    //   {
164    // Serial.println(data3);
165    // digitalWrite(LED,LOW);
166
167    //   }
168    data3="";
169
170
171    }
```
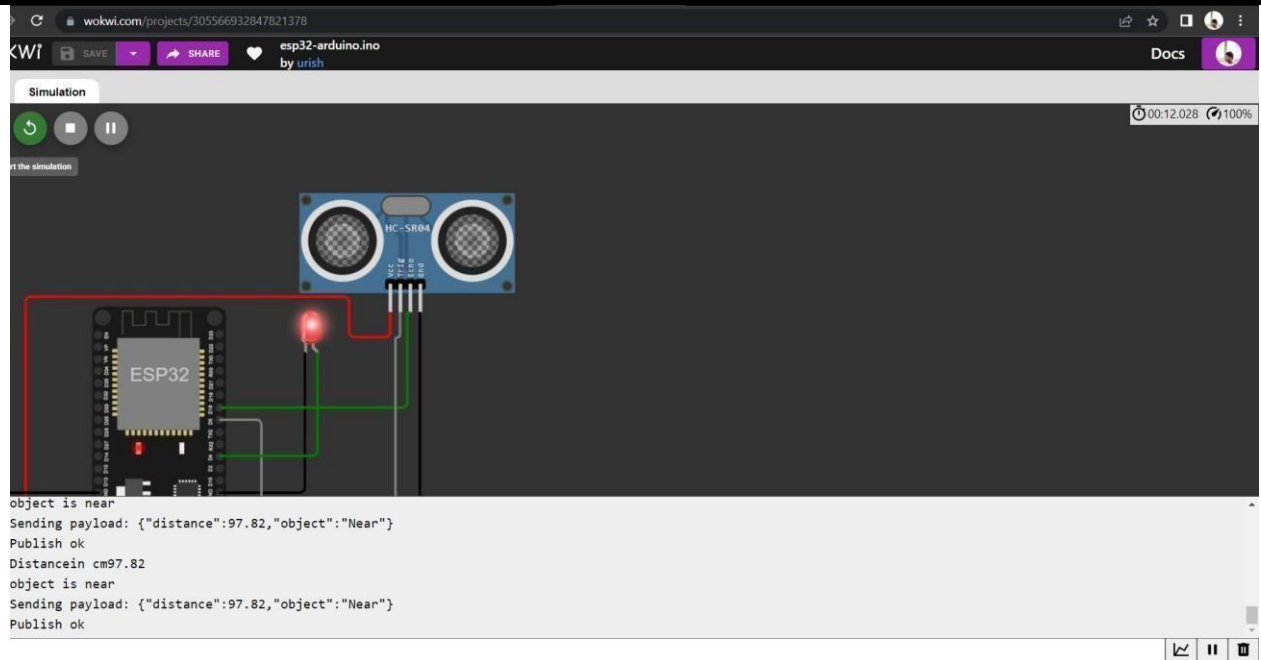
OUTPUT:
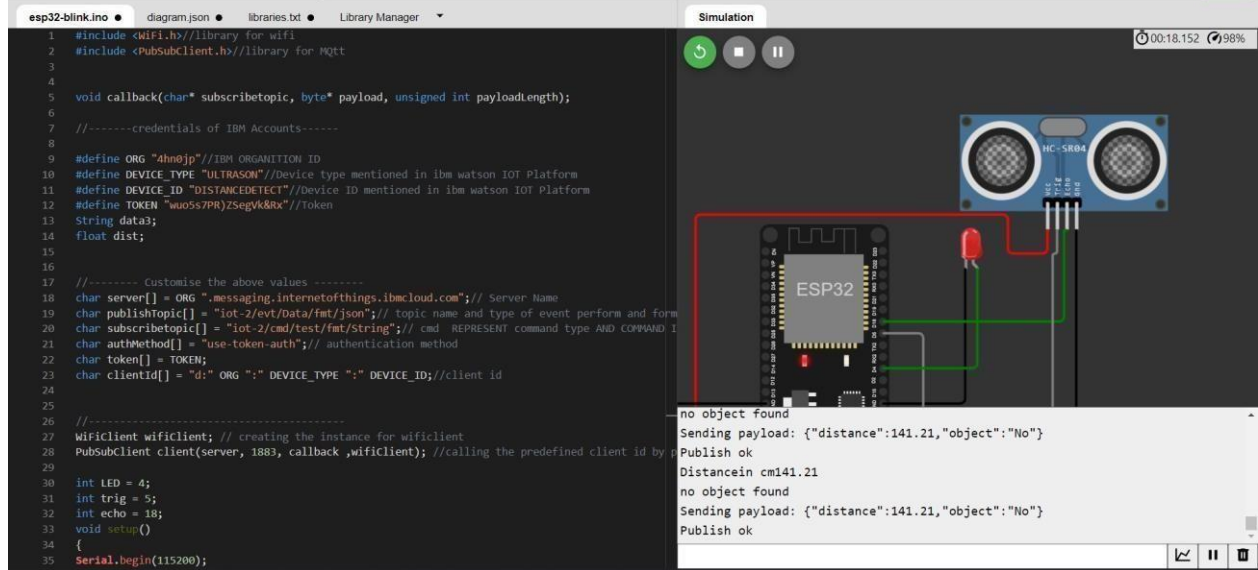
Data send to the IBM cloud device when the object is far
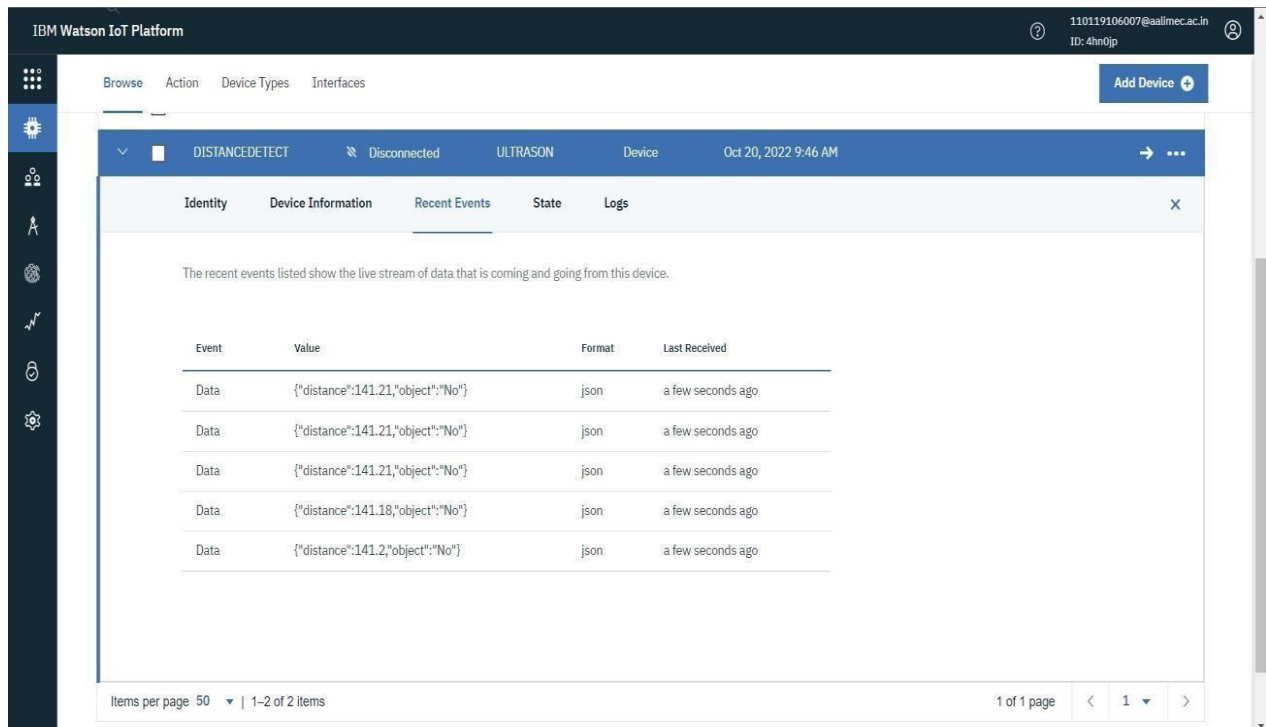
when object is near to the ultrasonic sensor

Data sent to the IBM Cloud Device when the object is near