

Delivery of Sprint-2

DATE	4 November 2022
TEAM ID	PNT2022TMID51935
PROJECT NAME	SMART WASTE MANAGEMENT FOR METROPOLITAN CITIES-IOT

Code for Data Transfer from Sensors

```
#include <WiFi.h>                                // library for wifi
#include <PubSubClient.h>                        // library for MQTT
#include <LiquidCrystal_I2C.h>
LiquidCrystal_I2C lcd(0x27, 20, 4);

//----- credentials of IBM Accounts -----

#define ORG "9gbe4w"                            // IBM organisation id
#define DEVICE_TYPE "SWMSMC"                    // Device type mentioned in ibm watson iot platform
#define DEVICE_ID "ibmproject"                  // Device ID mentioned in ibm watson iot platform
#define TOKEN "sUNA41tG6-Pq)0rk5X"             // Token

//----- customise above values -----

char server[] = ORG ".messaging.internetofthings.ibmcloud.com"; // server name
char publishTopic[] = "iot-2/evt/data/fmt/json";
char topic[] = "iot-2/cmd/led/fmt/String";          // cmd Represent type and command is test format of strings
char authMethod[] = "use-token-auth";              // authentication method
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID; //Client id

//-----

WiFiClient wifiClient;                          // creating instance for wificlient
PubSubClient client(server, 1883, wifiClient);

#define ECHO_PIN 12
#define TRIG_PIN 13
float dist;

void setup()
{
  Serial.begin(115200);
  pinMode(LED_BUILTIN, OUTPUT);
  pinMode(TRIG_PIN, OUTPUT);
  pinMode(ECHO_PIN, INPUT);
  //pir pin
  pinMode(4, INPUT);

  //ledpins
  pinMode(23, OUTPUT);
  pinMode(2, OUTPUT);
  pinMode(4, OUTPUT);
  pinMode(15, OUTPUT);

  lcd.init();
  lcd.backlight();
  lcd.setCursor(1, 0);
  lcd.print("");
}
```

```

wifiConnect();
mqttConnect();
}

float readcmCM()
{
  digitalWrite(TRIG_PIN, LOW);
  delayMicroseconds(2);
  digitalWrite(TRIG_PIN, HIGH);
  delayMicroseconds(10);
  digitalWrite(TRIG_PIN, LOW);
  int duration = pulseIn(ECHO_PIN, HIGH);
  return duration * 0.034 / 2;
}

void loop()
{

  lcd.clear();

  publishData();
  delay(500);
  if (!client.loop())
  {
    mqttConnect(); // function call to connect to IBM
  }
}

/* -----retrieving to cloud-----*/

void wifiConnect()
{
  Serial.print("Connecting to ");
  Serial.print("Wifi");
  WiFi.begin("Wokwi-GUEST", "", 6);
  while (WiFi.status() != WL_CONNECTED)
  {
    delay(500);
    Serial.print(".");
  }
  Serial.print("WiFi connected, IP address: ");
  Serial.println(WiFi.localIP());
}

void mqttConnect()
{
  if (!client.connected())
  {
    Serial.print("Reconnecting MQTT client to ");
    Serial.println(server);
    while (!client.connect(clientId, authMethod, token))
    {
      Serial.print(".");
      delay(500);
    }
    initManagedDevice();
    Serial.println();
  }
}

void initManagedDevice()
{
  if (client.subscribe(topic))
  {
    Serial.println("IBM subscribe to cmd OK");
  }
  else
  {

```

```

    Serial.println("subscribe to cmd FAILED");
  }
}
void publishData()
{
  float cm = readcmCM();

  if(digitalRead(34)) //PIR motion detection
  {
    Serial.println("Motion Detected");
    Serial.println("Lid Opened");
    digitalWrite(15, HIGH);

  }
  else
  {
    digitalWrite(15, LOW);
  }

  if(digitalRead(34)== true)
  {
    if(cm <= 100) //Bin level detection
    {
      digitalWrite(2, HIGH);
      Serial.println("High Alert!!!,Trash bin is about to be full");
      Serial.println("Lid Closed");
      lcd.print("Full! Don't use");
      delay(2000);
      lcd.clear();
      digitalWrite(4, LOW);
      digitalWrite(23, LOW);
    }
    else if(cm > 150 && cm < 250)
    {
      digitalWrite(4, HIGH);
      Serial.println("Warning!!,Trash is about to cross 50% of bin level");
      digitalWrite(2, LOW);
      digitalWrite(23, LOW);
    }
    else if(cm > 250 && cm <=400)
    {
      digitalWrite(23, HIGH);
      Serial.println("Bin is available");
      digitalWrite(2,LOW);
      digitalWrite(4, LOW);
    }
    delay(10000);
    Serial.println("Lid Closed");
  }
  else
  {
    Serial.println("No motion detected");
  }

  if(cm <= 100)
  {
    digitalWrite(21,HIGH);
    String payload = "{\"High Alert!!\":\":";
    payload += cm;
    payload += "left\" }";
    Serial.print("\n");
    Serial.print("Sending payload: ");
    Serial.println(payload);
  }
}

```


```

if (client.publish(publishTopic, (char*) payload.c_str()))    // if data is uploaded to cloud successfully,prints publish ok or prints publish failed
{
  Serial.println("Publish OK");
}
}
if(cm <= 250)
{
  digitalWrite(22,HIGH);
  String payload = "{\"Warning!!\":\".\"\"";
  payload += dist;
  payload += "|left\" }";
  Serial.print("\n");
  Serial.print("Sending distance: ");
  Serial.println(cm);
  if(client.publish(publishTopic, (char*) payload.c_str()))
  {
    Serial.println("Publish OK");
  }
  else
  {
    Serial.println("Publish FAILED");
  }
}

float inches = (cm / 2.54);                                //print on LCD
lcd.setCursor(0,0);
lcd.print("Inches");
lcd.setCursor(4,0);
lcd.setCursor(12,0);
lcd.print("cm");
lcd.setCursor(1,1);
lcd.print(inches, 1);
lcd.setCursor(11,1);
lcd.print(cm, 1);
lcd.setCursor(14,1);
delay(1000);
lcd.clear();
}

```

Connection Diagram

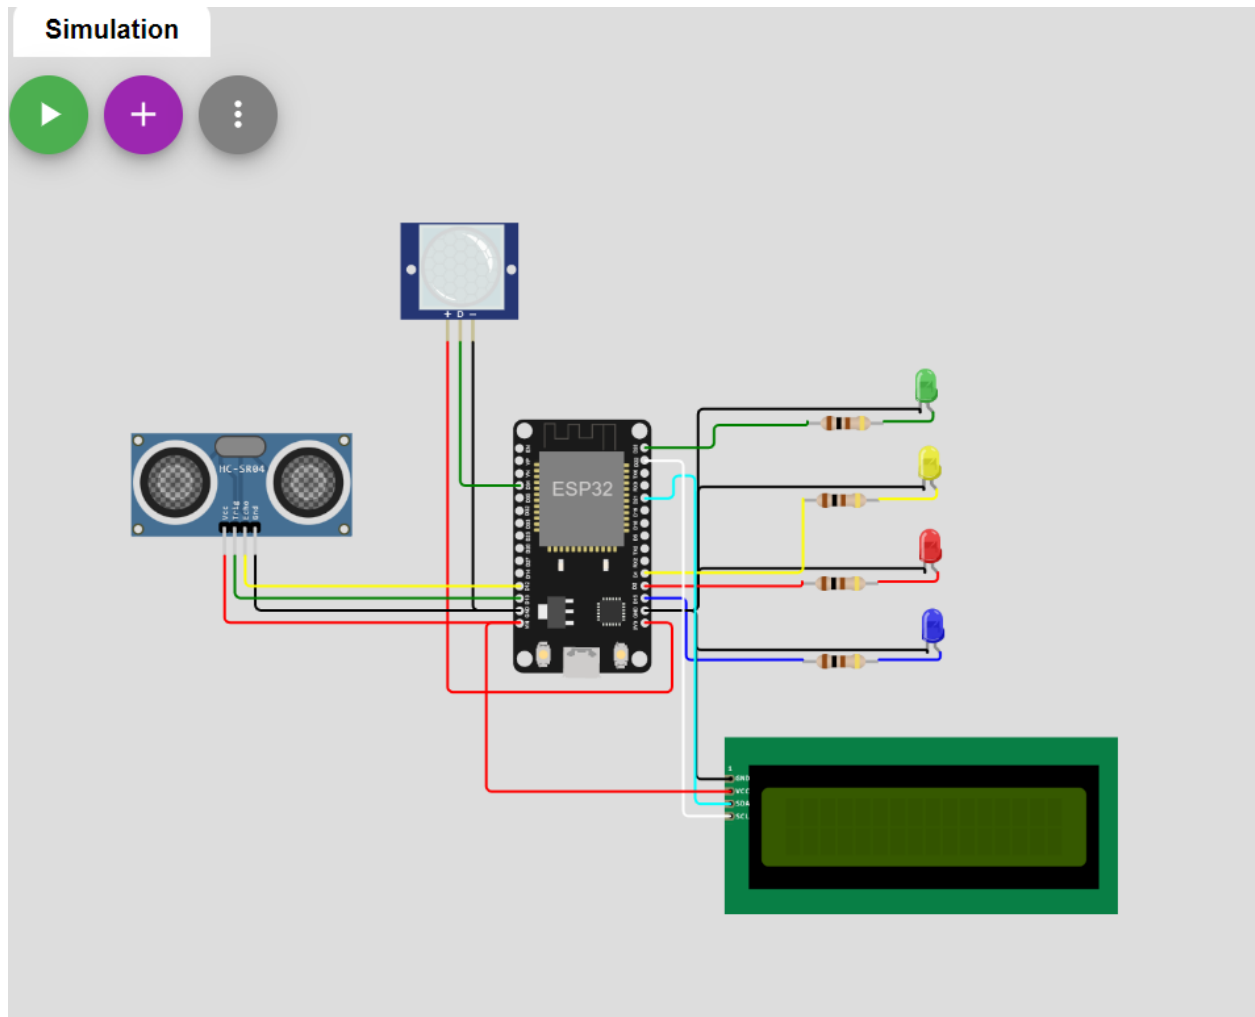

Link : <https://wokwi.com/projects/347376419979919956>