Delivery of Sprint-2

DATE	6 November 2022
TEAM ID	PNT2022TMID35389
PROJECT NAME	SMART WASTE MANAGEMENT FOR METROPOLITAN CITIES-IOT

Code for Data Transfer from Sensors

```
#include <WiFi.h>                       // library for wifi
#include <PubSubClient.h>                   // library for MQTT
#include <LiquidCrystal_I2C.h>
LiquidCrystal_I2C lcd(0x27, 20, 4);

//---------------------- credentials of IBM Accounts ----------------------------
```

```
#define ORG "usx5i2"                    // IBM organisation id
#define DEVICE_TYPE "ibmproject"                // Device type mentioned in ibm watson iot platform
#define DEVICE_ID "SWMSMC"              // Device ID mentioned in ibm watson iot platform
#define TOKEN "123456789"           // Token
```

```
//---------------------- customise above values ---------------------------------------------------
```

```
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";             // server name
char publishTopic[] = "iot-2/evt/data/fmt/json";                            // topic name and type of event
perform and format in which data to be send
char topic[] = "iot-2/cmd/led/fmt/String";                                  // cmd Represent type and command
is test format of strings
char authMethod[] = "use-token-auth";                                       // authentication method
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;                   //Client id
```

```
//-------------------------------------------------------------------------------------------------------
```

```
WiFiClient wifiClient;                                          // creating instance for wificlient
PubSubClient client(server, 1883, wifiClient);
```

```
#define ECHO_PIN 12
#define TRIG_PIN 13
float dist;
```

```
void setup()
{
  Serial.begin(115200);
  pinMode(LED_BUILTIN, OUTPUT);
  pinMode(TRIG_PIN, OUTPUT);
  pinMode(ECHO_PIN, INPUT);
```

```
  //pir pin
  pinMode(34, INPUT);
```

```
  //ledpins
  pinMode(23, OUTPUT);
  pinMode(2, OUTPUT);
  pinMode(4, OUTPUT);
  pinMode(15, OUTPUT);
```

```
  lcd.init();
  lcd.backlight();
  lcd.setCursor(1, 0);
  lcd.print("");
  wifiConnect();
  mqttConnect();
}
```

```
float readcmCM()
{
  digitalWrite(TRIG_PIN, LOW);
  delayMicroseconds(2);
  digitalWrite(TRIG_PIN, HIGH);
  delayMicroseconds(10);
  digitalWrite(TRIG_PIN, LOW);
  int duration = pulseIn(ECHO_PIN, HIGH);
  return duration * 0.034 / 2;
}
```

```
void loop()
 {
```

```
  lcd.clear();
```

```
  publishData();
  delay(500);
  if (!client.loop())
    {
      mqttConnect();                              // function call to connect to IBM
    }
}
```

```
/* ------------------------------retrieving to cloud----------------------------------------------------*/
```

```
void wifiConnect()
{
  Serial.print("Connecting to ");
  Serial.print("Wifi");
  WiFi.begin("Wokwi-GUEST", "", 6);
```

```
  while (WiFi.status() != WL_CONNECTED)
    {
      delay(500);
      Serial.print(".");
    }
  Serial.print("WiFi connected, IP address: ");
  Serial.println(WiFi.localIP());
}
void mqttConnect()
 {
   if (!client.connected())
     {
       Serial.print("Reconnecting MQTT client to ");
       Serial.println(server);
       while (!client.connect(clientId, authMethod, token))
         {
           Serial.print(".");
           delay(500);
         }
       initManagedDevice();
       Serial.println();
     }
 }
void initManagedDevice()
 {
   if (client.subscribe(topic))
     {
       Serial.println("IBM subscribe to cmd OK");
     }
   else
     {
       Serial.println("subscribe to cmd FAILED");
     }
 }
void publishData()
{
 float cm = readcmCM();
```

```
 if(digitalRead(34))                          //pir motion detection
 {
   Serial.println("Motion Detected");
   Serial.println("Lid Opened");
   digitalWrite(15, HIGH);



if(digitalRead(34)== true)
{
 if(cm <= 60)                                 //Bin level detection
```

```
 {
   digitalWrite(2, HIGH);
   Serial.println("High Alert!!!,Trash bin is about to be full");
   Serial.println("Lid Closed");
   lcd.print("Full! Don't use");
   delay(2000);
   lcd.clear();
   digitalWrite(4, LOW);
   digitalWrite(23, LOW);
 }
 else if(cm > 60 && cm < 120)
 {
   digitalWrite(4, HIGH);
   Serial.println("Warning!!,Trash is about to cross 50% of bin level");
   digitalWrite(2, LOW);
   digitalWrite(23, LOW);

 }
 else if(cm > 120)
 {
   digitalWrite(23, HIGH);
   Serial.println("Bin is available");
   digitalWrite(2,LOW);
   digitalWrite(4, LOW);

 }
   delay(10000);
   Serial.println("Lid Closed");
}
else
{
  Serial.println("No motion detected");
   digitalWrite(2, LOW);
   digitalWrite(15, LOW);
   digitalWrite(4, LOW);
   digitalWrite(23, LOW);
}
```

```
}
 else
 {
   digitalWrite(15, LOW);
 }
```

```
  if(cm <= 60)
{
digitalWrite(21,HIGH);
```

```
String payload = "{\"High_Alert\":";
payload += cm;
payload += " }";
Serial.print("\n");
Serial.print("Sending payload: ");
Serial.println(payload);
```

```
if (client.publish(publishTopic, (char*) payload.c_str()))        // if data is uploaded to cloud
successfully,prints publish ok else prints publish failed
{
Serial.println("Publish OK");
}
}
else if(cm <= 120)
{
digitalWrite(22,HIGH);
String payload = "{\"Warning\":";
payload += cm ;
payload += " }";
Serial.print("\n");
Serial.print("Sending payload: ");
Serial.println(payload);
if(client.publish(publishTopic, (char*) payload.c_str()))
{
Serial.println("Publish OK");
}
else
{
Serial.println("Publish FAILED");
}
}
else
{
Serial.println("");
}
```

```
 float inches = (cm / 2.54);                                  //print on lcd
 lcd.setCursor(0,0);
 lcd.print("Inches");
 lcd.setCursor(4,0);
 lcd.setCursor(12,0);
 lcd.print("cm");
 lcd.setCursor(1,1);
 lcd.print(inches, 1);
 lcd.setCursor(11,1);
 lcd.print(cm, 1);
 lcd.setCursor(14,1);
 delay(1000);
 lcd.clear();
```

```
}
```

Connection Diagram

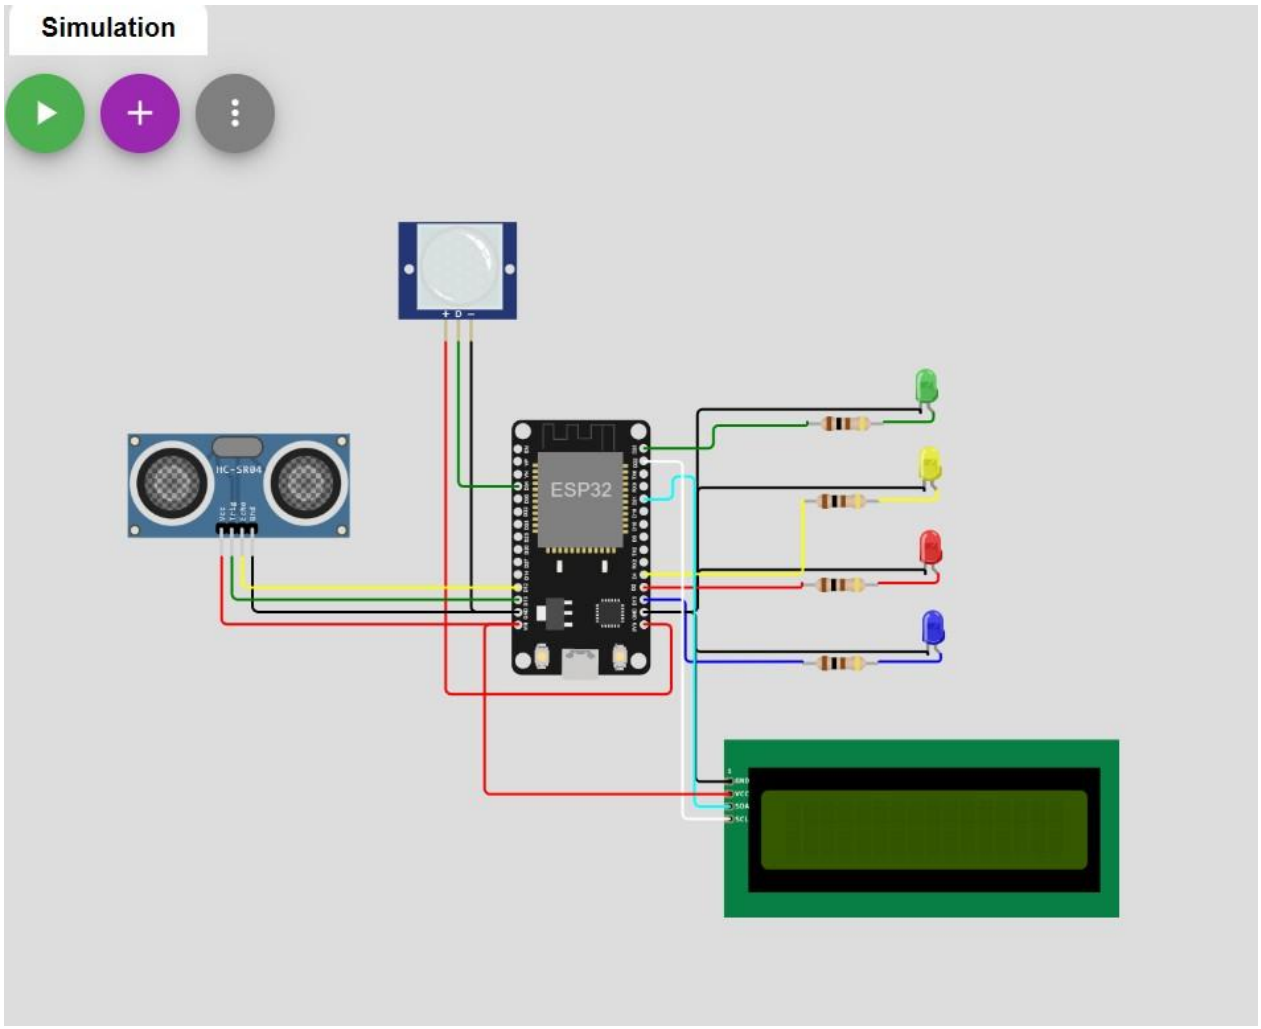

Link :

https://wokwi.com/projects/347769641779593811