**ASSIGNMENT-4**

**DISTANCE DETECTION USING ULTRASONIC SENSOR**

| | |
|---|---|
| Date | 20 October 2022 |
| Team ID | PNT2022TMID10962 |
| Name | R. Dhanya |
| Student Roll Number | 811519106032 |
| Maximum Marks | 2 Marks |

Question1 :

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100 cms send "alert" to ibm cloud and display in device recent events.

WOKWI  LINK :

https://wokwi.com/projects/305566932847821378

CODE :

```cpp
#include <WiFi.h>//library for wifi
#include <PubSubClient.h>//library for MQtt


void callback(char* subscribetopic, byte* payload, unsigned int payloadLength);

//---------credentials of IBM Accounts--------

#define ORG "4he0jp"//IBM ORGANITION ID
#define DEVICE_TYPE "ULTRASON"//Device type mentioned in ibm watson IoT Platform
#define DEVICE_ID "DISTANCEDETECT"//Device ID mentioned in ibm watson IoT Platform
#define TOKEN "weo5s7P0)ZSegVkBRx"//Token
String data3;
float dist;


//--------- Customise the above values ---------
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";// Server name
char publishTopic[] = "iot-2/evt/Data/fmt/json";// topic name and type of event perfore and format in which data to be send
char subscribetopic[] = "iot-2/cmd/test/fmt/string";// cmd  REPRESENT command type AND COMMAND IS TEST OF FORMAT STRING
char authMethod[] = "use-token-auth";// authentication method
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;//client id


//------------------------------------------
WiFiClient wifiClient; // creating the instance for wifiClient
PubSubClient client(server, 1883, callback ,wifiClient); //calling the predefined client id by passing parameter like server id,portand wificredential

int LED = 4;
int trig = 5;
int echo = 18;
void setup()
{
Serial.begin(115200);
```

```
36    pinMode(trig,OUTPUT);
37    pinMode(echo,INPUT);
38    pinMode(LED, OUTPUT);
39    delay(10);
40    wificonnect();
41    mqttconnect();
42    }
43    void loop()// Recursive Function
44    {
45
46     digitalWrite(trig,LOW);
47      digitalWrite(trig,HIGH);
48      delayMicroseconds(10);
49      digitalWrite(trig,LOW);
50      float dur = pulseIn(echo,HIGH);
51      float dist = (dur * 0.0343)/2;
52      Serial.print ("Distancein cm");
53      Serial.println(dist);
54
55
56      PublishData(dist);
57      delay(1000);
58      if (!client.loop()) {
59        mqttconnect();
60      }
61    }
62
63
64
65    /*...................................retrieving to Cloud.............................*/
66
67    void PublishData(float dist) {
68      mqttconnect();//function call for connecting to ibm
69      /*
70        creating the String in in form JSon to update the data to ibm cloud
```

```
70        | creating the String in in form JSon to update the data to ibm cloud
71      */
72      String object;
73      if (dist <100)
74      {
75        digitalWrite(LED,HIGH);
76        Serial.println("object is near");
77        object = "Near";
78      }
79      else
80      {
81        digitalWrite(LED,LOW);
82        Serial.println("no object found");
83        object = "No";
84      }
85
86      String payload = "{\"distance\":";
87      payload += dist;
88      payload += "," "\"object\":\"";
89      payload += object;
90      payload += "\"}";
91
92
93      Serial.print("Sending payload: ");
94      Serial.println(payload);
95
96
97
98
```

esp32-blink.ino ● diagram.json ● libraries.txt ● Library Manager ▾

```
98
99      if (client.publish(publishTopic, (char*) payload.c_str())) {
100       Serial.println("Publish ok");// if it successfully upload data on the cloud then it will print publish ok in Serial monitor or else it will print publish failed
101     } else {
102       Serial.println("Publish failed");
103     }
104
105   }
106   void mqttconnect() {
107     if (!client.connected()) {
108       Serial.print("Reconnecting client to ");
109       Serial.println(server);
110       while (!!!client.connect(clientId, authMethod, token)) {
111         Serial.print(".");
112         delay(500);
113       }
114
115       initManagedDevice();
116       Serial.println();
117     }
118   }
119   void wificonnect() //function defination for wifconnect
120   {
121     Serial.println();
122     Serial.print("Connecting to ");
123
124     WiFi.begin("Wokwi-GUEST", "", 6);//passing the wifi credentials to establish the connection
125     while (WiFi.status() != WL_CONNECTED) {
126       delay(500);
127       Serial.print(".");
128     }
129     Serial.println("");
130     Serial.println("WiFi connected");
131     Serial.println("IP address: ");
132     Serial.println(WiFi.localIP());
```

```
124      WiFi.begin("Wokwi-GUEST", "", 6);//passing the wifi credentials to establish the connection
125      while (WiFi.status() != WL_CONNECTED) {
126        delay(500);
127        Serial.print(".");
128      }
129      Serial.println("");
130      Serial.println("WiFi connected");
131      Serial.println("IP address: ");
132      Serial.println(WiFi.localIP());
133    }
134
135    void initManagedDevice() {
136      if (client.subscribe(subscribetopic)) {
137        Serial.println((subscribetopic));
138        Serial.println("subscribe to cmd OK");
139      } else {
140        Serial.println("subscribe to cmd FAILED");
141      }
142    }
143
144    void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
145    {
146
147      Serial.print("callback invoked for topic: ");
148      Serial.println(subscribetopic);
149      for (int i = 0; i < payloadLength; i++) {
150        //Serial.print((char)payload[i]);
151        data3 += (char)payload[i];
152      }
153
154    //    Serial.println("data: "+ data3);
155    //    if(data3=="Near")
156    //    {
157    // Serial.println(data3);
```

```
142    }
143
144    void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
145    {
146
147      Serial.print("callback invoked for topic: ");
148      Serial.println(subscribetopic);
149      for (int i = 0; i < payloadLength; i++) {
150        //Serial.print((char)payload[i]);
151        data3 += (char)payload[i];
152      }
153
154    //    Serial.println("data: "+ data3);
155    //    if(data3=="Near")
156    //    {
157    // Serial.println(data3);
158    // digitalWrite(LED,HIGH);
159
160    //    }
161
162    //    else
163    //    {
164    // Serial.println(data3);
165    // digitalWrite(LED,LOW);
166
167    //    }
168    data3="";
169
170
171    }
```
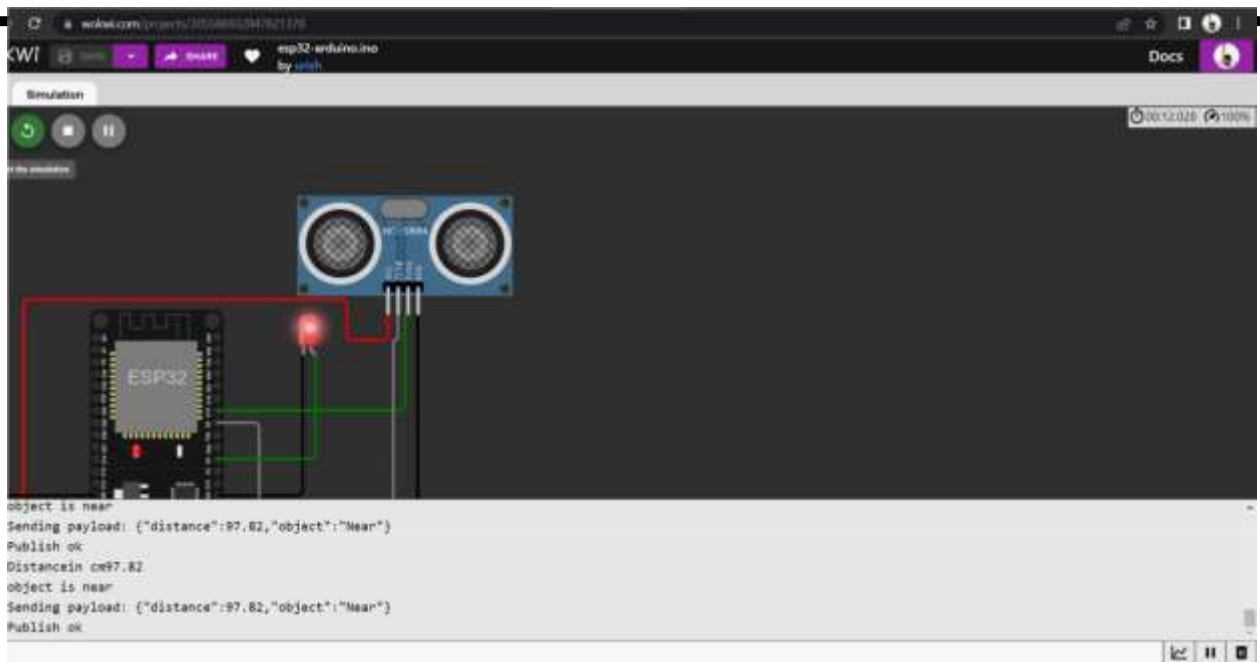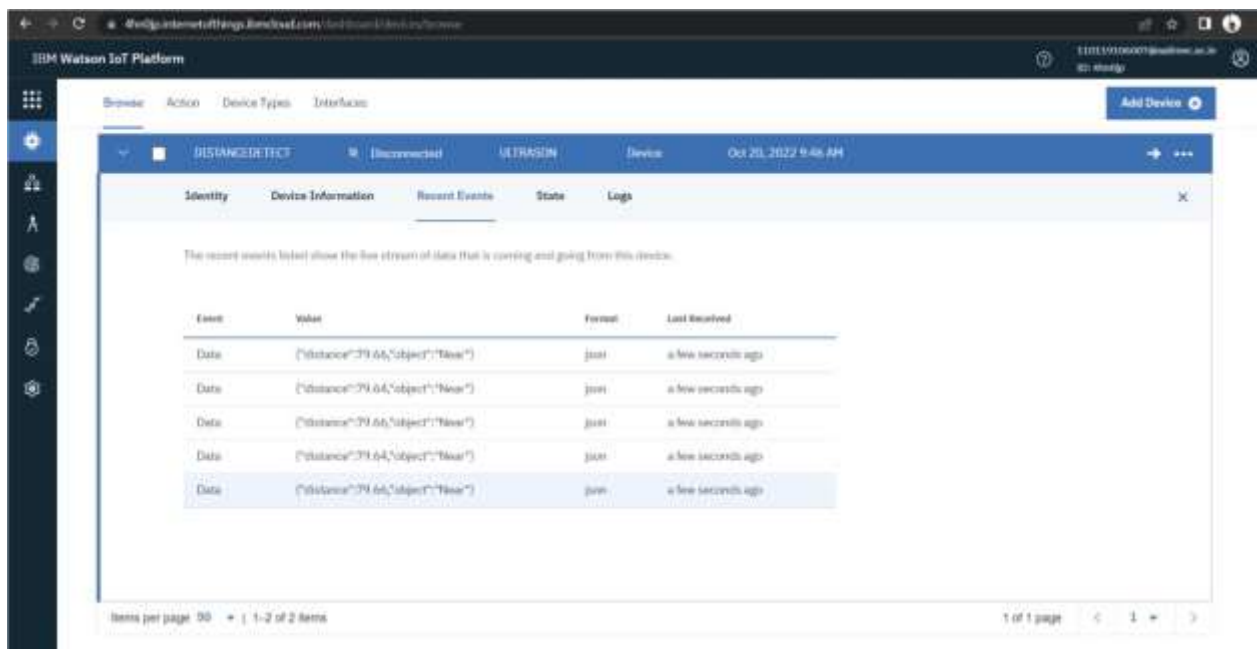
OUTPUT:
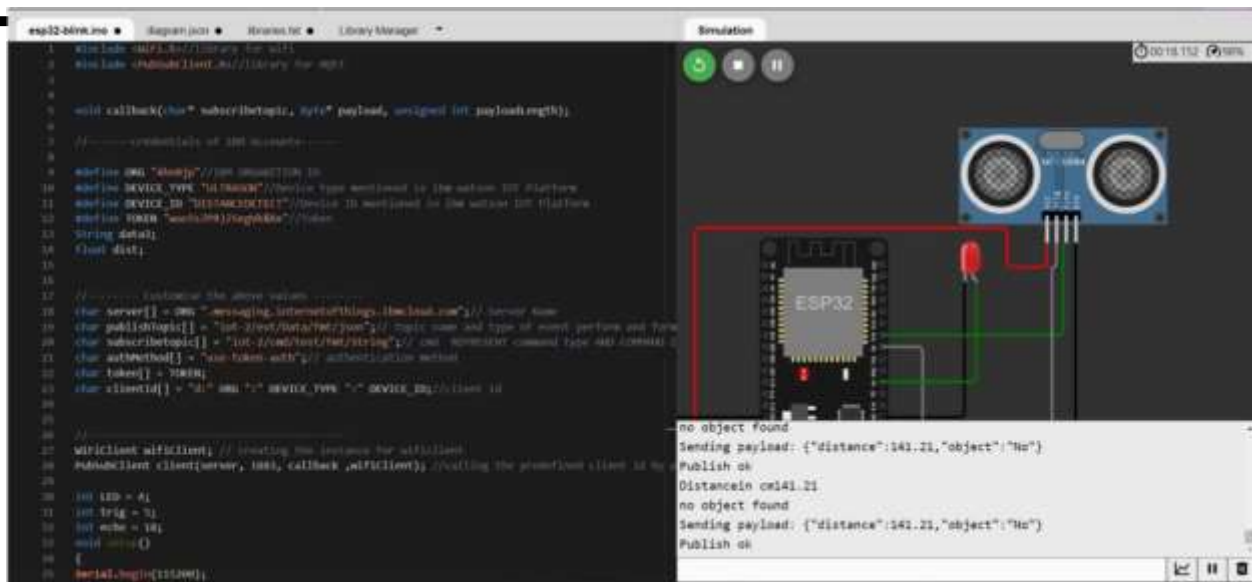
Data send to the IBM cloud device when the object is far
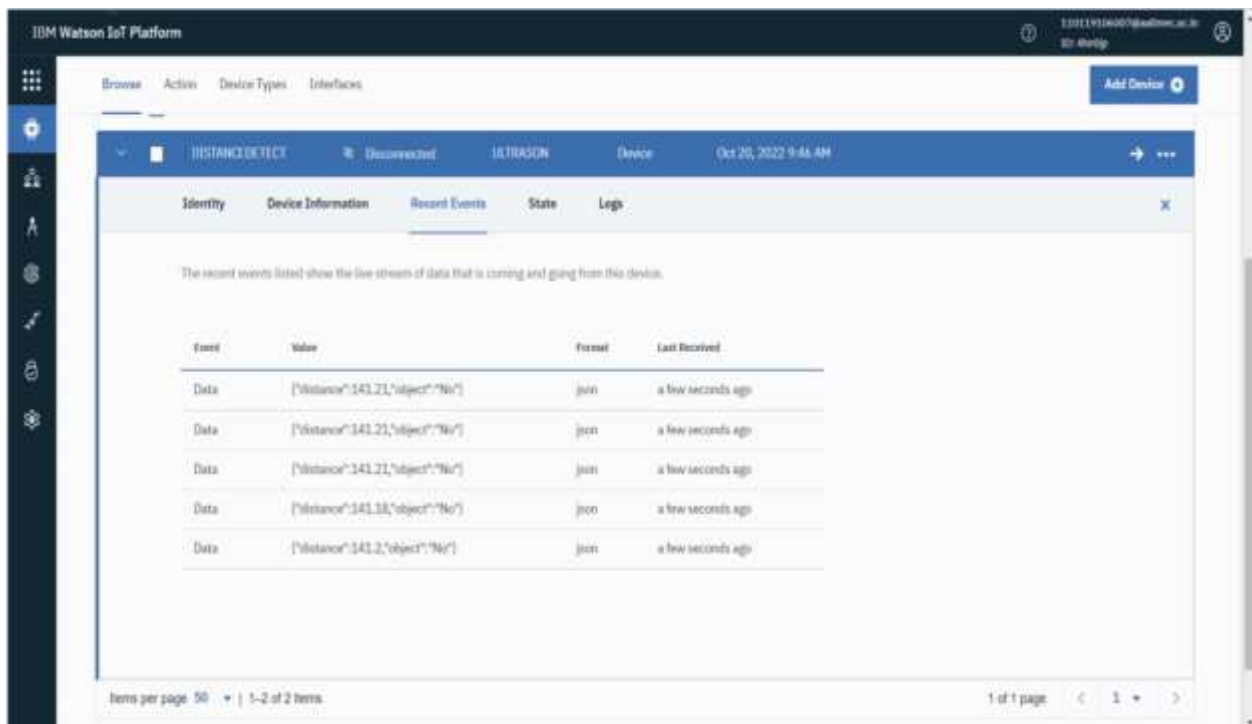


when object is near to the ultrasonic sensor

Data sent to the IBM Cloud Device when the object is near



https://wokwi.com/projects/305566932847821378