

ASSIGNMENT-4

Hazardous Area Monitoring For Industrial Plant Powered By IOT

Date	20October2022
TeamID	PNT2022TMID10955
Name	AHAMED HUSSAIN J
StudentRollNumber	811519106005
MaximumMarks	2Marks

Question1:

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100cm send "alert" to IBM Cloud and display in device recent events.

```
1  #include <WiFi.h> //library for wifi
2  #include <PubSubClient.h> //library for MQTT
3
4
5  void callback(char* subscribetopic, byte* payload, unsigned int payloadLength);
6
7  //-----credentials of IBM Accounts-----
8
9  #define ORG "4hn0jp" //IBM ORGANITION ID
10 #define DEVICE_TYPE "ULTRASON" //Device type mentioned in ibm watson IOT Platform
11 #define DEVICE_ID "DISTANCEDETECT" //Device ID mentioned in ibm watson IOT Platform
12 #define TOKEN "wuo5s7PR)ZSegVk&Rx" //Token
13 String data3;
14 float dist;
15
16
17 //----- Customise the above values -----
18 char server[] = ORG ".messaging.internetofthings.ibmcloud.com"; // Server Name
19 char publishTopic[] = "iot-2/evt/Data/fmt/json"; // topic name and type of event perform and format in which data to be send
20 char subscribetopic[] = "iot-2/cmd/test/fmt/String"; // cmd REPRESENT command type AND COMMAND IS TEST OF FORMAT STRING
21 char authMethod[] = "use-token-auth"; // authentication method
22 char token[] = TOKEN;
23 char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID; //client id
24
25
26 //-----
27 WiFiClient wifiClient; // creating the instance for wifiClient
28 PubSubClient client(server, 1883, callback ,wifiClient); //calling the predefined client id by passing parameter like server id,portand wificredential
29
30 int LED = 4;
31 int trig = 5;
32 int echo = 18;
33 void setup()
34 {
35   Serial.begin(115200);
```

CODE:

```
36  pinMode(trig,OUTPUT);
37  pinMode(echo,INPUT);
38  pinMode(LED, OUTPUT);
39  delay(10);
40  wificonnect();
41  mqttconnect();
42  }
43  void loop()// Recursive Function
44  {
45
46      digitalWrite(trig,LOW);
47      digitalWrite(trig,HIGH);
48      delayMicroseconds(10);
49      digitalWrite(trig,LOW);
50      float dur = pulseIn(echo,HIGH);
51      float dist = (dur * 0.0343)/2;
52      Serial.print ("Distancein cm");
53      Serial.println(dist);
54
55
56      PublishData(dist);
57      delay(1000);
58      if (!client.loop()) {
59          mqttconnect();
60      }
61  }
62
63
64
65  /*.....retrieving to Cloud.....*/
66
67  void PublishData(float dist) {
68      mqttconnect();//function call for connecting to ibm
69      /*
70      |   creating the String in in form JSon to update the data to ibm cloud
```

```

69 |
70 | | creating the String in in form JSon to update the data to ibm cloud
71 | */
72 String object;
73 if (dist <100)
74 {
75     digitalWrite(LED,HIGH);
76     Serial.println("object is near");
77     object = "Near";
78 }
79 else
80 {
81     digitalWrite(LED,LOW);
82     Serial.println("no object found");
83     object = "No";
84 }
85
86 String payload = "{\"distance\":";
87 payload += dist;
88 payload += "," " \"object\":";
89 payload += object;
90 payload += "\"}";
91
92
93 Serial.print("Sending payload: ");
94 Serial.println(payload);
95
96
97
98

```

```
98
99   if (client.publish(publishTopic, (char*) payload.c_str())) {
100       Serial.println("Publish ok");// if it successfully upload data on the cloud then it will print publish ok in Serial monitor or else it will print publish failed
101   } else {
102       Serial.println("Publish failed");
103   }
104
105   }
106   void mqttconnect() {
107       if (!client.connected()) {
108           Serial.print("Reconnecting client to ");
109           Serial.println(server);
110           while (!client.connect(clientId, authMethod, token)) {
111               Serial.print(".");
112               delay(500);
113           }
114
115           initManagedDevice();
116           Serial.println();
117       }
118   }
119   void wificonnect() //function definition for wificonnect
120   {
121       Serial.println();
122       Serial.print("Connecting to ");
123
124       WiFi.begin("Wokwi-GUEST", "", 6);//passing the wifi credentials to establish the connection
125       while (WiFi.status() != WL_CONNECTED) {
126           delay(500);
127           Serial.print(".");
128       }
129       Serial.println("");
130       Serial.println("WiFi connected");
131       Serial.println("IP address: ");
132       Serial.println(WiFi.localIP());
```

```
123
124   WiFi.begin("Wokwi-GUEST", "", 6); //passing the wifi credentials to establish the connection
125   while (WiFi.status() != WL_CONNECTED) {
126       delay(500);
127       Serial.print(".");
128   }
129   Serial.println("");
130   Serial.println("WiFi connected");
131   Serial.println("IP address: ");
132   Serial.println(WiFi.localIP());
133 }
134
135 void initManagedDevice() {
136     if (client.subscribe(subscribetopic)) {
137         Serial.println((subscribetopic));
138         Serial.println("subscribe to cmd OK");
139     } else {
140         Serial.println("subscribe to cmd FAILED");
141     }
142 }
143
144 void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
145 {
146
147     Serial.print("callback invoked for topic: ");
148     Serial.println(subscribetopic);
149     for (int i = 0; i < payloadLength; i++) {
150         //Serial.print((char)payload[i]);
151         data3 += (char)payload[i];
152     }
153
154     // Serial.println("data: "+ data3);
155     // if(data3=="Near")
156     // {
157     // Serial.println(data3);
158     // if(data3=="Near") {
```

```
esp32-blink.ino • diagram.json • libraries.txt • Library Manager ▼
142 }
143
144 void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
145 {
146
147     Serial.print("callback invoked for topic: ");
148     Serial.println(subscribetopic);
149     for (int i = 0; i < payloadLength; i++) {
150         //Serial.print((char)payload[i]);
151         data3 += (char)payload[i];
152     }
153
154     // Serial.println("data: "+ data3);
155     // if(data3=="Near")
156     // {
157     // Serial.println(data3);
158     // digitalWrite(LED,HIGH);
159
160     // }
161
162     // else
163     // {
164     // Serial.println(data3);
165     // digitalWrite(LED,LOW);
166
167     // }
168     data3="";
169
170
171 }
```

OUTPUT:

esp32-blink.ino

diagram.json

libraries.txt

Library Manager

```

1 #include <WiFi.h>//library for wifi
2 #include <PubSubClient.h>//library for MQTT
3
4
5 void callback(char* subscribetopic, byte* payload, unsigned int payloadLength);
6
7 //-----credentials of IBM Accounts-----
8
9 #define ORG "4hn0jp"//IBM ORGANITION ID
10 #define DEVICE_TYPE "ULTRASON"//Device type mentioned in ibm watson IOT Platform
11 #define DEVICE_ID "DISTANCEDETECT"//Device ID mentioned in ibm watson IOT Platform
12 #define TOKEN "wuo5s7PR)ZSegV&Rx"//Token
13 String data3;
14 float dist;
15
16
17 //----- Customise the above values -----
18 char server[] = ORG ".messaging.internetofthings.ibmcloud.com";// Server Name
19 char publishTopic[] = "iot-2/evt/Data/fmt/json";// topic name and type of event perform and form
20 char subscribetopic[] = "iot-2/cmd/test/fmt/String";// cmd REPRESENT command type AND COMMAND ID
21 char authMethod[] = "use-token-auth";// authentication method
22 char token[] = TOKEN;
23 char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;//client id
24
25
26 //-----
27 WiFiClient wificlient; // creating the instance for wificlient
28 PubSubClient client(server, 1883, callback, wificlient); //calling the predefined client id by
29
30 int LED = 4;
31 int trig = 5;
32 int echo = 18;
33 void setup()
34 {
35   Serial.begin(115200);

```

Simulation

00:18.152

▶

■

⏸

```

no object found
Sending payload: {"distance":141.21,"object":"No"}
Publish ok
Distancein cm141.21
no object found
Sending payload: {"distance":141.21,"object":"No"}
Publish ok

```

DatasenttotheIBMclouddevicewhentheobjectisfar

IBM Watson IoT Platform

110119106007@aalimec.ac.in

ID: 4hn0jp

⚙

🔧

👤

🚶

📶

📡

📊

🔍

⚙

Browse

Action

Device Types

Interfaces

Add Device

▼

■

DISTANCEDETECT

Disconnected

ULTRASON

Device

Oct 20, 2022 9:46 AM

→ ...

Identity

Device Information

Recent Events

State

Logs

×

The recent events listed show the live stream of data that is coming and going from this device.

Event	Value	Format	Last Received
Data	{"distance":141.21,"object":"No"}	json	a few seconds ago
Data	{"distance":141.21,"object":"No"}	json	a few seconds ago
Data	{"distance":141.21,"object":"No"}	json	a few seconds ago
Data	{"distance":141.18,"object":"No"}	json	a few seconds ago
Data	{"distance":141.2,"object":"No"}	json	a few seconds ago

Items per page 50

1-2 of 2 items

1 of 1 page

<

1

>

when object is near to the ultrasonic sensor


wokwi.com/projects/305566932847821378

esp32-arduino.ino
by urish

Simulation

00:12.028

Start the simulation

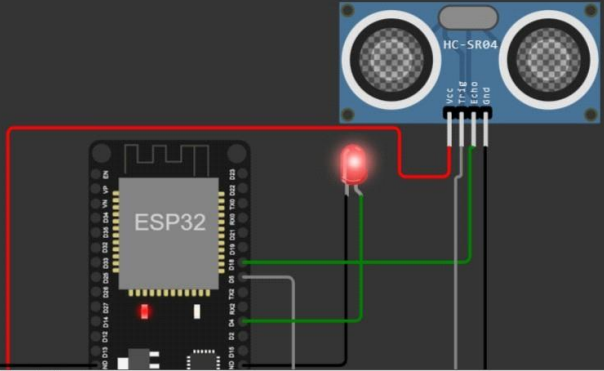

object is near
Sending payload: {"distance":97.82,"object":"Near"}
Publish ok
Distance in cm 97.82
object is near
Sending payload: {"distance":97.82,"object":"Near"}
Publish ok

Data sent to the IBM Cloud Device when the object is near

4hn0jp.internetofthings.ibmcloud.com/dashboard/devices/browse

IBM Watson IoT Platform

110119106007@aallmec.ac
ID: 4hn0jp

Browse

Action

Device Types

Interfaces

Add Device

DISTANCEDETECT

Disconnected

ULTRASON

Device

Oct 20, 2022 9:46 AM

Identity

Device Information

Recent Events

State

Logs

The recent events listed show the live stream of data that is coming and going from this device.

Event	Value	Format	Last Received
Data	{"distance":79.66,"object":"Near"}	json	a few seconds ago
Data	{"distance":79.64,"object":"Near"}	json	a few seconds ago
Data	{"distance":79.66,"object":"Near"}	json	a few seconds ago
Data	{"distance":79.64,"object":"Near"}	json	a few seconds ago
Data	{"distance":79.66,"object":"Near"}	json	a few seconds ago

Items per page 50 | 1-2 of 2 items

1 of 1 page

1