


Material Comparison: Adiabatic Temperature Change vs. Data-Center Range

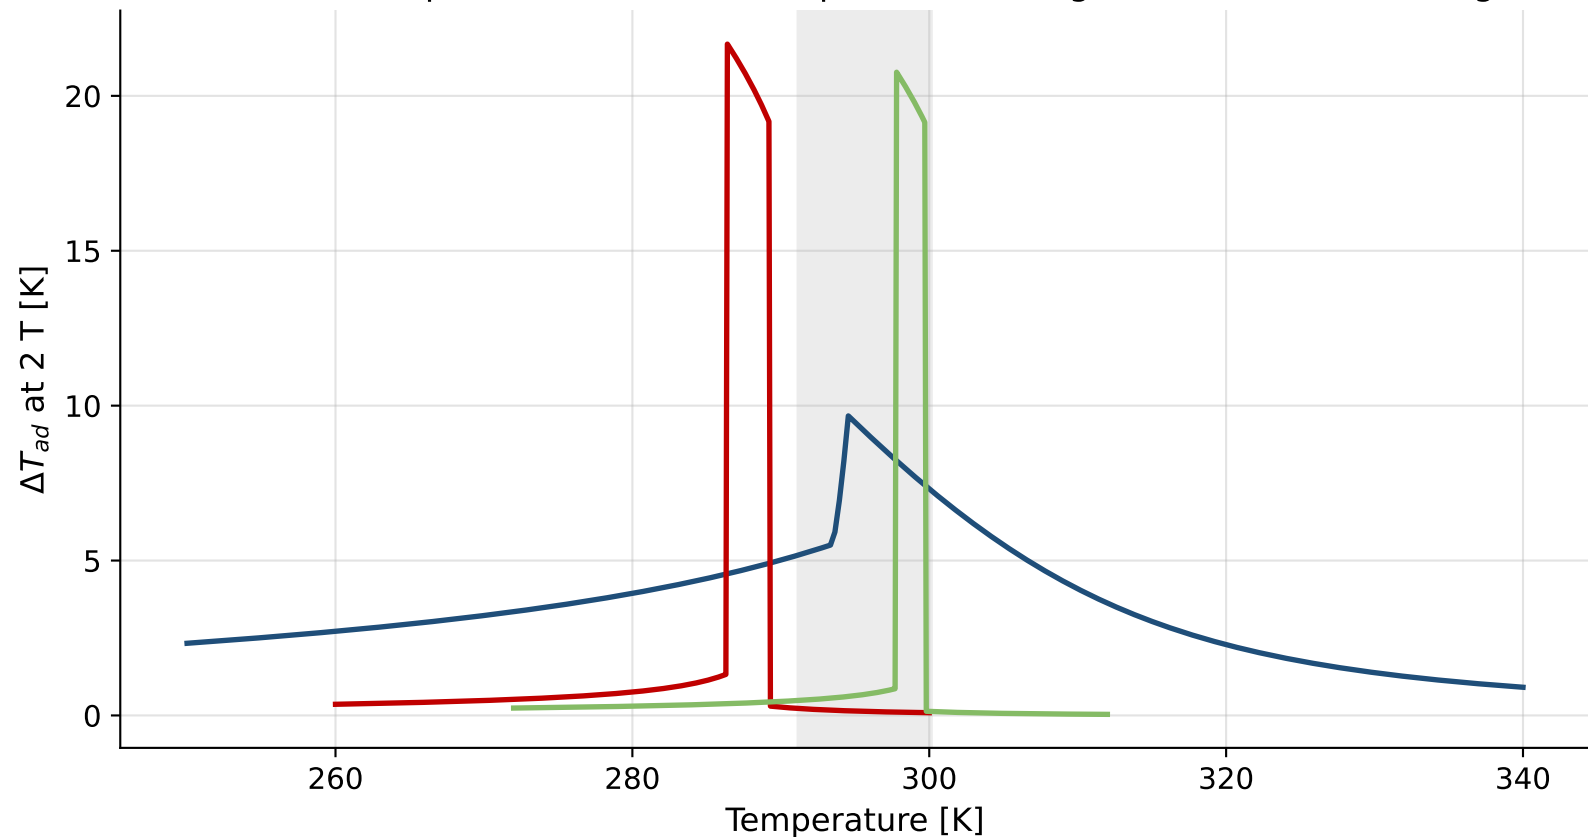

— Gd ($T_c=294\text{K}$)

— Gd₅Si₂Ge₂ ($T_c=276\text{K}$, first-order, uncorrected)

— La(Fe,Si)₁₃Hy ($T_c=287\text{K}$, first-order)

ASHRAE 18-27°C supply range