

Assignment - 4

Assignment Date	07-11-2022
Student Name	PRAVEEN KUMAR M
Student Roll Number	921319104152
Maximum Marks	2 Marks

Question-1:

WRITE A CODE AND CONNECTION IN WOKWI FOR THE ULTRASONIC SENSOR, WHENEVER THE DISTANCE IS LESS THAN 100CMs SEND AN ALERT TO THE IBM CLOUD AND DISPLAY THE RECENT EVENTS.

Solution:

WOKWI PROJECT ID/LINK : <https://wokwi.com/projects/346271658124771923>

1. Code:

```
#include <WiFi.h>
#include <PubSubClient.h>
void callback(char* subscribetopic, byte* payload, unsigned int payloadLength);
#define ORG "6jw3v9"
#define DEVICE_TYPE "ESP32"
#define DEVICE_ID "100100C40A24"
#define TOKEN "#####"
String data3;
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/Data/fmt/json";
char subscribetopic[] = "iot-2/cmd/test/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
WiFiClient wifiClient;
PubSubClient client(server, 1883, callback ,wifiClient);
const int trigPin = 5;
const int echoPin = 18;
#define SOUND_SPEED 0.034
long duration;
float distance;
void setup() {
  Serial.begin(115200);
  pinMode(trigPin, OUTPUT);
```

```

pinMode(echoPin, INPUT);
wificonnect();
mqttconnect();
}
void loop()
{
digitalWrite(trigPin, LOW);
delayMicroseconds(2);
digitalWrite(trigPin, HIGH);
delayMicroseconds(10);
digitalWrite(trigPin, LOW);
duration = pulseIn(echoPin, HIGH);
distance = duration * SOUND_SPEED/2;
Serial.print("Distance in cm: ");
Serial.println(distance);
if(distance<100)
{
Serial.println("ALERT!!");
delay(1000);
PublishData(distance);
delay(1000);
if (!client.loop()) {
mqttconnect();
}
}
delay(1000);
}
void PublishData(float dist) {
mqttconnect();
String payload = "{"distance\":";
payload += dist;
payload += ",\alert...\":"Distance less than 100 cms\"";
payload += "}";
Serial.print("Sending payload: ");
Serial.println(payload);
if (client.publish(publishTopic, (char*) payload.c_str())) {
Serial.println("Publish ok");
} else {
Serial.println("Publish failed");
}
}
void mqttconnect() {
if (!client.connected()) {
Serial.print("Reconnecting client to ");


```

```

Serial.println(server);
while (!client.connect(clientId, authMethod, token)) {
  Serial.print(".");
  delay(500);
}
initManagedDevice();
Serial.println();
}
}
void wificonnect()
{
  Serial.println();
  Serial.print("Connecting to ");
  WiFi.begin("Wokwi-GUEST", "", 6);
  while (WiFi.status() != WL_CONNECTED) {
    delay(500);
    Serial.print(".");
  }
  Serial.println("");
  Serial.println("WiFi connected");
  Serial.println("IP address: ");
  Serial.println(WiFi.localIP());
}
void initManagedDevice() {
  if (client.subscribe(subscribetopic)) {
    Serial.println((subscribetopic));
    Serial.println("subscribe to cmd OK");
  } else {
    Serial.println("subscribe to cmd FAILED");
  }
}
void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{
  Serial.print("callback invoked for topic: ");
  Serial.println(subscribetopic);
  for (int i = 0; i < payloadLength; i++)
  {
    data3 += (char)payload[i];
  }
  Serial.println("data: "+ data3);
  data3="";
}

```

2. Wokwi implementation:

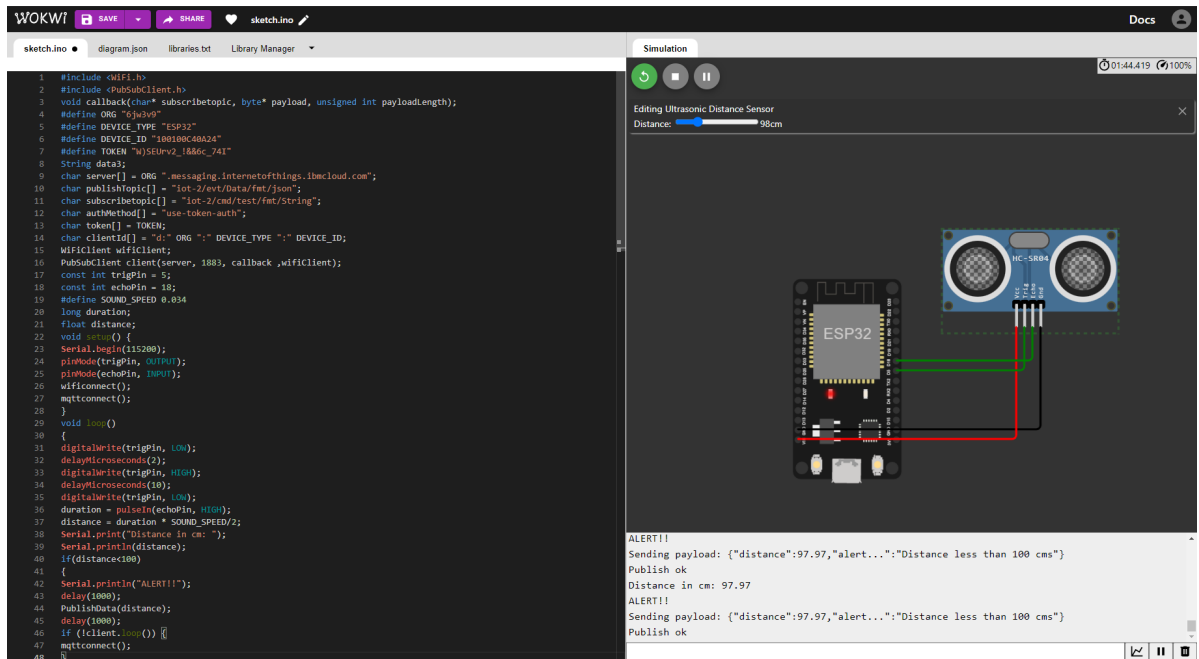

3. IBM Cloud:

