IFTW WCS issue report flow

IFTW PSS SMD GC TM SPB WCS
Traven

restricted

Microsoft Dynamic365

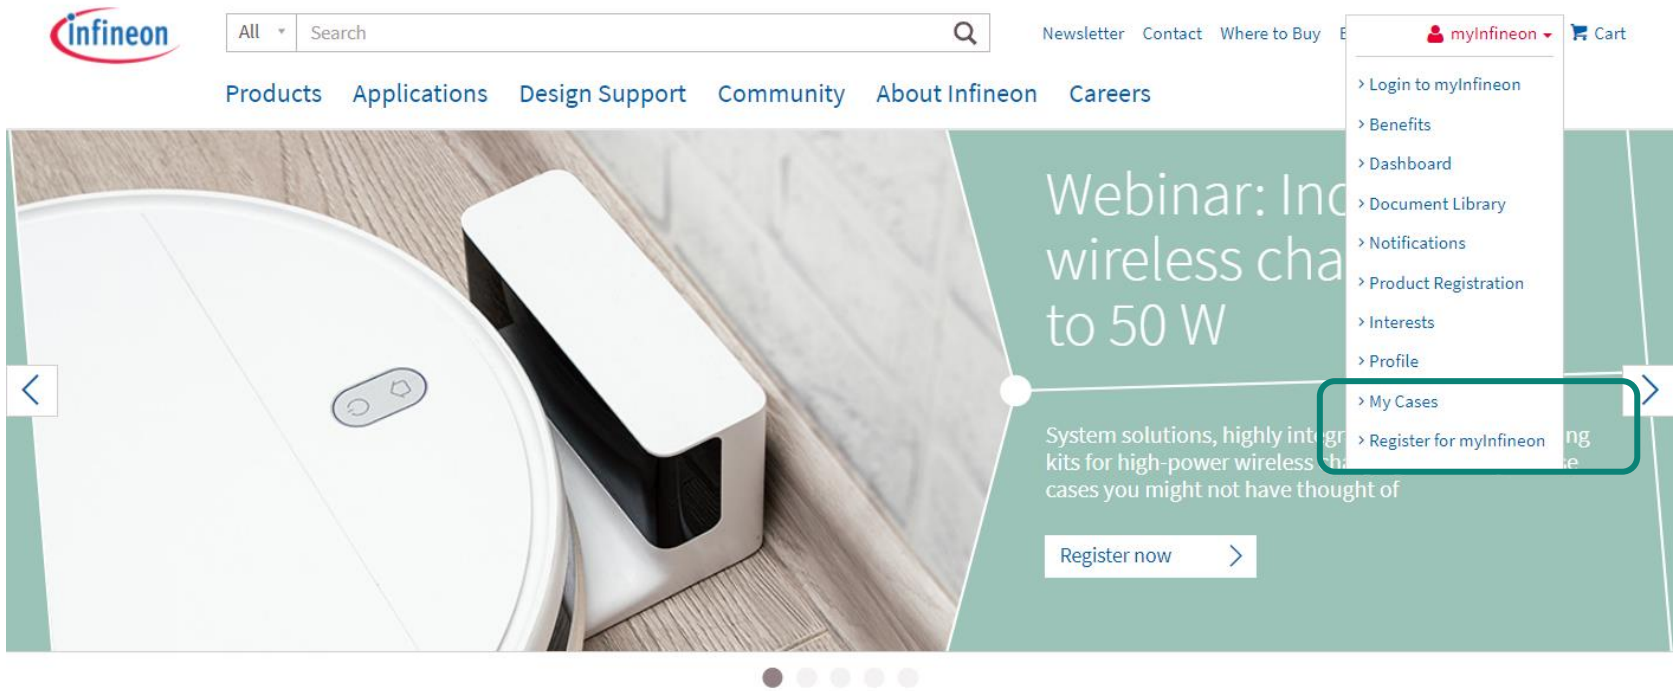

Products	Power	Power Overview
Applications	ASIC	MOSFET (Si/SiC)
Design Support	Battery Management ICs	IGBT
Focus areas	Clocks & Timing Solutions	HEMT (GaN)
Support	ESD and Surge Protection	Diodes & Thyristors (Si/SiC)
Technology	High Reliability	Smart Power Switches
Partners	Memories	Linear Voltage Regulator
	Microcontroller	DC-DC Converters

Copyright © Infineon Technologies AG 2023. All rights reserved.

Case creation – Subject

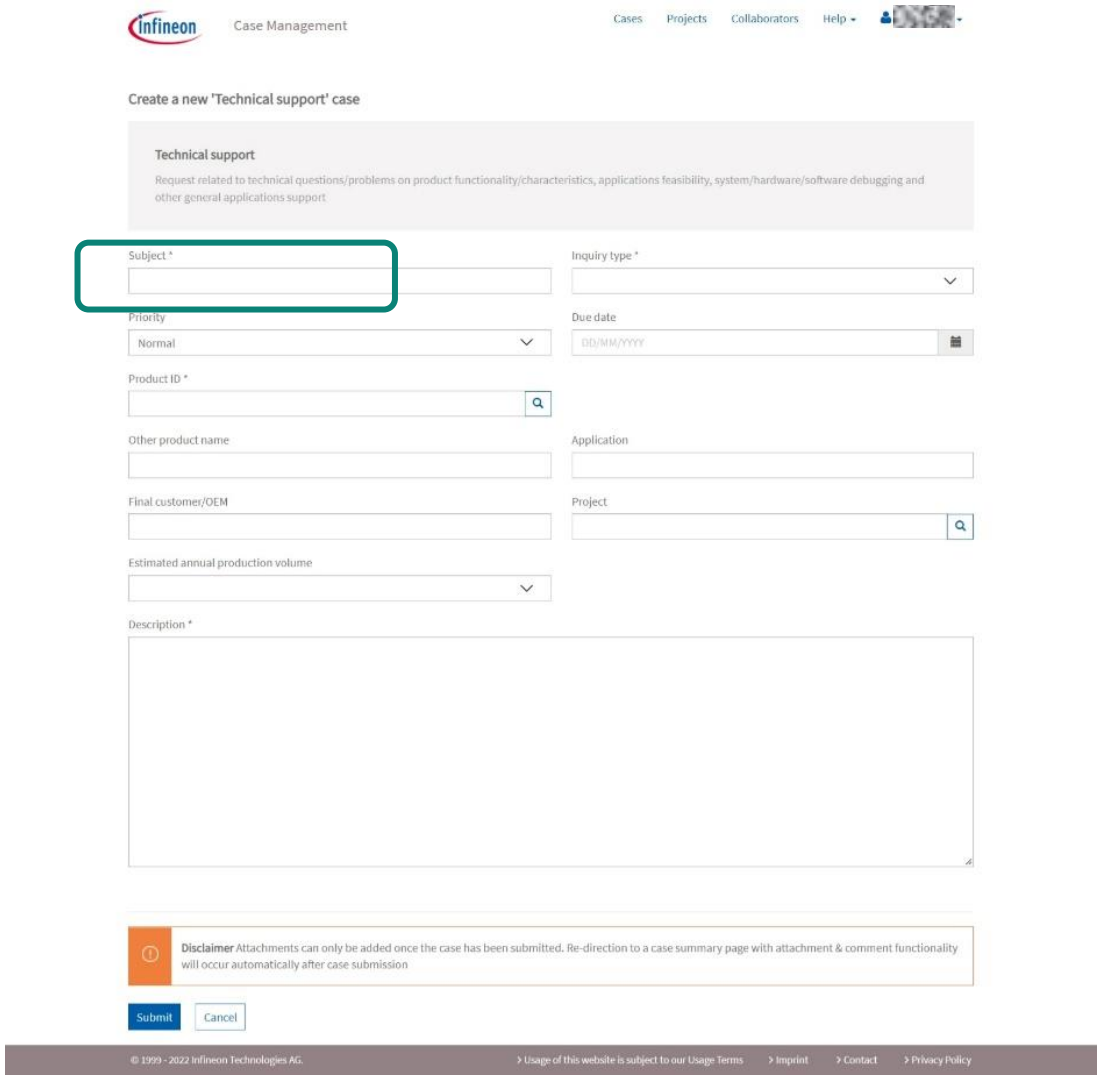

- **[-*oem*-][-*odm*-][-*project*-][-*ticket#*-] *short description***
  - 100 words as maximum

e.g.

- [HP][IEC][Hook2][OBS1234567] power button event lost
- [HP][TPV][Deora] PV1 power consumption too high

Copyright © Infineon Technologies AG 2023. All rights reserved.

Case creation – Description

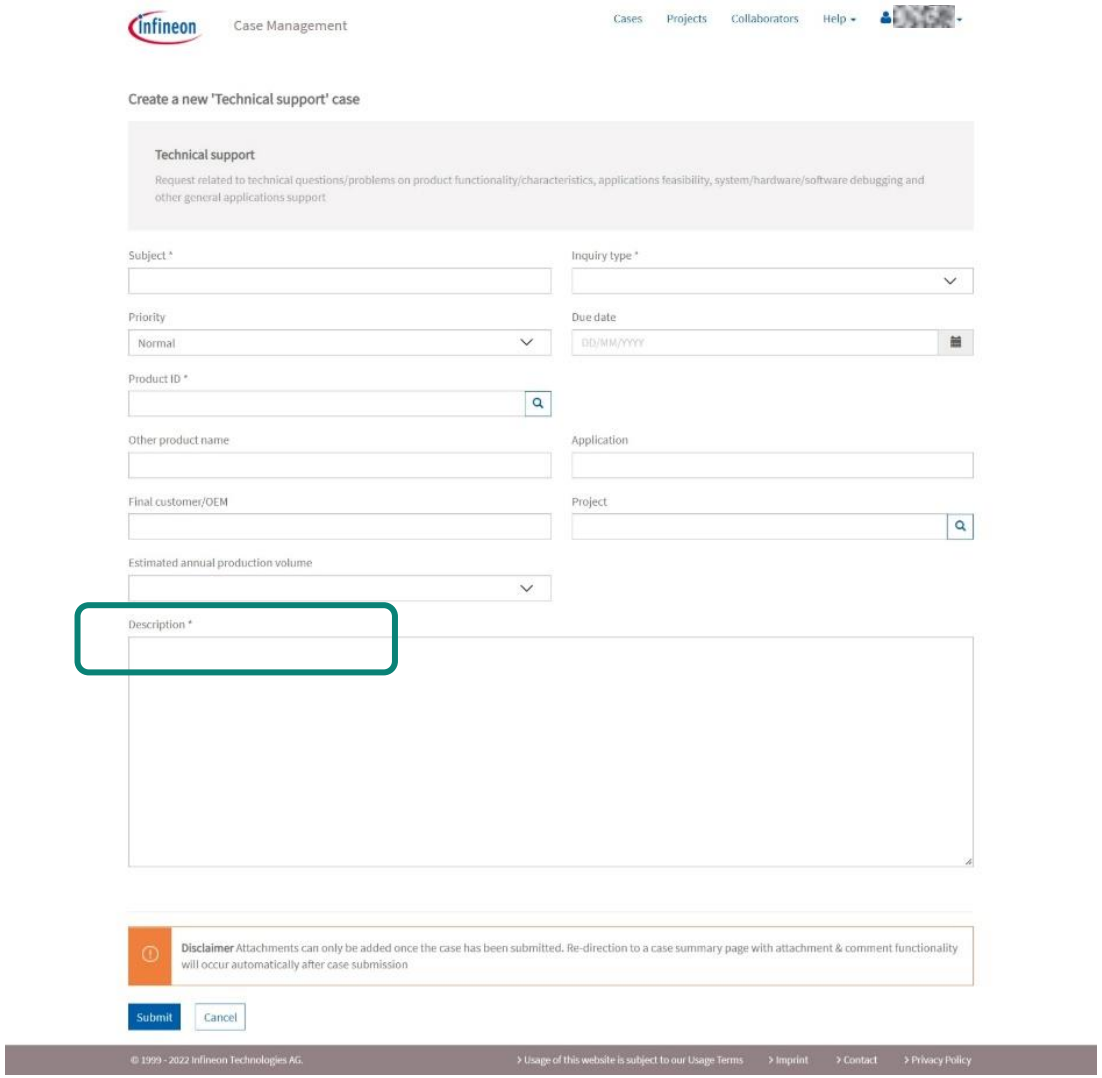

- **Include these information and designate to Infineon FAE (email)**
  - Firmware / hardware version
  - Expected behaviour
  - Failure symptom
  - Failure rate
  - Reproduce steps
  - Function recovery method
  - Other necessary information

Description * Please route this case to Traven.Shih@infineon.com.

Hi Traven,
Here is request from HP Vincent and need AE team's support.

Copyright © Infineon Technologies AG 2023. All rights reserved.

Case creation – Collaboration

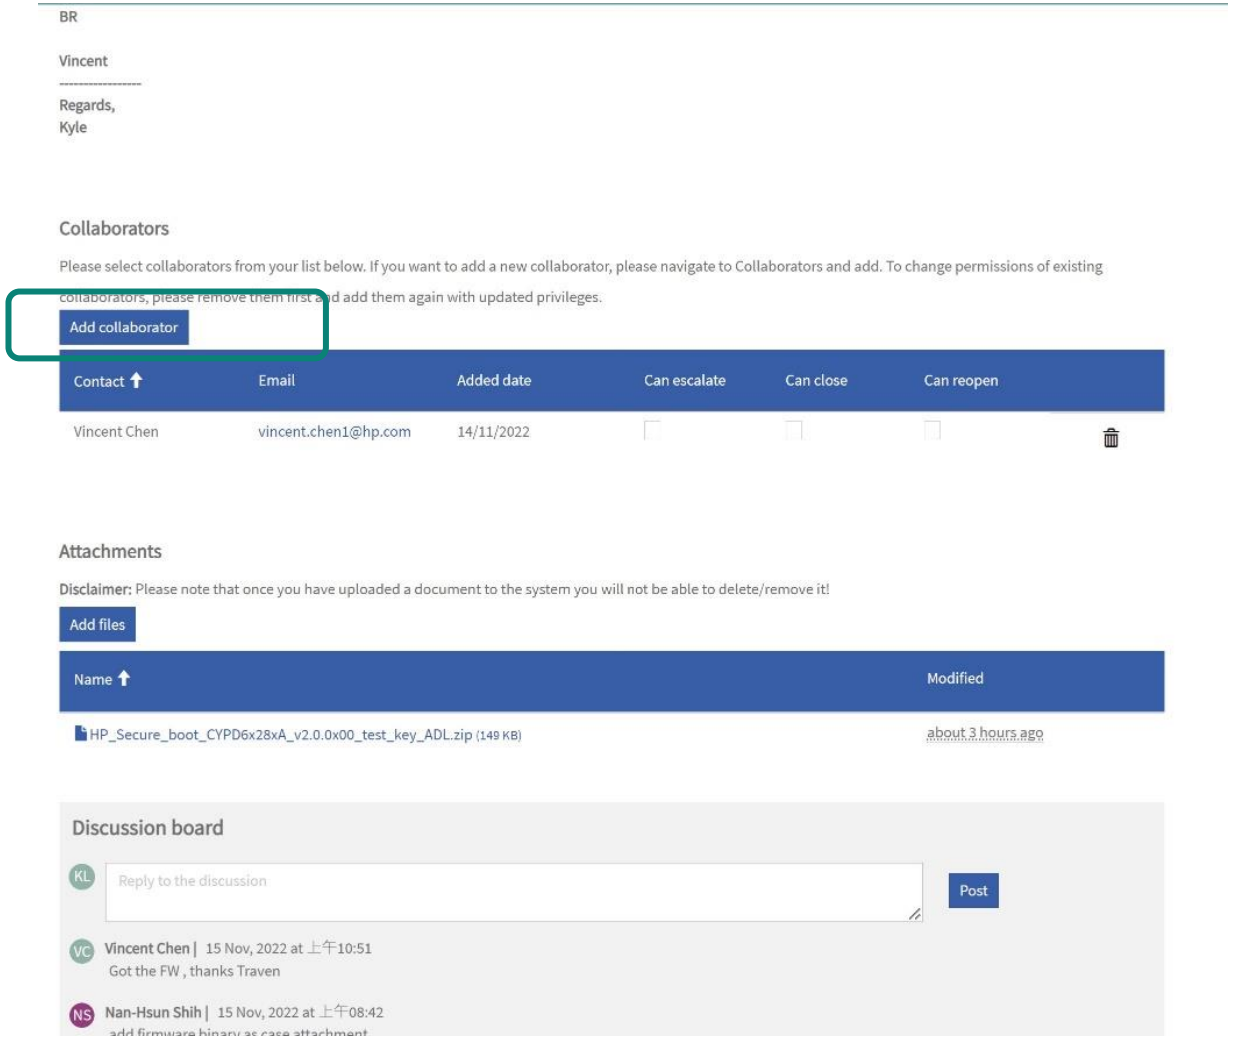

– Customers can add collaborator themselves in the Portal for their colleagues or other non-Infineon people. If they need to add Infineon colleagues, they need to request via discussion board.

Copyright © Infineon Technologies AG 2023. All rights reserved.

Case creation – Discussion board

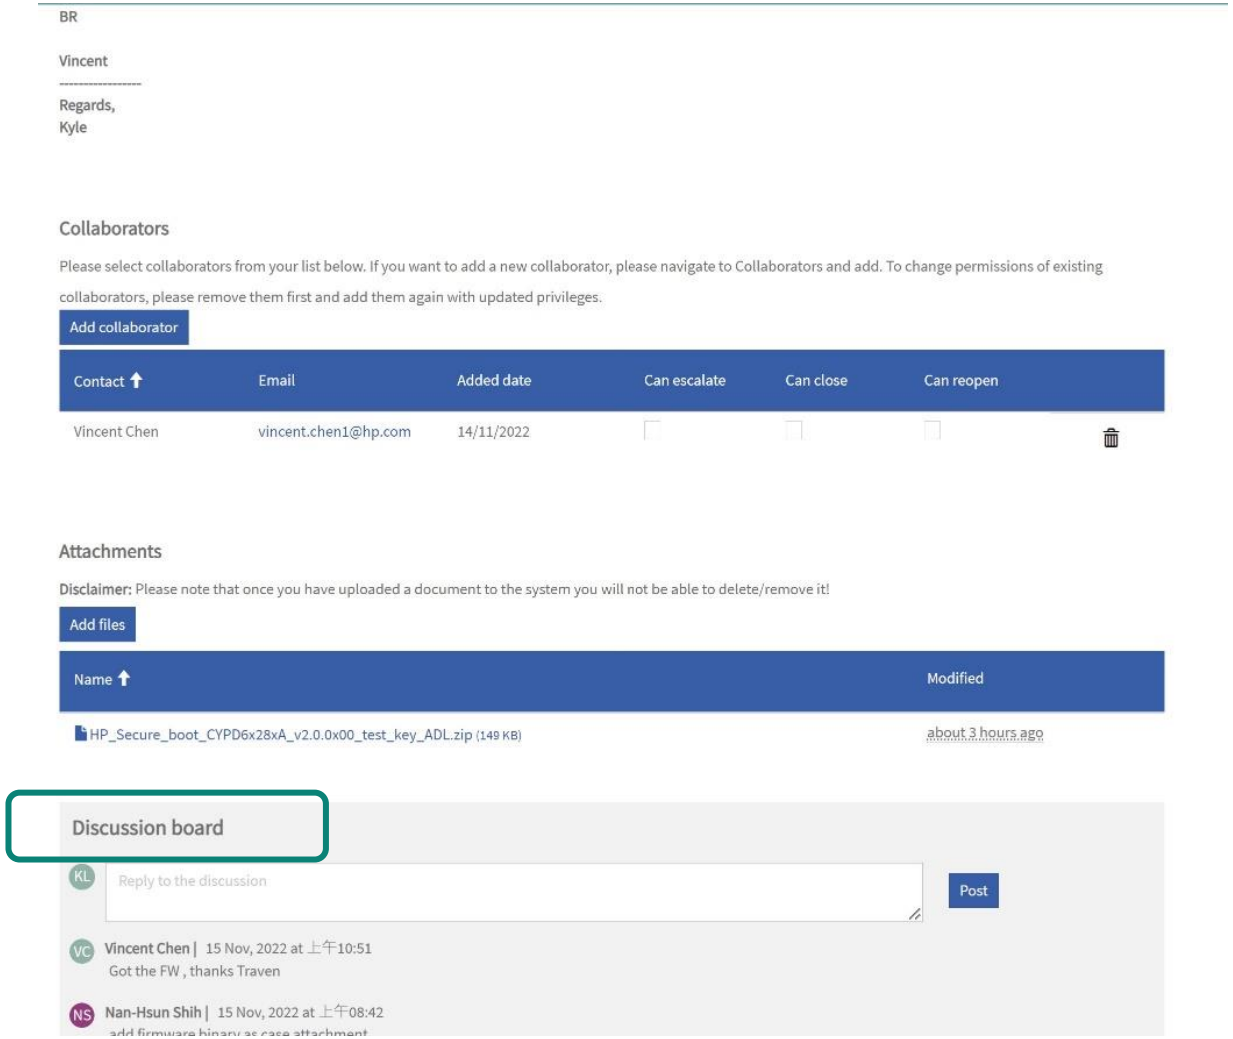

– The interaction section where there is exchange of information/comments between CRM users (Case owners, Collaborators) and portal users (Case creators). It provides options to add internal and external comments on the case.

Copyright © Infineon Technologies AG 2023. All rights reserved.

Case creation – Attachment

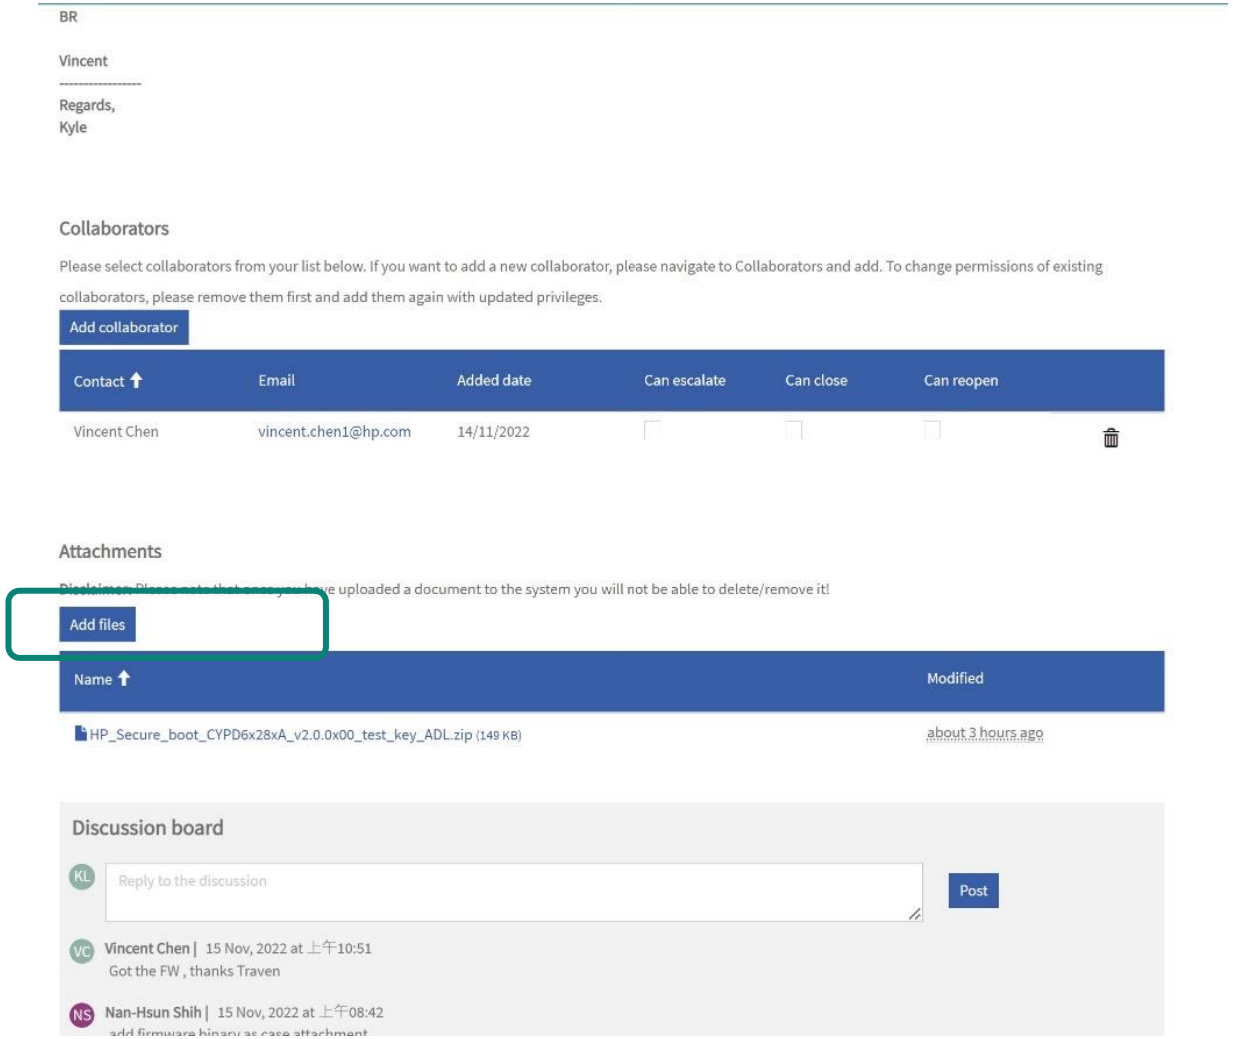

- **Basic**
  - Issue Tracker Form (Mandatory)
  - CC logs in CYPD4500 PD3.0 / PD2.0
  - SALEAE logs
  - Ellisys C-Tracker logs
  - Others (test reports, screenshots or anything helpful to issues)
- **Recommended**
  - CC with SALEAE Pro at 1.2V digital (IFTW Logger)

Copyright © Infineon Technologies AG 2023. All rights reserved.

IFTW WCS Logger – helper for log collection

SOP for log collecting – The WCS PD Host E2 training

	INTEL Platform	AMD Platform	EVK Board	Checking Points
HW Signal	PCH_INT0# PCH_INT1# (Maple Ridge only) PCH_SDA PCH_SCL BBR_PWR BBR_RST SBU1/2	APU_RST# APU_INT APU_SDA APU_SCL Retimer_SDA Retimer_SCL HPD SBU1/2	MUX_SDA MUX_SCL HPD SBU1/2	Is the I/O behavior normal !? Is the SBU signal normal !?
CC Log	CC Log	CC Log	CC Log	Is enter DP Alt mode? Is device issue the Attention HPD High message to Host?
I2C Log	PCH I2C Log Retimer I2C Log	APU I2C Log Retimer I2C Log	MUX I2C Log	Compare the PASS log and Fail log to dig out is anything abnormal.

Copyright © Infineon Technologies AG 2023. All rights reserved.

Issue report flow SOP

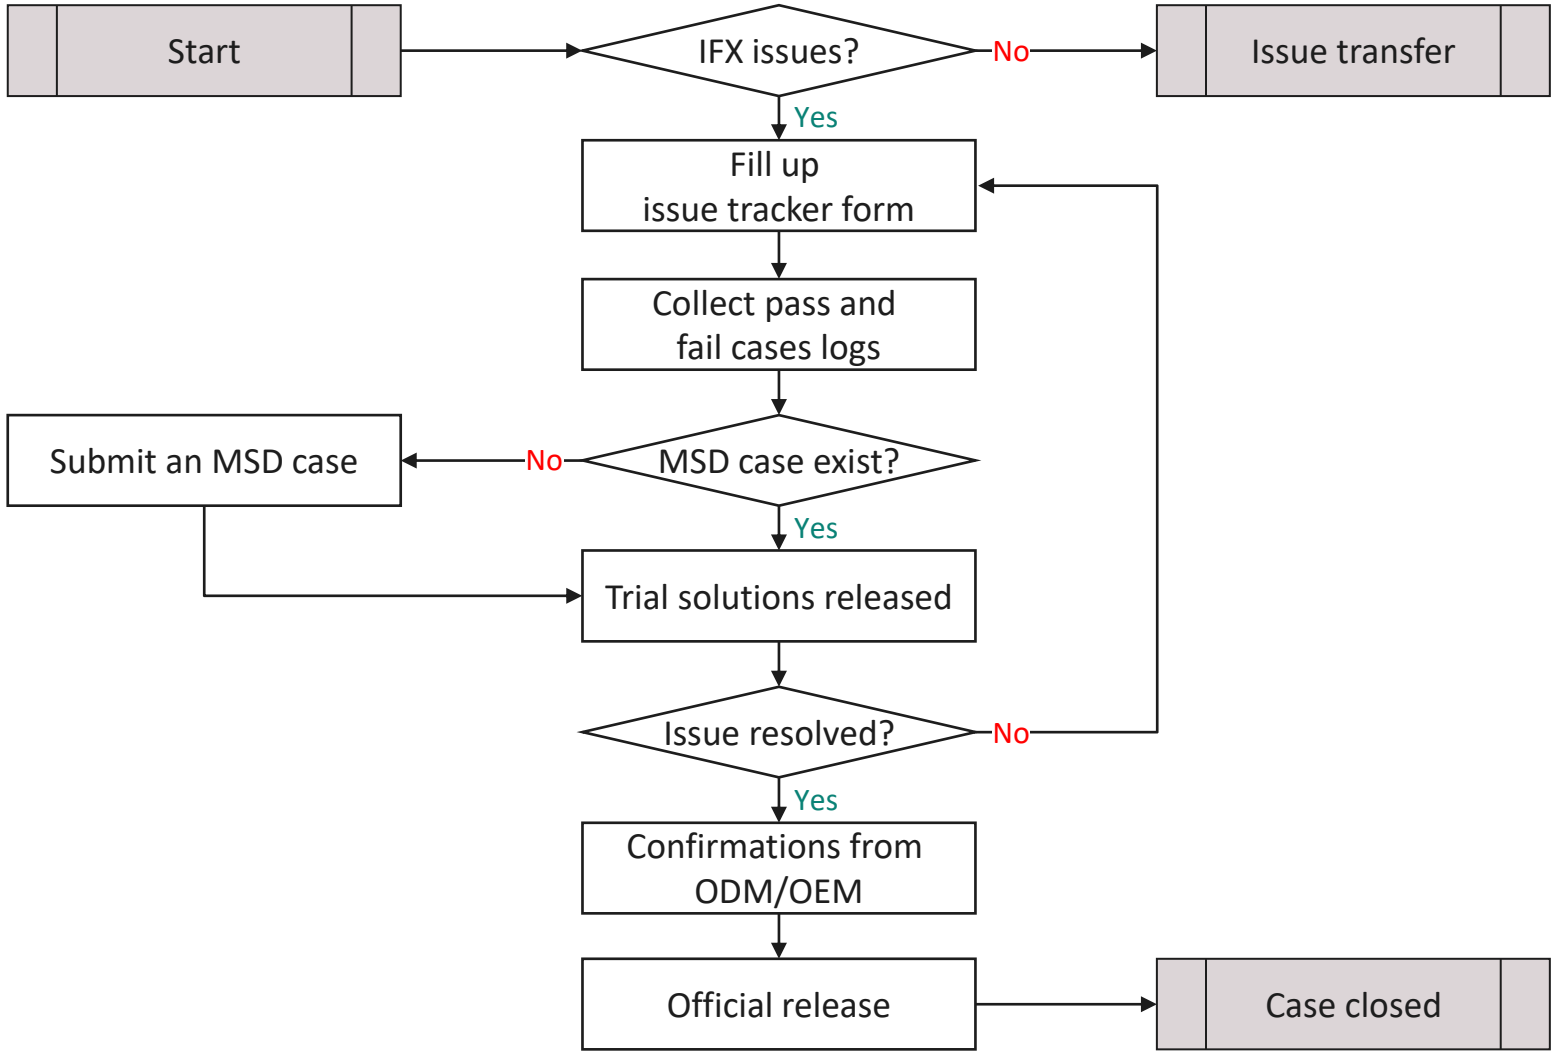

Copyright © Infineon Technologies AG 2023. All rights reserved.

Issue report flow SOP – Infineon Issue Tracker Form

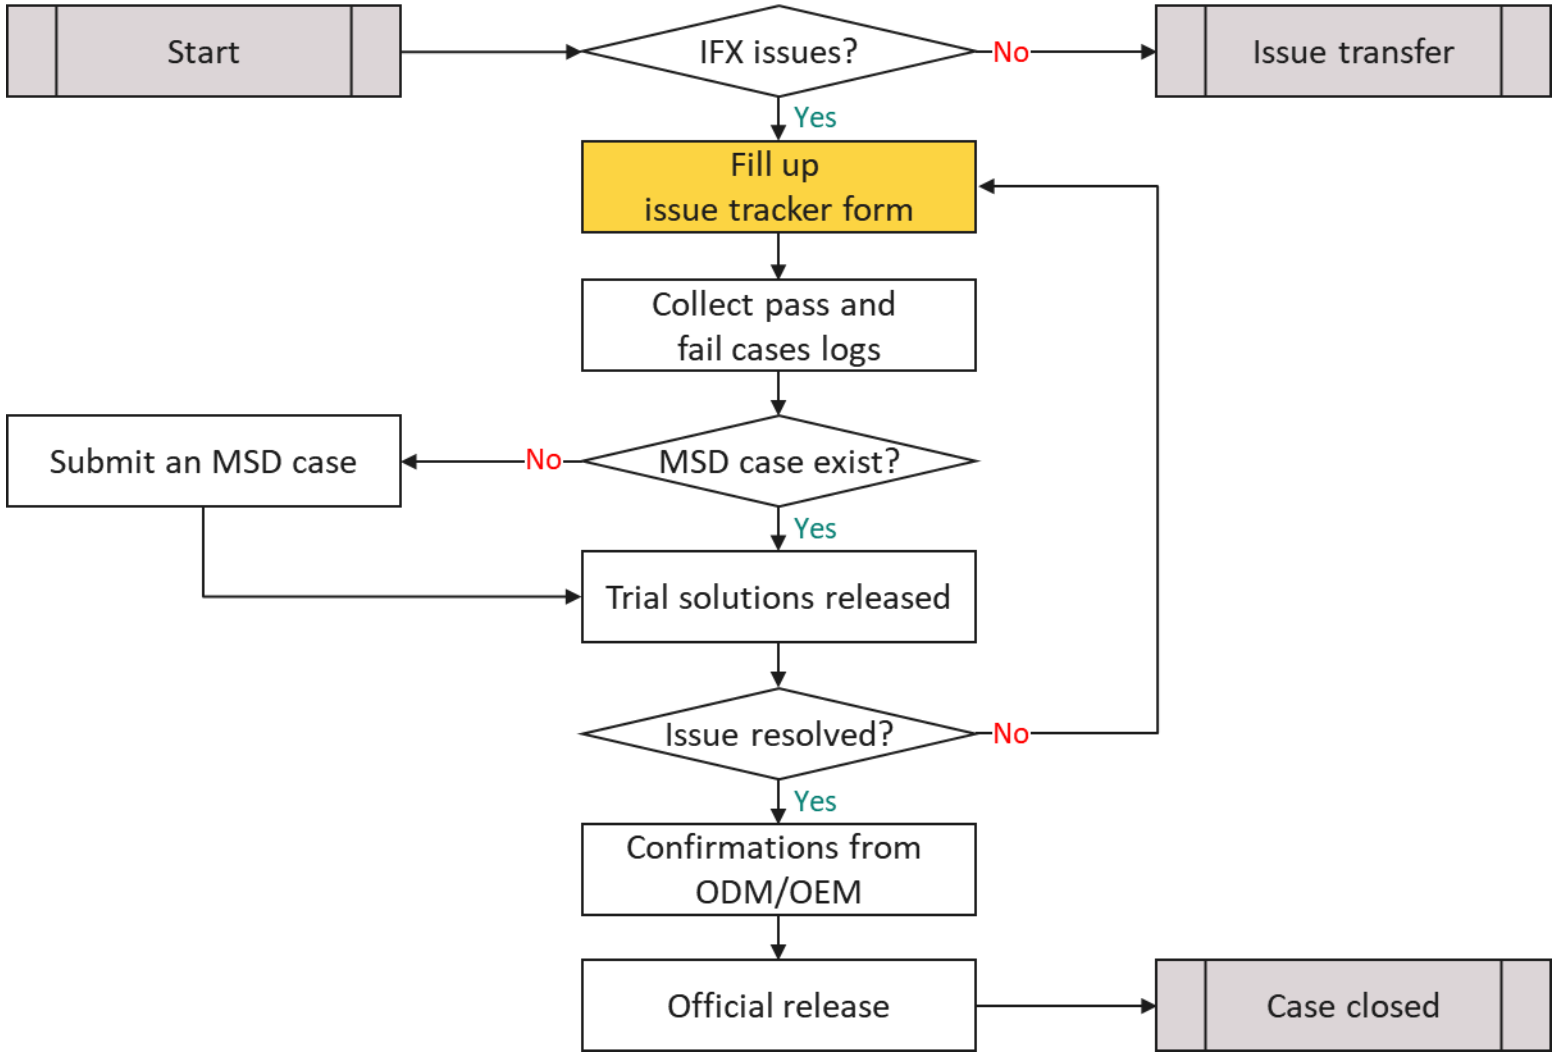

- Specialised for WCS PC host applications
- Issue information

	A
1	Project Name
2	EC/BIOS version
3	F/W version
4	OEM Ticket#
	Which port?

Copyright © Infineon Technologies AG 2023. All rights reserved.

Issue report flow SOP – Infineon WCS Logger

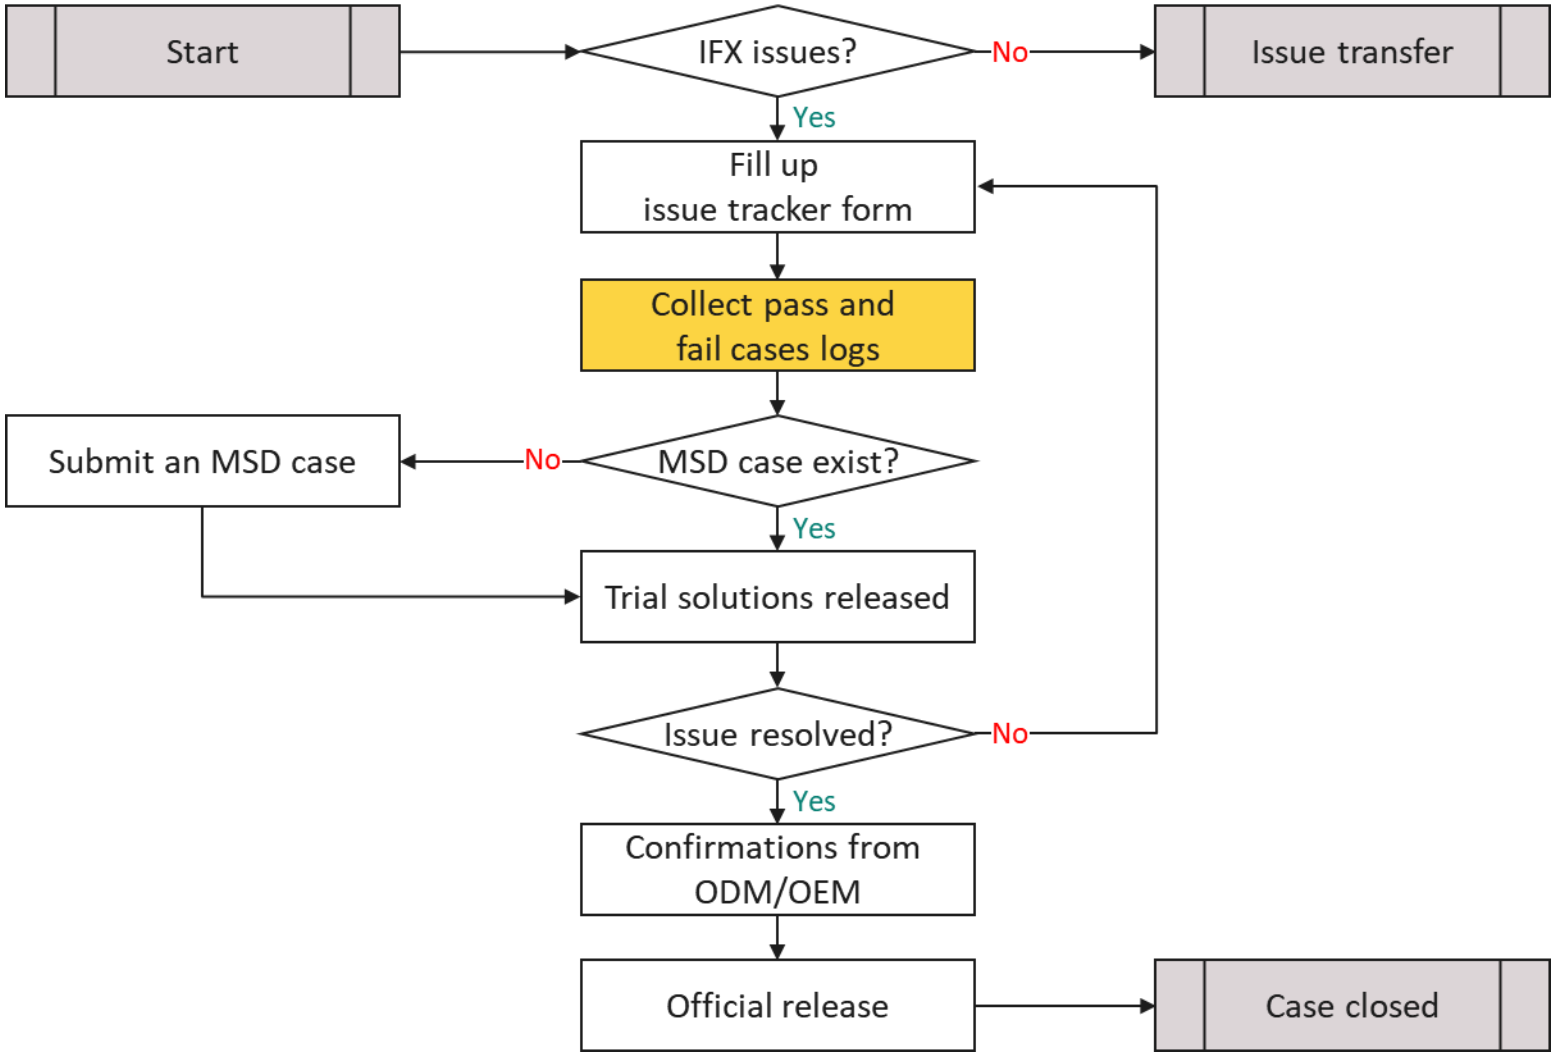

- WCS Logger
  - Tracker Form
  - CYPD4500 PD3.0
  - SALEAE logs
  - Ellisys C-Tracker logs

Copyright © Infineon Technologies AG 2023. All rights reserved.

Infineon WCS Logger

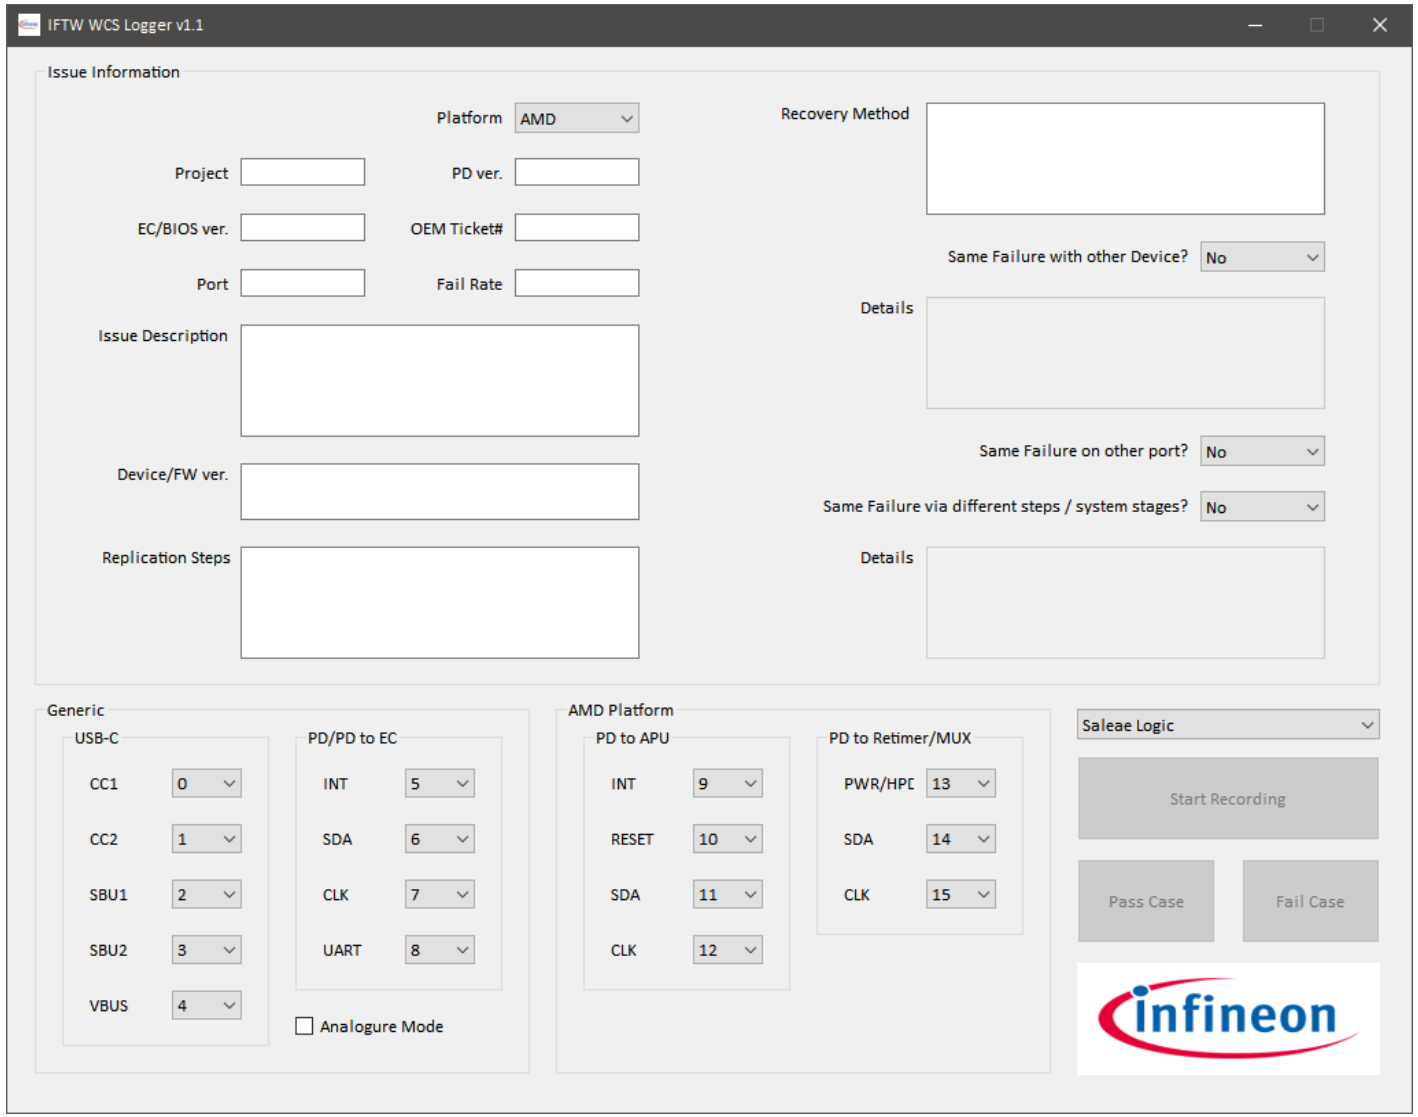

- Issue Information
- Generic
  - USB-C
  - PD/PD to EC
  - Analogue Mode
- AMD/INTEL Platform
  - PD to APU/Ridge
  - PD to MUX/Retimer
- Saleae Logic/Ellisys C-Tracker
- Start Recording
- Pass Case
- Fail Case

Copyright © Infineon Technologies AG 2023. All rights reserved.

Infineon WCS Logger – Prerequisites

Toolkit:

- A CY4500.
- A SALEAE 16ch Pro Logic Analyser.
- An Ellisys C-Tracker (optional).

Software:

- EZ-PD Protocol Analyzer Utility v3.1.x.
- SALEAE Logic2 v2.4.0+.
  - “Saleae_PDCC_Release” CC analyser plugin.
  - “I2C_HPI” I^2C analyser plugin.
- Ellisys Type-C Tracker Analyzer.

- Download: https://drive.google.com/drive/folders/1AqxentVzGbndPK5DALp_iF4E_E6OO_a0?usp=sharing

My Drive › wcs_logger

Name	Owner	Last modified	File size
RemoteControl	me	Jul 31, 2023 me	—
AnalyzerRemoteControl.ice	me	Apr 9, 2023 me	7 KB
HPI_regs.xml	me	Jun 26, 2023 me	76 KB
i2c_analyzer_for_HPI.dll	me	Jun 26, 2023 me	74 KB
manchester_analyzer_dist.dll	me	Apr 20, 2023 me	92 KB
saleae_pd_analyser_release.dll	me	Aug 4, 2023 me	89 KB
tracker_form.xlsx	me	Jul 20, 2023 me	13 KB
wcs_logger_console.exe	me	Aug 7, 2023 me	51.1 MB
wcs_logger.exe	me	Aug 7, 2023 me	51.1 MB

Copyright © Infineon Technologies AG 2023. All rights reserved.

Infineon WCS Logger – Function Flow

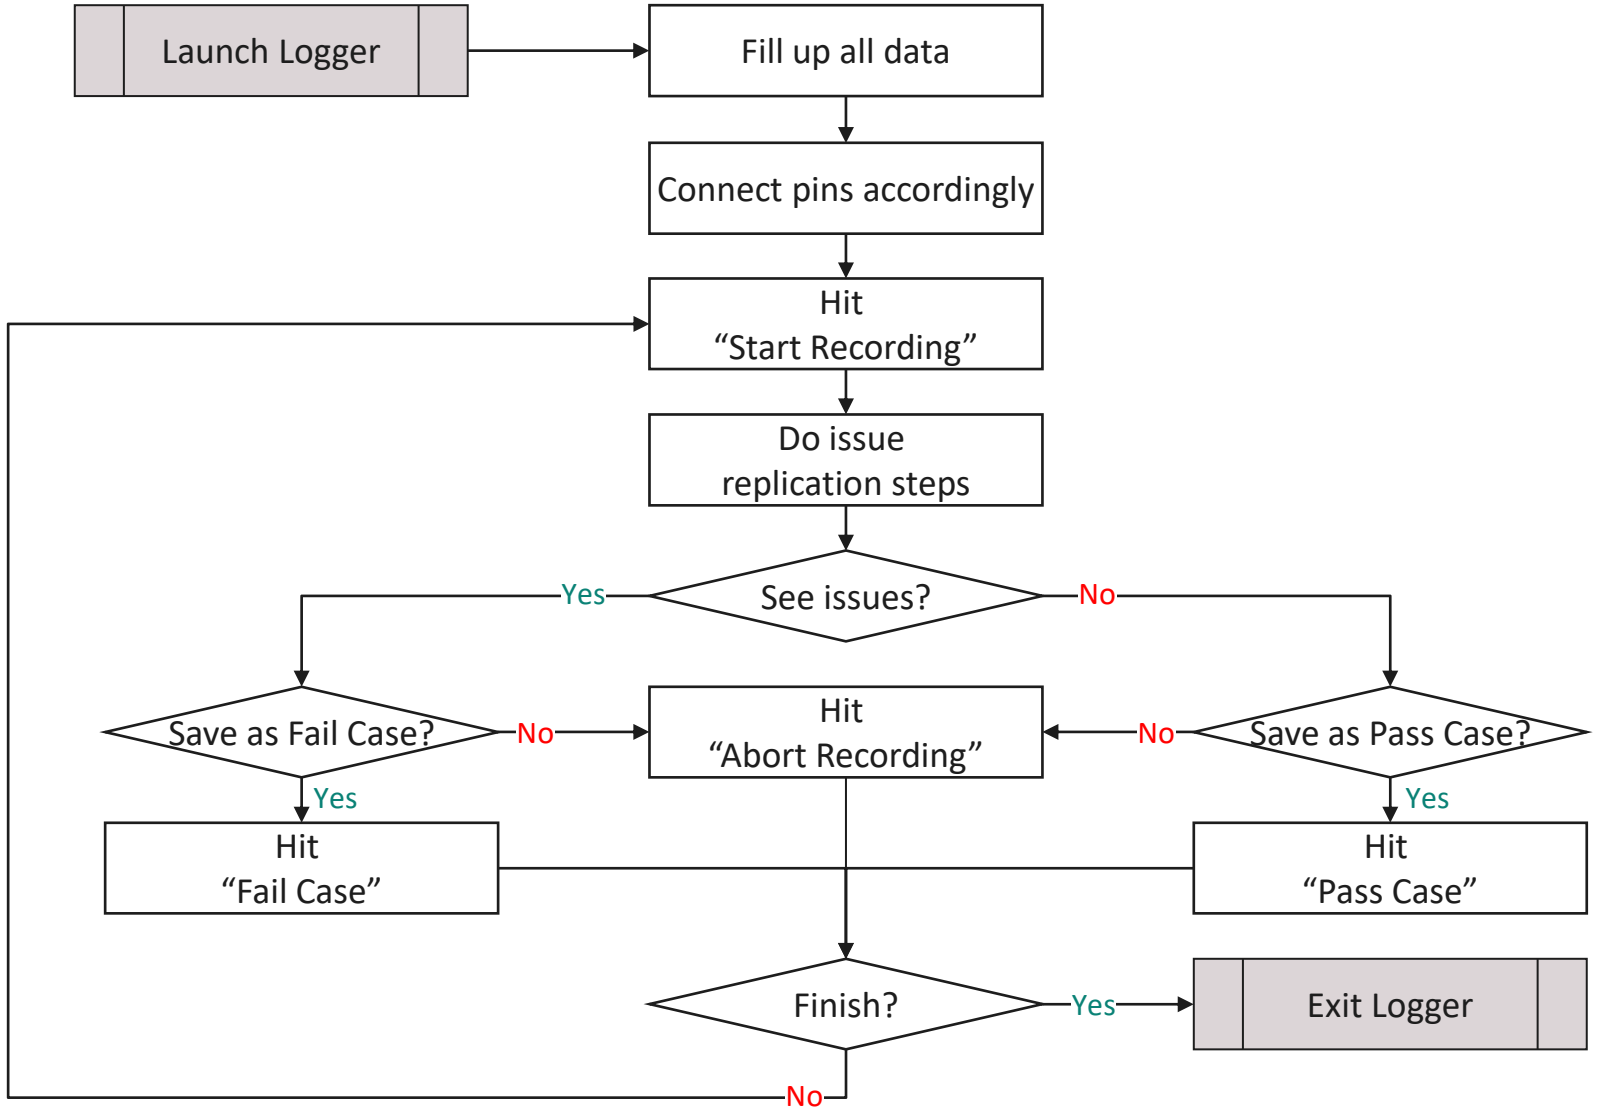

Copyright © Infineon Technologies AG 2023. All rights reserved.

Issue report flow SOP – Faster and Easier

Conventional log capture flow

1. Open issue tracker form
2. Fill up all fields except “waveforms”, 14 fields in total
3. Run/Select EZ-PD Protocol Analyzer Utility
4. Click “Start”
5. Run/Select Saleae Logic2
6. Setup channels, names, mode, bitrate
7. Click “Start”
8. Reproduce issues
9. In EZ-PD Protocol Analyzer Utility
   a. Click “Stop”
   b. Click “Save”
   c. Type file name and save
   d. Click “OK” to close the confirmation dialog
10. In Saleae Logic2
    a. Click “Stop”
    b. Assign I2C, UART and CC analysers to channels
    c. Type file name and save
11. Fill up “waveforms” field in issue tracker forms with all log filenames created above.
12. Go to step4 for another log capture round

In Infineon automation tool flow

1. Run WCS Logger
2. Fill up all blank fields, 10 – 12 in total
3. Click “Start Recording”
4. Reproduce issues
5. Click “Pass case” or “Fail case”
6. Go to step3 for another log capture round

Copyright © Infineon Technologies AG 2023. All rights reserved.

We will …

- Release firmware / documents on case system instead of emails.
- Turn down cases if insufficient information is provided.
  - Issue tracker form
  - CYPD4500 CC logs
  - SALEAE logs
  - Ellisys C-Tracker logs
  - Others (optional)

Copyright © Infineon Technologies AG 2023. All rights reserved.

Questions?

traven.shih@infineon.com

ifx-traven

Copyright © Infineon Technologies AG 2023. All rights reserved.

infineon