




## Danale 4MP 32GB AI Camera User Guide

[Home](#) » [Danale](#) » Danale 4MP 32GB AI Camera User Guide 

### Contents


- [1 Danale 4MP 32GB AI Camera](#)
- [2 Product Description](#)
- [3 What's In the box](#)
- [4 Install D-Smart Life App](#)
- [5 Steps to connect](#)
- [6 Get ready to connect](#)
- [7 Install your device](#)
- [8 Specification of LED Light](#)
- [9 Product Specification](#)
- [10 WARRANTY](#)
- [11 FCC STATEMENT](#)
- [CAUTION](#)
- [12 Documents / Resources](#)
- [13 Related Posts](#)

# Danale

**Danale 4MP 32GB AI Camera**




## Product Description

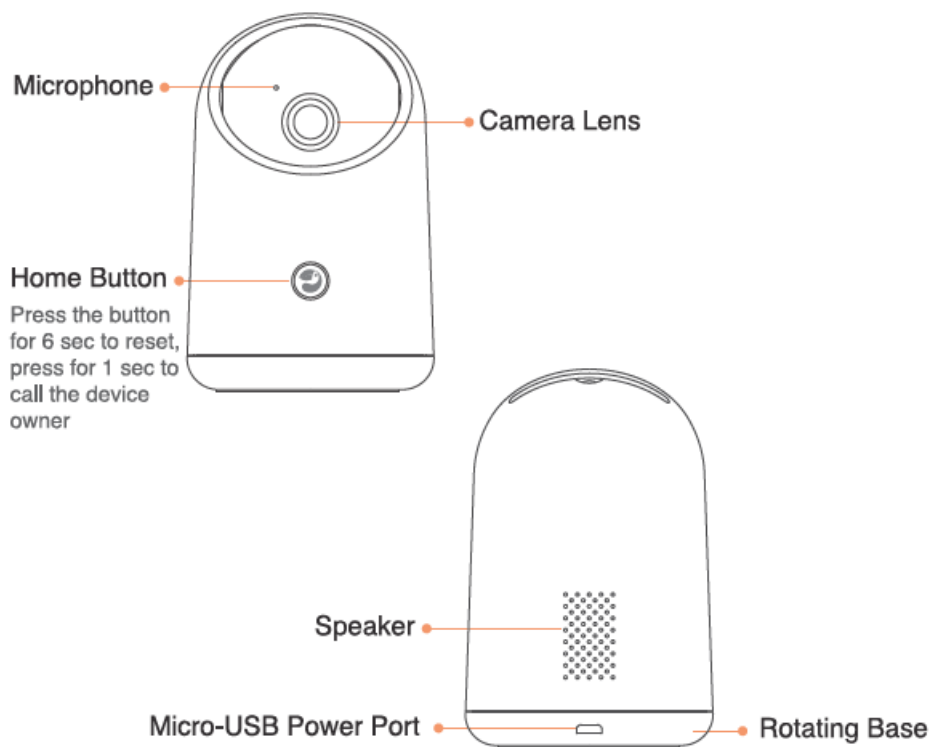

## What's In the box




DANALE AI CAMERA




USB Cable




Decorating Accessory



Power Adapter

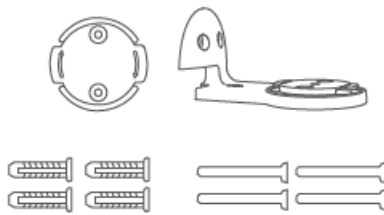

Optional Installation Kits



Quick Start Guide

## Install D-Smart Life App




## Steps to connect

1. Make sure your phone is connected to your 2.4 GHz Wi-Fi with good reception.
2. When logging in the D-Smart Life App, you may create a new account or use your existing account.
3. Click on the “Add device” on the App and follow the connection procedure to connect the device.
4. Select the device in the list of detected devices. Enter your Wi-Fi password and then scan the QR Code at the bottom of the device or input the PIN Code, and the device will connect to the Internet successfully.

## Get ready to connect

1. Plug in your Danale device.

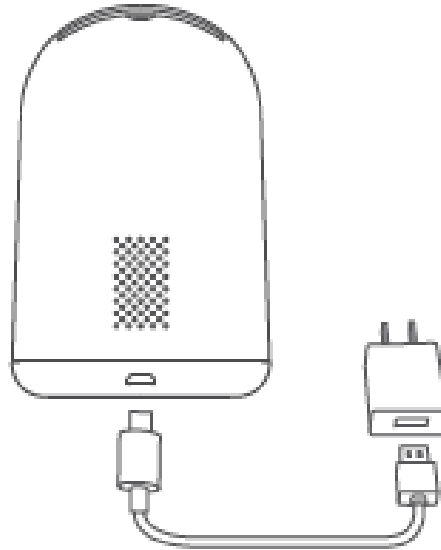


Please do not use other USB cables and power adapters that are not provided in the box.

2. Constant red light means the device is starting up and ready for Internet connection. Then you can follow the connection steps on the App to connect the device.

## **Install your device**

### **Mode 1: On a flat surface**


Place the device on the desk, table or other planes.

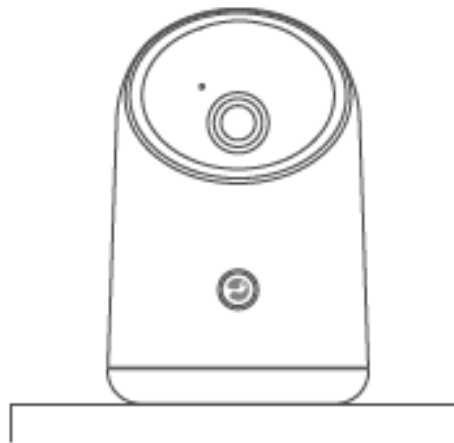

### **Mode 2: On the wall**

Please make sure you have completed the connection steps before installing the device on the wall.

1. Drill holes of 5mm diameter and 25mm depth at any height on the wall and insert the plastic plugs (you can find them in the optical installation kits).
2. Use screws to attach the hanging bracket vertically to the wall.
3. Install the device on the bracket, then rotate and secure the device.

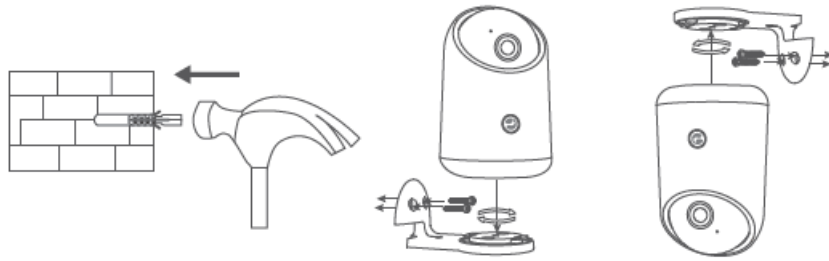


It's recommended to install the device upside down when the height is over 4.92 Ft(1.5m).

### Mode3: On the ceiling

Please make sure you have completed the connection steps before installing the device on the ceiling.

1. Drill holes of 5mm diameter and 25mm depth on the ceiling and insert the plastic plugs (you can find them in the optical installation kits).
2. Use screws to attach the mount to the ceiling.
3. Install the device on the mount, then rotate and secure the device.

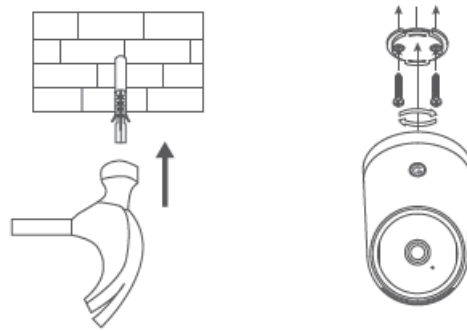

### Specification of LED Light

- Constant red: The device is starting up.
- Flash red: Waiting for network configuration. (1 flash/sec)
- Flash white: Connecting router.(1 flash/sec)
- Fast flash white: The device is connected to the router, connecting with the cloud platform. (4 flashes/sec)
- Constant white: The device is online.
- Constant red: The user is viewing a live video.

### Reset the device

If you are switching Wi-Fi networks or the device has been offline for a long time, please press the Home Button on the device for 6 sec and complete the connection steps after the prompt "The camera has been reset successfully".

### Change the account

Delete the device on the App before you change the account, and then complete the connection steps with another account.

If you want to delete the account, the cloud storage and built-in eMMC storage bound to the account will also be cleared, please handle it with caution.

### Product Specification

- **Product Name:** Danale AI Camera 4MP 32GB
- **Product Model:** IG2S400S1
- **Power Input:** 5V/1A
- **Resolution:** 2560 1440P
- **Lens:** Diagonal 110°
- **Video Coding Standard:** H.265
- **Working Power:** 5W MAX
- **Working Temperature:** 14°F-132°F(-10°C-55°C)
- **Working Relative Humidity:** RH <90%
- **Wi-Fi:** 802.11b/g/n, 2.4GHz
- **Cloud Service:** Danale Cloud Service

## Note

1. Do not place the device near heat sources or exposed fire sources, such as electric heaters, ovens, stoves, candles, or other places where high temperatures may occur.
2. Do not let children or pets swallow swatches or other accessories to avoid injury or equipment failure.
3. The Applicable working temperature of this product is 14 °F~ 132 °F(-10°C-55°C). Do not use this product in an environment where the temperature is too high or too low.
4. This product is a precision electronic device. Do not use this product in an environment where water might get inside or humidity is above 90%, so as not to affect normal operation.
5. For the best picture quality, avoid placing the camera next to or directly in front of a reflective surface such as a window or mirror, otherwise, parts of the image may be overexposed.
6. Please make sure to place the device in a position to receive the best signal from the Wi-Fi router.

## WARRANTY

### 30-Day Money-Back Guarantee for Any Reason

You may return your product within 30 days of purchase to receive a FULL REFUND for any reason. But if the reason to return isn't quality-related, the customer must pay for the return shipping.

### 6-Month Warranty for Quality-Related Issues

Danale warrants its products to be free from defects in material and workmanship, under normal use, during the warranty period. Within 6 months, Danale will provide a replacement and cover any return shipping costs for products that fail in normal use.

## FCC STATEMENT CAUTION

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.


**Note:**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help. or
- The device has been evaluated to meet the general RF exposure requirements.
- This equipment should be installed and operated with a minimum distance of 20 cm between the radiator and your body.

**Documents / Resources**

	<a href="#">Danale 4MP 32GB AI Camera</a> [pdf] User Guide IG2S400S1, 2AOJSIG2S400S1, 4MP 32GB AI Camera, 4MP Camera, 32GB Camera, AI Camera, Camera
---	---