Colour cards for the phone-camera demo

Stand-in for the ripeness model: the dashboard reads the card's colour as the palm's maturity.

The four cards

Tender	Harvest target (pre-mature)
Young	Not ready yet
Mature	Past the tender stage
Over-Mature	Too old

How to use

Print	Pages 2-3 in colour on plain white paper (any scale works). Cut along the dashed lines: four A5 cards.
Connect	Phone camera connected on the dashboard's camera card (IP Webcam app or phone browser).
Fly	When the aircraft (real, simulator or fake) reaches a palm stop, the dashboard takes a photo. Hold the card for that palm under the phone camera.
Frame it	Card flat and well lit, filling most of the picture, white border visible all round. Then the reading is about 100%.
One card	Only one card in view at a time. Two colours, or a card on a coloured or dark background, are rejected as no reading (the photo is still saved).
Result	The palm's maturity updates, the prediction and the next mission re-plan, and a green card raises the 'Tender nuts' alert.

Rules the reader applies

- The card colour covers at least 2% of the photo (full confidence from 6%).
- White paper fills at least 15% of the photo.
- Confidence = share of the main colour among all coloured pixels x size factor; at least 0.6 to count.
- Colour only: card shapes are not read, and nothing detects health (pests, frond damage) yet.

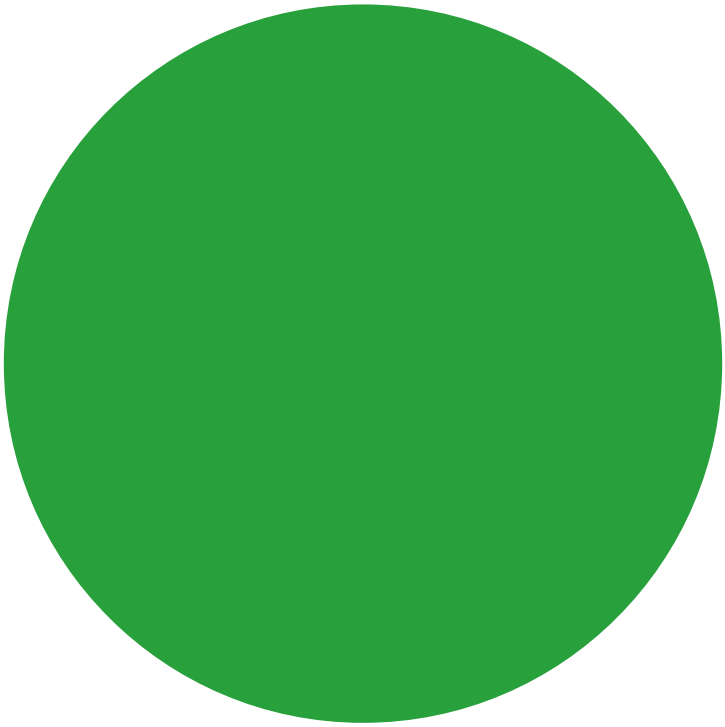

TENDER

Harvest target (pre-mature) - reads as "tender"

Coconut VTOL colour card - RGB 40,160,60

YOUNG

Not ready yet - reads as "young"

Coconut VTOL colour card - RGB 175,230,150

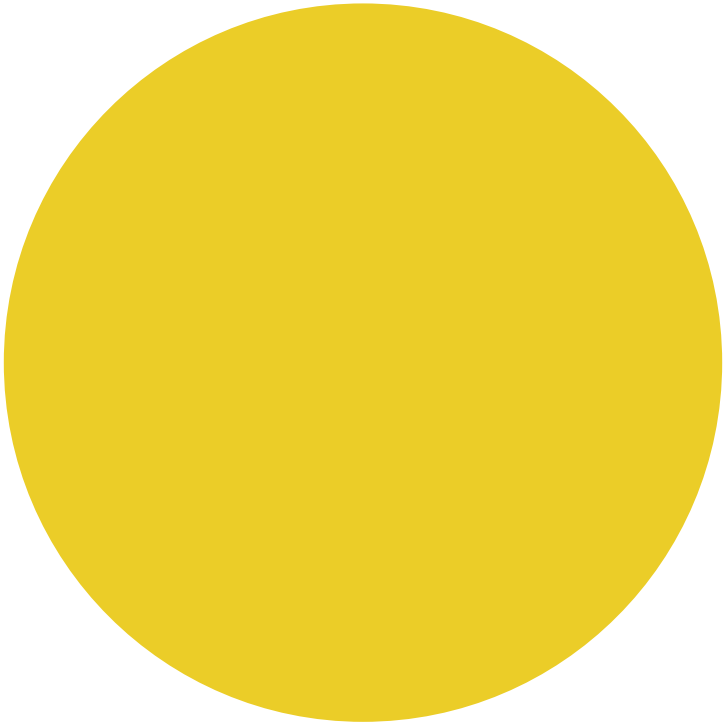

MATURE

Past the tender stage - reads as "mature"

Coconut VTOL colour card - RGB 235,205,40

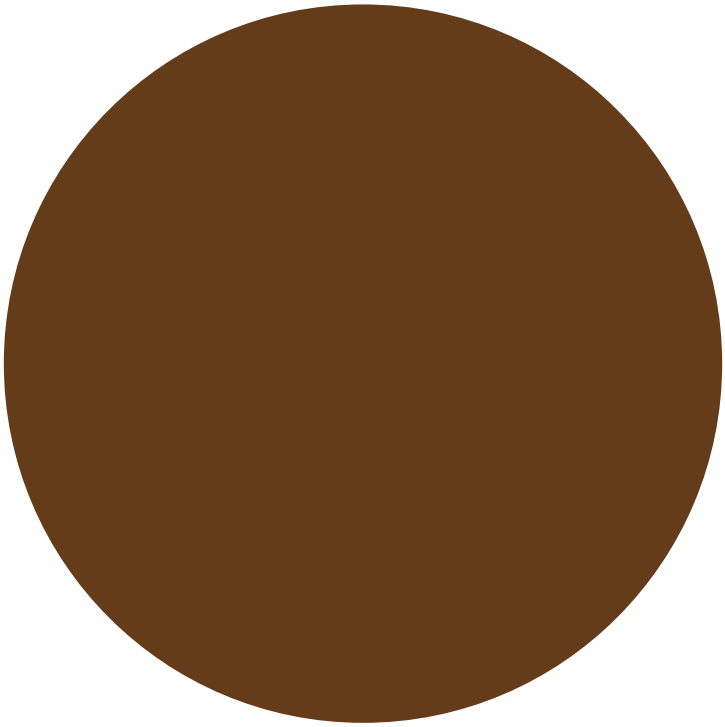

OVER-MATURE

Too old - reads as "over-mature"

Coconut VTOL colour card - RGB 100,60,25