A Ball-on-Arc Benchmark: Classical and Learning-Based Control on Realistic Deployment Hardware

Jaydeepkumar Ranpariya, Sandipan Nath, Alexander Mattick,
Georgios Kontes, Tobias Feigl, and Christopher Mutschler Fraunhofer Institute for Integrated Circuits IIS, Nuremberg, Germany {jaydeepranpariya037@gmail.com, sandipan.nath@fau.de, alexander.mattick@iis.fraunhofer.de}

***Abstract*—Reproducibility and fair comparison of control paradigms, i.e., classical, predictive, and learning-based, in robotics research are widely called for, yet controllers from different paradigms are seldom evaluated on the same physical system under the same conditions. The aim of this article is to provide a reproducible benchmark for comparing control paradigms on realistic robot hardware. We built a compact ball-on-arc balancer that pairs an industrial servo and motion controller with commodity sensors. We deliberately keep real-world imperfections that a deployed controller must deal with to enable a solid and realistic evaluation of controllers. We tested 13 controllers across four families under one common protocol. The hardware and setup, the implemented controllers, and all trial records are publicly available to foster reproduction of the results and to serve as a benchmark in robotics research.**

***Index Terms*—Robotics benchmarking, reinforcement learning, model predictive control, ball balancing, sim-to-real transfer, learned dynamics models, reproducible research**

I. Introduction

Robots are leaving the laboratory for factories and commercial sites, where a controller has to work in a realistic environment. Deployed machines are assembled from parts chosen for cost and availability, so a precise industrial actuator often sits behind cheap sensors, or the other way around. Picking a controller for such a machine is as much a practical question as a theoretical one. Each option asks for something different up front: a classical law needs a model derived and tuned, a policy trained in simulation needs a simulator worth trusting, and a method learned from logs needs the logs collected on the machine. Some of them also require online compute. Model-based and learning-based control have both come a long way, so this is a real choice, and getting it wrong costs months of engineering.

The rigs built for benchmarking often smooth away the frictions of a realistic deployment [1], so doing well on such a platform says little about how a controller would behave once deployed. Nor do the comparisons themselves settle the choice, because methods are seldom measured against each other under the same conditions. Most benchmarking stays inside a single family: classical controllers compared with other classical controllers, learning methods with other learning methods [2]–[5]. The comparisons that reach across paradigms run in simulation [6], [7], where the actuator and the sensors behave the way the simulator says they do. The one that reaches hardware shares a rig and a protocol but lets each team tune its own entry, so tuning and method are measured together [8].

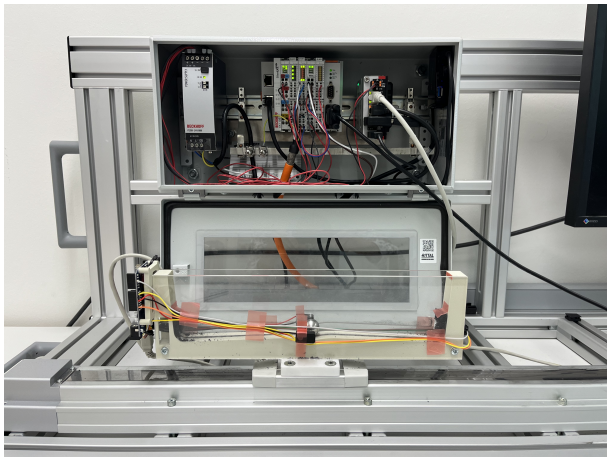


Fig. 1. The ball-on-arc platform: a freely rolling ball on a shallow arc, carried by a motorized linear cart.

Our main goal is to provide a reproducible hardware benchmark that allows for the replication of our results and the evaluation of other control strategies in a realistic deployment scenario. We built it around a ball rolling freely on a shallow arc carried by a motorized cart (Fig. 1), where a controller steers the ball only indirectly, by moving the cart, until the ball balances at the center. The task is small and underactuated, and quick enough to run and reset that a full 13-controller benchmark fits into a few sessions at the rig.

We drive the cart with an industrial servo through a belt, commanded via velocity; we track the ball with commodity sensors slower and noisier than what an ideal setup gives you; and the workspace has hard rail limits. These frictions are ordinary in a deployed machine and usually engineered out of a benchmark rig, and on this platform every controller has to face them [9].

We ran thirteen controller configurations on the platform through the same four-state, scalar-command interface, each prepared the way its own paradigm asks (Tbl. I). We group them as classical feedback (PD, LQR, and sliding-mode control), predictive control (MPC and NMPC), reinforcement

learning trained in simulation (PPO [10], TD3, TQC, SAC, and TRPO), and methods built from logged hardware data, which either plan through a learned dynamics model with Model Predictive Path Integral control (MPPI [11]), train a policy inside one (PPO-WM), or learn a policy straight from the logs with Implicit Q-Learning (IQL [12]). We put each through the same 50-trial protocol from the same distribution of starting conditions, giving 650 hardware trials, and scored them on success rate, settling time, and control effort. Because we held the conditions identical throughout, the differences that emerge are not artifacts of the setup, though each pipeline still brings its own model, tuning, and boundary handling.

In our trials, handling the boundary mattered more than the choice of controller family for reliability. Each of the three classical controllers corrects the ball, but doing so drives the cart to the end of the rail, where it cannot recover, and most of their trials fail. Adding a wall override without changing the gains lifts all three into the reliable group. Once the boundary is handled, every family has a controller that rarely fails. The families differ more on speed and effort, and there the clearest advantage came from learning a dynamics model on hardware data. Planning through such a model, MPPI succeeds on every trial, settles fastest, and uses the least control effort, in exchange for running model rollouts inside every control period. The protocol resolves only large differences, so we avoid reading a ranking into small ones.

For reproducing the comparison and extending the platform, we release the hardware design, the controller implementations, the trained models, the random-exploration datasets, and the complete trial record.[1]

The remainder of this article is organized as follows. Sec. II positions the platform against prior work, Sec. III describes the system, and Sec. IV the controllers. Sec. V defines the evaluation protocol, Sec. VI reports the results, and Sec. VII distills the takeaways for practitioners.

II. Related Work

Comparisons of control methods have become rigorous within each family, yet they rarely reach across them. The ball-and-beam and its ball-on-arc relatives have served as control testbeds since the 1970s, usually one controller at a time [2]. Real-robot benchmarking has since become far more systematic, though mostly within reinforcement learning: a systematic evaluation of RL on physical robots compares model-free algorithms with one another [4], with classical and predictive control outside its scope. Control learned from data, whether by planning through a learned dynamics model, training a policy inside one, or fitting a policy offline from logged data, forms a substantial line of its own, and its hardware evaluations stay within it too, as in an offline-RL benchmark on manipulation hardware [5]. The efforts that do span paradigms, most notably safe-control-gym, which evaluates classical control, MPC, and RL under shared constraints [6], and a comparison of MPC and RL for legged locomotion [7], run in simulation.

[1]https://github.com/JDRanpariya/ball-balancing-on-arc

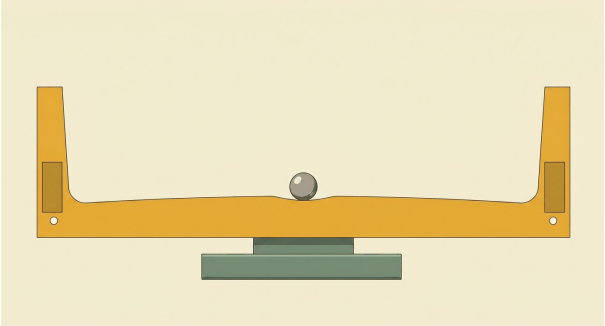


Fig. 2. Cross-section of the cart, a single 3D-printed part whose top surface is the arc the ball rolls on. A shallow concave dip at the center, where the ball rests, forms a weak but restoring gravitational well, so the balance point is locally stable and lightly damped. The cart rides the linear actuator below it and translates left and right to steer the ball.

When multi-method comparison does reach hardware, it tends either to idealize the plant or to split the tuning across authors. The classic rigs, with the Quanser rotary servo pendulum as a representative example [1], pair a direct-drive motor and clean encoders with a closely matched simulator, so little of the sim-to-real gap a deployed system faces ever reaches the bench. The closest effort on hardware, the second AI Olympics on the RealAIGym underactuated double pendulum [8], runs on real quasi-direct-drive hardware under a shared protocol. Its four finalists are all reinforcement-learning variants, each authored and tuned by a separate team, so its comparison stays within reinforcement learning rather than spanning the classical, predictive, and learning-based paradigms, and its quasi-direct-drive plant leaves out the actuation and sensing frictions of a deployed rig. An empirical study of real-world reinforcement learning identifies latency, noise, and constraints among the conditions where learning-based controllers most often fail [9].

Those are the conditions a benchmark should put a controller through, yet no shared hardware bench presents them to every paradigm at once. A comparison worth trusting also has to be reproducible: implementation and evaluation choices already dominate learning-based outcomes [13], [14], and on hardware the plant becomes one of those choices, since no two rigs share the same friction, latency, and sensor behavior, so the rig has to be documented well enough for another laboratory to rebuild it. Bonsignorio and Zereik reached that bar for a two-method visual-servoing comparison on a low-cost arm [15]; doing the same across every paradigm, on hardware that keeps the frictions of deployment, is the harder task that remains.

III. The Ball-on-Arc Platform

Our platform is an underactuated ball-on-arc system with a rail-constrained industrial cart and realistic on-board sensing. The ball is 24 g and 9 mm in radius, and the convex arc it rolls on has radius $R = 2.101$ m with a shallow concave dip at its center (2 mm deep, Fig. 2), mounted on a 3D-printed (PLA) cart[2] riding a motorized linear actuator (Fig. 1). The dip forms

[2]Printable STL models of the cart (with its integrated arc surface) and the mounts are included in the public repository.

a weak but restoring well, so the balance point is locally stable and lightly damped rather than open-loop unstable like the classical ball-and-beam, and a PD law holds the ball there with no integral term; the difficulty lies in the actuation, the sensing, and the rail. The cart is moved by a rotary AC servo motor (Beckhoff AM8121) turning a belt-driven linear slide (SMC LEFB32NXS), commanded in velocity through an industrial EtherCAT servo drive (Beckhoff EL7201) under the TwinCAT motion runtime. The actuator has 1.0 m of physical stroke; its drive reports positions in axis units, in which the soft-limited workspace spans ± 0.78 m. All positions and velocities in this article use these axis units (the supplement gives the scaling).

Every controller reads the platform's own signals, with no observer reconstructing state: the ball angle straight from the time-of-flight geometry, its rate as a finite difference of that angle, and the cart's position and velocity from the servo encoder. Whatever latency and noise the sensors carry therefore reaches each controller unfiltered.

Recovering the ball is a textbook problem, but what makes this platform demanding are four frictions in the hardware:

Underactuation: The ball cannot be commanded directly, only indirectly by accelerating the cart, so an aggressive correction can destabilize the ball instead of recovering it.

Hard constraints: The workspace spans 1.56 m in axis units, about 0.80 m of the actuator's 1.0 m stroke. A controller that ignores the approaching boundary exhausts its maneuvering space on one side, limiting its ability to recover, which makes explicit constraint handling a central design concern on this platform [16].

Sensing: Ball position comes from two VL53L0X Time-of-Flight sensors read alternately; in operation the estimate refreshes every $\sim$80–100 ms (about 10–12 Hz), well slower than the 50 ms (20 Hz) control loop, so the controller acts on ball measurements up to about two control cycles ($\sim$100 ms) old while the cart encoder updates synchronously. Near the arc edge ($|\theta| > 0.071$ rad), where the ball rolls within a few millimeters of a sensor, the reading enters the VL53L0X near-field *blind zone* and saturates, holding at the boundary until the ball returns. Even at center the ball-position reading varies about 13 mm peak-to-peak ($\sigma \approx 3.3$ mm; the raw per-unit spread is 14–17 mm), so every controller has to cope with this noise and latency on its own.

Velocity interface: We command a velocity setpoint (`MC_MoveVelocity`) within the axis limit of ± 0.9 m/s, and the drive realizes it through an internal S-curve profiler and the servo's cascaded position, velocity, and current loops. We model this as a first-order lag ($\tau_v = 0.15$ s) for control design; the profiler, the inner loops, and the belt compliance do not appear in an open-loop simulator, and contribute to the platform's sim-to-real gap.

The state vector is 4-dimensional: cart position and velocity, ball angle and angular velocity; the control input is a scalar velocity command. The complete dynamics equations and system parameters are provided in the supplementary material.

IV. The Controllers

We implemented 13 controllers (Tbl. I), each meeting the platform through the same interface: it reads the current state and the physical limits, and returns a velocity command. Holding that interface fixed keeps the comparison on the control law. All numerical parameters, training configurations, and reward functions are detailed in the supplementary material.

TABLE I

The 13 benchmarked controllers. Paradigm labels follow standard taxonomy in control and RL literature. The taxonomy has two axes: data/model source (analytical model, simulation, hardware logs) and decision mechanism (feedback law, MPC/planning, online RL policy, offline RL policy). Suffixes: WO = wall override, DR = domain randomization, BZ = blind-zone sensor model, WM = learned world model.

Controller	Data source	Decision mechanism
PD + WO	Analytical model	Error feedback + tuned gains
LQR + WO	Analytical model	PD-equivalent state feedback
SMC + WO	Analytical model	Sliding-mode feedback
MPC + WO	Analytical model	Constrained QP planning
NMPC	Analytical model	Nonlinear MPC planning
PPO (BZ+DR)	Simulation	Model-free RL (on-policy)
TRPO (DR)	Simulation	Model-free RL (on-policy)
SAC (DR)	Simulation	Model-free RL (off-policy)
TD3 (DR)	Simulation	Model-free RL (off-policy)
TQC (DR)	Simulation	Model-free RL (off-policy)
PPO (WM)	Logged data	RL trained in learned model
MPPI	Logged data	Sampling MPC via learned model
IQL	Logged data	Offline model-free RL

A. Classical Control (PD, LQR, SMC)

The three classical controllers follow the standard workflow: model, tune in simulation, deploy. PD acts on measured position and velocity errors, LQR on the linearized dynamics, and SMC on a nonlinear sliding surface. We tuned PD and SMC with CMA-ES [17], an evolutionary optimizer, in simulation over stratified initial conditions. For LQR, the CMA-ES-tuned gain does not transfer to the hardware, so we deploy a PD-equivalent gain instead; the supplement's classical-tuning appendix gives the details. Each law is designed around the equilibrium and carries no notion of the rail ends from Sec. III.

The wall-override mechanism: To give the nominal controllers a way to respect the boundary, we add a simple heuristic: when the cart approaches the rail limit, or wall, override whatever the nominal controller commands and drive away from it. PD, LQR, SMC, and MPC all run with this guard, denoted "+WO" in our results; NMPC handles the rail through its own constraint formulation and runs without it.

B. Predictive Control (MPC, NMPC)

Linear MPC solves a constrained quadratic program (QP) at each timestep using linearized dynamics; NMPC uses the full nonlinear model over a horizon of $N = 10$ steps. Both were tuned with the same CMA-ES framework, in this case over cost weights and horizon parameters. Near the rail, linear MPC's cart-position constraint can make that QP infeasible, so the deployed MPC (+WO) drops the constraint and falls back on the same wall override as the classical controllers.

C. Simulation-Trained Reinforcement Learning

We trained five RL algorithms, PPO [10], TD3, TQC, SAC, and TRPO, in simulation with domain randomization. The training environment includes the velocity interface of Sec. III, so each policy trains against the servo dynamics the hardware presents; all use small two-layer MLPs, with architectures and training budgets in the supplement. One variant, PPO (BZ+DR), also models the sensor blind zone of Sec. III during training: with the simulated readings freezing near the arc edges as the real ones do, the policy learns to act cautiously while its inputs may already be stale. We ablate this blind-zone model on PPO alone, comparing PPO with the sensor model against PPO without it (ablations in the supplementary material).

D. Hardware-Data-Driven Controllers (IQL, MPPI, PPO-WM)

These three controllers all learn from real hardware data, and each puts that data to work in a different way.

Offline RL (IQL): IQL [12] learns a policy directly from logged hardware data, requiring no simulator. We trained it on approximately 333,000 transitions (1,415 trials) collected from every controller we ran on hardware (MPPI, NMPC, RL, MPC, PD, LQR, SMC, and earlier offline-RL checkpoints, though not the deployed IQL policy itself). The dataset is mixed, 83% successful episodes and 17% failures, and rewards are recomputed offline from the logged states. IQL extracts its policy conservatively, through expectile regression [12], which keeps it clear of the distributional-shift instabilities common to other offline RL methods.

Model-based planning (MPPI): This approach learns the system's dynamics directly from hardware data: a two-layer LSTM trained to predict state transitions from a 1M-transition random-exploration dataset. At runtime MPPI treats this learned model as an internal simulator. Every control step (50 ms) it samples hundreds of candidate action sequences, rolls each forward through the network, and executes the first action of the cost-weighted-average sequence, replanning continuously as new data arrives.

RL in a learned world (PPO-WM): A second variant trains a standard PPO policy inside a learned world model [18] rather than using it for online planning. The result is a lightweight network that trains and runs on CPU, with no GPU at deployment, while still drawing on dynamics learned from real data. MPPI and PPO-WM share the same world-model architecture but were trained on two separate 1M-transition collections; the collection behind the PPO-WM model suits RL training better, see reasons in the supplement's world-model appendix.

All thirteen then meet the same evaluation protocol, defined in the next section.

V. Experimental Protocol

Each of the 13 controllers runs on the physical platform under the same conditions: the sensors, actuator, and 20 Hz control loop detailed in Sec. III, under the stratified initial-condition schedule below.

A. Stratified Initial Conditions

To probe different failure modes, we stratify the 50 trials by difficulty. Difficulty is set mainly by the cart's starting position, and the two at-wall strata split further by which side of the cart the ball starts on.

Center (10 trials): cart near center (± 0.10 m), maximum maneuverability in both directions. **Mid-rail** (16 trials): cart at ± 0.40 m, with asymmetric maneuvering space. **Near-wall** (14 trials): cart at ± 0.65 m, leaving only 0.13 m of clearance to the boundary. **At-wall-opposite** (5 trials): cart at the boundary (± 0.78 m), ball displaced to the side away from the wall. Getting under the ball drives the cart back toward open rail, so the correction has room to run; the easier of the two at-wall cases. In this stratum the cart did not always reach the physical limit, so the achieved start was not uniform across controllers (supplement, Evaluation Protocol); we therefore read it as a recovery-speed check rather than an equal-condition comparison. **At-wall-same** (5 trials): cart at the boundary (± 0.78 m), ball displaced to the same side as the cart. Getting under the ball means driving further into the wall, so this stratum stresses controllers that lack explicit constraint handling; the harder of the two at-wall cases.

B. Success Criterion

A trial succeeds when the ball angle stays within ± 0.01 rad continuously for 1.0 s; a trial that runs past 30 s is a failure. At the arc radius $R = 2.101$ m of Sec. III, ± 0.01 rad is about ± 21 mm of arc, against sensor readings that run about 13 mm peak-to-peak.

C. Metrics

We report success rate (SR) with 95% Wilson score intervals, median settling time with interquartile range over the successful trials, and RMS control effort (the root-mean-square commanded cart velocity in m/s, saturated at the ± 0.9 m/s axis limit that the actuator enforces, then averaged over all trials). For pairwise comparisons we use the Mann-Whitney rank test on the successful-trial settling times, with Bonferroni correction across all 78 controller pairs; a rank test suits these skewed distributions better than a mean-based t-test. Success-rate differences are compared with Fisher's exact test in the same Bonferroni family. We use 50 trials per controller as a balance between confidence-interval width and hardware-time budget: each trial runs on the physical rig, up to 30 s of balancing plus an automated reset that jolts the cart to reposition the ball for the next trial. Settling statistics are computed over successful trials only, so cross-controller settling comparisons slightly favor the less-reliable controllers, whose failed (and typically hardest) trials are excluded; success rate is therefore reported separately and never folded into the settling comparison.

D. A Note on Statistical Power

With 50 trials per controller, the benchmark resolves only large differences in success rate, and its pairwise tests hold the family-wise error rate across all 78 controller pairs. At that

corrected level, a Fisher comparison reaches 80% power only for success-rate gaps of roughly 30 percentage points near the top of the range, widening to about 40 points near 50%; for a single uncorrected comparison the figures are closer to 20 and 30 points. Gaps of a few points sit below this resolution.

The confidence intervals show the same limit directly. A controller that succeeds in all 50 of its trials still carries a 95% Wilson interval of $[93, 100]$, and one that succeeds in 40 carries $[67, 89]$, so any single success rate is uncertain by several points on each side.

We chose 50 trials rather than the more common 10 or 20 because the interval narrows substantially with sample size: at ten trials the interval on a 90% success rate is about twice as wide as at fifty. Collecting the full 650-trial dataset (13 controllers $\times$ 50 trials) took several sessions at the rig, on top of thousands of development and screening trials.

E. Auxiliary Studies

A few auxiliary studies use the same platform and protocol and are reported where they inform a finding: the wall-override ablations (each classical controller with and without the boundary rule), the PPO domain-randomization and blind-zone ablations, an open-loop sweep of world-model accuracy against dataset size, and a short on-hardware fine-tuning trial. The supplement gives their full protocols.

VI. Results

Tbl. II presents the full benchmark results. Reliability (success rate), speed (median settling time), and control effort do not order the controllers the same way: the most reliable are also among the fastest, but others trade speed for reliability or, like IQL, speed for gentleness. The three data-driven controllers (MPPI, PPO-WM, IQL) post the highest mean reliability (97%) of any family, and the lowest mean effort (0.41), roughly 30% below the classical and simulation-trained families. At the other extreme, the highest-effort controllers, TD3 and TQC (RMS effort 0.68 and 0.66), run close to the ± 0.9 m/s saturation limit and drive the actuator into saturation on many trials. Three findings below explain these differences, and a closing note covers offline RL.

A. Constraint Handling and the Choice of Paradigm

The comparison's central result is a difference in magnitude: handling the rail boundary changes reliability a great deal, while any effect of the control paradigm is too small for this protocol to resolve. The deployed LQR, run without boundary handling, succeeds on only 20% of hardware trials: it corrects the ball but lets the cart drift into the rail, and cannot recover from there. Adding a wall override, with the gain unchanged, raises it to 92%. The CMA-ES-tuned gain reached only 16% even with the override; the supplement reports that comparison. This override rule, run over the 50-trial protocol, lifts every classical controller into the reliable group:

	Without WO	With WO
PD	18%	96% (+78 pp)
LQR	20%	92% (+72 pp)
SMC	12%	92% (+80 pp)

Against a change of this size, any effect of the paradigm behind a controller is small enough that this protocol cannot resolve it. The controllers at 90% success or better come from all four families, and no pairwise success-rate difference within this group is statistically significant (Fisher's exact test, Bonferroni corrected). The two lowest, MPC+WO at 80% and SAC at 82%, may well be less reliable, but with fifty trials and correction across every pair we cannot establish it. NMPC reaches the reliable group through its own internal constraint handling (45/50), with no external override.

Control effort is the one axis on which the benchmark does resolve a paradigm difference: 58 of the 78 pairwise RMS-effort differences are significant (Mann-Whitney, Bonferroni corrected as its own family). MPPI and IQL, the two lowest-effort controllers, each use significantly less effort than every other controller except one another, holding their reliability while keeping the actuator clear of the saturation the wall-override controllers reach by design. PPO-WM, whose learned model carries only a weak action response, sits mid-range, its effort not separable from PPO (BZ+DR) or TRPO.

Fig. 4 places all 13 on the speed-reliability plane. MPPI ties for the highest success rate and settles fastest; its edge over the other reliable controllers is one of speed alone. Its settling time is significantly shorter than nine of the twelve other controllers, while against PPO (BZ+DR), PD+WO, and NMPC the difference stays below significance at this sample size (the effect sizes are given in the supplement).

B. Two Deployments from a Learned Model

A small LSTM trained on logged hardware data captures dynamics our analytical model misses (the supplement shows it has lower total trajectory error at every tested horizon). A learned model of this kind enables two deployment strategies with different cost profiles.

Online planning (MPPI): Using the learned model for sampling-based planning at every timestep achieves the best combined performance: 100% success, fastest median settling (1.67 s), and lowest control effort (0.354 RMS), at the cost of real-time model rollouts (mean 40 ms per step on CPU, within the 50 ms control period after a one-step cold start; the supplement gives the full timing distribution and a $2\times$ speedup on 4 threads).

Offline policy training (PPO-WM): Training an RL policy inside a learned model of the same kind reaches the same 100% reliability with about 6.7 ms CPU inference per step, cheaper than MPPI's $\sim$40 ms planning; PPO-WM trains and deploys on CPU ($\sim$42 min training), no GPU needed. PPO-WM's world model is built from a different logged collection than the one MPPI plans through; the supplement details both.

How much data is needed? An open-loop data sweep shows prediction error plateauing around 50–100k transitions. In open loop, an accurate model needs far less data than the 1M we collected, though how much accuracy survives closed-loop deployment depends on the planner.

MPPI's speed advantage also shows up as consistency: in the settling-time distributions of Fig. 3, its spread is the tightest of any controller, with every successful trial settling in a

TABLE II

HARDWARE BENCHMARK RESULTS (50 TRIALS PER CONTROLLER, 20 HZ). SR = SUCCESS RATE WITH 95% WILSON SCORE CI; SETTLING STATISTICS COMPUTED OVER SUCCESSFUL TRIALS ONLY. RMS EFFORT IS THE ROOT-MEAN-SQUARE COMMANDED CART VELOCITY (M/S), SATURATED AT THE ±0.9 M/S AXIS LIMIT. DATA SOURCE / MECHANISM FOLLOWS THE TWO-AXIS TAXONOMY OF TBL. I. SORTED BY SR, THEN BY MEAN SETTLING TIME.

Controller	Data source / mechanism	SR (%)	95% CI	Mean (s)	Median (s) [IQR]	RMS Effort
MPPI	Logged data / sampling MPC	**100**	[93, 100]	**2.06**	**1.67** [1.04, 2.67]	**0.354**
PPO (WM)	Logged data / trained-in-model RL	**100**	[93, 100]	6.84	3.64 [2.04, 7.54]	0.492
PPO (BZ+DR)	Sim / model-free RL	96	[87, 99]	3.81	3.15 [1.29, 4.96]	0.498
PD + WO	Analytical / error feedback	96	[87, 99]	5.80	3.38 [1.11, 7.48]	0.580
SMC + WO	Analytical / sliding-mode	92	[81, 97]	8.93	8.28 [4.69, 10.78]	0.562
LQR + WO	Analytical / PD-equivalent feedback	92	[81, 97]	10.21	8.28 [2.86, 16.68]	0.625
IQL	Logged data / offline RL	92	[81, 97]	10.62	9.80 [4.49, 15.63]	0.395
TD3 (DR)	Sim / model-free RL	92	[81, 97]	11.45	10.06 [4.54, 17.91]	0.680
NMPC	Analytical / nonlinear MPC	90	[79, 96]	7.48	4.71 [1.35, 7.51]	0.608
TRPO (DR)	Sim / model-free RL	90	[79, 96]	8.09	4.80 [1.50, 13.60]	0.508
TQC (DR)	Sim / model-free RL	86	[74, 93]	9.77	6.61 [2.68, 15.51]	0.663
SAC (DR)	Sim / model-free RL	82	[69, 90]	10.10	8.40 [3.26, 15.16]	0.588
MPC + WO	Analytical / linear MPC	80	[67, 89]	10.81	9.65 [2.35, 18.35]	0.623

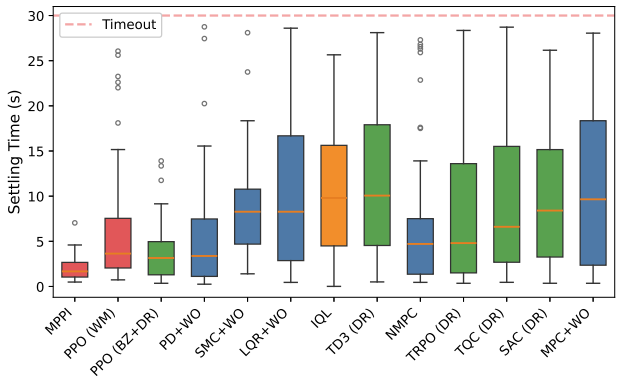


Fig. 3. Settling time distributions. MPPI shows the tightest distribution with no outliers beyond 9 s. Classical controllers with wall override show bimodal behavior: fast successes plus occasional slow recoveries after the override triggers.

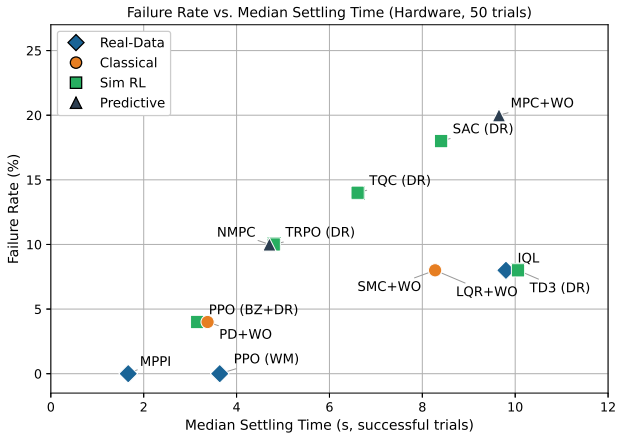


Fig. 4. Failure rate versus median settling time (successful trials) across all 13 controllers. Both axes increase toward worse outcomes, so the ideal corner is bottom-left. MPPI ties for the best success rate and is fastest on median settling (100%, 1.67 s). Two controllers achieve perfect reliability; all handle the boundary, whether explicitly or through learned dynamics.

few seconds and none past 9 s. The wall-override classical controllers are more spread out, fast when the ball stays clear of the boundary and slow when the override has to bring it back from the rail.

The supplementary material breaks settling time down by the cart's starting stratum. The clearest pattern there is MPPI's consistency across strata; the other controllers vary more, though with only five trials in each at-wall stratum those per-controller differences are descriptive rather than tested.

C. The Reach of Domain Randomization

Domain randomization is the workhorse of sim-to-real transfer [19], and has carried policies onto hardware as demanding as in-hand manipulation and champion-level drone racing. In our PPO ablation it does most of the work and then plateaus: it lifts hardware success from 60% without it to 90% with it, a thirty-point gain, after which the remaining gap did not close with more of it.

The source of the remaining gap is less certain. We can model one sensor effect directly: near the arc edges the ToF sensors saturate and report frozen values, and a policy trained without this artifact overcorrects on stale data. Adding a blind-zone model lifts PPO from 90% to 98%.[3] At 50 trials this eight-point move is within the benchmark's resolution, so we treat the perceptual reading as a hypothesis; the data cannot yet resolve an effect this small. Nor is modeling the sensor the only route past the plateau: trained to 5M steps, the base PPO policy also reaches 100% over 50 hardware trials, so the blind-zone model is the training-efficient path rather than the necessary one. It fits what we see: the five simulation-trained RL agents all reach 96–100% in simulation yet span only 82% to 96% on hardware, though they also differ in their training conditions, so this cross-agent spread is suggestive and not conclusive.

[3]The domain-randomization and blind-zone ablations in this subsection are measured within the S-curve servo-model family, the regime the extended training runs used. Tbl. II instead reports PPO (BZ+DR) at the first-order-lag checkpoint (96%), matched to the servo model the other 4 RL agents trained against so the cross-agent comparison is fair; the supplement reports both.

D. A Note on Offline RL

IQL achieves 92% success at the second-lowest control effort of any controller (0.395 RMS, behind only MPPI), using no simulator: its conservative policy is reliable and gentle on the hardware, at the price of speed, with a median settling of 9.80 s, roughly six times MPPI's. The result is attractive mainly for where the data came from: the dataset built up as a by-product of normal evaluation runs, so once a platform is instrumented and several controllers have been run, offline RL becomes a viable low-overhead option when simulation fidelity is uncertain.

VII. Discussion and Conclusions

The controller choice posed at the outset has a conditional answer on this system. A practitioner who can gather hardware logs and afford real-time CPU rollouts should consider planning through a learned model: MPPI ties for the top success rate and settles fastest (100%, 1.67 s median). Reliability alone, however, cannot decide among the leaders: at 50 trials per controller the top group is statistically inseparable on success rate, and even MPPI's settling advantage, significant over nine of the twelve other controllers, does not separate it from PD+WO, PPO (BZ+DR), or NMPC. The choice among the reliable controllers rests on the axes that do differ: settling consistency, control effort, deploy-time compute, and the engineering a team already has in place. Effort is one such axis the benchmark can resolve statistically, and there MPPI and IQL are significantly better than the remaining eleven.

The engineering axis is the one most directly relevant to the classical result. An already running linear regulator can reach reliable hardware success on this system simply by handling the boundary constraint: the wall override alone lifted nominal LQR from 20% to 92% success. It follows that, for reliability in a constrained system like ours, the choice between a classical and a learned controller matters less than the decision to model the boundary at all.

MPPI has a higher settling speed due to three mechanisms acting together: a model learned from hardware logs bridges the sim-to-real gap, sampling-based planning handles the boundary problem without a manual override, and replanning at every step absorbs the model error that remains. The drawbacks are the real-time CPU rollouts at every control period and a non-trivial tuning effort.

We observe that the various approaches merely shift the engineering effort rather than remove it: analytical controllers need modeling and tuning, simulation-trained RL needs a simulator with credible sensor and motor models, offline RL needs logged trials, and model-based planning needs exploration data and a trained dynamics model. Therefore choosing among the reliable controllers is essentially choosing which of these inputs is most readily available.

Our results suggest a pragmatic order of priorities for deploying a controller on a constrained system. One should begin with explicit constraint handling, the largest single lever on reliability we measured, worth 72 to 80 percentage points across the three classical controllers, whether through a boundary heuristic like our wall override or a formal method such as a control barrier function [20]. Where simulation fidelity is uncertain, logged hardware data deserves to be treated as a serious alternative to building a simulator: the three controllers built from it take the two highest success rates and the two lowest control efforts in the benchmark, and IQL's dataset accumulated as a by-product of ordinary evaluation runs rather than a dedicated collection. And once a policy is deployed, on-robot fine-tuning should not be counted on to rescue it. Over 50,000 hardware steps per policy, and with a noise-free reward signal that simulation cannot supply, fine-tuning left the world-model policy unchanged at 100% and nominally degraded both simulation-trained agents, though those two arms rest on ten trials each; the supplement's fine-tuning appendix reports the study.

One further observation reinforces the caution about simulation, which is that simulation rank does not forecast hardware rank: SAC balanced perfectly and settled quickly in simulation yet was the least reliable of the five on hardware, at 82%, with only MPC+WO, at 80%, ranking lower overall. With a single algorithm trained under its own conditions we only take this as a caution to bear in mind; our data do not establish it as a controlled effect.

A. Limitations and Future Work

These results are specific to our system: the quantitative ranking applies to this particular arc geometry, sensor characteristics, and control frequency, and it may shift on systems without hard constraint boundaries or with faster dynamics. Two rankings also depend on configuration choices documented in the supplement: PPO-WM's world model is trained on one of two logged collections whose data properties suit RL training, and the simulation-trained agents did not all use the same sensor model, since PPO (BZ+DR) includes a blind-zone model the other four omit. The reinforcement-learning results are also single-seed: each agent was trained once (seed 1), so we report point estimates and do not characterize the training-stochasticity variance that a multi-seed study would expose. The families also differ in more than paradigm, in data source, model fidelity, tuning effort, boundary mechanism, and deploy-time compute, so we read the small cross-paradigm spread as constraint handling being decisive in this configuration rather than as an isolation of paradigm as a causal variable.

We offer the qualitative findings, constraint awareness as the dominant lever, the training efficiency of modeling the dominant sensor failure, and the viability of real-data model-based planning, as conjectures to test on similar constrained underactuated systems; we make no claim for them beyond this platform.

Natural next directions are to expand the platform toward more axes and higher dimensionality with a modified constraint structure, moving toward more complex underactuated systems, and to investigate uncertainty-aware exploration as an alternative to random data collection.

Acknowledgment

The authors thank the Fraunhofer IIS team for hardware support.

REFERENCES

[1] Quanser Inc., "QUBE-Servo 2 rotary servo and inverted pendulum experiment," https://web.archive.org/web/20260722075615/https://ednex.me/wp-content/uploads/2021/04/QUBE-Servo-2-Datasheet-Ednex.pdf, 2021, datasheet, archived 2026-07-22.

[2] P. E. Wellstead, V. Chrimes, P. R. Fletcher, R. Moody, and A. J. Robins, "The ball and beam control experiment," *International Journal of Electrical Engineering & Education*, vol. 15, no. 1, pp. 21–39, 1978.

[3] M.-T. Ho, S.-T. Kao, and Y.-S. Lu, "Sliding mode control for a ball and arc system," in *Proceedings of SICE Annual Conference 2010*, Taipei, Taiwan, 2010, pp. 791–798.

[4] A. R. Mahmood, D. Korenkevych, G. Vasan, W. Ma, and J. Bergstra, "Benchmarking reinforcement learning algorithms on real-world robots," in *Conference on Robot Learning*. PMLR, 2018, pp. 561–591.

[5] N. Gürtler, S. Blaes, P. Kolev, F. Widmaier, M. Wüthrich, S. Bauer, B. Schölkopf, and G. Martius, "Benchmarking offline reinforcement learning on real-robot hardware," in *International Conference on Learning Representations*, 2023.

[6] Z. Yuan, A. W. Hall, S. Zhou, L. Brunke, M. Greeff, J. Panerati, and A. P. Schoellig, "safe-control-gym: A unified benchmark suite for safe learning-based control and reinforcement learning in robotics," *IEEE Robotics and Automation Letters*, vol. 7, no. 4, pp. 11 142–11 149, 2022.

[7] S. Akki and T. Chen, "Benchmarking model predictive control and reinforcement learning-based control for legged robot locomotion in MuJoCo simulation," *IEEE Access*, vol. 13, pp. 108 732–108 742, 2025.

[8] F. Wiebe, N. Turcato, A. Dalla Libera, J. S. B. Choe, B. Choi, T. L. Faust, H. Maraqten, E. Aghadavoodi, M. Cali, A. Sinigaglia, G. Giacomuzzo, R. Carli, D. Romeres, J.-k. Kim, G. A. Susto, S. Vyas, D. Mronga, B. Belousov, J. Peters, F. Kirchner, and S. Kumar, "Reinforcement learning for robust athletic intelligence: Lessons learned from the second AI olympics with RealAIGym competition," *IEEE Robotics & Automation Magazine*, pp. 2–12, 2025.

[9] G. Dulac-Arnold, N. Levine, D. J. Mankowitz, J. Li, C. Paduraru, S. Gowal, and T. Hester, "Challenges of real-world reinforcement learning: definitions, benchmarks and analysis," *Machine Learning*, vol. 110, no. 9, pp. 2419–2468, 2021.

[10] J. Schulman, F. Wolski, P. Dhariwal, A. Radford, and O. Klimov, "Proximal policy optimization algorithms," *arXiv preprint arXiv:1707.06347*, 2017.

[11] G. Williams, N. Wagener, B. Goldfain, P. Drews, J. Rehg, B. Boots, and E. Theodorou, "Information theoretic MPC for model-based reinforcement learning," in *IEEE International Conference on Robotics and Automation*, 2017, pp. 1714–1721.

[12] I. Kostrikov, A. Nair, and S. Levine, "Offline reinforcement learning with implicit Q-learning," in *International Conference on Learning Representations*, 2022.

[13] P. Henderson, R. Islam, P. Bachman, J. Pineau, D. Precup, and D. Meger, "Deep reinforcement learning that matters," in *Proceedings of the 32nd AAAI Conference on Artificial Intelligence (AAAI)*, 2018, pp. 3207–3214.

[14] R. Agarwal, M. Schwarzer, P. S. Castro, A. Courville, and M. G. Bellemare, "Deep reinforcement learning at the edge of the statistical precipice," *Advances in Neural Information Processing Systems*, vol. 34, pp. 29 304–29 320, 2021.

[15] F. Bonsignorio and E. Zereik, "A simple visual-servoing task on a low-accuracy, low-cost arm: An experimental comparison between belief space planning and proportional-integral-derivative controllers," *IEEE Robotics & Automation Magazine*, vol. 28, no. 3, pp. 117–127, 2021.

[16] L. Brunke, M. Greeff, A. W. Hall, Z. Yuan, S. Zhou, J. Panerati, and A. P. Schoellig, "Safe learning in robotics: From learning-based control to safe reinforcement learning," *Annual Review of Control, Robotics, and Autonomous Systems*, vol. 5, pp. 411–444, 2022.

[17] N. Hansen, "The CMA evolution strategy: A tutorial," *arXiv preprint arXiv:1604.00772*, 2016.

[18] D. Hafner, T. Lillicrap, J. Ba, and M. Norouzi, "Dream to control: Learning behaviors by latent imagination," in *International Conference on Learning Representations*, 2020.

[19] W. Zhao, J. P. Queralta, and T. Westerlund, "Sim-to-real transfer in deep reinforcement learning for robotics: A survey," in *2020 IEEE Symposium Series on Computational Intelligence (SSCI)*, 2020, pp. 737–744.

[20] A. D. Ames, S. Coogan, M. Egerstedt, G. Notomista, K. Sreenath, and P. Tabuada, "Control barrier functions: Theory and applications," in *2019 18th European Control Conference (ECC)*, 2019, pp. 3420–3431.

A Ball-on-Arc Benchmark: Classical and Learning-Based Control on Realistic Deployment Hardware

Supplementary Material

Jaydeepkumar Ranpariya, Sandipan Nath, Alexander Mattick, Georgios Kontes, Tobias Feigl, and Christopher Mutschler
Fraunhofer Institute for Integrated Circuits IIS, Nuremberg, Germany

***Abstract*—This document provides supplementary technical details for the main paper "A Ball-on-Arc Benchmark: Classical and Learning-Based Control on Realistic Deployment Hardware," organized into five parts. *Part I (System)* covers (I) sensor characterization and calibration and (II) the mathematical model of the plant. *Part II (Controller Implementation)* covers (III) controller design, (IV) classical controller tuning insights and failure modes, (V) reinforcement learning training details including PPO ablation, multi-algorithm comparison, blind-zone ablation, motor-model ablation, offline RL, and sim-to-real transfer, (VI) world-model RL training, and (VII) MPPI controller tuning. *Part III (Experimental Setup)* covers (VIII) the dataset collection protocol and (IX) the evaluation protocol. *Part IV (Results and Discussion)* covers (X) simulation validation of the analytical and learned dynamics models via open-loop prediction accuracy, (XI) detailed statistics and per-trial data, (XII) results, analysis, and discussion, and (XIII) real-hardware fine-tuning. *Part V* is (XIV) the reproducibility guide.**

CONTENTS

I Sensor Characterization 3
I-A VL53L0X Time-of-Flight Sensor 3
I-B Sequential Mode 3
I-C Continuous Mode 3
I-D Simulation Sensor Model 3
I-E Selected Configuration and Control Implications 4
I-F Calibration Offset 4

II Mathematical Model 5
II-A Coordinates and Kinematics 5
II-B Energy Formulation 5
II-B1 Translational Kinetic Energy 5
II-B2 Rotational Kinetic Energy . . 5
II-B3 Effective Ball Contribution . 5
II-B4 Total Kinetic and Potential Energy 5
II-C Equations of Motion 5
II-D Matrix Form 6
II-E First-Order State-Space Form 6
II-F Velocity-Input Plant Model 6
II-G Remarks 7

III Controller Design 7
III-A Tuning Methodology 7
III-B PD Controller 7
III-C Linear Quadratic Regulator (LQR) . . . 8
III-D Sliding Mode Controller (SMC) 8
III-E Linear MPC 8
III-F Nonlinear MPC (NMPC) 8
III-G Reinforcement Learning 8
III-H Offline Reinforcement Learning (IQL) . 9

IV Classical Controller Tuning: Insights and Lessons 9
IV-A General Methodology 9
IV-B PD 9
IV-C LQR 10
IV-D SMC 11
IV-E Linear MPC 11
IV-F NMPC 11
IV-G Cross-Controller Insights 11

V Reinforcement Learning Training Details 12
V-A Algorithm and Architecture 12
V-B Reward Function 12
V-C Training Environment 12
V-D Training Curves 13
V-E PPO Ablation Study 13
V-E1 Results 13
V-E2 Analysis 13
V-F Hardware Validation of PPO Variants . 13
V-F1 Hardware Insights 13
V-G Multi-Algorithm Comparison 14
V-G1 Algorithm Analysis 14
V-G2 Failure Mode Analysis . . . 15
V-G3 Full Hardware Evaluation (50 Trials) 15
V-H Extended Training: 5M-Step Ablation . 15
V-I Sensor Blind Zone Ablation 16
V-J Complete Ablation Summary 16
V-K Selected Model 16
V-L Motor Model and Dip-Width (FWHM) Ablation 17

V-L1 Training configurations . . . 17
V-L2 Hardware screening (10 trials) 17
V-M Fairness of the RL Comparison 18
V-N Simulation-to-Real Transfer 18
V-O Offline Reinforcement Learning (IQL) . 19
V-O1 Dataset 19
V-O2 Algorithm Configuration . . 19
V-O3 Model Selection 19
V-O4 Hardware Results 19

VI World Model RL Training 20
VI-A World Model Architecture 20
VI-B Checkpoint Provenance and Sign Conventions 20
VI-C PPO Training on World Model 20
VI-D Results 20
VI-E Data Size Sweep 21

VII MPPI Controller Tuning 21
VII-A Algorithm Overview 21
VII-B Cost Function 21
VII-C Importance Weighting 21
VII-D Action Sampling with Temporal Smoothing 22
VII-E Final Tuned Parameters 22
VII-F Tuning Method 22
VII-G Tuning Sweep Results 22
VII-H Advanced Implementation Features . . . 22
VII-I Compute Performance 22

VIII Dataset Collection Protocol 23
VIII-A Data-Collection Notes 24

IX Evaluation Protocol 24
IX-A Initial Conditions and Success Criteria . 24
IX-B Performance Metrics 25
IX-C Experiment 1: Baseline Performance . . 25

X Simulation Validation 26
X-A Methodology 26
X-B Analytical Model Ablation 26
X-C Analytical Model vs. World Model . . . 27
X-D Crossover Analysis 27
X-E Summary 27

XI Detailed Statistics and Per-Trial Data 27
XI-A MPPI: Per-Stratum Breakdown (50 Trials) 27
XI-B Complete Benchmark Results (All 13 Controllers) 28
XI-C Failed Controller Variants (Excluded from Main Results) 29
XI-D Statistical Significance 29
XI-E Initial Condition Protocol 30
XI-F Control Effort and Trajectory Shape . . 30

XII Results, Analysis, and Discussion 30
XII-A Experiment 1: Baseline Performance Results 30
XII-A1 Simulation Prediction Accuracy 31
XII-A2 Performance Variability . . . 31
XII-A3 Initial Condition Robustness 31

XIII Real-Hardware Fine-Tuning 33
XIII-A Motivation 33
XIII-B Protocol 33
XIII-C Results 34
XIII-D Analysis 34

XIV Reproducibility Guide 35
XIV-A Hardware 35
XIV-B Software 35
XIV-C Repository layout 35
XIV-D Sensor calibration (hardware runs only) 35
XIV-E Reproducing the project 35
XIV-F Companion website 36
XIV-G Key Parameters 36

References 39

I. Sensor Characterization

A. VL53L0X Time-of-Flight Sensor

The position sensor is one of the defining sources of difficulty on this platform, so we characterize its behavior carefully before turning to the controllers. Ball position is read by two VL53L0X (STMicroelectronics) Time-of-Flight sensors, each with a programmable timing budget that sets the integration time per measurement. We mount one at each end of the nearly 30 cm arc (radius 2.101 m, approximately linear) so that whichever half of the arc the ball occupies is always read by the nearer sensor: the left sensor covers the left half, the right sensor the right half. This nominal span corresponds to ± 0.071 rad at $R = 2.101$ m; logged ball angles occasionally reach the ± 0.081 rad empirical limit used elsewhere, because each sensor's 0–170 mm range can report the ball marginally past the nominal arc ends. Both share a single I^2C bus, which precludes reading them simultaneously without interference.

B. Sequential Mode

In sequential mode we trigger and read the two sensors alternately. The total cycle time we measure follows $T_{\text{cycle}} \approx 2 \times \text{budget} + 12\,\text{ms}$, where the $\sim$12 ms overhead comes from the I^2C transactions and the inter-trigger delay. To map the tradeoff between noise and update rate, we held the ball static at three positions, the center of the arc and each extreme, and averaged 50 samples per position at four timing budgets (Table 1). The minimum programmable budget is 20 ms, which caps the sequential update rate at ≈ 18.6 Hz.

Two systematic effects appear consistently across all configurations:

1) **Near-field blind zone:** The VL53L0X datasheet [1] (§6) specifies a minimum measurable distance dependent on target reflectance and ambient IR levels. Below this threshold ($\approx$30–50 mm in our configuration), the return photon pulse arrives before the SPAD timing gate opens, causing one of two failure modes:
   - The sensor reports `RangeStatus` $= 4$ (signal fail), which the firmware outputs as -1 and the host-side parser rejects, the previous valid reading is held.
   - The sensor returns an erroneously large distance (typically $\approx$40–48 mm regardless of true position), which passes the host-side validity check (< 300 mm) and is accepted as a legitimate measurement.

   Effect on ball-angle estimation: As the ball approaches the arc end nearest a sensor, the measured ball-to-sensor distance shrinks toward zero; near the edge it falls below the near-field threshold and the reading is no longer valid. The blind-zone onset occurs at approximately $\theta_{\text{blind}} \approx 0.071$ rad. Beyond this angle, the reported position *saturates*: the controller observes the ball at approximately 0.071 rad, and when the ball is stationary or moving very slowly, the velocity estimate appears near zero, even as the true ball angle increases to 0.08 rad. If the ball is moving through the blind zone at speed, the saturation duration is brief and typically inconsequential because the next reading captures the ball at a different position. When the ball reverses direction and exits the blind zone, normal tracking resumes.
2) **Inter-sensor bias:** On this characterization unit the right sensor reads $\approx$14–16 mm higher than the left at center despite symmetric physical placement. This is an intrinsic per-unit offset rather than a physical asymmetry: after a later sensor-board swap the deployed board carries the opposite bias, with the left sensor reading $\approx$30 mm higher (Sec. I-F). Either way the offset must be calibrated out so the two halves of the arc report a consistent zero.

Measurement noise scales inversely with the timing budget, roughly tripling as the budget drops from 100 ms to 20 ms, so faster sensing comes directly at the cost of noisier readings.

C. Continuous Mode

Continuous mode ranges both sensors in parallel rather than alternately, so each unit runs on its own $\sim$33 ms budget (nominally $\sim$30 Hz) instead of the two sharing the $\sim$82 ms sequential cycle (12 Hz). We rejected it for two reasons. The first is optical crosstalk between the co-located sensors: the VL53L0X uses a 940 nm VCSEL infrared emitter [1], and when both emit at once, the signal from one is picked up by the other's receiver and corrupts the reading. The second is noise: even setting crosstalk aside, levels run roughly 5 to 30 times larger than in sequential mode at the same budget (Table 2), enough to render position estimates unusable for control. We therefore use sequential mode throughout.

D. Simulation Sensor Model

To narrow the sim-to-real gap, our training environment (`BalancerSim`) reproduces three of these sensor effects:

1) **Measurement staleness:** Ball position updates at $\sim$10 Hz (geometric inter-arrival, mean $= 2$ control steps). Between updates the controller observes the last valid reading (this matches the deployed effective ball-update rate quantified in the selected-configuration subsection below).
2) **Observation noise:** Additive Gaussian noise with $\sigma_\theta \approx 0.0005$–$0.002$ rad ($\approx$ 1.0–4.2 mm of arc, position) and $\sigma_{\dot\theta} \approx 0.02$–$0.04$ rad/s ($\approx$ 42–84 mm/s, velocity, amplified by finite-difference estimation). In domain-randomization mode, σ is sampled uniformly each episode from the measured hardware range.
3) **Near-field blind zone (optional):** When $|\theta_{\text{true}}| > \theta_{\text{blind}}$ (nominally 0.064 rad from the sensor geometry; the calibrated measured onset is 0.071 rad, and both lie within the $[0.060, 0.080]$ rad range randomized under DR), the ball-position observation is clamped to $\pm\theta_{\text{blind}}$ and the velocity observation is set to ≈ 0. This reproduces the saturation behavior described above: the controller sees the ball "stuck" at the blind-zone boundary while the true state continues evolving. The feature is disabled by

TABLE 1. VL53L0X sequential mode characterization. All values are mean $\pm\,\sigma$ (mm), averaged over 50 static measurements. †Interpolated by applying the σ scaling factor observed across measured entries; means are physically stable.

Budget (ms)	Cycle (ms)	Rate (Hz)	Center		Left Extreme		Right Extreme	
			L	R	L_{min}	R_{max}	L_{max}	R_{min}
100	211.7	4.72	161.80 ± 0.85	175.76 ± 1.06	48.32 ± 0.99	210.46 ± 1.01	181.22 ± 0.97	40.32 ± 1.00
50	113.2	8.84	161.34 ± 1.24	175.46 ± 1.51	$48.20 \pm 1.44^{\dagger}$	$210.30 \pm 1.47^{\dagger}$	180.68 ± 1.54	40.58 ± 1.14
34.5	82.1	12.17	160.54 ± 1.62	175.64 ± 1.68	$48.08 \pm 1.90^{\dagger}$	$210.12 \pm 1.93^{\dagger}$	180.44 ± 2.11	41.62 ± 1.78
20	53.8	18.59	160.22 ± 2.83	176.42 ± 2.81	$47.78 \pm 3.29^{\dagger}$	$209.74 \pm 3.36^{\dagger}$	180.12 ± 3.22	42.34 ± 3.01

TABLE 2. VL53L0X continuous mode at center position (mean $\pm\,\sigma$, mm), 50 samples. Update rates were not reliably characterized in this mode due to crosstalk effects. ‡Partial outlier exclusion applied; fault rate 3–5%.

Budget (ms)	L (mm)	R (mm)
50	217.5 ± 38.9	117.2 ± 10.0
34.5	$179.1 \pm 29.8^{\ddagger}$	$144.0 \pm 8.9^{\ddagger}$
20	147.1 ± 41.2	170.9 ± 38.1

default (`sensor_blind_zone=False`) and must be explicitly enabled for training with blind-zone awareness. When combined with domain randomization, the threshold is randomized over $[0.060, 0.080]$ rad.

E. Selected Configuration and Control Implications

We use the default 34.5 ms timing budget in sequential mode for all experiments, which yields a 12.17 Hz sensor update rate (82.1 ms cycle) with ≈1.6–1.7 mm noise at center. This budget is held fixed across all experiments so that observed performance differences reflect controller variation alone, not changes in sensor characteristics. Longer budgets offer marginal noise reduction at a disproportionate rate penalty; shorter budgets increase noise without sufficient rate benefit for the tested frequency range. All sensor readings are used raw without filtering to benchmark controller robustness under realistic sensing conditions. The 82.1 ms cycle introduces position-measurement latency that exceeds the control period (50 ms at 20 Hz); all controllers therefore act on position data that may be up to one full sensor cycle old. In deployment the effective refresh is slower still: sampled by the 50 ms control loop, the fused ball reading updates every one to two control cycles across the benchmark trials (median 100 ms, mean 87 ms, i.e. ∼10–12 Hz effective). This is the rate the simulator's ∼10 Hz ball-staleness model reproduces, so the training environment matches the deployed sensing rate rather than the faster 12 Hz rate measured statically on the bench.

F. Calibration Offset

Post-hoc analysis revealed a systematic offset between the sensor-reported zero and the true physical center of the arc. Using the IR beam-break sensor (which fires when the ball crosses the arc's lowest point) as ground truth, we measured the ToF sensor readings with the ball stationary at physical center (5000 samples, dip = 1 for all):

	Left sensor	Right sensor
Measured at physical center	193 ± 4 mm	160 ± 5 mm
Calibration used in code	175 mm	170 mm
Error	+18 mm	−10 mm

With the earlier code calibration (175/170), the `process_dual_sensors` routine reports $\theta \approx +4.8$ mrad when the ball is at physical center (right sensor path: $-(160 - 170)/1000/2.101$), and across the 175/170-era trial logs the median ball angle at dip = 1 is +7.14 mrad. Recalibrating the center constants to the measured equilibrium removes this residual: in the deployed datasets (`arcball_cont_1M_calib196_160`, center constants 189/158) the median ball angle at dip = 1 is ≈ 0 mrad.

Noise characterization: With the ball stationary at center, the left sensor spans 187–201 mm and the right sensor spans 151–168 mm. The per-sample standard deviation is approximately 3 mm for the left sensor and up to 6 mm for the right, the larger figure inflated by intermittent near-field fault readings; excluding those faults the robust spread is close to 3 mm for both. Converted to angle, the typical per-reading noise is $\sigma_\theta \approx 3\,\text{mm} / 2101\,\text{mm} \approx 1.4$ mrad. The ±4 mm and ±5 mm figures in the calibration table are the per-sample spreads over these 5000 stationary, dip-gated samples.

Because `process_dual_sensors` fuses the two units, the ball-angle estimate that controllers actually receive is tighter than either raw channel. Over the same stationary samples (from the deployed calibration, `arcball_cont_1M_calib196_160`) its standard deviation is $\sigma_\theta \approx 1.6$ mrad (≈ 3.3 mm of arc), with a peak-to-peak spread near 13 mm. This is the figure quoted in the main paper; the 14–17 mm per-unit spans above are the raw single-sensor peak-to-peak, so the two are consistent views of the same measurement. Either way, the deployed-board noise is roughly double the pre-swap figure and a substantial fraction of the ±21 mm success tolerance.

Note on Table 1 discrepancy: The characterization table reports L=161.8, R=175.8 at center, which differs from the current L=193, R=160. This data was collected prior to a hardware modification (sensor board swap) that changed the per-unit offsets. The post-modification readings at true physical center are $L \approx 193$, $R \approx 160$.

Impact on experiments: For the final benchmark (Experiment 1, Table II in the main paper), the sensor offset is corrected by recalibrating the center reading:

rather than subtracting a bias from raw readings, the `process_dual_sensors` routine was updated so that the center calibration constants produce $\theta = 0$ when the ball is at physical center. After recalibration, the left and right baseline values are no longer 175 and 170; they reflect the new reference point such that center readings are $\theta \approx 0$ by default. The offset discussion above applies to earlier ablation runs and datasets collected before the correction was applied. For those runs the bias is constant and smaller than the settling band (± 10 mrad); its main effect is to lengthen settling times, though it also lowers success rate to a modest degree (for PD+WO, correcting the offset raises hardware SR from 88% to 96%, Appendix III), which is why it is corrected for the deployed benchmark. Because these per-unit offsets drift between sessions, recalibrating the center constants before each experiment campaign is necessary rather than optional; the specific constants quoted here are representative, and the exact deployed values vary from run to run. The recalibration procedure is documented in the reproducibility guide.

II. Mathematical Model

This section derives the full nonlinear dynamics of the ball-on-arc system. The ball rolls on a convex arc with a central concave dip. The dip makes the equilibrium locally stable and lightly damped, a shallow restoring well, rather than open-loop unstable as in the classical ball-and-beam system. The well is narrow, however: with the parameters of Table 3, gravity restores the ball only within about 0.0115 rad of center and beyond that the convex arc dominates and rolls the ball away. We use the Euler-Lagrange method under a pure-rolling assumption, accounting for both translational and rotational motion of the ball. The base ball-and-arc formulation follows [2]; we extend it with the central concave dip (the $d\,e^{-k\theta^2}$ term below), rolling and viscous friction, and a velocity-input actuator model (Section II-F).

A. Coordinates and Kinematics

We define the generalized coordinates as x (cart position) and θ (ball angle measured from the arc's vertical centerline, positive to the right), consistent with the platform schematic in the main paper. The ball position relative to the cart is

$$X_{\text{rel}} = R\sin\theta, \quad Y_{\text{rel}} = R\cos\theta - de^{-k\theta^2}, \tag{1}$$

where R is the arc radius, d is the dip depth, and $k = R^2/(2\sigma^2)$ defines the Gaussian dip width. The term $de^{-k\theta^2}$ represents the concave dip that lowers the surface by depth d at the arc center ($\theta = 0$) and smoothly transitions to the nominal convex arc profile as $|\theta|$ increases. In inertial coordinates,

$$X = x + X_{\text{rel}}, \quad Y = Y_{\text{rel}}. \tag{2}$$

The corresponding velocity components are

$$\dot{X} = \dot{x} + R\cos\theta\,\dot{\theta}, \quad \dot{Y} = (-R\sin\theta + a(\theta))\dot{\theta}, \tag{3}$$

with $a(\theta) = 2dk\theta e^{-k\theta^2}$ capturing the velocity contribution from the dip geometry.

Assuming pure rolling without slip, the ball's angular velocity is

$$\omega = \frac{R}{r}\dot{\theta}, \tag{4}$$

where r is the ball radius. This holonomic constraint $r\varphi = R\theta$ relates the ball's rotational angle φ to its position along the arc.

B. Energy Formulation

1) Translational Kinetic Energy: The cart moves along the horizontal track:

$$T_{\text{cart}} = \frac{1}{2}M\dot{x}^2. \tag{5}$$

The ball contributes translational kinetic energy in both the horizontal and vertical directions:

$$T_{\text{ball,trans}} = \frac{1}{2}m(\dot{X}^2 + \dot{Y}^2). \tag{6}$$

Using (3), we expand:

$$\begin{aligned}\dot{X}^2 + \dot{Y}^2 &= \dot{x}^2 + 2\dot{x}R\cos\theta\,\dot{\theta} \\ &\quad + \left[(R\cos\theta)^2 + (-R\sin\theta + a(\theta))^2\right]\dot{\theta}^2.\end{aligned} \tag{7}$$

Combining cart and ball translational contributions:

$$T_{\text{trans}} = \frac{1}{2}(M+m)\dot{x}^2 + mR\cos\theta\,\dot{x}\dot{\theta} + \frac{1}{2}mC(\theta)\dot{\theta}^2, \tag{8}$$

with

$$C(\theta) = (R\cos\theta)^2 + (-R\sin\theta + a(\theta))^2. \tag{9}$$

2) Rotational Kinetic Energy: The ball rolls without slipping along the arc:

$$T_{\text{rot}} = \frac{1}{2}I\omega^2 = \frac{1}{2}I\left(\frac{R}{r}\right)^2\dot{\theta}^2, \tag{10}$$

where I is the moment of inertia of the ball and r its radius.

3) Effective Ball Contribution: Combining translational and rotational contributions along the arc:

$$C_{\text{eff}}(\theta) = C(\theta) + \frac{I}{m}\frac{R^2}{r^2}, \quad T_{\text{ball}} = \frac{1}{2}mC_{\text{eff}}(\theta)\dot{\theta}^2. \tag{11}$$

4) Total Kinetic and Potential Energy:

$$\boxed{T = \frac{1}{2}(M+m)\dot{x}^2 + mR\cos\theta\,\dot{x}\dot{\theta} + \frac{1}{2}mC_{\text{eff}}(\theta)\dot{\theta}^2} \tag{12}$$

$$\boxed{V(\theta) = mg\big(R\cos\theta - de^{-k\theta^2}\big).} \tag{13}$$

C. Equations of Motion

The Euler–Lagrange equation for a generalized coordinate q_i with generalized force Q_i is:

$$\frac{d}{dt}\left(\frac{\partial L}{\partial \dot{q}_i}\right) - \frac{\partial L}{\partial q_i} = Q_i, \tag{14}$$

where $L = T - V$ is the Lagrangian.

The derivatives used in the formulation are defined as

$$C'(\theta) = \frac{dC_{\text{eff}}}{d\theta}, \quad a'(\theta) = \frac{da(\theta)}{d\theta} = 2dke^{-k\theta^2}(1 - 2k\theta^2). \tag{15}$$

a) Cart coordinate x: The horizontal force applied is $Q_x = u$. Partial derivatives of the Lagrangian:

$$\begin{aligned} \frac{\partial L}{\partial \dot{x}} &= (M+m)\dot{x} + mR\cos\theta\,\dot{\theta}, \\ \frac{\partial L}{\partial x} &= 0. \end{aligned} \tag{16}$$

Time derivative:

$$\frac{d}{dt}\left(\frac{\partial L}{\partial \dot{x}}\right) = (M+m)\ddot{x} + mR\left(-\sin\theta\,\dot{\theta}^2 + \cos\theta\,\ddot{\theta}\right). \tag{17}$$

The Euler–Lagrange equation gives the following:

$$\boxed{(M+m)\ddot{x} - mR\sin\theta\,\dot{\theta}^2 + mR\cos\theta\,\ddot{\theta} = u.} \tag{18}$$

b) Ball coordinate θ: The generalized force is zero, $Q_\theta = 0$. Partial derivatives of the Lagrangian are

$$\begin{aligned} \frac{\partial L}{\partial \dot{\theta}} &= mR\cos\theta\,\dot{x} + mC_{\text{eff}}(\theta)\,\dot{\theta}, \\ \frac{\partial L}{\partial \theta} &= -mR\sin\theta\,\dot{x}\dot{\theta} + \tfrac{1}{2}mC'_{\text{eff}}(\theta)\,\dot{\theta}^2 - mg\big(a(\theta) - R\sin\theta\big). \end{aligned} \tag{19}$$

Time derivative:

$$\begin{aligned} \frac{d}{dt}\left(\frac{\partial L}{\partial \dot{\theta}}\right) = mR(-\sin\theta\,\dot{\theta}\,\dot{x} + \cos\theta\,\ddot{x}) \\ + m\left(C'(\theta)\dot{\theta}^2 + C_{\text{eff}}(\theta)\ddot{\theta}\right). \end{aligned} \tag{20}$$

The Euler–Lagrange equation simplifies to:

$$\boxed{R\cos\theta\,\ddot{x} + C_{\text{eff}}(\theta)\,\ddot{\theta} + \tfrac{1}{2}C'(\theta)\dot{\theta}^2 + g\big(a(\theta) - R\sin\theta\big) = 0} \tag{21}$$

D. Matrix Form

Coupled second-order dynamics from Eqs. (18) and (21) can be expressed compactly in matrix form:

$$\begin{bmatrix} M+m & mR\cos\theta \\ R\cos\theta & C_{\text{eff}}(\theta) \end{bmatrix} \begin{bmatrix} \ddot{x} \\ \ddot{\theta} \end{bmatrix} = \begin{bmatrix} u + mR\sin\theta\,\dot{\theta}^2 \\ -\tfrac{1}{2}C'_{\text{eff}}(\theta)\,\dot{\theta}^2 - g\big(-R\sin\theta + a(\theta)\big) \end{bmatrix}. \tag{22}$$

This matrix form makes it easier to see the coupling between the cart and ball. For controller design, we convert the system into a first-order state-space form.

E. First-Order State-Space Form

To facilitate controller design and linearization, we convert the second-order dynamics in Eq. (22) to a first-order form. We define the state vector as

$$x = \begin{bmatrix} x_{\text{cart}} \\ \dot{x}_{\text{cart}} \\ \theta \\ \dot{\theta} \end{bmatrix} \in \mathbb{R}^4, \quad u \in \mathbb{R}. \tag{23}$$

The dynamics can then be written compactly as

$$\dot{x} = f(x,u) = \begin{bmatrix} \dot{x}_{\text{cart}} \\ \ddot{x}_{\text{cart}}(x,\dot{x},\theta,\dot{\theta},u) \\ \dot{\theta} \\ \ddot{\theta}(x,\dot{x},\theta,\dot{\theta}) \end{bmatrix}, \tag{24}$$

where $\ddot{x}_{\text{cart}}$ and $\ddot{\theta}$ are computed from Eq. (22).

a) Linearization: We linearize the system around an operating point (x_0, u_0) using the Jacobians of f with respect to the state and input:

$$A = \left.\frac{\partial f}{\partial x}\right|_{x_0,u_0}, \quad B = \left.\frac{\partial f}{\partial u}\right|_{x_0,u_0}. \tag{25}$$

These matrices form the basis for designing linear controllers.

b) Discrete-Time Approximation: For controllers that require discrete-time dynamics, the first-order system can be integrated over a timestep Δt using zero-order hold (ZOH):

$$x_{k+1} = F(x_k, u_k) \approx x_k + \int_{t_k}^{t_k+\Delta t} f(x(t), u_k)\,dt, \tag{26}$$

where F defines the discrete-time map.

F. Velocity-Input Plant Model

The physical platform uses a Beckhoff servo drive controlled via the `MC_MoveVelocity` function block, where the controller commands a desired cart velocity v_{cmd} rather than a force. Internally, the drive executes a 7-phase S-curve motion profile; for modeling tractability, we approximate this as a first-order lag:

$$\ddot{x} = \frac{v_{\text{cmd}} - \dot{x}}{\tau_v}, \qquad \tau_v = 0.15 \text{ s}, \tag{27}$$

where τ_v is identified empirically from open-loop trajectory matching between simulation and hardware (Appendix X). Because $\ddot{x}$ is now a known function of state and input, the ball equation reduces to

$$\begin{aligned} \ddot{\theta} = \frac{1}{C_{\text{eff}}(\theta)}\Big[-R\cos\theta\,\ddot{x} - \tfrac{1}{2}C'_{\text{eff}}(\theta)\dot{\theta}^2 \\ + g(R\sin\theta - a(\theta)) - Q_{\text{rr}} - Q_{\text{visc}}\Big], \end{aligned} \tag{28}$$

where the generalized friction terms are

$$Q_{\text{rr}} = \mu_{\text{rr}}\, g\, R\cos\theta\ \text{sign}(\dot{\theta}), \tag{29}$$

$$Q_{\text{visc}} = \beta_v\,\dot{\theta}. \tag{30}$$

with rolling-friction coefficient $\mu_{\text{rr}} = 0.025$ and viscous damping $\beta_v = 0.009$ m^2/s. These two are nominal estimates rather than precisely identified values; domain randomization samples them over $[0.010, 0.040]$ and $[0.003, 0.015]$ respectively during training. In simulation the $\text{sign}(\dot{\theta})$ in Eq. (29) is replaced by a smoothed $\tanh(\dot{\theta}/\varepsilon)$ with $\varepsilon = 0.005$ rad/s to avoid chattering at $\dot{\theta} = 0$. The physical parameters are taken from `balancer/core/params.py`; the actuation limit $v_{\max}$ and the 20 Hz control rate come from `balancer/hardware/constants.py`. All are summarized in Table 3.

TABLE 3. Nominal system parameters.

Parameter	Value	Description
g	9.81 m/s^2	Gravitational acceleration
R	2.101 m	Arc radius
m	0.024 kg	Ball mass (24 g)
r	0.009 m	Ball radius (9 mm)
M	0.351 kg	Cart mass
τ_v	0.15 s	Velocity-lag time constant
μ_{rr}	0.025	Ball rolling friction (est.)
β_v	0.009 m^2/s	Ball viscous damping (est.)
d	0.002 m	Dip depth (2 mm)
FWHM	0.020 m	Dip width ($\sigma = \mathrm{FWHM}/2.355$)
$v_{\max}$	0.9 m/s	Cart velocity-command limit
T_s	0.05 s	Control timestep (20 Hz)

All reported controllers and the benchmark environments use this velocity-input plant; the drive's underlying jerk-limited S-curve profile is also implemented and drives the development-regime results (Appendix V-M), while the force-input formulation (Eq. (22)) is retained for derivation reference only. Both the linearized velocity-input system (used by LQR/MPC) and the nonlinear RK4 integration (used by NMPC) incorporate τ_v explicitly.

G. Remarks

We treat the ball as a solid spherical bead, so its moment of inertia is $I = \frac{2}{5}mr^2$. LQR and MPC use this model linearized around the arc center, while NMPC and the training simulator integrate the full nonlinear form; in either case the model carries the coupling between cart and ball along with the effect of the central concave dip.

III. Controller Design

All controllers inherit from a common `BaseController` interface, accept state $s = [x, \dot{x}, \theta, \dot{\theta}]^\top$, and return a cart-velocity set-point u in m/s. The set-point is saturated at the axis limit (± 0.9 m/s) by the shared command interface: the simulator clips it before the motor model, and the hardware bridge applies the identical clip before converting to mm/s. Saturation is therefore a property of the plant interface rather than of any individual controller, and all controller families command against the same effective actuation range in simulation and on hardware. This command is passed directly to `MC_MoveVelocity`, the PLCopen velocity-command function block accepted by the Beckhoff servo drive (it starts an endless travel at a commanded velocity/direction, not a jogging primitive). Internally, the servo executes a 7-phase optimized S-curve velocity profile; for control design we approximate this as a first-order lag ($\tau_v = 0.15$ s). Learning-based controllers (RL, MPPI, IQL) are implemented in PyTorch [3]. The justification is pragmatic, not algorithmic: (1) the first-order lag was identified empirically from open-loop trajectory matching and captures the dominant outer-loop velocity response that every controller family actually commands against; and (2) none of our controllers (feedback laws, planners, or RL policies) issue jerk/acceleration set-points, so the S-curve's internal jerk-limited transitions are not a design degree of freedom for them. Where the higher-order motor response matters (predictive controllers trying to brake into a wall), the residual mismatch is characterized as a sim-to-real gap in Appendix X rather than modeled in the loop. This section describes the key design choices for each controller; selected deployed parameters are listed in Table 4.

A. Tuning Methodology

We tune the classical controllers via CMA-ES [4] (pycma [5]) (Covariance Matrix Adaptation Evolution Strategy: a gradient-free optimizer that adapts a multivariate Gaussian search distribution, well-suited for low-dimensional, non-convex parameter optimization) in a first-order motor simulation (RK4, 20 Hz) using an ISE-based objective:

$$J = 500 \cdot \mathrm{ISE}_\theta + 20 \cdot \mathrm{ISE}_{\dot{\theta}} + 0.5 \cdot \mathrm{ISE}_u + 0.1 \cdot N_{\text{boundary}} \quad (31)$$

where $\mathrm{ISE}_x = \frac{1}{T}\int_0^T x(t)^2\,dt$ is the time-averaged squared error of the ball angle θ and the command u; the velocity term additionally weights $\dot{\theta}^2$ by a Gaussian gate $\exp(-\theta^2/2\sigma_g^2)$ with $\sigma_g \approx 0.0085$ (the value `0.020/2.355` used in code, applied to the ball angle θ), so angular velocity is penalized mainly near equilibrium; and N_{boundary} counts timesteps at which the ball angle reaches its physical limit ($|\theta| \geq \theta_{\max}$). J is averaged over 7 representative initial conditions spanning all strata.

B. PD Controller

We use a PD controller whose derivative term acts on the measured angular velocity:

$$u_t = K_p\,\theta_t + K_d\,\dot{\theta}_t. \quad (32)$$

No integral term is used ($K_i = 0$, confirmed by CMA-ES convergence): adding integral action causes windup during wall-override intervals (when the nominal command is replaced) and was consistently rejected by the optimizer. The arc's concave dip is passively restoring about the equilibrium, so no integral term is needed to remove steady-state angle error in the linear regime.

a) Wall-proximity override.: Let u_{nom} be the controller's nominal command. When the cart is within d_w of a rail limit and u_{nom} pushes toward the wall, the output is overridden with a fixed escape velocity u_{ov} (m/s):

$$u_t = \begin{cases} -u_{\text{ov}} & x > x_{\text{lim}} - d_w \text{ and } u_{\text{nom}} > 0, \\ +u_{\text{ov}} & x < -(x_{\text{lim}} - d_w) \text{ and } u_{\text{nom}} < 0, \\ u_{\text{nom}} & \text{otherwise.} \end{cases} \quad (33)$$

With the override and calibrated sensors, PD+WO reaches 96% hardware SR. Two ablations isolate the contributions: removing the override drops it to 18% (vanilla PD), and

keeping the override but disabling sensor-offset correction (Appendix I-F) drops it to 88% (Appendix XII). The override prevents irreversible wall collisions. The same override is applied to LQR.

C. Linear Quadratic Regulator (LQR)

LQR linearizes the first-order velocity-input dynamics about $\theta = 0$; the discrete-time algebraic Riccati equation (DARE) [6] yields a state-feedback gain $K = [K_x, K_{\dot{x}}, K_\theta, K_{\dot{\theta}}]$. The deployed wall-override configuration does not use this DARE solution: on hardware the gain that transfers is the PD-equivalent one (cart terms zero, Table 4), as the DARE and CMA-ES solutions perform far worse on the real system (see the LQR discussion in the classical-tuning appendix). Three variants are evaluated:

- **Basic**: No constraint handling; same PD-equivalent deployed gain with the override disabled (20% HW SR).
- **Q-center**: High Q_x penalizes cart displacement (28% HW SR, oscillatory).
- **Wall override**: Eq. (33) with d_w=0.12 m, u_{ov}=0.5 (**92%** HW SR, PD-equivalent gain).

D. Sliding Mode Controller (SMC)

Sliding mode control has been applied to the ball-and-arc system in prior work [2], [7]. Our implementation defines a sliding surface $\sigma = \dot{\theta} + \lambda\theta$ and computes the equivalent control via model inversion [8]:

$$v_{\text{eq}} = -\frac{F}{G}, \quad F = f_{\text{vel}}(\theta, \dot{\theta}, \dot{x}) + \lambda\dot{\theta}, \quad G = g_{\text{vel}}(\theta) \tag{34}$$

with a smooth reaching law $v_{\text{reach}} = -(k/G)\,\tanh(\sigma/\phi)$ and an explicit cart-velocity damping term:

$$v_{\text{cmd}} = -\frac{F + k\,\tanh(\sigma/\phi)}{G} - k_d\,\dot{x}. \tag{35}$$

a) Cart-velocity damping.: The term $-k_d\dot{x}$ is a separate cart-velocity damper appended to the SMC command; it is not part of the sliding surface (which depends only on $\dot{\theta}$ and θ). The ball bearing's rolling friction (Appendix II) enters f_{vel} and is included in the nominal equivalent-control compensation; it is not what k_d addresses. Instead, k_d closes an open-loop cart-drift mode: when $\sigma \approx 0$ and $\theta \approx 0$ the model-inversion terms in v_{eq} collapse to small residuals (model error, discretization, sensor offset) that act as a constant velocity command; without damping these integrate through the first-order cart lag into unbounded cart motion after the ball is balanced. Adding $-k_d\dot{x}$ directly opposes any residual cart velocity, independent of ball angle. We find k_d=0.5 sufficient on hardware.

b) Boundary layer.: The boundary layer thickness ϕ controls the trade-off between chattering and steady-state accuracy. Small ϕ (<0.15) causes chattering (>500 sign reversals per episode at 20 Hz); large ϕ (>0.8) reduces tanh to a near-linear function, effectively converting the controller to a continuous nonlinear approximation rather than a true variable-structure controller. CMA-ES selects ϕ=0.806 for the deployed SMC+WO variant, in the large-ϕ regime. We acknowledge this trade-off: the sliding-mode discontinuity is sacrificed for stability on hardware at 20 Hz with noisy sensor feedback; smaller ϕ values produced unacceptable chattering in preliminary trials. The cart-velocity damping term $-k_d\dot{x}$ is retained in the deployed SMC+WO variant (k_d=0.5); without it, the post-balance cart-drift mode described above remains open-loop and the cart eventually reaches a rail. Earlier SMC formulations without the wall-override achieved only about 12% hardware SR.

c) Wall-proximity override.: The same override as Eq. (33) is applied with d_w=0.12 m, u_{ov}=0.5. Combined with the k_d damping term, this raises hardware SR from 12% (the basic variant without override or damping) to **92%**.

E. Linear MPC

MPC formulates a finite-horizon QP using the linearized first-order motor model with cart position as a hard constraint:

$$\begin{aligned} \min_{U} \; & \sum_{k=0}^{N-1} \left[x_k^\top Q\, x_k + u_k^\top R\, u_k\right] + x_N^\top Q_f\, x_N \\ \text{s.t.} \; & x_{k+1} = A_d x_k + B_d u_k, \quad x_0 = s_t, \\ & |[x_k]_1| \le x_{\text{lim}}, \quad |u_k| \le 0.9 \text{ m/s} \end{aligned} \tag{36}$$

with N=10, solved via OSQP [9]. The QP cart constraint is MPC's native boundary handling and yields 44% hardware SR; the deployed wall-override variant (d_w=0.12, u_{ov}=0.5) drops the QP cart constraint and relies on the override instead, raising SR to **80%**.

F. Nonlinear MPC (NMPC)

NMPC solves a full nonlinear NLP using CasADi/IPOPT [10] with RK4 discretization of the velocity-input dip dynamics:

$$\begin{aligned} \ddot{\theta} = \frac{1}{C_{\text{eff}}(\theta)}\Big[& -R\cos\theta\cdot\ddot{x} - \tfrac{1}{2}C'(\theta)\dot{\theta}^2 \\ & + g(R\sin\theta - a(\theta)) - Q_{\text{rr}} - Q_{\text{visc}}\Big] \end{aligned} \tag{37}$$

with $a(\theta)$, $C_{\text{eff}}(\theta)$, and the friction terms Q_{rr}, Q_{visc} as defined in Appendix II, and cart position enforced as hard NLP constraints over the N=10 horizon.

a) Beneficial model mismatch.: NMPC's internal model uses FWHM=42 mm for the arc's dip width, wider than the actual 20 mm. This wider-well approximation is beneficially conservative and produces smoother recoveries, gentler commands that avoid exciting the wall-bounce limit cycle (Appendix XII), yielding **90% hardware SR** (50 trials; first-order simulation predicts 100%).

G. Reinforcement Learning

We train five algorithms in simulation using StableBaselines3 [11] and `sb3_contrib`: PPO, TRPO (on-policy, 16 parallel environments), and SAC, TD3, TQC (off-policy, single environment). PPO and TRPO use an MLP [64, 64] with `tanh` activations; the off-policy algorithms SAC and TQC use the StableBaselines3 default [256, 256], and TD3 its default [400, 300]. Consistent with the main paper, on-policy algorithms (PPO, TRPO) train for 3M timesteps and off-policy algorithms (SAC, TD3, TQC) for 1M timesteps, at 20 Hz.

a) Domain randomization (DR).: At each episode reset, physical parameters are sampled uniformly from ranges centered on measured values: gravity ±0.5%, arc radius ±5%, cart friction ±56%, ball rolling friction ±60%, ball viscous damping ±67%, motor lag τ_v±33%, dip depth ±50%, and dip width ±40%. Ranges are deliberately wide for parameters that are difficult to measure precisely (friction, damping) and narrow for well-characterized quantities (gravity, arc radius). The nominal values and absolute ranges are gravity $9.81\,[9.76, 9.86]$, arc radius $2.101\,[2.001, 2.201]$ m, cart friction $0.08\,[0.035, 0.125]$, ball rolling friction $0.025\,[0.010, 0.040]$, ball viscous damping $0.009\,[0.003, 0.015]$, motor lag τ_v $0.15\,[0.10, 0.20]$ s, dip depth $0.002\,[0.001, 0.003]$ m, and dip width (FWHM) $0.020\,[0.012, 0.028]$ m, all specified in `balancer/core/params.py`.

b) Blind-zone modeling (BZ).: The simulation optionally clamps the θ observation to $\pm\theta_{\text{blind}}$ and sets the velocity observation to ≈ 0 when $|\theta| > \theta_{\text{blind}}$ (nominally 0.064 rad from the sensor geometry; the measured onset is ≈0.071 rad) to reproduce the VL53L0X minimum-range saturation (Appendix I). The exact onset θ_{blind} depends on the per-sensor calibration constants and physical mounting, so under domain randomization the threshold is sampled over $[0.060, 0.080]$ rad rather than fixed. Combined with DR, this yields the best RL performance: PPO (BZ+DR) achieves **96% hardware SR**.

TABLE 4. Deployed Controller Parameters

Controller	Parameter	Value
PD+WO	K_p, K_d	19.78, 1.37
	d_w, u_{ov}	0.12 m, 0.5
LQR+WO	K	[0, 0, −19.78, −1.37]
	d_w, u_{ov}	0.12 m, 0.5
SMC+WO	λ, k, ϕ	3.0, 6.0, 0.806
	k_d	0.5
	d_w, u_{ov}	0.12 m, 0.5
MPC+WO	Q, R, N	diag(0.001,0,40,0), 0.017, 10
	d_w, u_{ov}	0.12 m, 0.5
NMPC	Q, R, N	diag(0,0,9,0), 0.006, 10
	FWHM (internal)	42 mm
RL (online)	Architecture	MLP [64,64] on-pol.; [256,256] off-pol.
	γ, λ_{GAE} (on-pol.)	0.99, 0.95
	Training steps	on-policy 3M; off-policy 1M
IQL (offline)	Architecture	MLP [256, 256], ReLU
	Expectile, β	0.7, 3.0
	Training data	≈333k real transitions (post-recalib)
	Gradient steps	280k (of 500k)
MPPI	Horizon H, samples N	30, 800
	Q cost	diag(0, 0.1, 30, 0.1)
	R, λ	0.001, 0.4
	World model	2-layer LSTM, see App. VI
	Runtime device	CPU (faster than GPU for this small LSTM)
	PyTorch threads	1 (conservative; 4 threads gives 20.07 ms)

H. Offline Reinforcement Learning (IQL)

In addition to simulation-trained online RL, we evaluate *Implicit Q-Learning* (IQL) [12], an offline RL algorithm trained entirely on real hardware transitions from multiple controller families with no simulator access during training.

a) Algorithm.: IQL avoids querying out-of-distribution actions by learning a state-value function $V(s)$ via expectile regression and extracting a policy through advantage-weighted regression:

$$\pi(a|s) \propto \exp\big(\beta\,(Q(s,a) - V(s))\big) \tag{38}$$

where β is the inverse temperature (`weight_temp`). This avoids the need for pessimistic Q-value penalties (as in CQL) or a separate additive behavior-cloning penalty (as in TD3+BC), making IQL well-suited to narrow mixed offline datasets.

b) Training data and hyperparameters.: IQL is trained on ≈333k real post-recalibration transitions (1,415 mixed-controller trials, no simulation data) with d3rlpy 2.8.1 [13]. The dataset composition, network sizes, and the full hyperparameter set (expectile 0.7, $\beta = 3.0$, and the 280k-step checkpoint selection) are given in Appendix V-O.

c) Deployment.: The trained d3rlpy model is wrapped as an `OfflineRLController` that accepts the standard 4-dimensional state and returns $u \in [-1, 1]$ via deterministic policy inference (no action noise at deployment).

IV. Classical Controller Tuning: Insights and Lessons

This appendix documents the tuning process for each classical controller, including approaches that failed and the reasoning behind final parameter choices. All tuning uses the full nonlinear dynamics with first-order motor model ($\tau_v = 0.15$ s), 1-step command delay, and RK4 integration at 20 Hz. (S-curve was used in earlier ablations only; the first-order model matches what is used for final evaluation.)

A. General Methodology

We tune the classical and predictive controllers with CMA-ES [4], scaling the population size and evaluation budget to each controller's cost per evaluation: 40 and 1500 evaluations for PD, 32 and 980 for LQR, 36 and 1200 for SMC, and 20 and 500 for MPC and NMPC, whose per-evaluation solves are far more expensive. The deployed LQR+WO is an exception: its gain is the PD-equivalent one (the deployed PD law's gains with the cart-state terms zeroed) rather than the CMA-ES or Riccati LQR solution, which fail on hardware (see the LQR subsection below). All share the composite CMA-ES objective J (integrated squared error in θ and u, a Gaussian-gated ISE in $\dot{\theta}$, and a boundary-violation count) defined in Appendix III. We optimize over 7 stratified initial conditions, including 2 same-side cases with the ball displaced toward the wall, using 30 s trials, and evaluate the tuned controllers on 50 stratified initial conditions with a settling band of 0.01 rad held for 1.0 s.

B. PD

The deployed PD controller uses two gains, $K_p = 19.78$ and $K_d = 1.37$, together with the wall override ($d_w = 0.12$ m, $u_{\text{ov}} = 0.5$). We set the wall margin at 0.12 m empirically; it

serves as a heuristic braking-distance reference, close to the velocity-lag product $V_{\max} \times \tau_v = 0.9 \times 0.15 = 0.135$ m, which gives a rough upper bound.

Three additions that seemed reasonable did not survive tuning. A cart-position centering gain ($u \mathrel{+}= K_x \cdot x$, $K_x < 0$) conflicts with the $K_p \cdot \theta$ term, since the two oppose in sign when the ball is displaced toward the wall, so we removed it entirely. Integral action ($K_i > 0$) causes windup during the wall-override intervals, and CMA-ES consistently converges to $K_i \approx 0$, which is why we use PD rather than PID. Vanilla PD without the override reaches 84% in simulation but only 18% on hardware (Table 30): when the ball is off-center it commands the cart toward the ball, and if the ball responds slowly, through inertia or friction, the cart crosses the full track and reaches the rail limit before the ball recenters, a runaway from which PD without the wall override cannot recover.

C. LQR

Our LQR computes its gain from the discrete-time algebraic Riccati equation (DARE): a state weighting Q and control weighting R go in and the optimal feedback gain comes out. We tried both a hand-set $Q = \text{diag}([0.001, 0.004, 18.7, 1.76])$, $R = 0.017$ (giving $K_\theta \approx -20.7$) and a from-scratch CMA-ES search over Q, R against our usual objective (giving a more aggressive $K_\theta \approx -34$). Both are optimal-control gains, and both carry cart-position and cart-velocity feedback.

The optimal-control gain did not transfer in our runs. The CMA-ES gain, even with the wall override, reached only 16% SR (8/50) and failed from the roomy center starts too (0 of 10), so what we see looks more like a settling problem than a boundary one. In the trajectories, the cart-state feedback keeps the controller active even once the ball is balanced: over the timesteps where the ball is already inside the 0.01 rad success band, the command is dominated by the cart-position term (the cart sits about 0.6 m off-center at those moments on average), and the optimal gain saturates the ± 0.9 m/s actuator on more than half of them, against essentially none for the PD-equivalent gain. Those cart-centering commands appear to knock the ball back out before it can hold the band for the required second, the same tension as the Q-center variant below. The hand-set Riccati gain, run without the override, does no better (3/50).

The gain that did transfer is the PD law used directly as state feedback: we take the deployed PD gains ($K_\theta = -19.78$, $K_{\dot\theta} = -1.37$) as K, with the cart entries at zero. This gain carries no cart-position or cart-velocity feedback at all, so on its own it does nothing to keep the cart off the rail: run without the override it reaches only 20% SR (10/50), failing near-uniformly across the difficulty strata as the cart drifts out. Adding the wall override ($d_w = 0.12$ m, $u_{\text{ov}} = 0.5$), with the gain otherwise unchanged, supplies exactly that missing rail protection and lifts the same controller to 92% SR (46/50); this is what the deployed LQR+WO applies. What we take from this, on this platform rather than as a general claim, is that reaching a reliable LQR here took two things together: using the PD gains as the state-feedback gain, so the cart authority the optimal cost assigns does not fight ball stabilization, and adding the override to handle the rail that this gain ignores. The 20%-versus-92% pair isolates the override's effect with the gain held fixed; the 16% optimal gain shows that simply restoring cart authority is not the fix.

One further variant shows why the cost cannot substitute for the override. Trying to prevent wall collisions through the cost alone, by raising the cart-position weight until $K_0 > 2$, makes the centering term fight ball stabilization and the response oscillates; this forced Q-center variant reaches only 28% on hardware. That is a fundamental limitation of a single linear gain vector, which cannot simultaneously optimize same-side recovery and large-angle stability.

a) Override contribution.: The wall-override, not the underlying control law, does much of the recovery work for every classical controller on this platform, not just LQR. Across the 50 trials per controller, the cart reaches the override trigger zone ($|x| > 0.66$ m) in 75–98% of successful trials (85% for LQR+WO, 75% for PD+WO, 98% for SMC+WO, 80% for MPC+WO) and, once there, spends ∼31–47% of its steps inside it. Few trials end at track center (Fig. 1): most successful trajectories invoke the override and finish away from center, consistent with boundary handling, rather than linear-model fidelity or sliding-surface design, doing much of the recovery.

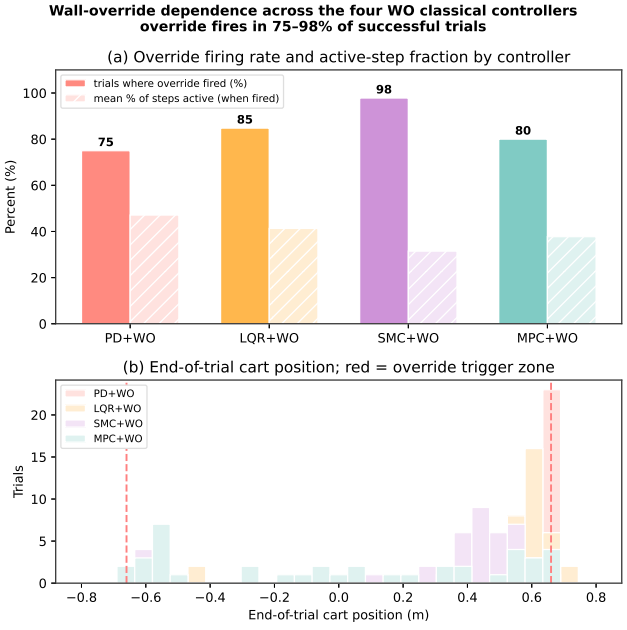


Fig. 1. Wall-override dependence across the four WO classical controllers (successful trials only). (a) Override firing rate and mean active-step fraction. (b) End-of-trial cart-position histogram; few trials end at center, indicating that successful trials typically invoke the override rather than settling under the nominal control law alone.

D. SMC

The deployed SMC uses a first-order sliding surface $\sigma = \dot{\theta} + \lambda\theta$ with a smooth saturation boundary layer ϕ and the same wall override as PD and LQR. Its best variant takes a relatively wide boundary layer ($\phi = 0.806$) to avoid chattering at the 20 Hz hardware rate, and reaches 92% on hardware: the override prevents irreversible wall impacts, while the wide boundary layer keeps the sensor-noise-induced switching manageable.

The failure modes trace back to the same two pressures. Without boundary handling, the nominal sliding surface regulates ball angle but does not center the cart, so residual model-cancellation bias and friction mismatch let the cart drift toward the rail, leaving the basic variant at 12% on hardware. Thin boundary layers make the controller behave more like a discontinuous sliding controller and chatter severely under noisy ToF feedback, with more than 500 sign reversals per episode in preliminary tests, so hardware stability forces the wide-boundary-layer regime. Aggressive cart-centering or damping gains reduce wall drift but destabilize ball regulation at large angles, which is why the final SMC+WO variant leans on the override for boundary recovery rather than trying to solve boundary avoidance inside the sliding surface. Finally, because SMC's equivalent control depends on accurate dynamics, the residual sim-to-real gap, consistent with the higher-order motor response (Appendix X) and sensor staleness (Appendix I), is a natural explanation for why SMC+WO settles more slowly on hardware than in first-order simulation despite its high success rate.

E. Linear MPC

Linear MPC uses a short horizon $N = 10$ with $Q = \mathrm{diag}([0.001,\ 0,\ 40,\ 0])$ and $R = 0.017$, together with the wall override ($d_w = 0.12$ m, $u_{\mathrm{ov}} = 0.5$) and the QP cart constraints *disabled* (the cart-constraint rows are omitted from the QP). Four things went wrong before we reached this configuration.

Penalizing $\dot{\theta}$ with a positive weight inverts the command. Writing the linearized discrete-time model as $x_{k+1} = Ax_k + Bu_k$ with state $x = [x_{\mathrm{cart}},\ \dot{x}_{\mathrm{cart}},\ \theta,\ \dot{\theta}]^\top$ and input matrix $B = (B_1, B_2, B_3, B_4)^\top$, the $\dot{\theta}$ input-sensitivity row B_4 is negative near $\theta = 0$: a positive cart-velocity command produces a negative angular acceleration. The $\dot{\theta}$-penalty is the fourth diagonal entry Q_{44}, and empirically a positive Q_{44} acting through the negative B_4 drives the QP to command the wrong sign, so the system diverges immediately; setting $Q_{44} = 0$ removes the inversion. A long horizon is the second problem: over many prediction steps the linearization error accumulates, and at large angles ($\theta > 0.06$) the linear model underestimates the restoring torque and plans too weak a correction, so the QP under-responds; $N = 30$ passes only 1 of 7 tuning initial conditions. The QP cart constraint fails on hardware for a related reason: the linear model underestimates braking distance (first-order lag versus the S-curve jerk limits), so when the cart is near the rail with positive velocity the QP becomes infeasible, because no admissible input sequence keeps the predicted cart positions within the bound, and the fallback $u = 0$ lets the ball escape: the natively constrained variant reaches only 44% on hardware. Removing the QP cart constraint and relying on the wall override instead yields 80%. Finally, too small an input penalty R (against the tuned $R = 0.017$) makes the controller over-trust the linear model's predicted optimum, which diverges quickly from reality on hardware and produces oscillatory commands that rarely settle within the trial.

F. NMPC

NMPC solves a full nonlinear program in CasADi [10] over the friction-augmented dynamics, with a short horizon $N = 10$, $Q = \mathrm{diag}([0,\ 0,\ 9,\ 0])$, $R = 0.006$, hard cart constraints in the NLP, and no wall override; it reaches 90% on hardware (45 of 50 trials).

Its failures come from optimizing too far ahead of reliable observations. A long horizon $N = 30$ balances 100% in simulation but passes only 1 of 7 conditions in a preliminary hardware screening, because the NLP optimizes a longer trajectory from the current, possibly stale estimate and its predictions degrade once the ball enters the sensor blind zone ($|\theta| > 0.071$ rad) and model error accumulates over the horizon; the shorter $N = 10$ optimizes over fewer steps and is the configuration we deploy. Both horizons re-solve every 50 ms and apply only the first planned action. Adding a wall override actually hurts NMPC, because it replaces that first planned action and invalidates the warm-started trajectory, producing oscillatory behavior. The first-order-versus-S-curve motor mismatch matters less than it might: with $N = 10$ the solver replans every 50 ms and applies only the first planned action, which limits error accumulation, whereas at $N = 30$ the prediction quality degrades and the solver returns unreliable plans.

G. Cross-Controller Insights

A few lessons cut across all five controllers. The first is that the wall override is controller-dependent: it helps PD, LQR, SMC, and linear MPC, which lack reliable boundary handling of their own, but it is counterproductive for NMPC, whose planned trajectories it disrupts; across the four controllers it helps, the gain ranges from +36 pp for MPC to +80 pp for SMC (Fig. 2). For MPC this comparison also removes the QP cart constraint, so its figure reflects the full configuration change rather than the override alone. The second concerns the sensor blind zone, which is a ball-side artifact, separate from the cart's rail limit: when the ball rolls to the ends of the arc ($|\theta| > 0.071$ rad) it comes too close to a sensor and the reading saturates. Its contribution to hardware failure is established directly by the blind-zone ablation, where modeling it lifts PPO (BZ+DR) about 8 pp over its no-blind-zone counterpart in the development regime (Appendix XII; the matched first-order-lag checkpoint gives 6 pp, Appendix V-M), rather than inferred from which cart strata fail. This is a difficulty distinct from the cart running out of rail, even though a hard recovery can provoke both at once, and the controllers least affected

on hardware are those that recover from the rail quickly (LQR+WO) or that learn the sensor artifact.

The remaining lessons are about planning. Shorter horizons beat longer ones on hardware: reducing N from 30 to 10 improves success dramatically for both MPC and NMPC, because stale observations corrupt long-horizon plans while reactive replanning tolerates the sensor limitations. More broadly, on this platform reactivity appears to matter as much as model accuracy. LQR+WO, with a linear model and no horizon planning, reaches 92% on hardware, whereas NMPC, with a full nonlinear model and 10-step planning, reaches 90% without an override and is degraded by adding one. No pairwise success-rate difference among the deployed controllers is statistically significant (Appendix XI), so we read this as a consistent pattern rather than a strict ranking: a controller that responds to the *current* observation is at least competitive with sophisticated planners whose plans are disrupted by external constraint handling. A final note, from NMPC, is that the S-curve simulation can be harder than hardware. NMPC $N = 10$ scores markedly lower in S-curve simulation, its internal first-order model running against an S-curve plant, than the 90% it reaches on hardware; the S-curve simulation thus appears to *overestimate* the sim-to-real gap for this short-horizon predictive controller.

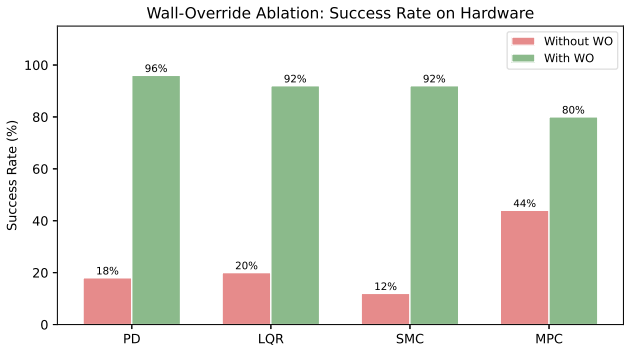


Fig. 2. Effect of wall override on hardware success rate across four classical controllers. The improvement ranges from +36 pp (MPC) to +80 pp (SMC).

V. Reinforcement Learning Training Details

This appendix covers training details for simulation-trained online RL controllers (PPO, TD3, SAC, TQC, TRPO). World-model-based RL (PPO-WM) is covered in Appendix VI; MPPI is covered in Appendix VII; offline RL (IQL) is covered in Appendix V-O below.

A. Algorithm and Architecture

The RL controller uses Proximal Policy Optimization (PPO) [14] implemented via StableBaselines3 [11]. The policy is parameterized by a two-layer MLP (`MlpPolicy`, $[64, 64]$ hidden units, `tanh` activations), consistent with the SB3 default architecture. A separate critic network of identical topology shares no weights with the actor. Table 5 lists all hyperparameters; parameters not shown retain SB3 library defaults.

TABLE 5. PPO Hyperparameters Used for Training

Parameter	Value	Source
Policy architecture	MlpPolicy [64, 64]	SB3 default
Activation function	`tanh`	SB3 default
Total timesteps	3 000 000	configured
Parallel environments	16	configured
Steps per rollout (n_{steps})	2048	SB3 default
Mini-batch size	64	SB3 default
Epochs per update	10	SB3 default
Learning rate	3×10^{-4}	SB3 default
Discount factor γ	0.99	SB3 default
GAE λ [15]	0.95	SB3 default
PPO clip range ϵ	0.2	SB3 default
Entropy coefficient	0.01	overridden
Value function coefficient	0.5	SB3 default
Max gradient norm	0.5	SB3 default
Device	CPU	configured

B. Reward Function

We use a composite *balanced* reward that combines position accuracy, velocity damping, control effort, and jerk penalization:

$$r_t = \text{clip}\Big(w_p\, r_{\text{pos}} - w_v\, p_{\text{vel}} - w_e \min(u_t^2, 1) - w_j \min\big((u_t - u_{t-1})^2, 1\big) - p_{\text{bnd}},\ -1,\ 1\Big) \tag{39}$$

where

$$r_{\text{pos}} = 0.6\, \exp\!\left(-\frac{\theta_t^2}{2\sigma_{\text{out}}^2}\right) + 0.4\, \exp\!\left(-\frac{\theta_t^2}{2\sigma_{\text{in}}^2}\right),$$

$$p_{\text{vel}} = g_\theta \cdot \min\!\left(\frac{\dot\theta_t^2}{v_{\max}^2},\ 1\right), \quad g_\theta = \exp\!\left(-\frac{\theta_t^2}{2\sigma_{\text{gate}}^2}\right),$$

$$p_{\text{bnd}} = w_b\, \phi\!\left(\frac{|\theta_t|}{\theta_{\max}}\right) + w_c\, \phi\!\left(\frac{|x_t|}{x_{\max}}\right) \mathbf{1}[u_t \text{ pushes into wall}],$$

$$\phi(\rho) = \left(\max\!\left(0,\ \tfrac{\rho - 0.85}{0.15}\right)\right)^2,$$

with $\sigma_{\text{out}} = \theta_{\max}/4$, $\sigma_{\text{in}} = \theta_{\max}/25$, $\sigma_{\text{gate}} = \theta_{\max}/10$, $v_{\max} = 2$ rad/s. Weights are w_p=0.60, w_v=0.25, w_e=0.05, w_j=0.05, w_b=0.35 (ball boundary), w_c=0.20 (cart wall). The cart-wall term $w_c\, \phi(\cdot)$ applies only when the commanded action pushes the cart further into the rail. The theoretical episode maximum is ≈ 360 (600 steps $\times$ 0.6/step).

C. Training Environment

We train the agent entirely in simulation using the full nonlinear dynamics (Appendix II), following established practices in learning-based control [16], integrated with a fourth-order Runge–Kutta solver at the hardware control rate $\tau = 0.05$ s (20 Hz). Sixteen parallel environments provide decorrelated rollout experience. Episodes are time-limited to 600 steps (30 s) via a gymnasium `TimeLimit` wrapper. The environment itself does *not* terminate on cart-position or ball-angle limits: the `step()` function always returns `terminated=False, truncated=False`, so the only way an episode ends before 600 steps is the `TimeLimit`. In

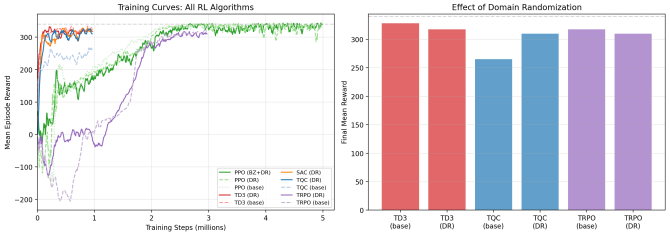


Fig. 3. Left: Training curves (mean eval reward vs. steps) for all RL algorithms. Right: Effect of domain randomization on final reward. DR slightly reduces sim performance but improves real-world success (see Appendix V-G3).

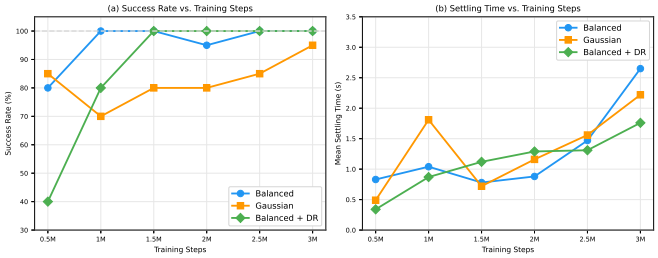


Fig. 4. Success rate and mean settling time vs. training checkpoint for the PPO variants. Balanced and Balanced+DR reach 100% SR by 1–1.5M steps; Gaussian plateaus below 100%.

particular, getting stuck at a wall (cart at the rail limit with the ball still on the arc) does *not* end the episode: the agent is left to attempt recovery from the wall-stuck state, since this is a realistic and frequent hardware scenario. Cart and ball excursions are still penalized through the reward described below, but they are not hard termination conditions.

The simulation incorporates key hardware characteristics:

- **Motor model:** Two motor models appear in this study. A simplified first-order-lag model (τ_v=0.15 s, identified empirically, one-step command delay) is used for all five reported RL agents in Table II (main paper), including PPO (BZ+DR), and for the extended-training ablation. An S-curve profile (jerk-limited, $j_{\max}$=50 m/s^3, $a_{\max}$=15 m/s^2) that mirrors the drive's internal profiler is the development regime used elsewhere in this supplement. Appendix V-M relates the two and confirms the choice does not affect the ranking.
- **Ball sensor staleness:** The ToF distance sensor updates at ∼10 Hz while the control loop runs at 20 Hz. Ball observations are held stale for a geometrically-distributed number of steps (mean = 2 steps).
- **Domain randomization (DR):** At each episode reset, physical parameters (gravity, arc radius, friction coefficients, velocity lag τ_v, dip geometry) are sampled uniformly from ranges centered on measured values.

D. Training Curves

Figure 3 shows the evaluation reward during training for all RL algorithms. The off-policy methods (TD3, SAC, TQC) reach their reward plateau early, within a fraction of their 1M-step budget, whereas the PPO variants climb more gradually over a longer schedule and cross the deployment-reward threshold only later in training. Domain randomization generally reduces final reward (the policy must succeed across a wider parameter distribution) but improves hardware transfer.

E. PPO Ablation Study

We conducted a systematic ablation to identify which training configuration factors most influence sim-to-real transfer quality. We trained several PPO variants (3M steps each, S-curve motor, seed = 1) and evaluated them on the same 50-trial stratified initial-condition sequence used for the benchmark (Section IX-A). The ablation factors are the reward function (balanced vs. Gaussian), domain randomization (DR), and the blind-zone sensor model (BZ); their combinations are listed in Table 6.

All variants used the S-curve motor model and ball sensor staleness.

1) Results: Table 6 reports the best checkpoint per variant (selected by highest success rate, then fastest settling) evaluated with 50 stratified trials, settling band = 0.01 rad, settling duration = 1.0 s.

2) Analysis:

a) Reward function.: The composite *balanced* reward achieves 100% simulation success with far lower control effort than the pure-Gaussian reward (RMS effort 0.078 vs. 0.731). The Gaussian reward lacks explicit effort and jerk penalties; its hardware validation (Table 7, 30% SR / 15.62 s over 10 trials) confirms that the oscillatory behavior translates directly to real-world failure.

b) Blind-zone and domain randomization.: Adding the blind-zone model alone (Balanced+BZ) drops simulation SR slightly (96%), consistent with the policy overfitting to a fixed blind-zone threshold. Adding DR on top (Balanced+BZ+DR) recovers 100% simulation SR (1.67 s); DR randomizes the blind-zone threshold together with the physical and observation-noise parameters, so the recovery is not attributable to threshold randomization alone. This is the configuration behind PPO (BZ+DR). Its S-curve policy reaches 98% hardware SR over 50 trials, while the matched first-order-lag checkpoint reported in Table II (main paper) reaches 96% (Appendix V-M). DR alone (Balanced+DR) also reaches 100% simulation SR with the lowest control effort (0.076).

c) Training duration.: Figure 4 shows that 1–1.5M steps is the best trade-off: at 500K steps all variants achieve ≤ 85% SR; beyond ∼2M steps settling time increases as the policy becomes more conservative without improving reliability.

F. Hardware Validation of PPO Variants

To validate the simulation ablation findings, we tested the top three PPO variants on real hardware (10 trials each, stratified initial conditions, identical protocol to Section IX-A).

1) Hardware Insights:

a) Reward function on hardware.: The Gaussian-reward policy fails 70% of hardware trials, confirming that the aggressive oscillatory behavior observed in simulation translates di-

TABLE 6. PPO ablation study: simulation (S-curve motor model). Every row except Gaussian is a 50-trial stratified evaluation from `rl_ablation/blind_zone_ablation.json`; the Gaussian row is a 20-trial checkpoint screen (seed 42) from `rl_ablation/ppo_checkpoint_sweep.json`. "Settle" is the mean over successful trials; "RMS Effort" is the RMS commanded action averaged over trials (the Gaussian value is derived from the stored squared effort).

Variant	Ckpt	SR	Settle (s)	RMS Effort
Balanced	best	100%	1.72	0.078
Gaussian	final	95%	2.22	0.731
Balanced + BZ	best	96%	2.37	0.145
Balanced + BZ + DR	best	100%	1.67	0.096
Balanced + DR	final	100%	1.49	0.076

TABLE 7. PPO hardware validation (10 trials per variant).

Variant	SR	Settle (s)	Max (s)
Balanced (no DR)	100%	5.26	15.81
Balanced + DR	100%	6.94	21.66
Gaussian	30%	15.62	28.11

rectly to real-world failure. The composite *balanced* reward's effort and jerk penalties produce smooth, hardware-compatible control signals.

b) Sim-to-real settling gap.: Hardware settling times are 3–5$\times$ slower than simulation (sim: 1.5–1.7 s $\rightarrow$ hw: 5.3–6.9 s). The simulation-to-hardware characterization in Appendix X identifies plausible contributors to this gap: sensor characteristics (the $\sim$82 ms ToF cycle and the $|\theta| > 0.071$ rad saturation) and the higher-order motor response (the S-curve profile approximated as first-order lag); ball-arc friction and the uncontrolled initial ball velocity likely add further variance. This is inferred from the open-loop prediction analysis rather than a controlled controller-level ablation.

c) Domain randomization: sim-to-real trade-off.: Both balanced variants achieve 100% hardware success rate. In simulation, DR is *faster* (1.49 vs. 1.72 s) due to its regularization effect. On hardware, this inverts: the no-DR model settles 24% faster (5.26 vs. 6.94 s), consistent with the real system being close to the nominal parameters it was trained on. The DR model's policy is smoother but more cautious on the real system. For long-term deployment where hardware properties may drift (mechanical wear, temperature drift), DR is plausibly the more robust choice, though we did not run a drift experiment to confirm this.

G. Multi-Algorithm Comparison

We trained five RL algorithms with the *balanced* reward, each in two variants (base: nominal dynamics; DR: domain randomization). On-policy algorithms (PPO, TRPO [17]) used 16 parallel environments; off-policy algorithms (SAC [18], TD3 [19], TQC [20]) used 1 environment. PPO and TRPO use two-layer MLPs with $[64, 64]$ hidden units; SAC and TQC use the Stable-Baselines3 default of $[256, 256]$, and TD3 uses its default of $[400, 300]$. Each algorithm therefore keeps its library default rather than a hand-tuned network. All five algorithms were trained with the same single seed (seed 1) under the deterministic Hydra configuration (`training/configs/train.yaml`), so cross-algorithm differences are not confounded by seed choice; per-algorithm training-stochasticity variance is not characterized. Table 8 summarizes the training cost; Table 9 reports simulation evaluation.

a) Model selection.: For each training run, all saved checkpoints are evaluated through simulation (50 trials, stratified ICs). Three models are selected for hardware deployment: (1) the checkpoint with the highest simulation success rate, (2) the final checkpoint at the end of training, and (3) an intermediate checkpoint that achieves good performance without being the absolute best or final (to capture potential overfitting). The model that performs best on hardware is reported in the main results. SB3's `EvalCallback` (10 deterministic episodes every 50K steps) is used only for training progress monitoring, not for final model selection.

The "$\geq$300 step" column indicates the first training step at which the evaluation reward exceeded 300 (a functional policy threshold; theoretical maximum is 360 for 600 steps). On-policy methods are faster in wall-clock time due to 16-environment parallelism despite requiring more total environment steps. Among the off-policy methods (single environment), TD3 reaches the functional-policy threshold in the fewest steps (from about 50K), while TQC has the longest wall-clock time (about 8.5 h).

1) Algorithm Analysis: The simulation settling times in Table 9 are those of the *deployed* checkpoints (the same policies as in Table 29), reproduced on the shipped models. The blind-zone and domain-randomization ablations later in this appendix instead report the S-curve development family (Appendix V-M), whose simulation settling differs accordingly; the two should not be compared directly.

a) PPO and SAC settling time.: At their deployed checkpoints, PPO (BZ+DR) has the fastest simulation settling (0.82 s) among these configurations, at 96% SR; SAC (DR) reaches 100% SR and settles in 0.98 s mean (0.60 s median). PPO also has lower control effort. The 16-environment parallelism makes PPO the most wall-clock efficient (40 min vs. 90+ min for SAC).

TABLE 8. Training cost per algorithm (Intel i5, CPU only).

Algorithm	Type	n_{envs}	Steps	Wall-clock	$\geq$300 step
PPO	on-policy	16	3.0M	$\sim$40 min	1.35–2.0M
TRPO	on-policy	16	3.0M	$\sim$58 min	1.0–1.35M
SAC	off-policy	1	1.0M	$\sim$5.7 h	150–250K
TD3	off-policy	1	1.0M	$\sim$5.7 h	50–250K
TQC	off-policy	1	1.0M	$\sim$8.5 h	100–200K

TABLE 9. Multi-algorithm comparison: simulation (50 trials, first-order motor model) and hardware (50 stratified trials) success rate and settling time. Sim settling is computed over successful trials; hardware SR ranges from 60–96%.

Model	SR	Sim Mean (s)	Med. (s)	HW SR	HW Mean (s)
PPO (base)	100%	1.72	1.25	60%	3.53
PPO (BZ+DR)	96%	0.82	0.40	96%	3.81
SAC (DR)	100%	0.98	0.60	82%	10.10
TD3 (DR)	100%	1.78	0.55	92%	11.45
TQC (DR)	100%	1.89	0.60	86%	9.77
TRPO (DR)	100%	3.88	2.18	90%	8.09

b) SAC with DR and longer training.: At its deployed checkpoint SAC (DR) settles in 0.98 s (simulation) at 100% SR. SAC reaches a functional policy (reward ≥ 300) in about 150K steps (Table 8), fewer than PPO, and both domain randomization and longer training improve settling relative to shorter runs.

c) TD3 across training budgets.: At its deployed checkpoint TD3 (DR) settles in 1.78 s (simulation) at 100% SR, and longer training improves settling over shorter budgets. TD3 (DR) converges fastest of all algorithms (reward ≥ 300 at 50K steps, Table 8).

d) TQC across training budgets.: At its deployed checkpoint TQC (DR) reaches 100% SR with 1.89 s mean settling (simulation). Its truncated quantile critics (25 atoms per critic) require more training budget than SAC or TD3 to reach strong performance, but converge to a reliable policy given enough training.

e) TRPO and DR.: At 3M steps, the deployed TRPO (DR) checkpoint reaches 100% simulation SR with 3.88 s mean settling, the slowest of the DR agents. TRPO (base) drops to 90% SR with longer training, suggesting overfitting to nominal dynamics. The conservative trust-region updates produce smooth control ($\text{ISE}_u \approx 0.03$) but cannot match PPO/SAC speed.

2) Failure Mode Analysis: Across the seven simulation-trained RL controllers evaluated with 50 hardware trials each (350 trials total), the dominant predictor of failure is the training configuration, not the initial-condition stratum (Tables 29 and 30), and the stratum pattern that does appear runs opposite to the expectation that the most constrained starts are the hardest:

a) Blind-zone modeling and DR.: The base PPO policy (no DR, no BZ) fails on 20/50 trials (60% SR); adding DR reduces this to 5/50 (PPO (DR), 90%), and adding both DR and the blind-zone model reduces it to a single failure (PPO (BZ+DR), 98% in the S-curve training family; Appendix V-M). SAC (DR) (82%, 9 failures) and TQC (DR) (86%, 7 failures), which are not trained with the blind-zone model, fail more often than PPO (BZ+DR), consistent with the blind-zone being a contributing cause of RL hardware failures.

b) Failure distribution across strata.: Contrary to the expectation that the most constrained starts are the hardest, the failures spread across strata, and the at-wall-opposite start is among the easiest rather than the hardest. The center and mid-rail starts draw as many failures as the constrained ones or more: the single PPO (BZ+DR) failure of the S-curve development checkpoint is on a center start (cart at -0.09 m), not at a wall (the deployed first-order-lag checkpoint of Table 29 instead misses two at-wall-same trials), and TD3 and TRPO also miss on center. This echoes the pattern that the center and mid-rail starts, despite offering the most maneuvering room, are where these RL controllers fail most: with the cart already positioned and no wall to use as a momentum backstop, the controller must wait out the ball's own dynamics.

3) Full Hardware Evaluation (50 Trials): Every model-free RL algorithm (the DR variant of each off-policy method, together with PPO (BZ+DR)) was evaluated on hardware over the full 50 stratified trials (same protocol as Section IX-A).

a) 50-trial results.: Over the full 50-trial evaluation (Table II, main paper), PPO (BZ+DR) achieves 96% SR, with two failures on at-wall-same trials. PPO (DR) achieves 90% SR. In the matched S-curve development ablation, adding the blind-zone model lifts PPO (BZ+DR) from 90% to 98% (+8 percentage points); the deployed first-order-lag checkpoint of Table II reaches 96%. PPO (base) at 60% indicates that domain randomization is important for sim-to-real transfer at this training budget (single training seed).

H. Extended Training: 5M-Step Ablation

While the main 3M-step ablation shows that blind-zone modeling is the efficient path to high hardware SR, we also evaluated PPO variants at extended timesteps on hardware (50 trials each, Table 11):

TABLE 10. Full hardware evaluation: RL models (50 trials each, stratified ICs).

Model	HW SR	Settle (s)	Med (s)	Max (s)	Sim SR
PPO (BZ+DR)	96%	3.81	3.15	13.90	96%
TD3 (DR)	92%	11.45	10.06	28.11	100%
TRPO (DR)	90%	8.09	4.80	–	100%
PPO (DR)	90%	5.11	2.55	22.85	100%
TQC (DR)	86%	9.77	6.61	–	100%
SAC (DR)	82%	10.10	8.40	–	100%
PPO (base)	60%	3.53	2.53	10.55	100%

TABLE 11. PPO 5M-step hardware evaluation (50 trials, 20 Hz).

Variant	Steps	HW SR	Median (s)
PPO base (no DR, no BZ)	5.0M	100%	3.05
PPO BZ+DR	2.75M	96%	3.15
PPO BZ+DR	3.50M	94%	3.30
PPO DR	2.25M	84%	4.55

Base PPO at 5M steps (first-order motor model) achieves 100% SR with no domain randomization and no blind-zone modeling, above the 3M base variant (60%). This suggests extended training can partly compensate for missing sensor awareness, though the two baselines differ in motor regime (first-order vs. S-curve development) and each is a single checkpoint, so the comparison is not fully controlled. However, PPO (BZ+DR) at 3M steps remains the more time-efficient approach (98% SR in ∼40 min vs. 100% SR in ∼67 min). BZ+DR performance is slightly lower at 3.5M steps (94%). PPO (DR) at 2.25M steps underperforms the 3M DR variant (84% vs. 90%). These are single-checkpoint point estimates, so we report them as observations rather than controlled trends.

In these runs, sensor modeling (BZ) and extended training each improved the observed sim-to-real transfer. BZ offers training efficiency (98% at 3M), while extended training reaches higher reliability (100% at 5M) at the cost of longer training time.

a) Simulation vs hardware ranking.: SAC (DR) reaches 100% simulation SR but only 82% hardware SR over 50 trials, the most aggressive sim-to-real gap among the RL controllers that still achieve 100% simulation SR, suggesting its policy exploits simulation dynamics that do not transfer. TRPO's conservative trust-region updates leave it too cautious to recover from some real perturbations within the 30 s time limit; it nonetheless reaches 90% SR over 50 trials.

b) TD3 and longer training.: The deployed TD3 (DR) checkpoint (1M steps) reaches 92% SR over the full 50-trial evaluation. TD3 transfers to hardware better than SAC but still cannot match PPO's robustness.

c) Overall ranking.: PPO's on-policy training with 16 parallel environments produces policies that generalize to hardware most reliably. The combination of PPO + DR + blind-zone modeling achieves 96% SR over 50 hardware trials with 3.81 s mean settling (the first-order-lag checkpoint of Table II, main paper). No off-policy algorithm matches this: TD3 (DR) is closest at 92% SR but with about three times the settling time (11.45 s).

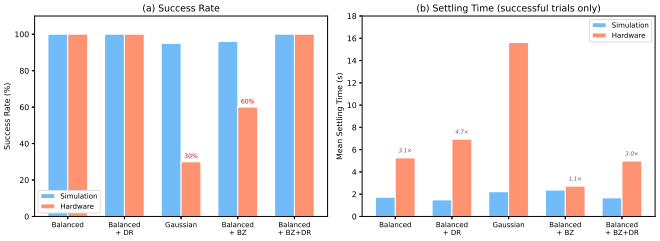


Fig. 5. Complete PPO ablation summary: success rate (a) and mean settling time (b) across simulation and hardware. Annotations in (b) show the sim-to-real settling ratio. The Balanced+BZ+DR variant achieves the best combined performance: 100% hardware SR with the lowest sim-to-real gap (3.0×).

I. Sensor Blind Zone Ablation

The VL53L0X sensor exhibits a minimum-range blind-zone (Appendix I): when the ball is within ∼40 mm of a sensor ($|\theta| > 0.071$ rad), the reading saturates and the controller observes the ball "stuck" at the boundary. We introduced an optional blind-zone model in the training environment (Appendix I-D) and trained two additional PPO variants: one with blind-zone only (BZ), one with both blind-zone and domain randomization (BZ+DR).

a) Blind-zone model and DR.: Without DR, the blind-zone model makes training harder (96% sim SR, 60% hardware SR): the policy overfits to a fixed blind-zone threshold and cannot generalize to the real sensor's variable minimum range. With DR (which randomizes the threshold over $[0.060, 0.080]$ rad), the policy achieves 100% hardware SR and settles 28% faster than the previous best (4.98 vs. 6.94 s).

b) Sim-to-real gap.: The settling-time ratio (hardware/sim) improves from $4.7\times$ (no BZ: $6.94/1.49$) to $3.0\times$ (BZ+DR: $4.98/1.67$), consistent with the blind-zone model capturing part of the sim-to-real gap (single training seed).

J. Complete Ablation Summary

Table 14 consolidates all PPO ablation variants with both simulation and hardware results, and Fig. 5 shows the same comparison visually: the Balanced+BZ+DR variant achieves the best combined performance, 100% hardware SR at the lowest sim-to-real settling gap (3.0×).

K. Selected Model

Based on the complete ablation (Table 14), the deployed PPO controller (Table II in the main paper, reported as

TABLE 12. Blind zone ablation: simulation evaluation (50 trials, evaluated *without* blind-zone to isolate control quality).

Training Config	BZ	DR	SR	Settle (s)
Balanced	No	No	100%	1.72
Balanced + DR	No	Yes	100%	1.49
Balanced + BZ	Yes	No	96%	2.37
Balanced + BZ+DR	Yes	Yes	100%	1.67

TABLE 13. Blind zone ablation: hardware validation (10 trials each).

Training Config	BZ	DR	SR	Settle (s)	Max (s)
Balanced	No	No	100%	5.26	15.81
Balanced + DR	No	Yes	100%	6.94	21.66
Balanced + BZ	Yes	No	60%	2.72	9.46
Balanced + BZ+DR	Yes	Yes	100%	4.98	13.66

TABLE 14. Complete PPO ablation: simulation (50 trials, except the Gaussian-wall row, a 20-trial checkpoint screen) and hardware (10 trials). All variants trained for 3M steps with balanced reward unless noted.

	Simulation		Hardware	
Variant	SR	Settle	SR	Settle
Balanced (base)	100%	1.72 s	100%	5.26 s
Balanced + DR	100%	1.49 s	100%	6.94 s
Gaussian	95%	2.22 s	30%	15.62 s
Balanced + BZ	96%	2.37 s	60%	2.72 s
Balanced + BZ+DR	**100%**	**1.67 s**	**100%**	**4.98 s**

PPO (BZ+DR)) uses:

- **Motor model:** The PPO (BZ+DR) reported in Table II of the main paper is the matched first-order-lag checkpoint, the same model used for the other four RL agents (Appendix V-M). The S-curve profile (jerk-limited, mirroring the drive's internal profiler) was the development regime used for the ablations elsewhere in this supplement (Appendix V-L, Table 15).
- Reward: *balanced* (Eq. 39)
- Domain randomization: enabled
- Sensor blind-zone model: enabled
- Observation: standard 4-dimensional state $[x, \dot{x}, \theta, \dot{\theta}]$
- Training: extended sweep, best checkpoint at 2.75M steps (matched first-order-lag, Table 11)

In simulation (50 trials): 100% SR, mean settling 1.67 s. On hardware (50 trials), the matched first-order-lag checkpoint reported in Table II reaches 96% SR, mean settling 3.81 s (two failures); the S-curve development policy reaches 98%, 5.11 s.

This configuration gives the highest hardware reliability among the simulation-trained model-free RL controllers. In the development ablation, blind-zone modeling lowers the sim-to-real settling gap from 4.7× (without it, $6.94/1.49$) to 3.0× ($4.98/1.67$).

L. Motor Model and Dip-Width (FWHM) Ablation

The original PPO models were trained with an S-curve motor profile and a dip width of FWHM$=$ 42 mm in the simulation environment. After independent measurement of the physical dip (FWHM$\approx$ 20 mm, measured via sensor calibration), we conducted a systematic ablation of these two training-environment parameters.

1) Training configurations: Two PPO training regimes were compared at FWHM$=$ 20 mm:

1) **FWHM=20, S-curve, 3M**: the original motor model, four sub-variants (base, DR, BZ+DR, Gaussian-wall).
2) **FWHM=20, first-order, 5M**: the simplified first-order-lag motor model (no jerk/acceleration limits), trained for 5M steps, four sub-variants (base, DR, BZ+DR, Gaussian-wall).

2) Hardware screening (10 trials): Table 15 reports the 10-trial hardware screening for both regimes (data file: `rl_finetuning/fwhm20_ablation_summary.json`). This is a screening comparison, not the definitive 50-trial benchmark of Table II (main paper).

a) FWHM=20 mm vs. 42 mm.: On 10-trial screening the FWHM=20 mm variants are competitive with the deployed FWHM=42 mm variants (whose S-curve 50-trial result is PPO (BZ+DR) 98%/5.11 s; Table II (main paper) reports the matched first-order-lag checkpoint at 96%/3.81 s). The dip-width mismatch does not measurably degrade hardware performance at the 10-trial screening level (single training seed); this is consistent with domain randomization varying the dip parameters during training regardless of the nominal value.

b) First-order vs. S-curve training.: Figure 6 shows the training-reward curves for the three first-order 5M variants (eval reward, 20 deterministic episodes every 5K steps; data files: `rl_5m_ablation/training_runs/ppo_fo_5M_*`).

TABLE 15. FWHM=20 mm ablation, 10-trial hardware screening. SR and mean settling (successful trials) for S-curve-trained vs. first-order-trained PPO variants.

	S-curve trained		first-order trained	
Variant	SR	Settle (s)	SR	Settle (s)
PPO base	100%	8.14	100%	11.06
PPO +DR	80%	6.33	90%	5.45
PPO +BZ+DR	90%	5.11	90%	6.58
PPO Gaussian-wall	90%	6.14	80%	12.84

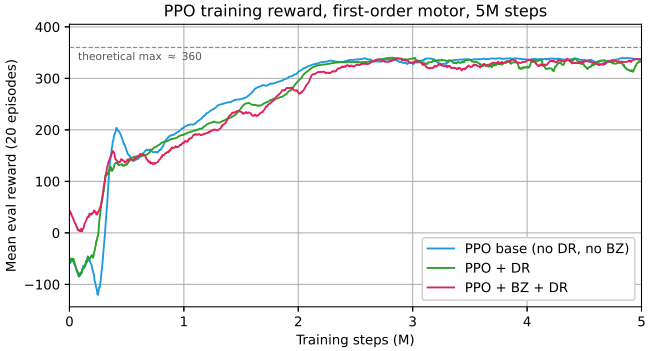


Fig. 6. First-order 5M PPO training-reward curves (mean eval reward vs. training step, 20 episodes per checkpoint). Base, DR, and BZ+DR all plateau near the theoretical maximum (360) by 2–3M steps.

All three converge to near-theoretical-maximum reward by 2–3M steps and remain stable through 5M, with the DR and BZ+DR variants reaching the plateau slightly later than base. We report training-reward curves rather than per-checkpoint hardware SR here because the per-checkpoint 50-trial hardware evaluation of the first-order 5M checkpoints is not included in this preprint; the deployed PPO (BZ+DR) reported in Table II (main paper) is the matched first-order-lag checkpoint at 96% SR; the S-curve (3M, FWHM=42 mm) policy reaches 98% and is the development regime used elsewhere in this supplement.

c) FWHM mismatch.: Training with FWHM= 42 mm (2.1× the true value) does not degrade hardware performance relative to the correct value. This contrasts with NMPC, where the same conservative dip-width mismatch materially helps hardware performance (Appendix IV). For RL, the policy learns to handle the dip regardless of its training-time width, provided domain randomization varies the dip parameters during training.

M. Fairness of the RL Comparison

The five simulation-trained RL agents in Table II (main paper) are all trained against the same first-order-lag motor model, but reaching that consistency required a correction. An earlier PPO (BZ+DR) policy used the S-curve profile that mirrors the drive's internal profiler, whereas TD3, SAC, TQC, and TRPO used the simplified first-order-lag approximation. Because the S-curve is the closer match to the physical drive, that asymmetry could in principle have flattered PPO.

To remove it, we re-trained PPO (BZ+DR) under the same first-order-lag model used for the other four agents and evaluated it over the identical 50-trial stratified protocol. The matched policy reaches 96% hardware SR (95% CI $[87, 99]$, median settling 3.15 s; best checkpoint of the extended-training sweep, Table 11), and this is the policy reported in Table II. The earlier S-curve policy reaches 98% and is the one used elsewhere in this supplement, where the S-curve training family is the consistent development regime: the fine-tuning study (Appendix XIII), the world-model comparison (Appendix VI), and the domain-randomization and blind-zone ablations. Under either motor model PPO (BZ+DR) remains the most reliable and fastest-settling of the simulation-trained agents, so the ranking and every qualitative finding are unchanged.

A second asymmetry concerns the blind-zone sensor model, added to PPO but not to TD3, SAC, TQC, or TRPO. The off-policy agents take six to nine hours each to train (Table 8), so the exhaustive reward-and-sensor-model ablation that produced PPO (BZ+DR) was practical only for the on-policy PPO (∼40 min per run). We therefore read PPO's lead as the strongest RL configuration we tested rather than evidence that PPO is the best algorithm; the controlled claim, that modeling the blind-zone helps, rests on the within-PPO ablation (PPO (DR) 90% to PPO (BZ+DR) 98% in the matched S-curve ablation), not on the cross-agent comparison.

N. Simulation-to-Real Transfer

The trained policy is deployed on hardware without any online fine-tuning or parameter adjustment (zero-shot transfer). The primary sources of sim-to-real gap are:

1) **Sensor blind-zone:** Near the arc boundaries ($|\theta| > 0.071$ rad), the VL53L0X reports a saturated reading due to its minimum-range limitation (∼30–50 mm, Appendix I). The blind-zone model introduced in training reduces this gap from 4.7× to 3.0×.
2) **Sensor latency:** The ToF sensor cycle (∼82 ms) exceeds the control timestep (50 ms), so the policy acts on ball-position measurements that may be one full sensor cycle old. This is modeled during training via stochastic ball-observation holding (mean staleness = 2 steps).
3) **Residual unmodeled dynamics:** Higher-order motor nonlinearities (the Beckhoff 7-phase S-curve profile approximated as first-order lag) and asynchronous sensor-

actuator timing account for the remaining $3.0\times$ settling-time ratio.

4) **Sensor noise:** Inherent ToF noise ($\sigma \approx 1.6$–1.7 mm) is captured via the observation noise model in domain randomization.

The combination of S-curve motor model, ball sensor staleness, blind-zone saturation model, and domain randomization gives 100% success in the 10-trial hardware screening (the matched first-order-lag checkpoint reaches 96% over the full 50-trial benchmark, the S-curve development policy 98%), with a settling gap of only $3.0\times$.

O. Offline Reinforcement Learning (IQL)

In contrast to the simulation-trained online RL controllers above, we evaluate Implicit Q-Learning (IQL) [12] trained *entirely on real hardware data*, with no simulated transitions used for policy optimization.

1) Dataset: The IQL training dataset (`arcball_post_recalib_flat.h5`, built by `data/build_flat_dataset.py`) contains 333,497 transitions from 1,415 hardware trials collected after sensor recalibration (May 20+ 2026). It is a mixed dataset from all controllers run on hardware during that period: MPPI, NMPC, RL variants (PPO, TD3, SAC, TQC, TRPO), MPC, PD, LQR, SMC, and earlier offline-RL checkpoints (104 trials from nine IQL checkpoints, none of them the deployed `model_280000`). The dataset is 83% successful and 17% failed episodes. This is *not* expert-only data: it was collected during normal hardware evaluation runs, not a dedicated data-collection phase.

The 222 source evaluation logs are released under `evaluation/results/real/`, and the exact corpus is rebuilt by `build_flat_dataset.py` over the recording window 2026-05-20 to 2026-05-28 15:03. That upper cut-off is 47 minutes before the deployed checkpoint's benchmark run, so by construction none of IQL's 50 benchmark trials can appear in its training data; the released manifest (`iql_source_manifest.csv`) lists all 106 contributing controllers and contains no entry for the deployed `model_280000`. The training/evaluation split is therefore reproducible rather than assumed.

Rewards are recomputed offline using the balanced reward function (Eq. 39) with dip_weight $= 1.0$. For training, the transition stream is segmented into fixed 600-step episodes (30 s at 20 Hz) in recording order. Trials are much shorter than this (median about 154 transitions), so nearly every window spans more than one trial (552 of 555), and the fixed-length segmentation is a coarse approximation of episode structure rather than an exact per-trial split. Recovery behaviors are learnable from the successful episodes (83%); failed episodes provide coverage of near-boundary and initial transient states but do not provide recovery signal.

2) Algorithm Configuration: IQL [12] is selected for its stability on narrow datasets: it avoids querying out-of-distribution actions by learning a separate value function $V(s)$ via expectile regression and extracting the policy through advantage-weighted behavioral cloning. Key hyperparameters (Table 16) follow the original paper's recommendations.

TABLE 16. IQL hyperparameters (d3rlpy 2.8.1 implementation).

Parameter	Value	Source
Policy architecture	MLP [256, 256]	d3rlpy default
Activation function	ReLU	d3rlpy default
Gradient steps	500 000	configured
Batch size	256	configured
Discount γ	0.99	default
Actor learning rate	3×10^{-4}	default
Critic learning rate	3×10^{-4}	default
Number of critics	2	default
Soft-target τ	0.005	default
Expectile	0.7	default
Weight temperature β	3.0	default
Max weight	100.0	default
Observation scaler	Standard	configured
Action scaler	MinMax	configured

TABLE 17. IQL hardware evaluation (model_280000, 50 stratified trials).

Metric	SR	Mean (s)	Med (s) [IQR]
50 trials	92%	10.62	9.80 [4.49, 15.63]
10 trials (screening)	100%	6.90	5.88

3) Model Selection: Checkpoints are saved every 10k gradient steps. Because IQL is trained on real hardware logs, its behavior can differ from our simulator, so simulation alone is not a reliable selector. We first use 50-trial stratified simulation evaluation (same ICs as the hardware protocol, first-order motor model) to shortlist checkpoints with similar performance, then run about 10 hardware trials on each shortlisted checkpoint to see which deploys best. The model at 280k steps gives the best hardware result and is selected for deployment.

4) Hardware Results:

a) Difficulty breakdown.: IQL achieves 100% SR on medium (16/16), at-wall-opposite (5/5), and at-wall-same (5/5) initial conditions. Failures concentrate on easy/center (8/10, 80%) and hard/near-wall (12/14, 86%) strata, an unusual pattern among RL controllers.

b) Center-trial failures.: IQL failed two center trials (cart at ±0.10 m) while succeeding on both at-wall strata. Center failures are not unique to IQL; several online-RL controllers also miss center trials (for example, TD3 and SAC each fail two). We did not retain per-step Q-values across the evaluation set, so we report this as an observed pattern without a verified mechanism.

c) Comparison with online RL.: IQL reaches 92% SR, matching TD3 (DR) (92%) and well above PPO (base) (60%), while training on real data alone; it is a few points below PPO (BZ+DR) (96%). Success-rate gaps this small sit within the benchmark's resolution (see the power analysis in the main paper), so we read them as descriptive rather than a strict ordering. IQL's clearest advantage is the lowest RMS control effort among the RL controllers (0.395 vs. 0.492–0.680), producing smoother actuator commands. Its median

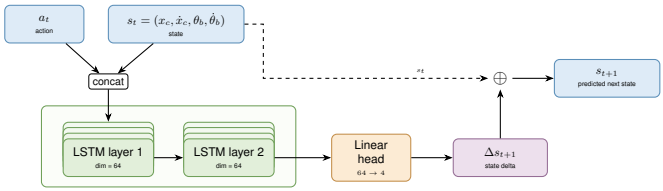


Fig. 7. World model architecture (v1). Inputs s_t (4-D state, z-score normalized) and a_t (scalar action, used in its original bounded scale) are concatenated and fed through a 2-layer LSTM (hidden dim $= 64$, dropout $= 0.2$). A linear output head maps to the 4-D state delta Δs_{t+1}; a skip connection adds this to the current state to produce the predicted next state s_{t+1}.

settling time (9.80 s) is slower than TQC (DR) (6.61 s) and much slower than PPO (BZ+DR) (3.15 s).

d) Significance.: Achieving 92% SR with a policy trained on only 333k real transitions (280k gradient steps), without simulated training data, domain randomization, or sensor modeling, demonstrates that offline RL is a viable path when simulation fidelity is uncertain or unavailable. The dataset of 1,415 post-recalibration trials was collected during normal hardware evaluation runs; no dedicated data-collection phase was required.

VI. World Model RL Training

This appendix reports on training PPO entirely inside a learned world model, replacing the physics simulator with a data-driven dynamics model.

A. World Model Architecture

The world model is a 2-layer LSTM [21] (hidden dim $= 64$, sequence length $= 10$), implemented in PyTorch [3] and trained on a 1 M-transition random-exploration dataset ($\sim$14 hours of operation; collection protocol in Appendix VIII). Its input is the concatenation of the current state $\mathbf{s}_t = [x_c, \dot{x}_c, \theta_b, \dot{\theta}_b]$ and the action a_t, and it predicts the state delta $\Delta\mathbf{s}_{t+1} = \mathbf{s}_{t+1} - \mathbf{s}_t$, with normalization statistics precomputed from the dataset (Fig. 7). We train it for 50 epochs, reaching a final training-set prediction MAE of 0.611 in the normalized state space.

a) Training hyperparameters.: The model (hidden dim 64, 2 LSTM layers, dropout 0.2) is trained with the Adam optimizer at learning rate 10^{-4}, batch size 256, over 10-step sequences for 50 epochs. The objective is a per-dimension-weighted MSE on the predicted state delta $\Delta\mathbf{s}$, with weights $[1, 5, 1, 5]$ on $[x_c, \dot{x}_c, \theta_b, \dot{\theta}_b]$ to emphasize the two velocity channels. The 1 M-transition collection is split $80/10/10$ into train/validation/test, with normalization statistics computed on the training split only, and all seeding uses seed 42. When MPPI plans with this world model at deployment, we run it on CPU, which is faster than GPU for a network this small on our target hardware, and the per-step planning cost (about 40 ms for 800 sampled rollouts over a horizon of 30) stays within the 50 ms control period. PPO-WM instead deploys only its trained policy network, so the world model runs online only under MPPI.

TABLE 19. World-model-trained PPO vs. physics-trained PPO (50 hardware trials). The PPO (BZ+DR) baseline here is the S-curve development policy; Table II (main paper) reports the matched first-order-lag checkpoint at 96% (Appendix V-M).

Model	HW SR	HW Mean	HW Med	Sim Settle (S-curve)
PPO (BZ+DR)	98%	5.11 s	2.55 s	1.67 s
PPO (WM)	**100%**	6.84 s	**3.64 s**	1.74 s

B. Checkpoint Provenance and Sign Conventions

MPPI and PPO-WM use *separate* LSTM checkpoints of the same architecture, trained on two distinct 1 M-transition hardware collections whose difference is subtle but consequential for RL training. Both are released in the repository.

TABLE 18. World model checkpoint provenance.

Property	**MPPI ckpt**	**PPO-WM ckpt**
Dataset	`arcball_cont_1M_calib196_160.h5`	`arcball_cont_1M_pre_neg.h5`
Sampling rate	20 Hz (50 ms)	20 Hz (50 ms)
Cart-velocity sign	negated (positive = right)	raw encoder (positive = left)
Action→velocity r	$+0.14$ (strong)	≈ 0 (negligible)
Sim SR of PPO-WM	$\sim$60% (wall-stuck)	$\sim$98% (robust)
Sim SR of MPPI	100%	N/A

The two collections differ in their velocity-sign convention. The MPPI dataset was collected with the current serial reader, which negates the encoder velocity so that positive cart velocity = right in the Python state space. The PPO-WM dataset was collected earlier on a separate host whose reader stored the raw encoder velocity (positive = left). The resulting model shows only a delayed, weak action response on the cart-velocity channel: the per-step velocity change is dominated by encoder noise, so the immediate effect of the action on cart velocity is small (a response emerges only over several steps). This makes it robust to the sign mismatch at deployment and, as a side effect, prevents it from learning the non-physical through-wall motion that harms RL training on the MPPI checkpoint. We therefore ship PPO-WM on the pre_neg checkpoint and MPPI on the calib196_160 one; swapping them degrades PPO-WM to $\sim$60% sim success (wall-stuck failures) and is not recommended. See `hardware/README.md` for the full sign-convention chain from PLC command to Python state.

C. PPO Training on World Model

We wrap the world model as a Gymnasium environment [22] (`BalancerWorldModel`) and train PPO inside it with 16 parallel environments (DummyVecEnv) for 3 M timesteps, using the balanced reward and no domain randomization. Training takes about 42 minutes on CPU.

D. Results

The world-model-trained agent achieves **100% success rate** on hardware (50/50 trials), the only RL controller in the deployed 13-controller benchmark to reach perfect reliability. The mean settling time is 6.84 s (std=6.94 s) but the median of 3.64 s is more representative; a few difficult initial conditions

TABLE 20. World model prediction error vs. training data size. Per-channel MAE averaged over the $h = 50$ (2.5 s) rollout. The reference analytical model achieves 0.475 total MAE over the same rollout.

Transitions	x (m)	$\dot{x}$ (m/s)	θ (rad)	$\dot{\theta}$ (rad/s)
10k	0.145	0.223	0.042	0.090
25k	0.091	0.148	0.044	0.077
50k	0.079	0.127	0.040	0.072
70k	0.084	0.130	0.040	0.071
100k	0.080	0.123	0.037	0.069
150k	0.075	0.117	0.039	0.070
200k	0.073	0.116	0.042	0.071
300k	0.070	0.111	0.040	0.070
400k	0.074	0.118	0.038	0.068
500k	0.072	0.112	0.036	0.069
1M	0.071	0.113	0.040	0.069

TABLE 21. Hardware validation of MPPI on world models trained with different data sizes (10 trials each; the 1M reference row is the first 10 trials of the 50-trial `MPPI_v12` hardware run, as no separate 1M sweep run was collected). SR: success rate; settling time reported as mean and median over successful trials.

WM data	**HW SR**	**HW Mean**	**HW Median**
50k	80% (8/10)	7.03 s	5.11 s
70k	100% (10/10)	9.65 s	9.90 s
100k	70% (7/10)	12.89 s	10.43 s
300k	100% (10/10)	5.30 s	2.85 s
400k	100% (10/10)	10.18 s	6.42 s
500k	100% (10/10)	8.88 s	8.83 s
1M (main)	100% (10/10)	1.90 s	1.92 s

produce outliers up to 26 s. In simulation (first-order motor model, 50 trials), it achieves 98% SR with 1.96 s mean settling.

E. Data Size Sweep

To determine how much data the world model actually requires, we trained the same LSTM architecture on subsets of the random-exploration dataset ranging from 10k to 500k transitions (the main model used 1M). Open-loop prediction accuracy (short-horizon, 50 steps) and, for a subset, 10-trial hardware validation under MPPI were evaluated for each model.

Prediction accuracy plateaus around 50–100k transitions: from 100k onward the per-channel MAE stays within about ± 0.01 of the 1M model (at table precision), and scaling to 500k or 1M offers no meaningful improvement. The 10k model is the only one noticeably worse (total MAE 0.499); it alone is comparable to the analytical model's total MAE of 0.475, while every model from 25k onward clearly outperforms the analytical reference.

To confirm that the prediction plateau translates to controller performance, we ran 10 hardware trials of MPPI (the same tuning as the main world-model MPPI) on each trained model.

The hardware results are noisier than the open-loop errors and only partly track the plateau: the 70k model reaches 10/10 while the 100k model reaches 7/10, even though its prediction MAE sits squarely on the plateau. Each point is a single 10-trial run, and every sweep model runs under the MPPI tuning optimized for the 1M main model, so a dip like the 100k model's may come from a model-planner mismatch rather than from the data amount alone. The 1M main model sets the reference (100% SR, 1.90 s mean), the lowest settling in the table. The supported finding is the open-loop one: prediction error, measured on the held-out validation split, plateaus by 50k to 100k transitions, well below our full collection. The hardware sweep gives the rough scale of the data requirement, not a precise threshold.

We also tested a model trained on 70k transitions from a *balanced demonstration* dataset (collected by a simple heuristic controller rather than random actions). With the same MPPI tuning as the main model, it achieves 80% SR on 10 hardware trials with a mean settling of 15.3 s, below the equivalent 70k random-exploration model (100% SR, 9.65 s). At equal data size, this structured-demonstration model did not match random exploration; richer demonstration data could narrow the gap, but these single runs do not show that structured collection lowers the data requirement.

VII. MPPI Controller Tuning

This appendix covers MPPI parameter tuning, implementation features, and compute performance. The world model used by MPPI is described in Appendix VI. Per-trial MPPI results are in Appendix XI.

A. Algorithm Overview

Model Predictive Path Integral (MPPI) is a sampling-based MPC algorithm [16], [23]. At each control step it samples N random action sequences around the previous solution, rolls each one out through the learned world model on CPU (at each of the H sequential LSTM steps the N candidate rollouts are advanced together as one batch, i.e. parallel across samples but sequential along the horizon), and scores the resulting trajectories by cost. It then forms an importance-weighted mean of the sampled sequences, applies the first action of that averaged plan, and shifts the trajectory left to warm-start the next step.

B. Cost Function

$$J^{(i)} = \sum_{t=1}^{H} \left[\mathbf{x}_t^T Q \mathbf{x}_t + R u_t^2 + c_{\text{wall}}(x_t) \right] + \mathbf{x}_H^T P \mathbf{x}_H \tag{40}$$

where:

- $Q = \text{diag}([0, 0.1, 30, 0.1])$: heavy ball-angle penalty
- $R = 0.001$: very low control effort penalty
- $c_{\text{wall}}(x_t) = 100 \cdot \max(0, |x_t^{\text{cart}}| - x_{\text{limit}})$: wall penalty on the cart position x_t^{cart} (first coordinate of $\mathbf{x}_t$)
- $P = \text{diag}([1, 2, 100, 5])$: terminal cost (LQR approximation), disabled in the deployed configuration

C. Importance Weighting

$$w^{(i)} = \frac{\exp(-(J^{(i)} - J_{\min})/\lambda)}{\sum_j \exp(-(J^{(j)} - J_{\min})/\lambda)} \tag{41}$$

$$\bar{U}^* = \sum_{i=1}^{N} w^{(i)} U^{(i)} \tag{42}$$

The temperature parameter λ controls how greedily the weights concentrate on low-cost trajectories: small λ makes the distribution sharply peaked on the best trajectory; large λ averages more uniformly. We use $\lambda = 0.4$ to balance greedy exploitation with smooth averaging.

D. Action Sampling with Temporal Smoothing

$$u_t^{(i)} = \beta \cdot (\bar{u}_t + \epsilon_t^{(i)}) + (1-\beta) \cdot u_{t-1}^{(i)}, \quad \beta = 0.9 \tag{43}$$

with the base case $u_0^{(i)} = \bar{u}_0 + \epsilon_0^{(i)}$ (the first step is unsmoothed) and the recursion above for $t \geq 1$.

Temporal smoothing ($\beta = 0.9$) correlates noise across consecutive timesteps, producing smoother candidate trajectories that are more physically realizable on a velocity-controlled actuator and reduce high-frequency chatter in the selected action sequence.

E. Final Tuned Parameters

Table 22 lists the parameters used for every reported MPPI run; the coordinate sweep that selected them is described next.

TABLE 22. MPPI tuned parameters.

Parameter	Value	Description
Q	$[0, 0.1, 30, 0.1]$	State cost weights
R	0.001	Control effort penalty
λ	0.4	Temperature (lower = more greedy)
Horizon (H)	30	Planning steps (1.5 s lookahead)
Samples (N)	800	Parallel rollouts
T_s	0.05 s	Control timestep (20 Hz)

F. Tuning Method

We tune MPPI by a coordinate sweep in simulation, varying each of the ball-angle weight $Q[2]$, the control penalty R, the temperature λ, and the horizon H in turn about a fixed center ($Q[2]$=30, H=30, R=0.001, λ=0.4) at $N = 400$ rollouts, scoring each configuration by the number of initial conditions settled and the mean settling time across 7 difficulty-stratified ICs (30 s per trial). We run the sweep on the released MPPI world model (Appendix VI-B), trained on the dataset `arcball_cont_1M_calib196_160.h5`; because it is conducted in simulation and is robust to minor model updates, the resulting parameter values transfer to the final hardware checkpoint.

G. Tuning Sweep Results

The sweep varied one factor at a time and evaluated $Q[2] \in \{15, 20, 25, 30, 40, 50\}$, $H \in \{20, 25, 30, 35\}$, $R \in \{0.001, 0.005, 0.01\}$, $\lambda \in \{0.3, 0.4, 0.5\}$ at $N = 400$ rollouts with 7 difficulty-stratified ICs (30 s per trial) in simulation. An earlier parameterization ($Q[2] = 80$, $R = 0.01$, $H = 15$, $N = 800$) is included as a baseline reference point.

TABLE 23. MPPI tuning sweep: selected configurations. All-settled (7/7) runs ranked by mean settling time; partial-success runs shown below.

Config	$Q[2]$	R	λ	H	Settled	Mean (s)
All 7 ICs settled						
early config	80	0.01	0.4	15	7/7	4.89
q30_h25	30	0.001	0.4	25	7/7	6.74
q30_h30	**30**	**0.001**	**0.4**	**30**	**7/7**	**7.16**
q30_h35	30	0.001	0.4	35	7/7	7.37
q30_h20	30	0.001	0.4	20	7/7	8.64
q15_h30	15	0.001	0.4	30	7/7	9.61
q50_h30	50	0.001	0.4	30	7/7	9.65
Partial success						
q20_h30	20	0.001	0.4	30	6/7	5.74
q30_lam05	30	0.001	0.5	30	6/7	7.46
q30_r005	30	0.005	0.4	30	5/7	6.95
q30_r01	30	0.01	0.4	30	5/7	8.43

The hardware evaluation uses $Q[2] = 30$, $R = 0.001$, $\lambda = 0.4$, $H = 30$, $N = 800$ (bolded row above, with the sample count raised to 800 for hardware; even at this higher count the mean compute stays within the 50 ms deadline, see Table 25). This configuration achieves 7/7 in simulation with $H = 30$ providing sufficient lookahead; increasing H beyond 30 does not improve success rate and raises compute cost. Several sweep configurations reach 7/7 with lower mean settling than the deployed one (including the earlier $Q[2] = 80$, $R = 0.01$, $H = 15$ config and $Q[2] = 25$, $H = 30$), so the deployed settings are not the settling-optimal choice by the tabulated score. We nonetheless deploy $Q[2] = 30$, $R = 0.001$, $H = 30$ because its higher $Q[2]$ and lower R give smoother, less reactive planning; since the sweep is run in simulation and the settling differences among 7/7 configurations are small, this is a qualitative engineering choice rather than a settling-optimal or measured-hardware selection.

H. Advanced Implementation Features

The deployed MPPI controller implements several features beyond the basic sampling loop (Table 24); the table lists the full set available in the code, and features marked † are disabled for the final evaluation. In the released configuration used for the 50-trial evaluation, context warm-up and warm-start are active, while model error correction and the terminal cost are turned off and adaptive noise has no effect because the deployed sampler draws uniform noise (the σ schedule applies only to Gaussian sampling). The cost function above gives the full form; its terminal term $\mathbf{x}_H^T P \mathbf{x}_H$ is therefore inactive in the deployed run.

I. Compute Performance

MPPI is the only controller that approaches the real-time control deadline (Table 25); the classical and on-policy controllers run in under 1 ms, and the remaining controllers (IQL, NMPC, PPO (WM), and the off-policy RL policies) sit in the 2–8 ms range, still far below the 50 ms deadline (Figure 16). Although the world model was trained on a GPU, MPPI rollouts are faster on CPU for this small LSTM on our test machine, so the deployed controller uses CPU

TABLE 24. MPPI implementation features. Features marked with † exist in code but are disabled for the final evaluation (best performance achieved without them).

Feature	Description
Context warm-up	Last $K = 10$ observations fed through LSTM before planning
Model error correction†	EMA of prediction error applied as bias
Terminal cost†	LQR cost-to-go extends effective planning horizon
Adaptive noise†	σ decays ($0.95\times$) when good; increases when struggling (inactive under uniform sampling)
Warm-start	Previous solution shifted left; last action repeated
Wall override†	Hard override when cart near boundary (disabled)
Cart clamping†	Physical wall simulated during rollouts (disabled)

inference. The numbers in Table 25 are measured with a single PyTorch intra-op thread, which is conservative and leaves CPU headroom for sensor I/O and IPC. Using four threads on the same hardware drops the per-step compute time to 20.07 ms (about $2\times$ faster; std 1.77 ms vs 1.47 ms) with a comparable overrun rate ($\sim$0.04%). We report the single-thread numbers as a conservative reference; the released evaluator defaults to four threads. This demonstrates that learned planning methods can meet stringent real-time constraints on a commodity host CPU without requiring a GPU at runtime [24]. We caution that the CPU-vs-GPU ranking reflects our single hardware configuration and may differ on other machines.

TABLE 25. MPPI runtime performance (50 hardware trials, single PyTorch intra-op thread on the deployment-host CPU, `calib196_160` world model; the four-thread figure is given in the text). Timings on a different CPU will scale accordingly.

Metric	Value
Mean compute time	39.99 ms
Max compute time	69.81 ms (cold-start)
Median compute time	39.77 ms
p95 compute time	42.45 ms
p99 compute time	43.94 ms
Mean active iteration time	40.06 ms
Control deadline	50 ms (20 Hz)
Device	CPU (PyTorch)

Beyond raw speed, MPPI settles cleanly across the difficulty range: Fig. 8 shows its ball-angle trajectories driving into the ± 0.01 rad band from every stratum, with median settling ranging from about 1.2 s (at-wall-same and center starts) to 2.7 s (at-wall-opposite), and no sustained oscillation.

VIII. Dataset Collection Protocol

This appendix describes the random-exploration dataset used for world model training (Appendix VI). The 333k post-recalibration dataset used for IQL training is described in Appendix V-O. The experimental evaluation protocol (stratified benchmarking) is in Appendix IX.

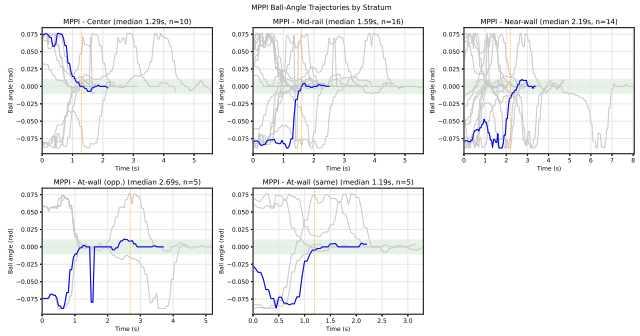


Fig. 8. MPPI ball-angle trajectories by stratum. Each panel shows all trials in the stratum (gray) with the median-settling trial highlighted (blue) and the median settling time marked (dotted). The controller settles the ball within the ± 0.01 rad band (green region) across all strata, with median settling from about 1.2 s (at-wall-same and center) to 2.7 s (at-wall-opposite).

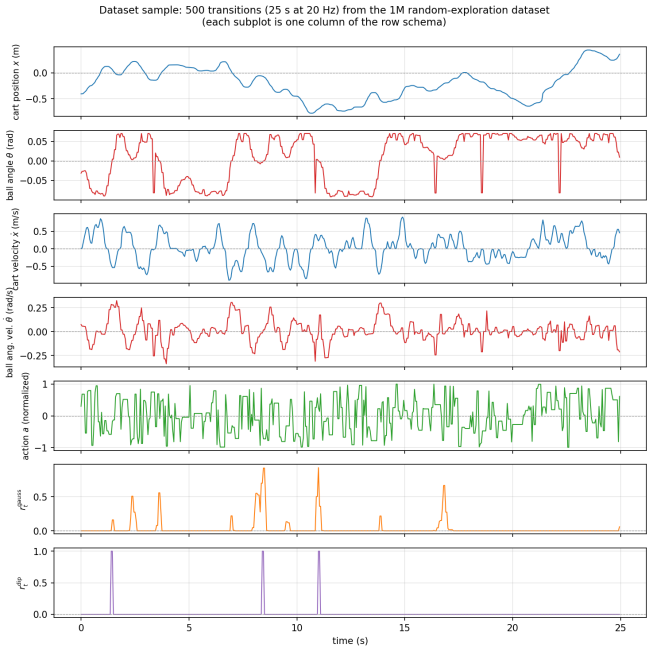


Fig. 9. A 500-transition contiguous sample of the 1M random-exploration dataset (row schema of Eq. 44), plotted as a time series at the 20 Hz control rate. Each subplot is one variable of the row: cart position x, ball angle θ, cart velocity $\dot{x}$, ball angular velocity $\dot{\theta}$, the action a (plotted normalized to $[-1, 1]$), the Gaussian position reward r_t^{gauss}, and the binary IR-dip reward r_t^{dip} (the hardware IR dip-sensor bit, 1 while the sensor reports the ball over the central dip).

We recorded random trajectories covering the full state space to support downstream tasks such as system identification, offline RL, and learning-based world modeling, collecting separate datasets for discrete and continuous actions. The agent's normalized action ($\{-1, 0, +1\}$ discrete, $[-1, 1]$ continuous) maps to a physical cart-velocity command ($\{-0.9, 0, +0.9\}$ and $[-0.9, 0.9]$ m/s). The stored a_t depends on the collection: the calibrated 1M files store this m/s command, while the earlier `pre_neg` collection stores the

normalized action in $[-1, 1]$. Each row contains:

$$[x_t,\ \dot{x}_t,\ \theta_t,\ \dot{\theta}_t,\ a_t,\ x_{t+1},\ \dot{x}_{t+1},\ \theta_{t+1},\ \dot{\theta}_{t+1},\ r_t^{\text{gauss}},\ r_t^{\text{dip}}], \tag{44}$$

where

$$r_t^{\text{gauss}} = \exp\Big(-\frac{\theta_t^2}{2\sigma_r^2}\Big) \cdot \exp\Big(-\frac{|\dot{\theta}_t|}{v_{\text{scale}}}\Big), \tag{45}$$

$$r_t^{\text{dip}} = \begin{cases} 1, & |\theta_{t+1}| \le \theta_{\text{center}} \\ 0, & \text{otherwise.} \end{cases} \tag{46}$$

Here $\sigma_r = \theta_{\max}/16 \approx 0.005\,\text{rad}$ sets the width of the Gaussian position reward ($\theta_{\max}$ is the ball angular limit, 0.081 rad in the calibrated collections and 0.075 in `pre_neg`), $v_{\text{scale}} = 0.2\,\text{rad/s}$ scales the angular-velocity term, and $\theta_{\text{center}} = 0.007\,\text{rad}$ (about 15 mm of arc at $R = 2.101\,\text{m}$) is the dip half-band. In the 1M random-exploration files, the stored r_t^{dip} column is the raw hardware IR dip-sensor bit read from the serial stream; the angular form above, evaluated on the next-state angle θ_{t+1}, is the offline recomputation applied when rebuilding the 333k post-recalibration dataset (`build_flat_dataset.py`). We recorded over one million steps for the random-exploration dataset used for world model training, stored in compressed HDF5 format, with the full acquisition scripts available in the public repository. The two released 1M collections differ in layout: the calibrated files (`calib196_148`, `calib196_160`) add four raw time-of-flight columns (previous and current `raw_left_mm` and `raw_right_mm`) for a 15-column on-disk array, while the earlier `pre_neg` collection is the 11-column form of Eq. 44. The world-model loader reads only the four-element state, the action, and the four-element next state.

Figure 9 shows a 500-transition contiguous sample from the 1M random-exploration dataset, one subplot per variable in the row schema of Eq. 44, giving a visual sense of what one dataset "looks like" as a time series (the caption details each channel).

We used the 1M-transition random-exploration dataset exclusively to train the LSTM world model (Appendix VI), which is then used by MPPI and PPO-WM (two checkpoints trained on two 1 M collections; see Appendix VI-B). It is *not* used for offline RL training, because random actions provide insufficient coverage of successful recovery behavior for an offline policy. IQL instead uses a separate post-recalibration dataset (333,497 transitions from 1,415 mixed-controller hardware trials, rewards recomputed offline), detailed in Appendix V-O. It is available as `arcball_post_recalib_flat.h5` (built by `data/build_flat_dataset.py`).

A. Data-Collection Notes

Two practical lessons from collecting these datasets on real hardware are worth recording, since both bear directly on data quality downstream.

Solder the sensor wiring: connect the time-of-flight sensors to the Arduino with soldered joints rather than push-fit jumper or breadboard connections. During random exploration the ball strikes the arc walls repeatedly, and the resulting vibration gradually loosens push-fit connectors. A momentarily broken power or signal line produces dropped or frozen readings that are easy to miss during a long unattended collection run; a soldered harness removes this failure mode.

Inspect trajectories before training: visualize the recorded state variables before committing a dataset to training. A sensor channel can go dead partway through a run and hold a constant or otherwise invalid value that still passes the online validity checks, so the fault survives into the stored data. Plotting each state variable as a time series (as in Figure 9) makes such segments immediately visible; training on them silently degrades the world model and any policy learned downstream.

IX. Evaluation Protocol

A. Initial Conditions and Success Criteria

Hardware trials. We use a stratified initial condition (IC) design to ensure fair comparison across controllers with different constraint-handling capabilities. Strata are defined mainly by the cart's starting position (available maneuvering space), and at the rail by the targeted ball side. The cart is positioned automatically via closed-loop velocity control (P-controller, 10 mm tolerance), and the ball is displaced from center via brief cart jolts.

The 50-trial schedule comprises five strata:

- **Center (20%, 10 trials):** Cart at ± 0.10 m, ball jolted off center.
- **Mid-rail (32%, 16 trials):** Cart at ± 0.40 m, ball jolted off center. Tests recovery with asymmetric rail budget ($\sim$0.38 m one side, $\sim$1.18 m other).
- **Near-wall (28%, 14 trials):** Cart at ± 0.65 m, ball jolted off center. Tests recovery under tight constraints (only 0.13 m clearance on one side).
- **At-wall-opposite (10%, 5 trials):** Cart at ± 0.78 m (workspace limit, axis units), ball displaced to *opposite* side. Feasible for all controllers; tests recovery speed.
- **At-wall-same (10%, 5 trials):** Cart at ± 0.78 m (workspace limit, axis units), ball displaced to *same* side as cart. Reveals structural limitations of controllers without explicit constraint handling.

Trials alternate left/right within each stratum and are shuffled deterministically (seed 42) so every controller sees the identical sequence. The schedule is logged alongside results for reproducibility.

Beyond the ball-side selection in the two at-wall strata, the ball's initial angle θ_0 is not controlled: it arises from the brief cart jolt used to displace the ball. Empirically, $\theta_0 \in [-0.091, 0.081]$ rad across the benchmark trials (mean $|\theta_0| \approx 0.062$ rad, standard deviation ≈ 0.019 rad), and it stays in the same range in every stratum, with per-stratum mean $|\theta_0|$ ranging only from 0.059 rad (at-wall-opposite) to 0.071 rad (at-wall-same). The initial ball displacement is therefore comparable across strata, so stratum difficulty reflects maneuvering room rather than initial ball displacement.

The jolt also places the ball outside the central dip in nearly every trial. With the surface parameters of Section II, the dip's restoring region reaches only to $|\theta| \approx 0.0115$ rad. Released at rest inside that angle with the cart held still, the ball returns to center, and released outside it, the ball rolls away down the convex arc. All but five of the 650 benchmark trials start beyond that angle, at a mean $|\theta_0|$ some five times larger, so a controller has to carry the ball back across the destabilizing part of the arc before the dip can capture it.

One caveat applies to the achieved cart start in the at-wall strata, where the cart is driven toward the rail ($|x_0| = 0.777$ m) before the ball is displaced. In the at-wall-*same* stratum the cart reached the physical limit on about 83% of the 13 benchmark controllers' trials, but this was not uniform across controllers: most reached the rail on all five trials, whereas for a few, notably NMPC and TD3, on three of their five trials the automated placement left the cart near center ($|x_0| \approx 0.08$ m) rather than at the rail, a materially easier start. Both still succeeded on all five, and within this stratum the success rate does not differ significantly between trials that reached the limit and those that did not ($50/54$ versus $9/11$; Fisher's exact test $p = 0.27$), so the effect on the reported comparison is small. The at-wall-*opposite* stratum is less uniform still: the cart reached the limit for only some controllers and started nearer center ($|x_0| \approx 0.09$ m) for the others. We therefore read both at-wall strata as recovery-speed checks for the controllers that did not reach the rail, rather than strictly equal-condition cross-controller robustness comparisons.

Simulation controller benchmarks (the RL and classical comparisons run in simulation) use the same 50-trial stratified schedule as the hardware protocol (cart at $\pm 0.10, \pm 0.40, \pm 0.65, \pm 0.78$ m). The simulator also provides a legacy uniform-sampling mode,

$$\begin{aligned} x_0 &\sim \mathcal{U}(-0.75,\ 0.75) \text{ m}, \\ \theta_0 &\sim \mathcal{U}(-0.074,\ 0.074) \text{ rad}, \\ \dot{x}_0 &= \dot{\theta}_0 = 0, \end{aligned} \tag{47}$$

but it was not used for the reported benchmarks.

Success criterion. A trial is **successful** if the ball angle satisfies

$$|\theta(t)| < 0.01 \text{ rad} \tag{48}$$

continuously for at least 1.0 s. The **settling time** t_s is defined as the wall-clock time at which the ball *enters* this band and remains within it for the required duration (i.e. the entry instant, not the end of the window). The maximum trial duration is 30 s; trials not meeting the settling criterion within this window are recorded as failures.

B. Performance Metrics

We evaluate controllers using the following metrics, computed with SciPy [25] and NumPy [26]:

- **Settling time** (t_s): wall-clock time from trial start until the success criterion is first met (as defined above). Medians, interquartile ranges, and the settling significance tests are computed over *successful trials only*, matching the main paper's Table II statistics; success rate is reported separately, so reliability is not folded into the settling comparison.
- **Success rate**: fraction of trials with $t_s < 30.0$ s, with 95% Wilson score intervals. Wilson intervals replace a bootstrap because a perfect $50/50$ record bootstraps to a degenerate $[100, 100]$ interval, understating uncertainty at the boundary.
- **Control effort**: root-mean-square commanded cart velocity in m/s, saturated at the ± 0.9 m/s axis limit the actuator enforces, computed per trial and averaged over all trials.
- **Significance testing.** Pairwise Mann-Whitney U rank tests (`scipy.stats.mannwhitneyu`) on the successful-trial settling distributions, Bonferroni-corrected [27] across all $\binom{13}{2} = 78$ pairs ($\alpha_c = 0.05/78$). A rank test is used because the settling distributions are right-skewed, so a mean-based t-test is inappropriate. Success-rate differences use Fisher's exact test (`scipy.stats.fisher_exact`) over the same family. Control-effort differences are tested the same way, as a separate Mann-Whitney family over the per-trial RMS effort across all 78 pairs, with the full pairwise matrix written to `exp1_effort_significance.csv`. Effect sizes are reported as Cohen's d ($d = (\bar{x}_i - \bar{x}_j)/s_{\text{pooled}}$, $s_{\text{pooled}} = \sqrt{(s_i^2 + s_j^2)/2}$, equal-weight pooling) to complement the p-values. Because the 78 pairwise tests are computed on overlapping controller data rather than independent samples, the Bonferroni correction is conservative here, so the number of pairs flagged significant is best read as a lower bound. All statistics are reproduced by `paper/scripts/compute_statistics.py`.

C. Experiment 1: Baseline Performance

a) Objective:: Establish the nominal performance hierarchy under realistic but unperturbed sensing conditions, using difficulty-stratified ICs that test regulation, recovery, and constraint handling.

b) Protocol:: We evaluate each controller over 50 trials on the physical platform at the nominal control frequency of 20 Hz ($T_s = 0.05$ s). Sensor readings use the 34.5 ms timing-budget sequential ToF configuration (Appendix I) with inherent noise ($\sigma_{\text{ToF}} \approx 1.6$–$1.7$ mm at the arc center); no additional artificial noise is injected.

c) Rationale:: The stratified IC design ensures that: (a) no controller is unfairly penalized by impossible starting conditions; (b) center strata establish baseline regulation performance; (c) near-wall/at-wall strata discriminate controllers by their constraint-handling and recovery capabilities; (d) the identical IC sequence across all controllers removes IC-related confounds from pairwise comparisons, with the exception of the achieved cart start in the two at-wall strata, which was not uniform across controllers (Section IX-A).

X. Simulation Validation

This appendix validates that the two dynamics models used by controllers in the main paper, the analytical first-principles model and the learned LSTM world model, are accurate enough predictors of real hardware dynamics. Rather than comparing controller-level metrics (success rate, settling time), we evaluate open-loop trajectory prediction accuracy against held-out partitions of the 1 M-transition real dataset. This isolates model error from controller behavior and provides a direct measure of simulation fidelity.

A. Methodology

We follow a standard open-loop prediction protocol:

1) From a dataset of real hardware transitions $(\mathbf{s}_t, a_t, \mathbf{s}_{t+1})$, select N reset-free segments of length L.
2) For each segment, initialize a candidate model to the real state $\mathbf{s}_0$ and replay the recorded action sequence $a_0, a_1, \ldots, a_{L-1}$ open-loop.
3) Record the predicted trajectory $\hat{\mathbf{s}}_1, \ldots, \hat{\mathbf{s}}_L$ and compute terminal MAE $|\hat{\mathbf{s}}_L - \mathbf{s}_L|$ and trajectory MAE $\frac{1}{L}\sum_{t=1}^{L} |\hat{\mathbf{s}}_t - \mathbf{s}_t|$.
4) Report means across all segments.

a) Metric choice.: We report mean absolute error (MAE) rather than root-mean-square error (RMSE) because MAE is robust to outliers and directly interpretable in physical units. Since the four state variables operate on very different scales (cart position ± 0.78 m, ball angle ± 0.081 rad), we also report *normalized MAE* (MAE divided by the variable's full operating range, expressed as a percentage). Normalized MAE makes channels comparable and reveals which state dimensions are predicted most poorly relative to their dynamics.

We use two configurations:

- **Exp 1 (short horizon):** $N = 100$ segments, filtered to initial conditions (IC) with $|\theta| < 0.04$ rad (ball near center), horizons 0.25–2.5 s (5–50 steps). This corresponds to the prediction horizon used by model-based controllers (MPPI, NMPC).
- **Exp 2 (long horizon):** $N = 50$ segments with no IC filter, horizons 0.25–30 s (5–600 steps). This covers the episode length used by RL agents.

Under the 80/10/10 split used to train the world model, the analytical ablation (Exp 1, which selects the best analytical configuration) draws segments from the validation partition (rows 80–90%), and the world-model comparison (Exp 2) draws from the held-out test partition (rows 90–100%). Neither partition receives gradient updates; the validation partition (Exp 1) is used only for early stopping and checkpoint selection, while the test partition (Exp 2) is fully held out and drives the primary world-model comparison. Both slices are disjoint from the one used to pick the analytical configuration.

The candidate models are:

- **Analytical model**: the velocity-input first-principles model (Section II-F) with nominal parameters ($\tau_v = 0.15$ s, $d = 0.002$ m, $\mu_{\text{rr}} = 0.025$, $\beta_v = 0.009$ m^2/s), Euler integration with step size 0.05 s, a 1-step command delay, and a first-order velocity observation filter (PT1, $\tau = 10$ ms). Additional structural variants are compared in the ablation below.
- **World model**: a 2-layer LSTM (hidden dim 64, sequence length 10) trained on 1 M real transitions, as detailed in Appendix VI. It predicts the state delta $\Delta\mathbf{s}_{t+1}$ with a skip connection. During rollout the LSTM hidden state is maintained across steps to capture temporal dynamics.

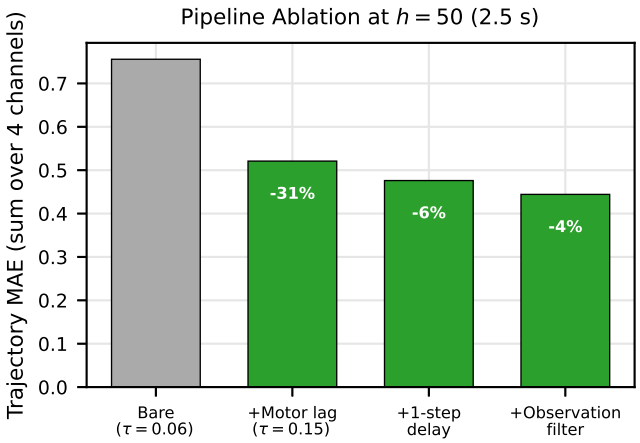


Fig. 10. Pipeline ablation: total trajectory MAE (sum of 4 channels) at $h = 50$ (2.5 s). Calibrating τ_v accounts for the largest improvement; command delay and observation filtering provide diminishing returns.

B. Analytical Model Ablation

Before comparing against the world model, we ablate the analytical model to quantify the contribution of each pipeline component. All ablations are at $h = 50$ (2.5 s).

a) Pipeline components.: Figure 10 shows the cumulative effect of adding each pipeline element. The bare model ($\tau_v = 0.06$, no delay, no filter) has a total trajectory MAE (sum over 4 channels) of 0.756. Calibrating τ_v to 0.15 reduces this to 0.521, a 31% improvement that accounts for the majority of the total gain. Adding a discrete one-step (50 ms) command-delay approximation further reduces error to 0.476. The 50 ms one-step delay is a conservative upper bound on the measured real transport delay (under 14 ms) and is retained in the training and tuning simulators (Appendices V and IV). The velocity observation filter (PT1, $\tau = 10$ ms) adds a small additional improvement to 0.444.

The normalized MAE (Table 26) shows that ball angle θ has the highest relative error (33% of operating range even with the bare model), confirming that the ball dynamics are the hardest channel to predict regardless of modeling choices.

b) Best analytical configuration.: Based on this ablation, the best analytical model is: velocity-input first-principles ball dynamics, first-order velocity lag ($\tau_v = 0.15$ s), 1-step command delay, and velocity observation filter (PT1, $\tau = 10$ ms). This configuration is used as the "analytical model" in the remainder of this appendix and in all controllers that rely on the analytical simulator.

TABLE 26. Pipeline ablation: normalized trajectory MAE (% of operating range) at $h = 50$ (2.5 s). Raw MAE values in parentheses.

Variant	x	$\dot{x}$	θ	$\dot{\theta}$
Bare ($\tau_v = 0.06$)	6% (0.099)	23% (0.417)	33% (0.054)	19% (0.186)
$+\tau_v = 0.15$	5% (0.084)	15% (0.267)	28% (0.046)	12% (0.124)
+Delay (1 step)	5% (0.082)	13% (0.226)	30% (0.048)	12% (0.120)
+Obs filter	5% (0.082)	12% (0.208)	29% (0.047)	11% (0.108)

C. Analytical Model vs. World Model

We now compare the best analytical model against the LSTM world model. Table 27 reports terminal MAE as a percentage of each channel's operating range.

Figure 11 visualizes the full error growth curves.

a) Normalized perspective.: Normalized MAE reveals that the analytical model's weakest channel is ball angle θ: at 2.5 s it reaches 31% of the ball's total range, and at 30 s it reaches 42%. Cart position and velocity stay below about 20% even at the longest horizon. This asymmetry reflects the indirect coupling: θ is driven through the arc geometry, which amplifies residual error from the cart model.

The world model's advantage is largest on cart velocity ($\dot{x}$ improves by 34–70% across the horizons). For ball angle θ the two models are close, and the world model is actually worse at 2.5 s (+30%). This is because ball angle is primarily determined by the physical geometry and gravity, dynamics that both models capture equally well, while velocity dynamics are more sensitive to the unmodeled servo behavior that the LSTM learns.

D. Crossover Analysis

A key question is whether there exists a prediction horizon at which the simpler analytical model matches or beats the learned world model, i.e., a *crossover*. Figure 12 shows the ratio of world model to analytical total trajectory MAE across all horizons.

a) Crossover across horizons.: The world model has lower total trajectory MAE across all tested horizons (0.25–30 s), by between 25 and 35%: it is 25% lower at 0.25 s, peaks near 35% around 10 s, and holds about 34% out to 30 s. There is no regime where the analytical model catches up on total error. These are point estimates from a single evaluation run (100 segments in Exp 1, 50 in Exp 2); per-segment dispersion, confidence intervals, and paired significance tests are not reported, so the ordering is descriptive rather than statistically tested.

b) Implication for controller selection.: For sampling-based predictive controllers that roll out many candidate trajectories through the model (e.g. MPPI with $H = 30$, a 1.5 s lookahead), the world model provides the largest relative benefit, because every sampled trajectory inherits the model's higher fidelity over the full rollout. For classical and predictive controllers designed around the analytical model (LQR+WO, MPC+WO, NMPC, SMC+WO), the analytical model is sufficient: its short-horizon accuracy (0.018 rad at 0.25 s, 11% of range) is adequate for feedback correction, and closed-loop control compensates for residual model error. For model-free RL trained purely in simulation (PPO (BZ+DR), SAC (DR), TD3 (DR), TQC (DR), TRPO (DR)), the analytical model is likewise sufficient because domain randomization and the controller's own robustness absorb the prediction gap, as confirmed by the hardware success rates in the main paper.

The world model provides its largest benefit in two settings: (i) zero-shot deployment of PPO-WM, which achieves 100% hardware success rate without domain randomization, and (ii) real-time trajectory optimization in MPPI, where the learned model's higher fidelity directly improves sampled trajectory quality relative to the analytical model.

E. Summary

1) **Pipeline components contribute unequally.** Calibrating τ_v accounts for the largest improvement. Command delay and observation filtering provide diminishing returns.
2) **Ball angle is the hardest channel.** Normalized MAE for θ reaches 31% of range at 2.5 s (analytical model), compared to 8–12% for the other channels.
3) **World model has lower trajectory-mean error.** Its total trajectory MAE is 25–35% lower than the analytical model's at every horizon (the analytical model is about 1.3–1.5× higher), with the largest advantage on cart velocity ($\dot{x}$). Terminal ball-angle error is mixed: the analytical model matches or beats the world model at 1, 2.5, 5, and 15 s.
4) **Analytical model is sufficient for its use cases.** Classical, predictive, and domain-randomized RL controllers reach high hardware success with the analytical model, which suggests closed-loop feedback and domain randomization absorb the residual prediction error. This is an inference from open-loop prediction accuracy and the measured hardware success rates, not a controlled controller-level swap of the dynamics model.
5) **World model delivers its largest gains where fidelity matters most.** Higher prediction fidelity most benefits world-model-based RL (PPO-WM at 100% SR) and MPPI trajectory optimization.

XI. Detailed Statistics and Per-Trial Data

This appendix provides per-stratum breakdowns and detailed statistics for individual controllers. The full 13-controller benchmark results (Table II equivalent) are given in Table 29 below.

A. MPPI: Per-Stratum Breakdown (50 Trials)

MPPI's median settling varies little across strata: it barely moves with the starting position, from 1.19 s at at-wall-same

TABLE 27. Terminal MAE (% of operating range) at representative horizons. Negative Δ indicates world model improvement.

Horizon	Model	x (%)	$\dot{x}$ (%)	θ (%)	$\dot{\theta}$ (%)	Avg. (%)
0.25 s	Analytical	2	13	11	11	9
	World Model	2	9	7	5	6
	Δ	+4%	−34%	−34%	−55%	
2.5 s	Analytical	8	12	31	10	15
	World Model	9	7	40	6	16
	Δ	+2%	−46%	+30%	−37%	
10.0 s	Analytical	11	15	38	12	19
	World Model	10	5	36	7	15
	Δ	−10%	−70%	−6%	−45%	
30.0 s	Analytical	20	14	42	8	21
	World Model	15	4	42	8	17
	Δ	−28%	−70%	−1%	+8%	

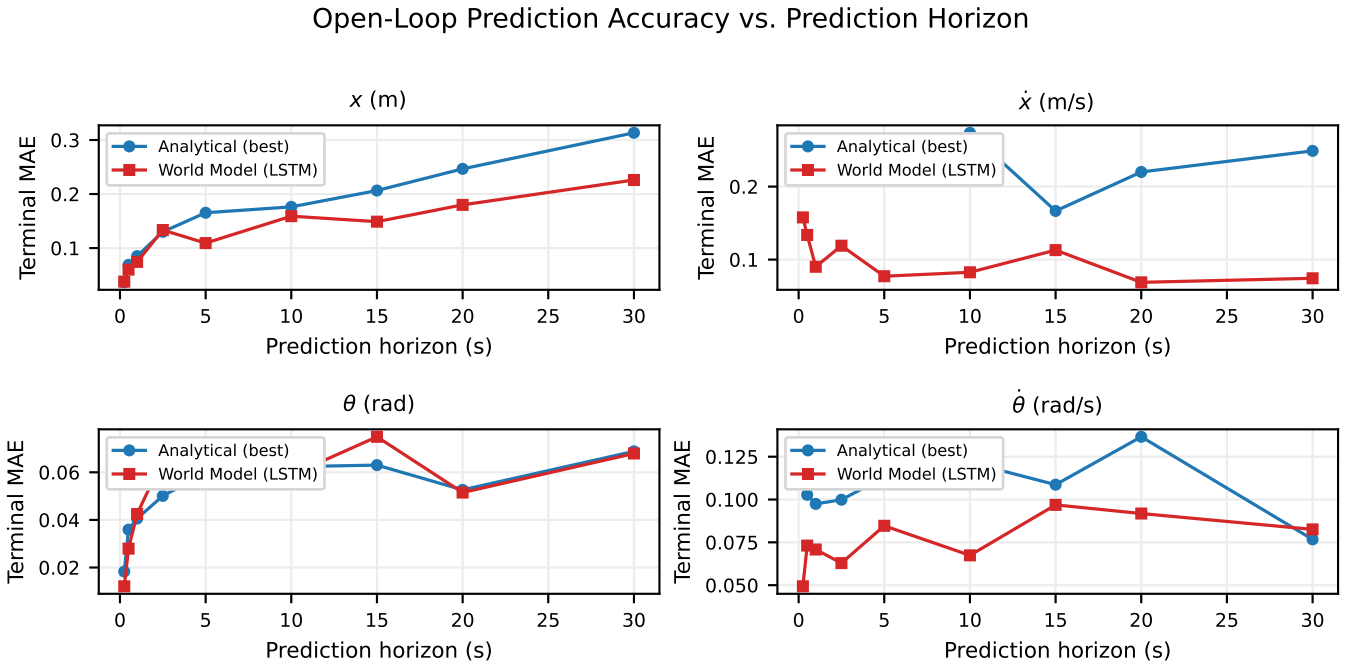


Fig. 11. Terminal MAE vs. prediction horizon for the analytical model (blue) and world model (red), one panel per state channel. The world model has lower terminal MAE at most horizons on cart position and both velocities; the exception is terminal ball-angle error, where the analytical model matches or beats it at 1, 2.5, 5, and 15 s. Error growth is sub-linear for both models, indicating no catastrophic divergence.

TABLE 28. MPPI hardware results by stratum.

Difficulty	Trials	SR	Mean (s)	Med (s)	Max (s)
Center	10	100%	1.82	1.29	4.59
Mid-rail	16	100%	1.99	1.59	4.59
Near-wall	14	100%	2.33	2.19	7.04
At-wall-opposite	5	100%	2.52	2.69	4.19
At-wall-same	5	100%	1.56	1.19	2.34
Overall	**50**	**100%**	**2.06**	**1.67**	**7.04**

and 1.29 s at center to 2.69 s at at-wall-opposite, a spread of only about 1.5 s despite the very different maneuvering room.

B. Complete Benchmark Results (All 13 Controllers)

Table 29 reports the definitive 50-trial hardware benchmark for all 13 deployed controllers, sorted by hardware success rate then by mean settling time (the same controllers as Table II of the main paper, extended here with the bootstrap settling-time confidence band and mean per-step compute time). SR 95% confidence intervals are Wilson score intervals (matching Appendix IX and the main paper); settling 95% confidence intervals are bootstrap over the successful trials only, and the per-step compute time excludes sensor I/O. Two controllers (MPPI, PPO (WM)) reach 100% SR; PPO (BZ+DR) and PD+WO reach 96%; the rest span 80–92%. The classical feedback laws, MPC+WO, and the on-policy RL policies PPO (BZ+DR) and TRPO (DR) run in under 1 ms; IQL,

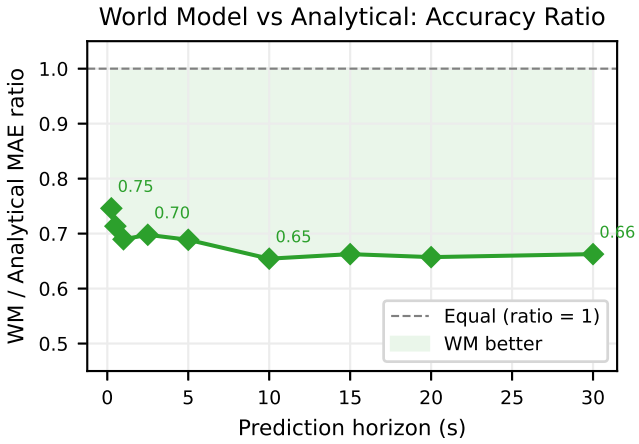


Fig. 12. Ratio of world model to analytical total MAE vs. prediction horizon. Values below 1 indicate the world model is more accurate. The world model wins at every horizon on total error; no crossover exists. The ratio stays between about 0.65 and 0.75 (25–35% lower error), with the smallest margin at 0.25 s and the largest around 10 s.

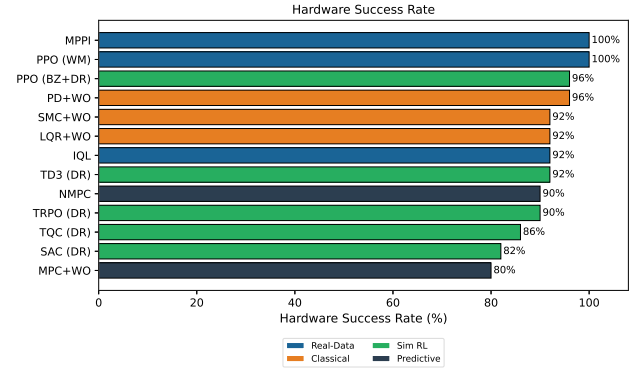


Fig. 13. Hardware success rate ranking across all controllers (50 trials each, 20 Hz, stratified ICs). Bars are colored by paradigm (real-data, classical, sim-trained RL, and predictive), matching Table 29. MPPI and PPO (WM) achieve 100% SR; PPO (BZ+DR) and PD+WO reach 96%; SMC+WO, LQR+WO, IQL (offline), and TD3 (DR) reach 92%.

NMPC, PPO-WM, and the off-policy RL policies (TD3, TQC, SAC) sit in the 2–8 ms range; and only MPPI (∼40 ms) approaches the 50 ms deadline.

C. Failed Controller Variants (Excluded from Main Results)

Table 30 lists controller variants excluded from the main benchmark. The first six did not reach our 50% SR deployment threshold on hardware; PPO (base) and PPO (DR) are the unaugmented and DR-only PPO ablations (the deployed form is PPO (BZ+DR)). They are reported here for completeness because their failure modes are the most instructive design lessons of the study: in every case the hardware collapse traces to a specific missing capability: absence of boundary handling (PD, LQR, SMC), a constraint formulation incompatible with

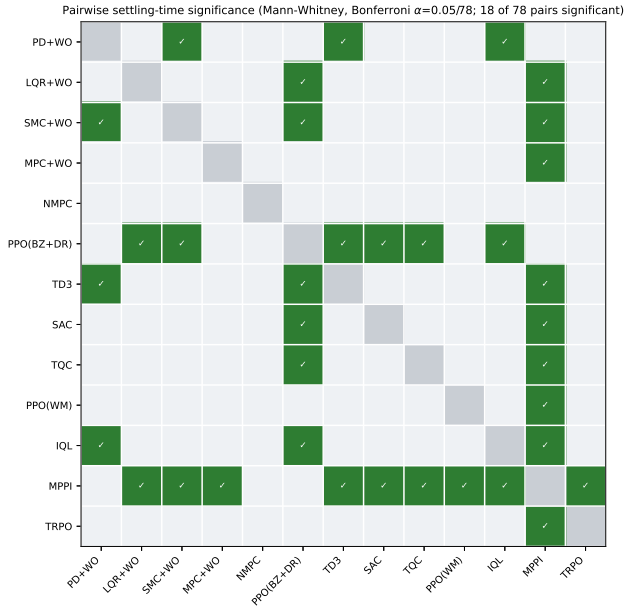


Fig. 14. Pairwise settling-time significance for the 13 benchmarked controllers (Mann-Whitney U rank test on successful trials, Bonferroni correction $\alpha = 0.05/78$; 18 of 78 pairs significant). Green cells mark significant differences.

the velocity-commanded actuator (MPC QP), or the sim-to-real gap left by not modeling the sensor blind zone or by omitting domain randomization (PPO base). Adding the wall-override heuristic or the blind-zone+DR training configuration lifts each of these to the corresponding +WO / +BZ+DR row of Table 29, which is why the deployed benchmark uses those augmented variants.

D. Statistical Significance

We run pairwise Mann-Whitney U rank tests with Bonferroni correction ($\alpha = 0.05/78$ for 13 controllers) on the settling times of successful trials. Eighteen of the 78 pairs are significant; because these pairwise tests share trial data (many pairs involve a common controller), the Bonferroni correction is conservative here, so this count likely understates the number of true differences. MPPI is significantly faster than the slower nine controllers (PPO (WM), LQR+WO, SMC+WO, TD3, IQL, TRPO, TQC, SAC, MPC+WO) but not than the other fast, reliable controllers (PPO (BZ+DR), PD+WO, NMPC), which it beats by a large but sub-threshold margin (Cohen's d of 0.70 to 0.90; e.g. 0.90 versus NMPC, 0.70 versus PPO (BZ+DR)). Those three, together with PPO (WM), form a fast cluster with no significant internal differences; the mid- and low-table controllers likewise separate into loose clusters with few significant differences inside each. Under Fisher's exact test with the same correction, no pairwise success-rate difference is significant, so the reliability ordering is practical rather than statistically certified.

TABLE 29. Complete hardware benchmark: 50 trials per controller, 20 Hz, stratified initial conditions. SR intervals are 95% Wilson score intervals; settling intervals are 95% bootstrap.

Controller	Paradigm	SR (%)	SR 95% CI	Settle (s)	Settle 95% CI	RMS Effort	Compute (ms)
MPPI	Real-data	100	[93, 100]	2.06	[1.71, 2.44]	0.354	40.0
PPO (WM)	Real-data	100	[93, 100]	6.84	[5.07, 8.95]	0.492	6.7
PPO (BZ+DR)	Sim-trained RL	96	[87, 99]	3.81	[2.93, 4.78]	0.498	0.59
PD+WO	Classical	96	[87, 99]	5.80	[4.08, 7.76]	0.580	0.05
SMC+WO	Classical	92	[81, 97]	8.93	[7.33, 10.64]	0.562	0.06
LQR+WO	Classical	92	[81, 97]	10.21	[7.76, 12.79]	0.625	0.33
IQL	Real-data	92	[81, 97]	10.62	[8.54, 12.76]	0.395	2.0
TD3 (DR)	Sim-trained RL	92	[81, 97]	11.45	[9.16, 13.87]	0.680	7.9
NMPC	Predictive	90	[79, 96]	7.48	[5.19, 10.08]	0.608	5.7
TRPO (DR)	Sim-trained RL	90	[79, 96]	8.09	[6.01, 10.43]	0.508	0.67
TQC (DR)	Sim-trained RL	86	[74, 93]	9.77	[7.25, 12.39]	0.663	7.9
SAC (DR)	Sim-trained RL	82	[69, 90]	10.10	[7.80, 12.42]	0.588	7.8
MPC+WO	Predictive	80	[67, 89]	10.81	[8.04, 13.55]	0.623	0.47

TABLE 30. Excluded and ablation controller variants; the first six fall below the 50% deployment threshold on hardware (the two PPO ablations reach 60% and 90%). Included for completeness, these demonstrate the critical importance of constraint handling. Sim SR is reported for the first-order-lag deployment regime; the S-curve development regime scores these variants higher (Appendix V).

Controller	HW SR	Sim SR	Failure Cause
PD (vanilla)	18%	84%	Positive-feedback runaway: ball drifts, controller saturates, cart hits wall
LQR (basic)	20%	84%	No boundary awareness; nominal feedback runs out of rail at the limits
SMC (basic)	12%	14%	Wide boundary layer ($\phi = 0.85$) + no WO; controller too passive at limits
MPC (QP constraints)	44%	34%	QP infeasibility near walls; constraint formulation incompatible with velocity interface
LQR (Q-center)	28%	100%	Q-weighting on cart position ($K_x = 3.31$) structurally insufficient for constraint handling
SMC (full)	24%	100%	Centering + barrier terms do not overcome sensor-offset and blind-zone effects on hardware
PPO (base, no DR)	60%	100%	Sim-to-real gap: blind zone not modeled; DR-induced robustness absent
PPO (DR, no BZ)	90%	100%	Blind-zone (VL53L0X saturation) not modeled; residual sim-to-real gap (deployed form adds BZ)

E. Initial Condition Protocol

We displace the ball from center with a brief cart "jolt/shake", noting its direction post-hoc from the first sensor reading; the cart is moved automatically by the evaluation script, with no manual ball placement during trials. For the two at-wall strata the ball side is targeted, and the realized cart position and side (read per trial from the recorded initial state) vary somewhat from the nominal targets, as detailed in Appendix IX. The five-stratum, 50-trial schedule (Center, Mid-rail, Near-wall, and the two at-wall strata) is specified in Appendix IX.

F. Control Effort and Trajectory Shape

The qualitative differences behind these numbers show up in three views. The control-effort distributions (Fig. 15) put MPPI and IQL at the smooth, low-effort end and TD3 and TQC at the aggressive, high-effort end, matching their RMS-effort figures in Table 29. A per-controller gallery of representative ball-angle recoveries (Fig. 17, one panel per controller, each showing that controller's median-settling trial) shows the same contrast in recovery shape: MPPI and PD+WO settle within a few seconds with little overshoot, while the other wall-override classical controllers (LQR+WO, SMC+WO, MPC+WO) and the slower simulation-trained agents (SAC, TQC, TD3) take longer and hunt more before settling. Because each panel uses a different representative trial, these are illustrations of typical recovery shape, not a matched head-to-head comparison. The command profiles (Fig. 18) trace one clean recovery per controller; once the ball is settled the command drops to a small residual (last-second action RMS around 0.05–0.23 for these representative trials, well below the ± 1 saturation), so these clean-recovery exemplars settle to a small residual command.

XII. Results, Analysis, and Discussion

This section presents quantitative results for the experiments described in Appendix IX. We emphasize statistical significance, distribution analysis, and practical implications for real-world deployment.

A. Experiment 1: Baseline Performance Results

Hardware performance was evaluated over 50 trials per controller at 20 Hz using stratified initial conditions (Section IX-A). Figure 13 ranks all controllers by success rate; Figure 19 shows the failure-vs-settling trade-off; and Figure 20 decomposes SR by stratum, while Figure 21 does the same for

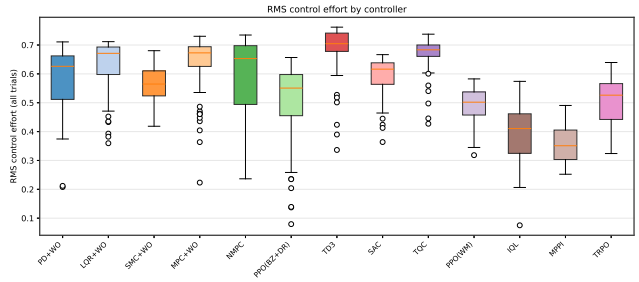


Fig. 15. RMS control effort distribution over all trials. MPPI and IQL produce the smoothest, lowest-effort control signals. TD3 and TQC show the highest effort, indicating aggressive, oscillatory control.

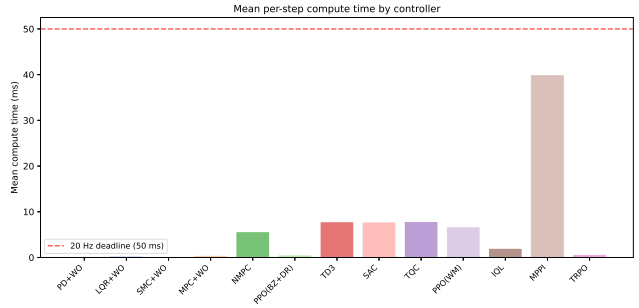


Fig. 16. Mean per-step compute time by controller. MPPI (∼40 ms) runs close to the 50 ms deadline (red dashed line). IQL, the off-policy RL policies (TD3, TQC, SAC), PPO-WM, and NMPC form a second tier at 2–8 ms; the classical controllers, MPC, and the on-policy RL policies execute in under 1 ms.

median settling time, where the pattern is strongly controller-dependent: MPPI stays tight across strata (1.2–2.7 s), the wall-override classical controllers mostly slow toward the boundary (MPC+WO excepted), and the simulation-trained RL agents swing widely from one stratum to the next, though with only five trials in each at-wall stratum much of that swing is sampling noise.

a) Evaluation protocol.: Every controller in the benchmark received the full 50-trial stratified evaluation: the five model-free RL algorithms (PPO with BZ+DR; TD3, TQC, SAC, TRPO with DR), the model-based controllers (MPPI, PPO (WM)), offline RL (IQL), and all classical controllers.

The complete benchmark results table is in Appendix XI (Table 29). The analysis below discusses key patterns.

1) Simulation Prediction Accuracy: Appendix X validates the open-loop prediction accuracy of both the analytical first-principles model and the LSTM world model against a held-out partition of the 1 M-transition hardware dataset. The world model consistently achieves lower total-trajectory prediction error (25–35% lower, across horizons from 0.25–30 s, with no crossover where the analytical model catches up; Fig. 12), while on terminal per-channel error the two are mixed and terminal ball-angle error in particular favors the analytical model (Table 27). Nevertheless, the analytical model is sufficient for classical, predictive, and domain-randomized RL controllers: its short-horizon error (<0.02 rad ball angle at 0.25 s) is modest relative to the ball-angle operating range, and the hardware success rates in Table 29 show that every controller paradigm transfers to the real system, though with a residual gap (hardware success 80–100%).

2) Performance Variability: Figure 22 shows the settling-time distributions in simulation for all thirteen benchmark controllers, each evaluated in the first-order physics simulator under the identical 50-trial stratified protocol (seed 42). NMPC is the fastest, with a median near 0.3 s, yet it takes 4.7 s on hardware, a compact illustration of the sim-to-real gap; the simulation-trained RL agents also settle quickly (medians 0.4–2.2 s), with TRPO the slowest of them. Notably, the three real-data methods — MPPI and PPO (WM), which plan through or are trained inside the learned world model, and IQL, trained offline on hardware logs — also transfer cleanly to the analytical simulator, each reaching 96–100% success with median settling under 0.9 s, even though none was tuned for the first-order model.

3) Initial Condition Robustness: Figure 20 decomposes each controller's hardware success rate across the five cart-position strata (center, mid-rail, near-wall, and the two at-wall strata). The two at-wall strata share the same cart target, the physical rail limit, and differ only by the ball's offset side: *same-side* (ball displaced toward that wall) and *opposite-side* (ball displaced toward center).

On hardware these initial conditions are realized only approximately: the cart and ball are reset by hand before each trial, so the achieved cart position within a labeled stratum varies from trial to trial and between controllers. We therefore report the per-stratum rates at the labeled-stratum level and do not attribute per-controller differences to the exact realized start.

a) Same-side initial conditions.: Same-side initial conditions place the ball displaced toward the nearest wall, which requires the controller to first *reverse* the cart away from the wall before stabilizing. On hardware, NMPC clears all five same-side trials (100%) while MPC+WO clears three of five (60%).

b) Classical controllers.: The design and tuning behind the classical results, and the failure modes of the variants without constraint handling, are detailed in Appendix IV; here we summarize what the benchmark shows. With the wall override, LQR reaches 92% hardware SR by separating ball regulation (a PD-equivalent gain, since the optimal-control solution itself fails on hardware) from constraint satisfaction (the override); its paradigm-native alternative of Q-weighting on cart position is structurally insufficient, leaving the forced Q-center variant ($K_x = 3.31$) at 28% and basic LQR at 20%, the latter failing in every stratum (40 of 50 trials, including 7 of 10 center and 11 of 14 near-wall starts) as the nominal feedback runs out of rail at the limits. SMC with the override reaches 92% (46/50), up from the basic variant's 12%. Two SMC results are specific to hardware. First, sensor-offset correction is essential: without it SMC+WO falls to 40%, a 52 pp drop, far larger than PD+WO's 8 pp, because

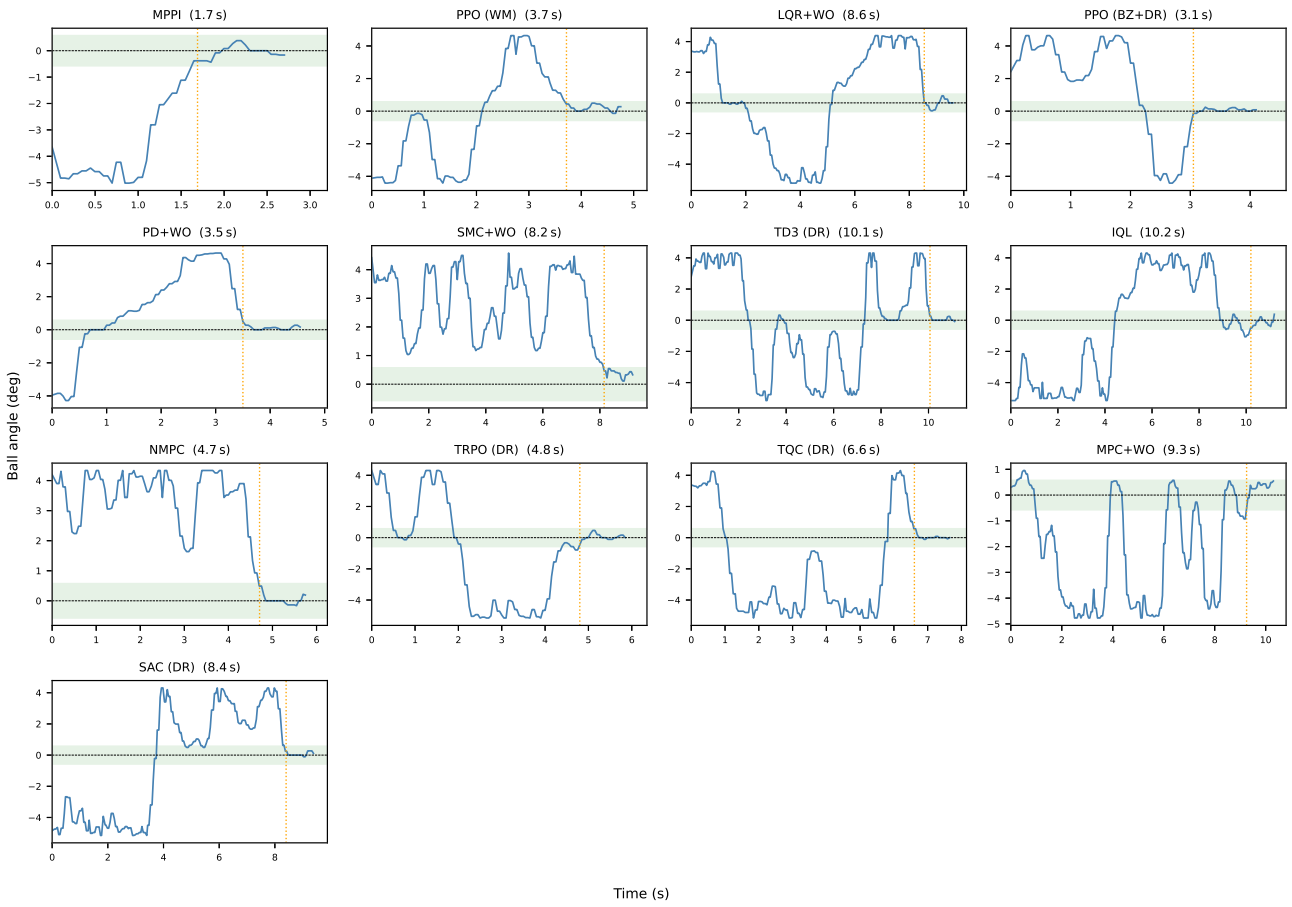


Fig. 17. Representative ball-angle recovery for each of the 13 benchmark controllers. Each panel shows that controller's successful trial closest to its own median settling time (orange dotted line: settling time; green band: the ± 0.01 rad settling window). Because each panel uses that controller's own representative trial, the initial conditions differ across panels, so this is a per-controller view of typical recovery shape rather than a matched head-to-head. MPPI and PD+WO recover within a few seconds; LQR+WO, SMC+WO, MPC+WO and the slower simulation-trained agents (SAC, TQC, TD3) settle later.

SMC's model-inversion term turns a constant sensor bias into a persistent spurious velocity command that PD never generates. Second, its residual 8% failures (4/50) occur when a blind-zone limit cycle and a wall approach coincide, the blind zone corrupting the model inversion into erratic commands that drive the cart toward the rail faster than the override can clear it. At 8.93 s mean settling (median 8.28 s) SMC is competitive with the other wall-aware classical controllers. PD tells the same story more simply: the override lifts it from 18% (vanilla) to 96% with calibration (88% without offset correction), and without the override it fails every near-wall and at-wall-same trial, with only 2 of 5 at-wall-opposite starts succeeding. When vanilla PD does settle it is fast (median 1.75 s versus 3.38 s for PD+WO, which pays a conservative retreat), but that speed is moot against its 82% failure rate. With the simulator's dip width set to the hardware-measured FWHM, PD+WO reaches 98% in simulation against 96% on hardware, so the two agree on reliability to within a single trial; settling is faster in simulation (2.15 s versus 5.80 s), as expected without the hardware's sensing and actuation lag. The one extra hardware failure is consistent with effects the simulator omits, such as the sensor blind zone ($|\theta| > 0.071$ rad) and the uncontrolled initial ball velocity.

c) Predictive controllers.: Linear MPC with the wall override reaches 80% over 50 trials; the basic QP-constrained variant manages only 44%, because QP infeasibility near the walls returns $u = 0$ and lets the ball escape (Appendix IV). All 10 MPC failures share the wall-bounce limit cycle described below for NMPC: the cart sweeps the full track repeatedly (14–23 wall hits per trial) with the actuator saturated roughly 40–52% of the time, and the failing trials' $|\theta_0|$ (mean 0.059 rad) is indistinguishable from the successes' (0.060 rad), so the trap is dynamic rather than a starting-angle threshold. MPC also reaches only 60% on same-side starts versus NMPC's 100%, though as noted these labeled at-wall starts were realized at differing cart positions across the two

controllers. When it does settle MPC is slower than NMPC (10.81 versus 7.48 s), and, as with NMPC, center starts are harder than near-wall ones (70% versus 79%) because there is no wall to use as a momentum backstop.

NMPC (N=10, no wall override) reaches 90%, the best of the analytical controllers without an external wall override, by planning constraint-satisfying trajectories through its nonlinear model [28]. Its 5 failures share one mechanism, independent of stratum (1 center, 2 mid-rail, 1 near-wall, 1 at-wall-opposite): a wall-bounce limit cycle rooted in a mismatch between the planner's wall model and what the cart physically does at the rail. We verified the causal chain across all 50-plus wall hits in the failed trials. NMPC does plan to brake in time, at every recorded hit the commanded action already pointed away from the wall, but the 0.5 s horizon (10 steps) cannot arrest the momentum built during a full cross-track rescue, so the cart reaches the rail with 0.26–0.59 m/s of residual velocity. The NLP encodes the rail only as a hard bound on cart position, not as a model of the rebound, so when the cart hits the rail its velocity reverses in a way the internal model never anticipates. The warm-start, which assumed the cart would taper to rest at the boundary, now carries the wrong sign on the most safety-critical state, and IPOPT settles into a local minimum: because the opposite-wall rescue also minimizes ball-angle error within the 0.5 s window, the solver commits to it and drives the system toward the next rebound a second or two later, outside the horizon. The cycle then locks in, 44–51% of steps saturate the actuator ($|u|>0.85$), the cart sweeps ± 0.78 m repeatedly, and θ oscillates near ± 0.08 rad; the one-second settling window is never met (Trial 14 reached 20 consecutive in-band steps at t=10.1 s before the next rebound reset the count). The failing trials' $|\theta_0|$ (0.066 rad) again matches the successes' (0.062 rad), and all five at-wall-same trials succeed, though only some were realized at the rail, so this stratum does not by itself establish immunity to the rebound. Two further points, detailed in Appendix IV: the short horizon is essential (at N=30, stale observations let NMPC pass only 1 of 7 tuning initial conditions on hardware), and its internal dip width of 42 mm, against the true 20 mm, is beneficially conservative, giving smoother recoveries. NMPC reaches 100% on at-wall-same starts, matched there by LQR+WO.

d) Real-data and learning-based controllers.: MPPI gives the best overall result, 100% SR at 2.06 s mean settling, the fastest of the reliable controllers, using sampling-based MPC over the learned LSTM world model. PPO (BZ+DR) reaches 96% SR (3.81 s mean settling); blind-zone modeling and domain randomization together are what make its sim-to-real transfer work. Among the other simulation-trained agents, TD3 (DR) reaches 92% but with the slowest settling (11.45 s), its deterministic policy gradient [19] giving consistent responses, and TQC (DR) 86% at 9.77 s from its distributional critics [20]. The two training ingredients contribute measurably: domain randomization [29] adds 30 pp to PPO's hardware SR (60% to 90%), and the blind-zone model a further 8 pp (90% to 98%), confirming that modeling the VL53L0X minimum-range saturation matters for deployment. These ablations are measured in the S-curve training family; the policy reported in Table 29 is the matched first-order-lag checkpoint at 96% (Appendix V-M). PPO (WM), trained entirely inside the learned world model with no domain randomization (Appendix VI), also reaches 100% across all 50 trials (joining MPPI); its mean settling (6.84 s) is inflated by a few high outliers but its median (3.64 s) is competitive. IQL reaches 92% from purely offline training on roughly 333k real post-recalibration transitions with no simulator, placing it mid-table among the deployed controllers; its mean and median settling (10.62 and 9.80 s) are close to TQC's, but it has the lowest control effort of any RL controller (0.395), reflecting the conservatism of implicit Q-learning. Its failures fall on center starts (2/10) and near-wall starts (2/14), while every at-wall trial succeeds (10/10). The most control-efficient controllers are the learned and real-data ones: MPPI's RMS effort (0.354) is the lowest of the deployed set, followed by IQL (0.395), PPO (WM) (0.492), and PPO (BZ+DR) (0.498), all well below NMPC (0.608) and LQR+WO (0.625). The off-policy agents are the exception, with TD3 (0.680) and TQC (0.663) among the highest.

Pairwise testing confirms this ordering is not noise, and control effort is the axis on which the benchmark most clearly separates controllers: 58 of the 78 RMS-effort comparisons are significant (Mann-Whitney, Bonferroni corrected as a separate family), against 18 of 78 for settling and 0 of 78 for success rate. MPPI and IQL each use significantly less effort than every other controller except one another, with which they are statistically tied. PPO (WM) sits mid-range, significantly gentler than the classical, MPC, and off-policy controllers but not separable from PPO (BZ+DR) or TRPO, consistent with the weak action response of its world model (Appendix VI). The full pairwise matrix is written to `exp1_effort_significance.csv`.

XIII. Real-Hardware Fine-Tuning

A. Motivation

Despite domain randomization and sensor modeling reducing the sim-to-real settling-time gap to 3.0× (Appendix V-N), the question remains whether online fine-tuning on real hardware can further close this gap. We fine-tune three deployed policies on real hardware: the two best sim-trained agents, one on-policy (PPO (BZ+DR)) and one off-policy (TD3), and the world-model policy PPO (WM), to compare adaptation strategies.

B. Protocol

We fine-tune all three policies directly on the real system in the `BalancerReal` Gym environment, with an augmented reward signal:

$$r_t^{\mathrm{FT}} = \mathrm{clip}\big(r_t^{\mathrm{balanced}} + d_t,\ -1,\ 1\big) \tag{49}$$

where $d_t \in \{0, 1\}$ is the binary infrared dip-sensor signal (1 while the ball physically obstructs the beam at the arc's lowest point, 0 otherwise). The beam is broken over an active band narrower than the ball diameter, so d_t fires only within

TABLE 31. Fine-tuning protocol. The PPO (BZ+DR) base model is the S-curve development policy (98% hardware SR); Table II (main paper) reports the matched first-order-lag checkpoint at 96% (Appendix V-M).

Parameter	PPO FT	TD3 FT
Base model	PPO (BZ+DR)	TD3 (DR)
Learning rate	10^{-4}	10^{-4}
Total steps	50 000	50 000
Wall-clock time	∼50 min	∼50 min
Episodes	∼83	∼83
Checkpoint freq	5 000 steps	5 000 steps
Reward	balanced + IR dip	balanced + IR dip
Entropy coeff	0.005	–

TABLE 32. Fine-tuning results: hardware evaluation. PPO (WM) evaluated on 50 stratified trials; PPO (BZ+DR) and TD3 on 10 trials each.

Model	N	SR	Mean (s)	Med (s)	Max (s)
Pre-fine-tuning:					
PPO (WM)	50	100%	6.84	3.64	–
PPO (BZ+DR)	10	100%	4.98	–	13.66
TD3 (DR)	10	100%	8.16	–	23.00
Post-fine-tuning:					
PPO (WM) + FT	50	100%	7.03	5.41	–
PPO (BZ+DR) + FT	10	90%	6.50	4.66	21.71
TD3 (DR) + FT	10	80%	8.60	5.85	26.65

a few millimeters of true center; this is the raw hardware bit, not the wider offline angular proxy ($\theta_{\text{center}} = 0.007$ rad) that Appendix VIII uses when rebuilding the logged dataset. It provides a strong, noise-free reward signal at the exact balancing target that is unavailable in simulation. The environment does not terminate on cart or ball limits; only the 30 s `TimeLimit` truncates an episode, and the per-step reward is the clipped balanced-plus-dip signal above, not overwritten at the limit.

Table 31 lists the fine-tuning hyperparameters. All three policies use a reduced learning rate (10^{-4}, vs. 3×10^{-4} for PPO and 10^{-3} for TD3 during sim training) to prevent catastrophic forgetting.

C. Results

Table 32 compares pre-FT and post-FT hardware performance, and Fig. 23 shows it graphically: the PPO (WM) settling-time distributions before and after fine-tuning differ modestly (both 100% SR), alongside the success-rate comparison for all three fine-tuned models.

D. Analysis

a) PPO (WM) fine-tuning.: The world-model PPO, fine-tuned for 50K steps on real hardware, retains 100% SR, and the before/after settling-time distributions differ in shape (a higher post-fine-tuning median, 3.64 s → 5.41 s, and a heavier upper tail), but not significantly (Mann-Whitney on settling times, $p = 0.27$); the means stay close (6.84 s → 7.03 s). The mean episode reward dips at the onset of fine-tuning and then recovers slowly over the 50K steps, ending near its starting level, so the fine-tuning step itself is not failing; the policy changes only modestly under real-data gradients on this budget. On this 50-trial evaluation, online adaptation did not produce a measurable improvement, consistent with the world-model policy already capturing much of the relevant dynamics.

b) Sim-trained model fine-tuning.: On a matched 10-trial hardware evaluation, fine-tuning did not improve either policy and moved each by one or two of ten trials: PPO (BZ+DR) from 10/10 to 9/10 and TD3 from 10/10 to 8/10, both with slightly longer settling. These 10-trial figures sit against the 50-trial baselines of 98% (PPO (BZ+DR)) and 92% (TD3), so the effect is small in absolute terms; at 10 trials these one- and two-trial changes are within sampling noise, and we observe no improvement from fine-tuning on either paradigm at this budget.

c) Root causes.: Three factors plausibly contribute. The first is simply too little data: 50k steps is roughly 83 episodes per policy (30 s trials at 20 Hz), against the 3M (PPO) and 1M (TD3) steps of the original simulation training, far too little real experience to learn a meaningful improvement. The second is catastrophic forgetting: even at the reduced learning rate (10^{-4}), gradient updates from a handful of real episodes partly overwrite the simulation-trained policy, and the low-reward episodes from at-wall starts corrupt the value function. The third is that the pre-fine-tuning models are already near their ceiling: PPO (BZ+DR) reaches 98% over 50 hardware trials without any fine-tuning, and its single failure, on a center start, may need an architectural change rather than more data to close.

d) On-policy vs. off-policy.: PPO changed by one of ten trials and TD3 by two; at this sample size the difference between them is not meaningful, and neither improved with this budget.

e) Implications.: These results validate the sim-to-real approach taken in this work: careful simulation modeling produces policies that transfer effectively without online adaptation, and PPO (BZ+DR) already sits near the reliability ceiling on hardware. On this budget online fine-tuning does not help: as the reward curve shows, the policy first unlearns and then relearns, spending the real interaction returning to where it started rather than improving. Because the deployed policy is already near-ceiling and a learned world model already captures the system's dynamics well (its prediction accuracy plateaus by roughly 100k transitions, Appendix VI), training PPO inside that world model (PPO-WM) or relying on one-shot transfer is a more effective use of effort than online fine-tuning on the physical rig.

Future work could investigate:

- Longer fine-tuning budgets (>500K real steps, ∼8 hours of continuous operation).
- Replay buffer seeding with sim data (for TD3/SAC) to prevent catastrophic forgetting.
- Residual policy learning: training a small correction network on top of the frozen sim policy.
- System identification: using real trajectories to update the simulation model rather than the policy directly.

XIV. Reproducibility Guide

All code, trained models, datasets, and evaluation scripts are available at https://github.com/JDRanpariya/ball-balancing-on-arc, together with per-subdirectory READMEs that give exact run instructions. This appendix only summarizes what is where; please refer to the repository for commands.

A. Hardware

Table 33 lists the physical components of the ball-on-arc platform.

TABLE 33. Hardware components.

Component	Specification
3D-printed cart	PLA; its top surface is the convex arc ($R = 2.101$ m, ≈30 cm span) with a shallow central dip (2 mm deep, 20 mm FWHM); rides the actuator carriage
Ball	Steel, $m = 24$ g, $r = 9$ mm
Linear actuator	SMC LEFB32NXS-1000, 1000 mm belt-driven stroke [30]
Servo motor & drive	Beckhoff AM8121 motor via an EL7201 EtherCAT servo terminal
Controller	Beckhoff C6015 IPC, TwinCAT 3 runtime
Ball sensors	2× VL53L0X ToF [1] at the arc edges (read alternately), plus a center IR beam-break, acquired by an Arduino Uno
Host PC	Windows (TwinCAT), Python stack in WSL2; USB serial to the drive and Arduino

a) Note on length units.: The rail provides approximately 1 m of physical cart travel (1000 mm actuator stroke), yet the drive reports positions at roughly twice that physical displacement, and the soft-limited operating window spans 1.553 m in these axis units (±0.7765 m about the center).

The factor comes from the drive's encoder scaling. The released NC configuration (`hardware/twincat/axis_parameters.xml`) sets `ScaleFactorNumerator` = 104.8576 against `ScaleFactorDenominator` = 1048576, that is 10^{-4} axis units per encoder increment. With the EL7201 at its default 20 single-turn bits (2^{20} increments per revolution), this amounts to a feed constant of 104.8576 mm per motor revolution, which is the encoder count rescaled rather than a measured quantity. The belt drive advances 54 mm per revolution (the catalogued equivalent lead of the LEFB32 AC-servo variant), so reported positions run $104.8576/54 \approx 1.94$ times the physical ones. On that factor the operating window is about 0.80 m of the 1000 mm stroke, leaving roughly 0.10 m of margin at each end, which is what the mechanical end stops require.

It affects no result: all positions, velocities, limits, identified dynamics, and results in the paper and code use these axis units consistently. The factor matters only when comparing quoted track lengths against the physical bill of materials.

B. Software

The reference environment pins Python 3.11, NumPy 2.2.6, SciPy 1.16.0, PyTorch [3] 2.10.0, Stable-Baselines3 [11] 2.9.0, sb3-contrib 2.9.0, d3rlpy [13] 2.8.1 (IQL), CasADi [10] 3.7.2 (NMPC), and OSQP [9] 1.1.3 (MPC); exact versions are locked in `env.yaml` and `requirements.lock.txt`.

C. Repository layout

- `balancer/` (core library): all 13 controllers, simulation and hardware environments, and PLC/sensor interfaces.
- `hardware/`: bill of materials and assembly guide, 3D-print STLs, the TwinCAT project, Arduino sensor firmware, and wiring documentation.
- `training/`: RL, offline-RL, and world-model training scripts and configuration files.
- `evaluation/`: benchmark evaluation, controller tuning, and profiling scripts.
- `data/`: datasets and data-driven models (including the 1M random-exploration dataset and the >1M-transition logged-trial archive).
- `paper/`: paper source and the result data backing every table and figure.
- `scripts/`: repository utilities.

D. Sensor calibration (hardware runs only)

Reproducing figures and tables from the committed data needs no calibration. For fresh on-hardware campaigns, the two time-of-flight sensors are recalibrated first, following Stage 4 of the repository reproducibility guide: the calibration script prints the per-sensor center offsets, which are written back to `balancer/balancer/hardware/constants.py` once the two arc halves report a consistent zero (the deployed datasets use the recalibrated constants 189/158 mm; the earlier 175/170 mm values and the bias they left are analyzed in Appendix I). The offsets drift slowly, so we recalibrate before each new data-collection or evaluation campaign.

E. Reproducing the project

The repository is built to reproduce the whole project end to end, not only the paper's numbers. The step-by-step guide, `reproducibility_guide.md`, with the per-directory READMEs, documents the full pipeline: building and wiring the platform, deploying the PLC firmware, setting up the pinned environment, calibrating the sensors, collecting datasets, training the learning-based controllers, and evaluating all 13 controllers in simulation and on the rig. The paper's tables and figures, the simulation validation, and the wall-override ablations are the final stage of that pipeline and regenerate from the committed data through the documented scripts, with no hardware required. The master hardware-results file that backs Table 1 and the hardware figures is itself rebuildable from the per-controller run aggregates by `data/build_consolidated.py`, which also emits the full source-to-entry provenance manifest and checks that the rebuild is byte-identical to the committed file. We do not duplicate the commands here.

F. Companion website

An interactive version of this benchmark, including the browser-based simulation and per-controller trial videos, is available at https://ball-on-arc.pages.dev/. The site carries no author, affiliation, or institution identifiers.

G. Key Parameters

Table 34 collects the experimental parameters held fixed across every benchmark trial.

TABLE 34. Critical experimental parameters.

Parameter	**Value**
Control frequency	20 Hz (50 ms period)
Trial duration	30 s maximum
Settling band	± 0.01 rad
Settling duration	1.0 s continuous
Random seed (ICs)	42
Number of trials	50 per controller
ToF timing budget	34.5 ms
Action range	$[-0.9, 0.9]$ m/s (velocity set-point, axis units)
Cart limits	± 0.7765 m (axis units)

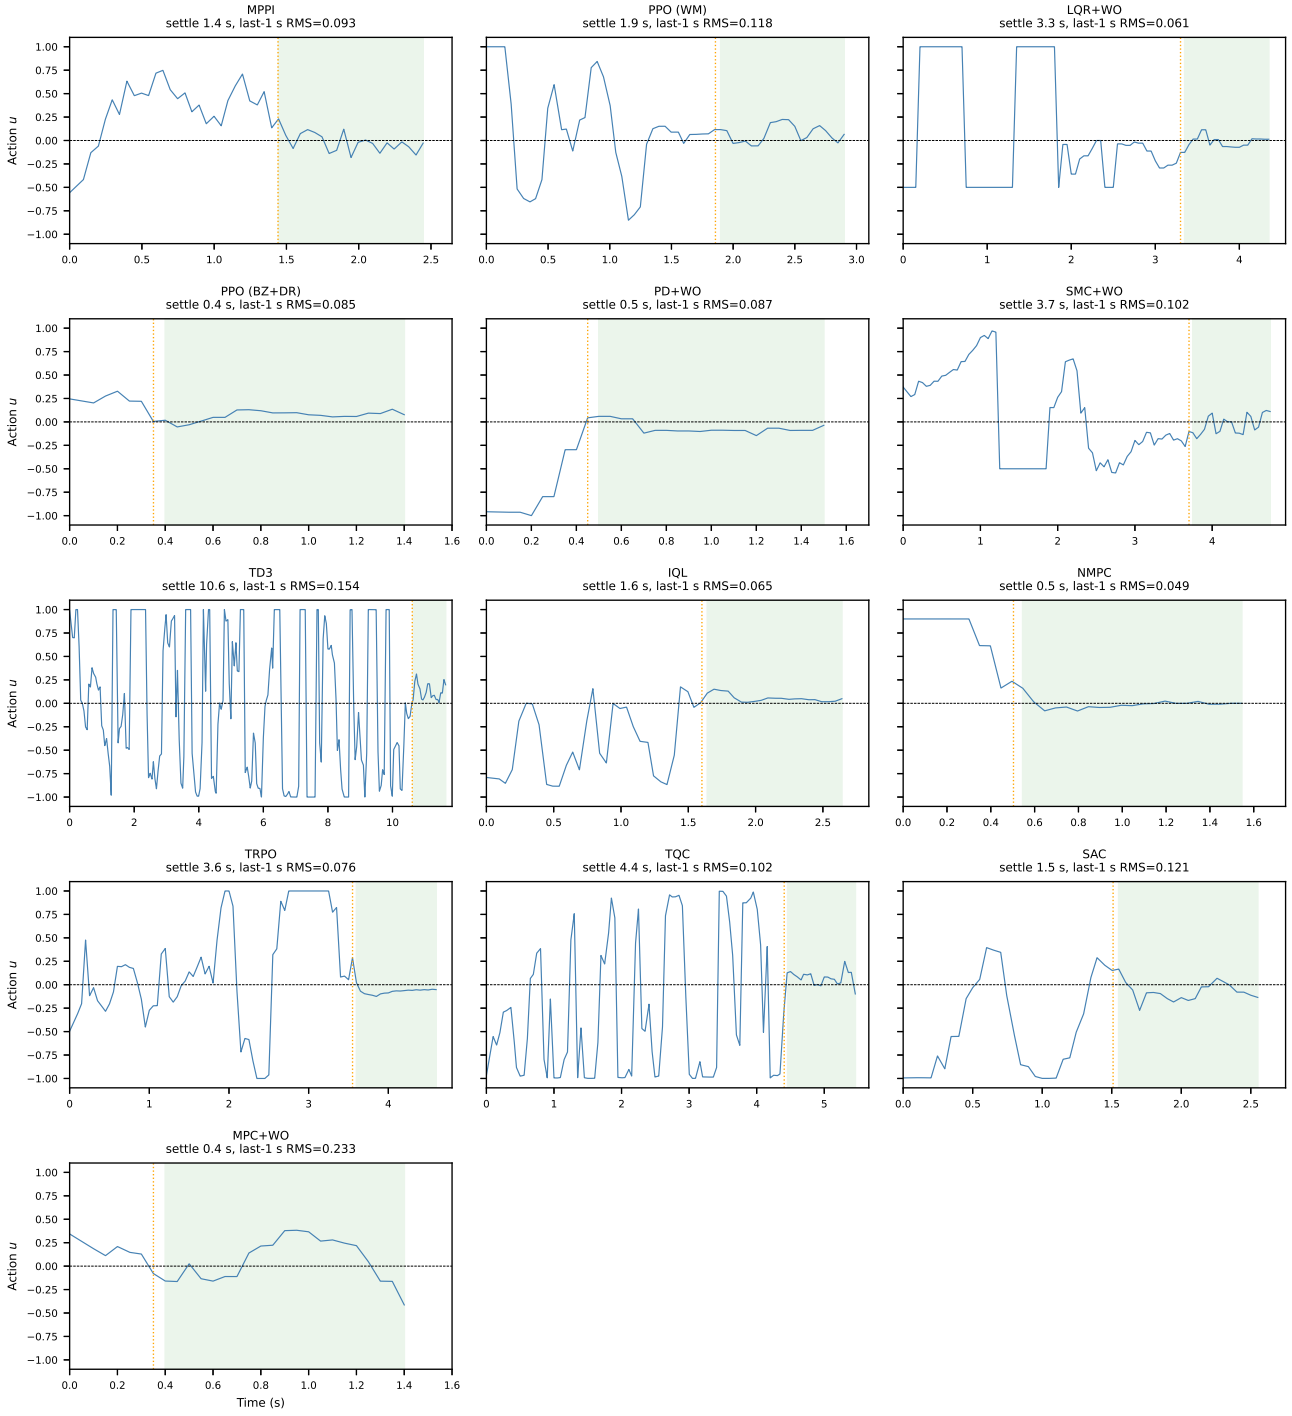


Fig. 18. Control action profiles for all 13 benchmark controllers. For each controller the shown trial is selected by a single uniform rule: among successful trials that settled reasonably early (settling time $\leq 1.5\times$ that controller's median) and have at least a 1 s settled tail (episode length $\geq$ settling $+1$ s), keep those whose final-1 s action RMS is within 10% of that controller's best, and pick the earliest-settling of those, i.e. a clean, early-settling exemplar rather than a barely-settled outlier. Shaded green band = the final 1 s window; orange dotted line = the trial's settling time. Last-1 s action RMS is 0.05–0.23 across controllers, i.e. commands are near zero once settled. Generated from `paper/data/exp1_hardware/consolidated.json` by `regenerate_extra_figures.py`.

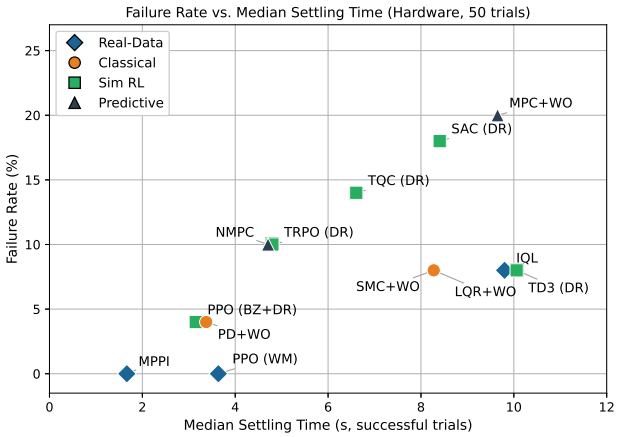


Fig. 19. Hardware failure rate vs. median settling time (successful trials); both axes increase toward worse outcomes, so the ideal controller occupies the bottom-left corner. MPPI ties for the best success rate (100%, with PPO (WM)) and has the fastest median settling (1.67 s); PPO (BZ+DR) offers 96% SR with 3.15 s median settling.

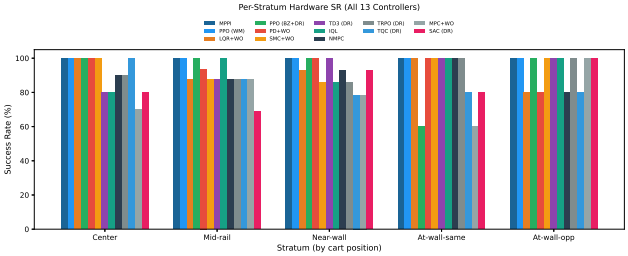


Fig. 20. Per-stratum hardware SR for all 13 controllers (50 stratified trials). Strata are defined mainly by cart starting position; the two at-wall strata additionally fix the ball side (Appendix IX). MPPI and PPO-WM achieve 100% across all strata; aggregate success is in fact lowest on the mid-rail starts (about 90%) and highest on at-wall-opposite (94%).

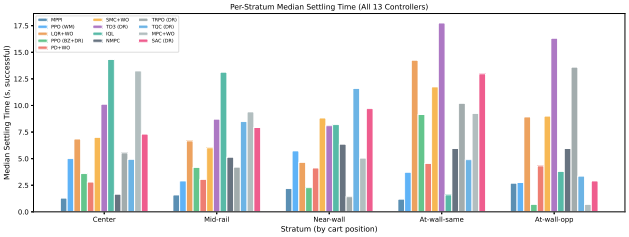


Fig. 21. Median settling time per stratum for all 13 controllers (successful trials only). The slowest stratum is controller-dependent (near-wall or at-wall-same for most), while at-wall-opposite is often the quickest, since a ball displaced away from the wall gives the controller room to recover; MPPI stays fast across all strata.

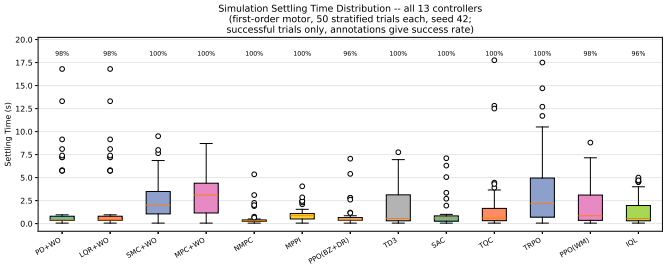


Fig. 22. Settling-time distributions in simulation (first-order motor, 50 stratified ICs, 20 Hz, seed 42; successful trials only) for all thirteen benchmark controllers, with success rate annotated above each box. NMPC has the fastest median; most controllers settle at medians below 2.2 s. The three real-data methods (MPPI, PPO (WM), IQL) are included for completeness: although they plan through or are trained on data rather than the analytical model, they still transfer to the physics simulator at 96–100% success.

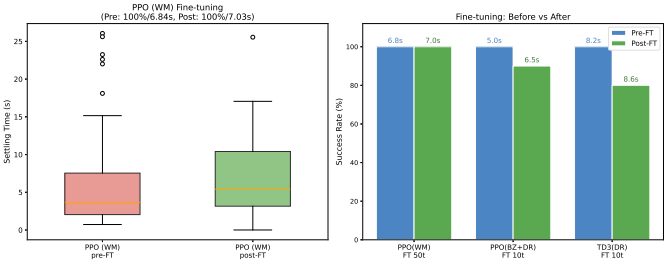


Fig. 23. Fine-tuning comparison. Left: PPO (WM) settling time distribution before and after fine-tuning (50 trials each, both 100% SR). Right: success rate comparison for all fine-tuned models with mean settling time annotations.

References

[1] STMicroelectronics, *VL53L0X Time-of-Flight Ranging Sensor Datasheet*, jun 2024, dS11555, Rev. 6.

[2] M.-T. Ho, S.-T. Kao, and Y.-S. Lu, "Sliding mode control for a ball and arc system," in *Proceedings of SICE Annual Conference 2010*, Taipei, Taiwan, 2010, pp. 791–798.

[3] A. Paszke, S. Gross, F. Massa, A. Lerer, J. Bradbury, G. Chanan, T. Killeen, Z. Lin, N. Gimelshein, L. Antiga *et al.*, "PyTorch: An imperative style, high-performance deep learning library," in *Advances in Neural Information Processing Systems*, vol. 32, 2019, pp. 8024–8035.

[4] N. Hansen, "The CMA evolution strategy: A tutorial," *arXiv preprint arXiv:1604.00772*, 2016.

[5] N. Hansen, Y. Akimoto, and P. Baudis, "CMA-ES/pycma on Github," Zenodo, DOI:10.5281/zenodo.2559634, Feb. 2019. [Online]. Available: https://doi.org/10.5281/zenodo.2559634

[6] F. L. Lewis, D. Vrabie, and V. L. Syrmos, *Optimal Control*, 3rd ed. Hoboken, NJ: John Wiley & Sons, 2012.

[7] S.-T. Kao and M.-T. Ho, "Second-order sliding mode control for ball-balancing system," in *2018 IEEE Conference on Control Technology and Applications (CCTA)*, Copenhagen, Denmark, 2018, pp. 1730–1735.

[8] J.-J. E. Slotine and W. Li, *Applied Nonlinear Control*. Englewood Cliffs, NJ: Prentice Hall, 1991.

[9] B. Stellato, G. Banjac, P. Goulart, A. Bemporad, and S. Boyd, "OSQP: An operator splitting solver for quadratic programs," *Mathematical Programming Computation*, vol. 12, no. 4, pp. 637–672, 2020.

[10] J. A. Andersson, J. Gillis, G. Horn, J. B. Rawlings, and M. Diehl, "CasADi: A software framework for nonlinear optimization and optimal control," *Mathematical Programming Computation*, vol. 11, no. 1, pp. 1–36, 2019.

[11] A. Raffin, A. Hill, A. Gleave, A. Kanervisto, M. Ernestus, and N. Dormann, "Stable-Baselines3: Reliable reinforcement learning implementations," *Journal of Machine Learning Research*, vol. 22, no. 268, pp. 1–8, 2021.

[12] I. Kostrikov, A. Nair, and S. Levine, "Offline reinforcement learning with implicit Q-learning," in *International Conference on Learning Representations*, 2022.

[13] T. Seno and M. Imai, "d3rlpy: An offline deep reinforcement learning library," *Journal of Machine Learning Research*, vol. 23, no. 315, pp. 1–20, 2022.

[14] J. Schulman, F. Wolski, P. Dhariwal, A. Radford, and O. Klimov, "Proximal policy optimization algorithms," *arXiv preprint arXiv:1707.06347*, 2017.

[15] J. Schulman, P. Moritz, S. Levine, M. Jordan, and P. Abbeel, "High-dimensional continuous control using generalized advantage estimation," in *International Conference on Learning Representations*, 2016.

[16] L. Hewing, K. P. Wabersich, M. Menner, and M. N. Zeilinger, "Learning-based model predictive control: Toward safe learning in control," *Annual Review of Control, Robotics, and Autonomous Systems*, vol. 3, pp. 269–296, 2020.

[17] J. Schulman, S. Levine, P. Moritz, M. Jordan, and P. Abbeel, "Trust region policy optimization," in *International Conference on Machine Learning*. PMLR, 2015, pp. 1889–1897.

[18] T. Haarnoja, A. Zhou, P. Abbeel, and S. Levine, "Soft actor-critic: Off-policy maximum entropy deep reinforcement learning with a stochastic actor," in *International Conference on Machine Learning*. PMLR, 2018, pp. 1861–1870.

[19] S. Fujimoto, H. van Hoof, and D. Meger, "Addressing function approximation error in actor-critic methods," in *International Conference on Machine Learning*. PMLR, 2018, pp. 1587–1596.

[20] A. Kuznetsov, P. Shvechikov, A. Grishin, and D. Vetrov, "Controlling overestimation bias with truncated mixture of continuous distributional quantile critics," in *International Conference on Machine Learning*. PMLR, 2020, pp. 5556–5566.

[21] S. Hochreiter and J. Schmidhuber, "Long short-term memory," *Neural Computation*, vol. 9, no. 8, pp. 1735–1780, 1997.

[22] M. Towers, A. Kwiatkowski, J. Terry, J. U. Balis, G. De Cola, T. Deleu, M. Goulão, A. Kallinteris, M. Krimmel, A. KG *et al.*, "Gymnasium: A standard interface for reinforcement learning environments," *arXiv preprint arXiv:2407.17032*, 2024.

[23] G. Williams, N. Wagener, B. Goldfain, P. Drews, J. Rehg, B. Boots, and E. Theodorou, "Information theoretic MPC for model-based reinforcement learning," in *IEEE International Conference on Robotics and Automation*, 2017, pp. 1714–1721.

[24] D. Wang and G. Beltrame, "Deployable reinforcement learning with variable control rate," *arXiv preprint arXiv:2401.09286*, 2024, presented at the AAAI 2024 Workshop on Deployable AI (DAI).

[25] P. Virtanen, R. Gommers, T. E. Oliphant, M. Haberland, T. Reddy, D. Cournapeau, E. Burovski, P. Peterson, W. Weckesser, J. Bright, S. J. van der Walt, M. Brett, J. Wilson, K. J. Millman, N. Mayorov, A. R. J. Nelson, E. Jones, R. Kern, E. Larson, C. J. Carey, İ. Polat, Y. Feng, E. W. Moore, J. VanderPlas, D. Laxalde, J. Perktold, R. Cimrman, I. Henriksen, E. A. Quintero, C. R. Harris, A. M. Archibald, A. H. Ribeiro, F. Pedregosa, P. van Mulbregt, and SciPy 1.0 Contributors, "SciPy 1.0: Fundamental Algorithms for Scientific Computing in Python," *Nature Methods*, vol. 17, pp. 261–272, 2020.

[26] C. R. Harris, K. J. Millman, S. J. van der Walt, R. Gommers, P. Virtanen, D. Cournapeau, E. Wieser, J. Taylor, S. Berg, N. J. Smith, R. Kern, M. Picus, S. Hoyer, M. H. van Kerkwijk, M. Brett, A. Haldane, J. F. del Río, M. Wiebe, P. Peterson, P. Gérard-Marchant, K. Sheppard, T. Reddy, W. Weckesser, H. Abbasi, C. Gohlke, and T. E. Oliphant, "Array programming with NumPy," *Nature*, vol. 585, no. 7825, pp. 357–362, 2020.

[27] C. E. Bonferroni, *Teoria statistica delle classi e calcolo delle probabilità*. Seeber, 1936.

[28] D. Q. Mayne, "Model predictive control: Recent developments and future promise," *Automatica*, vol. 50, no. 12, pp. 2967–2986, 2014.

[29] J. Tobin, R. Fong, A. Ray, J. Schneider, W. Zaremba, and P. Abbeel, "Domain randomization for transferring deep neural networks from simulation to the real world," in *2017 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*. IEEE, 2017, pp. 23–30.

[30] SMC Corporation, *LEF Series Electric Actuator Catalogue*, 2013.