


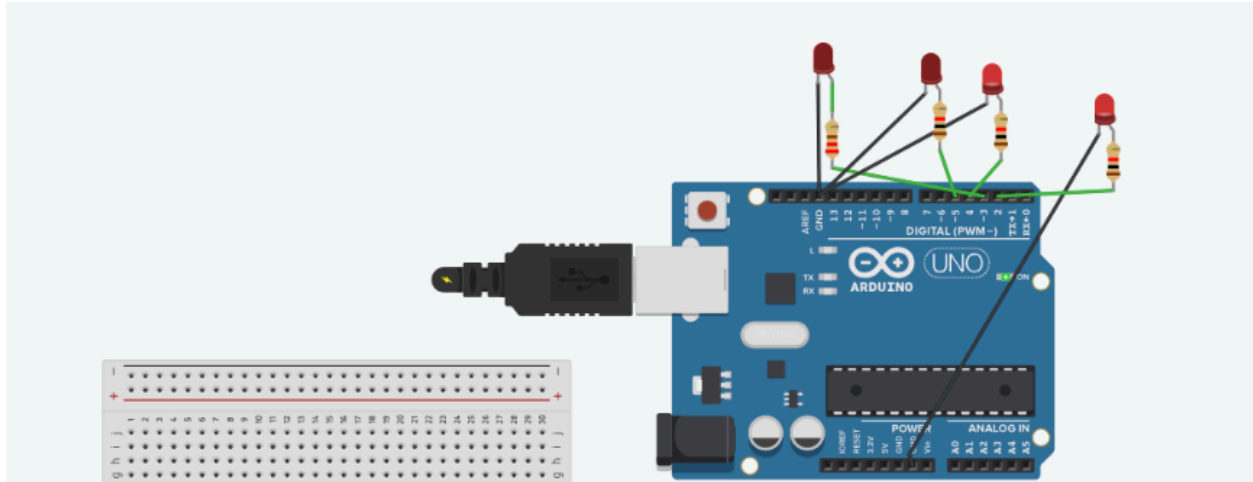

```
// C++ code  
//
```

```
int number;  
int led1 = 2;  
int led2 = 3;  
int led3 = 4;  
int led4 = 5;
```

```
void setup()
```

```
{  
  Serial.begin(9600);
```

```
  pinMode(led1, OUTPUT);  
  pinMode(led2, OUTPUT);  
  pinMode(led3, OUTPUT);  
  pinMode(led4, OUTPUT);
```

```
  Serial.println("Enter a number from 0 to 15:");  
}
```

```
void loop()
```

```
{  
  if (Serial.available() > 0)  
  {  
    number = Serial.parseInt();
```

```
    if (number >= 0 && number <= 15)  
    {
```

```

// Get each binary bit
int bit4 = number % 2;
number = number / 2;

int bit3 = number % 2;
number = number / 2;

int bit2 = number % 2;
number = number / 2;

int bit1 = number % 2;

digitalWrite(led1, bit1);
digitalWrite(led2, bit2);
digitalWrite(led3, bit3);
digitalWrite(led4, bit4);

Serial.print("Binary: ");
Serial.print(bit1);
Serial.print(bit2);
Serial.print(bit3);
Serial.println(bit4);
}
else
{
  Serial.println("Enter a number between 0 and 15.");
}
}
}

```

OUTPUT: