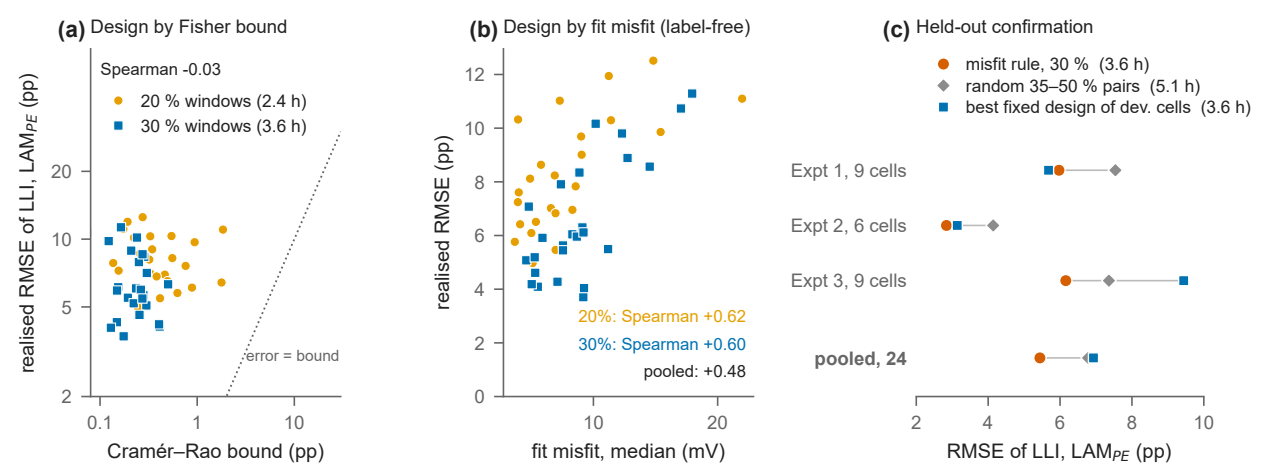

(a) Design by Fisher bound
Spearman -0.03
20 % windows (2.4 h)
30 % windows (3.6 h)
error = bound
realised RMSE of LLI, LAM$_{PE}$ (pp)
Cramér–Rao bound (pp)
(b) Design by fit misfit (label-free)
20%: Spearman +0.62
30%: Spearman +0.60
pooled: +0.48
realised RMSE (pp)
fit misfit, median (mV)
(c) Held-out confirmation
misfit rule, 30 % (3.6 h)
random 35–50 % pairs (5.1 h)
best fixed design of dev. cells (3.6 h)
Expt 1, 9 cells
Expt 2, 6 cells
Expt 3, 9 cells
pooled, 24
RMSE of LLI, LAM$_{PE}$ (pp)