

---

# **finufft Documentation**

***Release 1.1.0***


**Alex Barnett and Jeremy Magland**

November 02, 2018



<b>1</b>	<b>Installation</b>	<b>3</b>
1.1	Quick linux install instructions . . . . .	3
1.2	Dependencies . . . . .	3
1.3	Tips for installing dependencies on linux . . . . .	3
1.4	Tips for installing dependencies and compiling on Mac OSX . . . . .	4
1.5	General notes about compilation and tests . . . . .	5
1.6	Building MATLAB/octave wrappers, including in Mac OSX . . . . .	6
1.7	Building the python wrappers . . . . .	6
1.8	Tips for installing optional dependencies . . . . .	7
<b>2</b>	<b>Mathematical definitions of transforms</b>	<b>9</b>
<b>3</b>	<b>Contents of the package</b>	<b>11</b>
<b>4</b>	<b>Usage and interfaces</b>	<b>13</b>
4.1	Interfaces from C++ . . . . .	13
4.2	Interfaces from C . . . . .	20
4.3	Interfaces from fortran . . . . .	20
4.4	Usage and design notes . . . . .	21
<b>5</b>	<b>Advanced interfaces for many vectors with same nonuniform points</b>	<b>23</b>
5.1	2D transforms . . . . .	23
5.2	Design notes . . . . .	24
<b>6</b>	<b>MATLAB/octave interfaces</b>	<b>27</b>
<b>7</b>	<b>Python interface</b>	<b>35</b>
<b>8</b>	<b>Julia interface</b>	<b>47</b>
<b>9</b>	<b>Related packages</b>	<b>49</b>
9.1	Interfaces to FINUFFT from other languages . . . . .	49
9.2	Packages making use of FINUFFT . . . . .	49
<b>10</b>	<b>Known Issues</b>	<b>51</b>
10.1	Issues with library . . . . .	51
10.2	Issues with interfaces . . . . .	51
10.3	Bug reports . . . . .	51
<b>11</b>	<b>Acknowledgments</b>	<b>53</b>
<b>12</b>	<b>References</b>	<b>55</b>



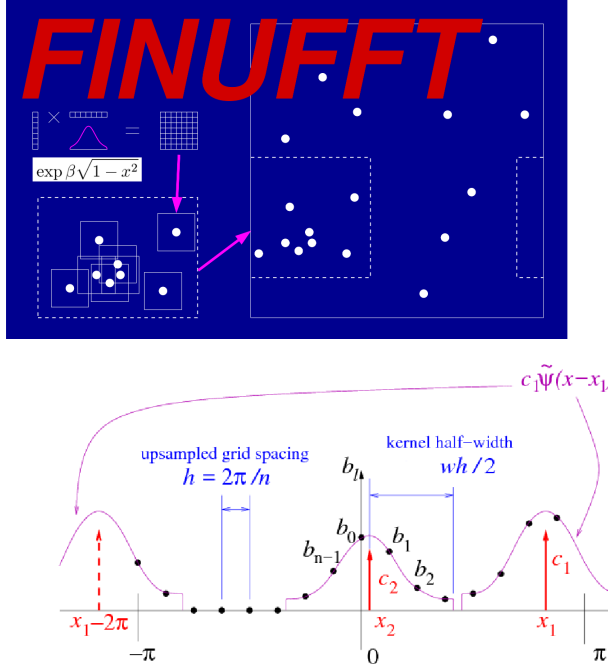

**FINUFFT** is a set of libraries to compute efficiently three types of nonuniform fast Fourier transform (NUFFT) to a specified precision, in one, two, or three dimensions, on a multi-core shared-memory machine. The library has a very simple interface, does not need any precomputation step, is written in C++ (using OpenMP and FFTW), and has wrappers to C, fortran, MATLAB, octave, and python. As an example, given  $M$  arbitrary real numbers  $x_j$  and complex numbers  $c_j$ , with  $j = 1, \dots, M$ , and a requested integer number of modes  $N$ , the 1D type-1 (aka “adjoint”) transform evaluates the  $N$  numbers

$$f_k = \sum_{j=1}^M c_j e^{ikx_j}, \quad \text{for } k \in \mathbb{Z}, \quad -N/2 \leq k \leq N/2 - 1. \quad (1)$$

The  $x_j$  can be interpreted as nonuniform source locations,  $c_j$  as source strengths, and  $f_k$  then as the  $k$ th Fourier series coefficient of the distribution  $f(x) = \sum_{j=1}^M c_j \delta(x - x_j)$ . Such exponential sums are needed in many applications in science and engineering, including signal processing, imaging, diffraction, and numerical partial differential equations. The naive CPU effort to evaluate (1) is  $O(NM)$ . The library approximates (1) to a requested relative precision  $\epsilon$  with nearly linear effort  $O(M \log(1/\epsilon) + N \log N)$ . Thus the speedup over the naive cost is similar to that achieved by the FFT. This is achieved by spreading onto a regular grid using a carefully chosen kernel, followed by an upsampled FFT, then a division (deconvolution) step. For the 2D and 3D definitions, and other types of transform, see below.

The FINUFFT library achieves its speed via several innovations including:

1. The use of a new spreading kernel that is provably close to optimal, yet faster to evaluate than the Kaiser-Bessel kernel
2. Quadrature approximation for the Fourier transform of the spreading kernel
3. Load-balanced multithreading of the type-1 spreading operation

For the same accuracy in 3D, the library is 3-50 times faster on a single core than the single-threaded fast Gaussian gridding **CMCL** libraries of Greengard-Lee, and in the multi-core setting for spreading-dominated problems is faster than the **Chemnitz NFFT3** library even when the latter is allowed a RAM-intensive full precomputation of the kernel. This is especially true for highly non-uniform point distributions and/or high precision. Our library does not require precomputation, and uses minimal RAM.

For the case of small problems where repeated NUFFTs are needed with a fixed set of nonuniform points, we have started to build advanced interfaces for this case. These are a factor of 2 or more faster than repeated calls to the plain interface, since certain costs such as FFTW setup and sorting are performed only once.

---

**Note:** For very small repeated problems (less than 10000 input and output points), users should also consider a dense matrix-matrix multiplication against the NUDFT matrix using BLAS3 (eg ZGEMM). Since we did not want BLAS to be a dependency, we have not yet included this option.

---

## INSTALLATION

### Quick linux install instructions

In brief, go to the github page <https://github.com/flatironinstitute/finufft> and follow instructions to download the source (eg see the green button). Make sure you have packages `fftw3` and `fftw3-devel` installed. Then `cd` into your FINUFFT directory and `make test`. This should compile the static library in `lib-static/`, some C++ test drivers in `test/`, then run them, printing some terminal output ending in:

```
0 crashes out of 5 tests done
```

If this fails see the more detailed instructions below. If it succeeds, you may use the library, and proceed to type `make` to see a list of other aspects to build (language interfaces, etc). Consider installing `numdiff` as below to allow `make test` to check the accuracy. Proceed to *Usage* and look in `examples/` and `test/` for other usage examples.

### Dependencies

This library is fully supported for unix/linux and almost fully on Mac OSX. We have heard that it is difficult to compile on Windows; for such a machine we suggest trying within the Windows Subsystem for Linux (WSL).

For the basic libraries you need

- C++ compiler, such as `g++` packaged with GCC, or `clang` with OSX
- FFTW3
- GNU make

Optional:

- `numdiff` (preferred but not essential; enables better pass-fail accuracy validation)
- for Fortran wrappers: compiler such as `gfortran`
- for matlab/octave wrappers: MATLAB, or octave and its development libraries
- for the python wrappers you will need `python` and `pip` (if you are stuck on python v2), or `python3` and `pip3` (for the standard python v3). You will also need `pybind11`
- for rebuilding new matlab/octave wrappers (experts only): `mwrap`

### Tips for installing dependencies on linux

On a Fedora/CentOS linux system, dependencies can be installed as follows:

```
sudo yum install make gcc gcc-c++ gcc-gfortran fftw3 fftw3-devel libgomp octave octave-devel
```

---

**Note:** we are not exactly sure how to install python3 and pip3 using yum

---

Alternatively, on Ubuntu linux (assuming python3 as opposed to python):

```
sudo apt-get install make build-essential libfftw3-dev gfortran numdiff python3 python3-pip octave 1.
```

For any linux flavor see below for the optional numdiff (and very optional mwrap). You should then compile via the various make tasks.

## Tips for installing dependencies and compiling on Mac OSX

---

**Note:** Improved Mac OSX instructions, and possibly a brew package, will come shortly. Stay tuned. The below has been tested on 10.14 (Mojave) with both clang and gcc-8.

---

First you'll want to set up Homebrew, as follows. If you don't have Xcode, install Command Line Tools (this is only around 130 MB in contrast to the full 6 GB size of Xcode), by opening a terminal (from /Applications/Utilities/) and typing:

```
xcode-select --install
```

You will be asked for an administrator password. Then, also as an administrator, install Homebrew by pasting the installation command from <https://brew.sh>

Then do:

```
brew install libomp fftw
```

This happens to also install the latest GCC, which is 8.2.0 in our tests.

---

**Note:** There are two options for compilers: 1) the native clang which works with octave but will *not* so far allow you to link against fortran applications, or 2) GCC, which will allow fortran linking with gfortran, but currently fails with octave.

---

First the **clang route**. Once you have downloaded FINUFFT, to set up for this, do:

```
cp make.inc.macosx_clang make.inc
```

This gives you compile flags that should work with make test and other tasks. Optionally, install numdiff as below. Then for python (note that pip is not installed with the default python v2):

```
brew install python3
pip3 install numpy pybind11
make python3
```

Octave interfaces work out of the box:

```
brew install octave
make octave
```

Look in make.inc.macosx\_\*, and see below, for ideas for building MATLAB MEX interfaces.



Alternatively, here's the **GCC route**, which we have also tested on Movaje:

```
cp make.inc.macosx_gcc-8 make.inc
```

You must now by hand edit `setup.py`, changing `gcc` to `gcc-8` and `g++` to `g++-8`. Then proceed as above with `python3. make fortran` in addition to the above (apart from octave) should now work.

---

**Note:** Choosing GCC-8 in OSX there is a problem with octave MEX compilation. Please help if you can!

---

## General notes about compilation and tests

We first describe compilation for default options (double precision, openmp) via GCC. If you have a nonstandard unix environment (eg a Mac) or want to change the compiler, then place your compiler and linking options in a new file `make.inc`. For example such files see `make.inc.*`. See the text of `makefile` for discussion of what can be overridden.

Compile and do a rapid (less than 1-second) test of FINUFFT via:

```
make test
```

This should compile the main libraries then run tests which should report zero crashes and zero fails. (If `numdiff` is absent, it instead produces output only about crashes; you will have to check by eye that accuracy is as expected.) Note that the very first test run is `test/finufftld_basicpassfail` which does include a low-accuracy math test, producing the exit code 0 if success, nonzero if fail. You can check the exit code thus:

```
test/finufftld_basicpassfail; echo $?
```

Use `make perfctest` for larger spread/interpolation and NUFFT tests taking 10-20 seconds. This writes into `test/results/` where you will be able to compare to results from standard CPUs.

Run `make` without arguments for full list of possible make tasks.

`make examples` to compile and run the examples for calling from C++ and from C.

The `examples` and `test` directories are good places to see usage examples.

`make fortran` to compile and run the fortran wrappers and examples.

Note that the library includes fortran interfaces defined in `fortran/finufft_f.h`.

If there is an error in testing on a standard set-up, please file a bug report as a New Issue at <https://github.com/flatironinstitute/finufft/issues>

## Custom library compilation options

You may want to make the library for other data types. Currently library names are distinct for single precision (`libfinufftf`) vs double (`libfinufft`). However, single-threaded vs multithreaded are built with the same name, so you will have to move them to other locations, or build a 2nd copy of the repo, if you want to keep both versions.

You *must* do at least `make objclean` before changing precision or openmp options.

**Single precision:** append `PREC=SINGLE` to the make task. Single-precision saves half the RAM, and increases speed slightly (<20%). The C++, C, and fortran demos are all tested in single precision. However, it will break matlab, octave, python interfaces.

**Single-threaded:** append `OMP=OFF` to the make task.

## Building MATLAB/octave wrappers, including in Mac OSX

`make matlab` to build the MEX interface to matlab.

`make octave` to build the MEX-like interface to octave.

We have had success in Mac OSX Mojave compiling the octave wrapper out of the box. For MATLAB, the MEX settings may need to be overridden: edit the file `mex_C++_maci64.xml` in the MATLAB distro, to read, for instance:

```
CC="gcc-8"
CXX="g++-8"
CFLAGS="-ansi -D_GNU_SOURCE -fexceptions -fPIC -fno-omit-frame-pointer -pthread"
CXXFLAGS="-ansi -D_GNU_SOURCE -fPIC -fno-omit-frame-pointer -pthread"
```

**These settings are copied from the `glnxa64` case. Here you will want to replace the compilers by whatever version of GCC you have or the default gcc/g++ that are aliased to clang.**

For pre-2016 MATLAB Mac OSX versions you'll instead want to edit the `maci64` section of `mexopts.sh`.

## Building the python wrappers

First make sure you have python3 and pip3 (or python and pip) installed and that you can already compile the C++ library (eg via `make lib`). Python links to this compiled library. You will get an error unless you first compile the static library. Next make sure you have NumPy and pybind11 installed:

```
pip3 install numpy pybind11
```

You may then do `make python3` which calls pip3 for the install then runs some tests. An additional test you could do is:

```
python3 run_speed_tests.py
```

In all the above the “3” can be omitted if you insist on working with python v2.

See also Dan Foreman-Mackey’s earlier repo that also wraps finufft, and from which we have drawn code: [python-finufft](#)

## A few words about python environments

There can be confusion and conflicts between various versions of python and installed packages. It is therefore a very good idea to use virtual environments. Here’s a simple way to do it (after installing python-virtualenv):

```
Open a terminal
virtualenv -p /usr/bin/python3 env1
. env1/bin/activate
```

Now you are in a virtual environment that starts from scratch. All pip installed packages will go inside the `env1` directory. (You can get out of the environment by typing `deactivate`)

## Tips for installing optional dependencies

### Installing numdiff

`numdiff` by Ivano Primi extends `diff` to assess errors in floating-point outputs. It is an optional dependency that provides a better pass-fail test; in particular it allows the accuracy check message 0 fails out of 5 tests done when `make test` is done for FINUFFT. To install `numdiff` on linux, download the latest version from <http://gnu.mirrors.pair.com/savannah/savannah/numdiff/> un-tar the package, cd into it, then build via `./configure; make; sudo make install`.

This compilation fails on Mac OSX, for which we found the following was needed in Mojave. Assume you un-tarred into `/usr/local/numdiff-5.9.0`. Then:

```
brew install gettext
./configure 'CFLAGS=-I/usr/local/opt/gettext/include' 'LDFLAGS=-L/usr/local/opt/gettext/lib'
make
sudo ln /usr/local/numdiff-5.9.0/numdiff /usr/local/bin
```

You should now be able to run `make test` in FINUFFT and get the second message about zero fails.

### Installing MWrap

This is not needed for most users. `MWrap` is a very useful MEX interface generator by Dave Bindel. Make sure you have `flex` and `bison` installed. Download version 0.33 or later from <http://www.cs.cornell.edu/~bindel/sw/mwrap>, un-tar the package, cd into it, then:

```
make
sudo cp mwrap /usr/local/bin/
```



## MATHEMATICAL DEFINITIONS OF TRANSFORMS

We use notation with a general space dimensionality  $d$ , which will be 1, 2, or 3, in our library. The arbitrary (ie nonuniform) points in space are denoted  $\mathbf{x}_j \in \mathbb{R}^d$ ,  $j = 1, \dots, M$ . We will see that for type-1 and type-2, without loss of generality one could restrict to the periodic box  $[-\pi, \pi)^d$ . For type-1 and type-3, each such NU point carries a given associated strength  $c_j \in \mathbb{C}$ . Type-1 and type-2 involve the Fourier “modes” (Fourier series coefficients) with integer indices lying in the set

$$K = K_{N_1, \dots, N_d} := K_{N_1} K_{N_2} \dots K_{N_d} ,$$

where

$$K_{N_i} := \begin{cases} \{-N_i/2, \dots, N_i/2 - 1\}, & N_i \text{ even,} \\ \{-(N_i - 1)/2, \dots, (N_i - 1)/2\}, & N_i \text{ odd.} \end{cases}$$

For instance,  $K_{10} = \{-5, -4, \dots, 4\}$ , whereas  $K_{11} = \{-5, -4, \dots, 5\}$ . Thus, in the 1D case  $K$  is an interval containing  $N_1$  integer indices, in 2D it is a rectangle of  $N_1 N_2$  index pairs, and in 3D it is a cuboid of  $N_1 N_2 N_3$  index triplets.

Then the type-1 (nonuniform to uniform, aka “adjoint”) NUFFT evaluates

$$f_{\mathbf{k}} := \sum_{j=1}^M c_j e^{\pm i \mathbf{k} \cdot \mathbf{x}_j} \quad \text{for } \mathbf{k} \in K \quad (2.1)$$

This can be viewed as evaluating a set of Fourier series coefficients due to sources with strengths  $c_j$  at the arbitrary locations  $\mathbf{x}_j$ . Either sign of the imaginary unit in the exponential can be chosen in the interface. Note that our normalization differs from that of references [DR,GL].

The type-2 (U to NU, aka “forward”) NUFFT evaluates

$$c_j := \sum_{\mathbf{k} \in K} f_{\mathbf{k}} e^{\pm i \mathbf{k} \cdot \mathbf{x}_j} \quad \text{for } j = 1, \dots, M \quad (2.2)$$

This is the adjoint of the type-1, ie the evaluation of a given Fourier series at a set of arbitrary points. Both type-1 and type-2 transforms are invariant under translations of the NU points by multiples of  $2\pi$ , thus one could require that all NU points live in the origin-centered box  $[-\pi, \pi)^d$ . In fact, as a compromise between library speed, and flexibility for the user (for instance, to avoid boundary points being flagged as outside of this box due to round-off error), our library only requires that the NU points lie in the three-times-bigger box  $\mathbf{x}_j \in [-3\pi, 3\pi]^d$ . This allows the user to choose a convenient periodic domain that does not touch this three-times-bigger box. However, there may be a slight speed increase if most points fall in  $[-\pi, \pi)^d$ .

Finally, the type-3 (NU to NU) transform does not have restrictions on the NU points, and there is no periodicity. Let  $\mathbf{x}_j \in \mathbb{R}^d$ ,  $j = 1, \dots, M$ , be NU locations, with strengths  $c_j \in \mathbb{C}$ , and let  $\mathbf{s}_k$ ,  $k = 1, \dots, N$  be NU frequencies. Then the type-3 transform evaluates:

$$f_{\mathbf{k}} := \sum_{j=1}^M c_j e^{\pm i \mathbf{s}_k \cdot \mathbf{x}_j} \quad \text{for } k = 1, \dots, N \quad (2.3)$$

For all three transforms, the computational effort scales like the product of the space-bandwidth products (real-space width times frequency-space width) in each dimension. For type-1 and type-2 this means near-linear scaling in the total number of modes  $N := N_1 \dots N_d$ . However, be warned that for type-3 this means that, even if  $N$  and  $M$  are small, if the product of the tightest intervals enclosing the coordinates of  $\mathbf{x}_j$  and  $\mathbf{s}_k$  is large, the algorithm will be inefficient. For such NU points, a direct sum should be used instead.

We emphasise that the NUFFT tasks that this library performs should not be confused with either the discrete Fourier transform (DFT), the (continuous) Fourier transform (although it may be used to approximate this via a quadrature rule), or the inverse NUFFT (the iterative solution of the linear system arising from nonuniform Fourier sampling, as in, eg, MRI). It is also important to know that, for NU points, *the type-1 is not the inverse of the type-2*. See the references for clarification.

## CONTENTS OF THE PACKAGE

- `finufft-manual.pdf` : the manual (auto-generated by sphinx)
- `docs` : source files for documentation (.rst files are human-readable)
- `README.md` : github-facing (and human text-reader) doc info
- `LICENSE` : how you may use this software
- `CHANGELOG` : list of changes, release notes
- `TODO` : list of things needed to fix or extend (hackers please help)
- `makefile` : GNU makefile (there are no makefiles in subdirectories)
- `src` : main library source and headers. Compiled objects will be built here
- `lib` : dynamic library will be built here
- `lib-static` : static library will be built here
- `test` : validation and performance tests, bash scripts driving compiled C++
  - `test/check_finufft.sh` is the main pass-fail validation bash script
  - `test/nuffttestnd.sh` is a simple uniform-point performance test bash script
  - `test/results` : validation comparison outputs (\*.refout; do not remove these), and local test and performance outputs (\*.out; you may remove these)
- `examples` : simple example codes for calling the library from C++ and C
- `fortran` : wrappers and drivers for Fortran (see `fortran/README`)
- `matlab` : wrappers and examples for MATLAB/octave
- `finufftpy` : python wrappers
- `python_tests` : accuracy and speed tests and examples using the python wrappers
- `setup.py` : needed so pip or pip3 can build and install the python wrappers
- `contrib` : 3rd-party code





## USAGE AND INTERFACES

Here we describe calling FINUFFT from C++, C, and Fortran.

We provide Type 1 (nonuniform to uniform), Type 2 (uniform to nonuniform), and Type 3 (nonuniform to nonuniform), in dimensions 1, 2, and 3. This gives nine basic routines. There are also two *advanced interfaces* for multiple 2d1 and 2d2 transforms with the same point locations.

Using the library is a matter of filling your input arrays, allocating the correct output array size, possibly setting fields in the options struct, then calling one of the transform routines below.

### Interfaces from C++

We first give a simple example of performing a 1D type-1 transform in double precision from C++, the library's native language, using C++ complex number type. First include the headers:

```
#include "finufft.h"
#include <complex>
using namespace std;
```

Now in the body of the code, assuming  $M$  has been set to be the number of nonuniform points, we allocate the input arrays:

```
double *x = (double *)malloc(sizeof(double)*M);
complex<double>* c = (complex<double>*)malloc(sizeof(complex<double>)*M);
```

These arrays should now be filled with the user's data: values in  $x$  should lie in  $[-3\pi, 3\pi]$ , and  $c$  can be arbitrary complex strengths (we omit example code for this here). With  $N$  as the number of modes, allocate the output array:

```
complex<double>* F = (complex<double>*)malloc(sizeof(complex<double>)*N);
```

Before use, set default values in the options struct `opts`:

```
nufft_opts opts; finufft_default_opts(&opts);
```

**Warning:**

- Without this call options may take on random values which may cause a crash.
- This usage has changed from version 1.0 which used C++-style pass by reference. Please make sure you pass a *pointer* to `opts`.

To perform the nonuniform FFT is then one line:

```
int ier = finufft1d1(M,x,c,+1,1e-6,N,F,opts);
```

This fills `F` with the output modes, in increasing ordering from  $-N/2$  to  $N/2-1$ . Here `+1` sets the sign of `i` in the exponentials in the [definitions](#), `1e-6` chooses 6-digit relative tolerance, and `ier` is a status output which is zero if successful (see below). See `example1d1.cpp`, in the `examples` directory, for a simple full working example. Then to compile, linking to the double-precision static library, use eg:

```
g++ example1d1.cpp -o example1d1 -I FINUFFT/src FINUFFT/lib-static/libfinufft.a -fopenmp -lfftw3_omp
```

where `FINUFFT` denotes the top-level directory of the installed library. The `examples` and `test` directories are good places to see further usage examples. The documentation for all nine routines follows below.

---

**Note:** If you have a small-scale 2D task (say less than  $10^5$  points or modes) with multiple strength or coefficient vectors but fixed nonuniform points, see the [advanced interfaces](#).

---

## Data types

There are certain data type names that we found convenient to unify the interfaces. These are used throughout the below.

- `FLT` : this means `double` if compiled in the default double-precision, or `float` if compiled in single precision. This is used for all real-valued input and output arrays.
- `CPX` : means `complex<double>` in double precision, or `complex<float>` in single precision. This is used for all complex-valued input and output arrays. In the documentation this is often referred to as `complex FLT`.
- `BIGINT` : this is the signed integer type used for all potentially-large input arguments, such as `M` and `N` in the example above. It is defined to the signed 64-bit integer type `int64_t`, allowing the number of input points and/or output modes to exceed  $2^{31}$  (around 2 billion). Internally, the `BIGINT` type is also used for all relevant indexing; we have not noticed a slow-down relative to using 32-bit integers (the advanced user could explore this by changing its definition in `finufft.h` and recompiling). This is also referred to as `int64` in the documentation.
- `int` : (in contrast to the above) is the usual 32-bit signed integer, and is used for flags (such as the value `+1` used above) and the output error code.

## Options

You may override the default options in `opts` by changing the fields in this struct, after setting up with default values as above. This allows control of various parameters such as the mode ordering, FFTW plan mode, upsampling factor  $\sigma$ , and debug/timing output. Here is the list of the options fields you may set (see the header `src/finufft.h`):

```
int debug;           // 0: silent, 1: text basic timing output
int spread_debug;    // passed to spread_opts, 0 (no text) 1 (some) or 2 (lots)
int spread_sort;     // passed to spread_opts, 0 (don't sort) 1 (do) or 2 (heuristic)
int spread_kerevalmeth; // "      spread_opts, 0: exp(sqrt()), 1: Horner ppval (faster)
int spread_kerpad;   // passed to spread_opts, 0: don't pad to mult of 4, 1: do
int chkbnds;        // 0: don't check if input NU pts in [-3pi,3pi], 1: do
int fftw;           // 0:FFTW_ESTIMATE, or 1:FFTW_MEASURE (slow plan, faster run)
int modeord;        // 0: CMCL-style increasing mode ordering (neg to pos), or
                    // 1: FFT-style mode ordering (affects type-1,2 only)
FLT upsampfac;      // upsampling ratio sigma, either 2.0 (standard) or 1.25 (small FFT)
```

Here are their default settings (set in `src/common.cpp:finufft_default_opts`):

```

debug = 0;
spread_debug = 0;
spread_sort = 2;
spread_kerevalmeth = 1;
spread_kerpad = 1;
chkbnds = 0;
fftw = FFTW_ESTIMATE;
modeord = 0;
upsampfac = (FLT)2.0;

```

To get the fastest run-time, we recommend that you experiment firstly with: `fftw`, `upsampfac`, and `spread_sort`, detailed below. If you are having crashes, set `chkbnds=1` to see if illegal  $x$  non-uniform point coordinates are being input.

Notes on various options:

`spread_sort`: the default setting is `spread_sort=2` which applies the following heuristic rule: in 2D or 3D always sort, but in 1D, only sort if  $N$  (number of modes)  $> M/10$  (where  $M$  is number of nonuniform pts).

`fftw`: The default FFTW plan is `FFTW_ESTIMATE`; however if you will be making multiple calls, consider `fftw=FFTW_MEASURE`, which could spend many seconds planning, but will give a faster run-time when called again. Note that FFTW plans are saved (by FFTW's library) automatically from call to call in the same executable (incidentally, also in the same MATLAB/octave or python session).

`upsampfac`: This is the internal factor by which the FFT is larger than the number of requested modes in each dimension. We have built efficient kernels for only two settings: `upsampfac=2.0` (standard), and `upsampfac=1.25` (lower RAM, smaller FFTs, but wider spreading kernel). The latter can be much faster when the number of nonuniform points is similar or smaller to the number of modes, and/or if low accuracy is required. It is especially much faster for type 3 transforms. However, the kernel widths  $w$  are about 50% larger in each dimension, which can lead to slower spreading (it can also be faster due to the smaller size of the fine grid). Thus only 9-digit accuracy can currently be reached when using `upsampfac=1.25`.

## Error codes

In the interfaces, the returned value is 0 if successful, otherwise the error code has the following meanings (see `src/defs.h`):

```

1 requested tolerance epsilon too small
2 attempted to allocate internal arrays larger than MAX_NF (defined in defs.h)
3 spreader: fine grid too small compared to spread width
4 spreader: if chkbnds=1, a nonuniform point out of input range [-3pi,3pi]^d
5 spreader: array allocation error
6 spreader: illegal direction (should be 1 or 2)
7 upsampfac too small (should be >1)
8 upsampfac not a value with known Horner eval: currently 2.0 or 1.25 only
9 ndata not valid in "many" interface (should be >= 1)

```

## 1D transforms

Now we list the calling sequences for the main C++ codes. Please refer to the above [data types](#). (Some comments not referring to the interface have been removed; if you want detail about the algorithms, please see comments in code.)

```

int finufft1d1(BIGINT nj,FLT* xj,CPX* cj,int iflag,FLT eps,BIGINT ms,
              CPX* fk, nufft_opts opts)

```

Type-1 1D complex nonuniform FFT.

```

        nj-1
    fk(k1) = SUM cj[j] exp(+/-i k1 xj(j))  for -ms/2 <= k1 <= (ms-1)/2
        j=0
Inputs:
    nj      number of sources (int64, aka BIGINT)
    xj      location of sources (size-nj FLT array), in [-3pi,3pi]
    cj      size-nj FLT complex array of source strengths
            (ie, stored as 2*nj FLT interleaving Re, Im).
    iflag   if >=0, uses + sign in exponential, otherwise - sign (int)
    eps     precision requested (>1e-16)
    ms      number of Fourier modes computed, may be even or odd (int64);
            in either case the mode range is integers lying in [-ms/2, (ms-1)/2]
    opts    struct controlling options (see finufft.h)
Outputs:
    fk      size-ms FLT complex array of Fourier transform values
            stored as alternating Re & Im parts (2*ms FLTs),
            order determined by opts.modeord.
    returned value - 0 if success, else see ../docs/usage.rst

int finufft1d2(BIGINT nj,FLT* xj,CPX* cj,int iflag,FLT eps,BIGINT ms,
              CPX* fk, nufft_opts opts)

Type-2 1D complex nonuniform FFT.

    cj[j] = SUM    fk[k1] exp(+/-i k1 xj[j])      for j = 0,...,nj-1
              k1
    where sum is over -ms/2 <= k1 <= (ms-1)/2.

Inputs:
    nj      number of targets (int64, aka BIGINT)
    xj      location of targets (size-nj FLT array), in [-3pi,3pi]
    fk      complex Fourier transform values (size ms, ordering set by opts.modeord)
            (ie, stored as 2*nj FLTs interleaving Re, Im).
    iflag   if >=0, uses + sign in exponential, otherwise - sign (int).
    eps     precision requested (>1e-16)
    ms      number of Fourier modes input, may be even or odd (int64);
            in either case the mode range is integers lying in [-ms/2, (ms-1)/2]
    opts    struct controlling options (see finufft.h)
Outputs:
    cj      complex FLT array of nj answers at targets
    returned value - 0 if success, else see ../docs/usage.rst

int finufft1d3(BIGINT nj,FLT* xj,CPX* cj,int iflag, FLT eps, BIGINT nk,
              FLT* s, CPX* fk, nufft_opts opts)

Type-3 1D complex nonuniform FFT.

        nj-1
    fk[k] = SUM  c[j] exp(+/-i s[k] xj[j]),      for k = 0, ..., nk-1
        j=0
Inputs:
    nj      number of sources (int64, aka BIGINT)
    xj      location of sources on real line (nj-size array of FLT)
    cj      size-nj FLT complex array of source strengths

```

```

        (ie, stored as 2*nj FLT's interleaving Re, Im).
nk      number of frequency target points (int64)
s       frequency locations of targets in R.
iflag   if >=0, uses + sign in exponential, otherwise - sign (int)
eps     precision requested (>1e-16)
opts    struct controlling options (see finufft.h)
Outputs:
fk      size-nk FLT complex Fourier transform values at target
        frequencies sk
returned value - 0 if success, else see ../docs/usage.rst

```

## 2D transforms

```

int finufft2d1(BIGINT nj,FLT* xj,FLT *yj,CPX* cj,int iflag,
               FLT eps, BIGINT ms, BIGINT mt, CPX* fk, nufft_opts opts)

```

Type-1 2D complex nonuniform FFT.

$$f[k_1, k_2] = \sum_{j=0}^{nj-1} c[j] \exp(+/-i (k_1 x[j] + k_2 y[j]))$$

for  $-ms/2 \leq k_1 \leq (ms-1)/2$ ,  $-mt/2 \leq k_2 \leq (mt-1)/2$ .

The output array is  $k_1$  (fast), then  $k_2$  (slow), with each dimension determined by `opts.modeord`.

If `iflag>0` the + sign is used, otherwise the - sign is used, in the exponential.

Inputs:

```

nj      number of sources (int64, aka BIGINT)
xj,yj   x,y locations of sources (each a size-nj FLT array) in [-3pi,3pi]
cj      size-nj complex FLT array of source strengths,
        (ie, stored as 2*nj FLT's interleaving Re, Im).
iflag   if >=0, uses + sign in exponential, otherwise - sign (int)
eps     precision requested (>1e-16)
ms,mt   number of Fourier modes requested in x and y (int64);
        each may be even or odd;
        in either case the mode range is integers lying in  $[-m/2, (m-1)/2]$ 
opts    struct controlling options (see finufft.h)

```

Outputs:

```

fk      complex FLT array of Fourier transform values
        (size ms*mt, fast in ms then slow in mt,
         ie Fortran ordering).
returned value - 0 if success, else see ../docs/usage.rst

```

```

int finufft2d2(BIGINT nj,FLT* xj,FLT *yj,CPX* cj,int iflag,FLT eps,
               BIGINT ms, BIGINT mt, CPX* fk, nufft_opts opts)

```

Type-2 2D complex nonuniform FFT.

$$c[j] = \sum_{k_1, k_2} f[k_1, k_2] \exp(+/-i (k_1 x[j] + k_2 y[j])) \quad \text{for } j = 0, \dots, nj-1$$

where sum is over  $-ms/2 \leq k_1 \leq (ms-1)/2$ ,  $-mt/2 \leq k_2 \leq (mt-1)/2$ ,

Inputs:

- `nj` number of targets (int64, aka BIGINT)
- `xj,yj` `x,y` locations of targets (each a size-`nj` FLT array) in  $[-3\pi, 3\pi]$
- `fk` FLT complex array of Fourier transform values (size `ms*mt`, increasing fast in `ms` then slow in `mt`, ie Fortran ordering). Along each dimension the ordering is set by `opts.modeord`.
- `iflag` if  $\geq 0$ , uses + sign in exponential, otherwise - sign (int)
- `eps` precision requested ( $>1e-16$ )
- `ms,mt` numbers of Fourier modes given in `x` and `y` (int64) each may be even or odd; in either case the mode range is integers lying in  $[-m/2, (m-1)/2]$ .
- `opts` struct controlling options (see `finufft.h`)

Outputs:

- `cj` size-`nj` complex FLT array of target values (ie, stored as  $2*nj$  FLTs interleaving Re, Im).
- returned value - 0 if success, else see `../docs/usage.rst`

```
int finufft2d3(BIGINT nj,FLT* xj,FLT* yj,CPX* cj,int iflag, FLT eps,
               BIGINT nk, FLT* s, FLT* t, CPX* fk, nufft_opts opts)
```

Type-3 2D complex nonuniform FFT.

$$fk[k] = \sum_{j=0}^{nj-1} c[j] \exp(+i (s[k] xj[j] + t[k] yj[j])), \quad \text{for } k=0, \dots, nk-1$$

Inputs:

- `nj` number of sources (int64, aka BIGINT)
- `xj,yj` `x,y` location of sources in the plane  $R^2$  (each size-`nj` FLT array)
- `cj` size-`nj` complex FLT array of source strengths, (ie, stored as  $2*nj$  FLTs interleaving Re, Im).
- `nk` number of frequency target points (int64)
- `s,t` (`kx,ky`) frequency locations of targets in  $R^2$ .
- `iflag` if  $\geq 0$ , uses + sign in exponential, otherwise - sign (int)
- `eps` precision requested ( $>1e-16$ )
- `opts` struct controlling options (see `finufft.h`)

Outputs:

- `fk` size-`nk` complex FLT Fourier transform values at the target frequencies `sk`
- returned value - 0 if success, else see `../docs/usage.rst`

### 3D transforms

```
int finufft3d1(BIGINT nj,FLT* xj,FLT* yj,FLT* zj,CPX* cj,int iflag,
               FLT eps, BIGINT ms, BIGINT mt, BIGINT mu, CPX* fk,
               nufft_opts opts)
```

Type-1 3D complex nonuniform FFT.

$$f[k_1,k_2,k_3] = \sum_{j=0}^{nj-1} c[j] \exp(+i (k_1 x[j] + k_2 y[j] + k_3 z[j]))$$

for  $-ms/2 \leq k_1 \leq (ms-1)/2, \quad -mt/2 \leq k_2 \leq (mt-1)/2,$   
 $-\mu/2 \leq k_3 \leq (\mu-1)/2.$

The output array is as in `opt.modeord` in each dimension.  
`k1` changes is fastest, `k2` middle,  
and `k3` slowest, ie Fortran ordering. If `iflag`>0 the + sign is  
used, otherwise the - sign is used, in the exponential.

Inputs:

`nj` number of sources (int64, aka BIGINT)  
`xj,yj,zj` `x,y,z` locations of sources (each size-`nj` FLT array) in `[-3pi,3pi]`  
`cj` size-`nj` complex FLT array of source strengths,  
(ie, stored as `2*nj` FLTs interleaving Re, Im).  
`iflag` if >=0, uses + sign in exponential, otherwise - sign (int)  
`eps` precision requested  
`ms,mt,mu` number of Fourier modes requested in `x,y,z` (int64);  
each may be even or odd;  
in either case the mode range is integers lying in `[-m/2, (m-1)/2]`  
`opts` struct controlling options (see `finufft.h`)

Outputs:

`fk` complex FLT array of Fourier transform values (size `ms*mt*mu`,  
changing fast in `ms` to slowest in `mu`, ie Fortran ordering).  
returned value - 0 if success, else see `../docs/usage.rst`

```
int finufft3d2(BIGINT nj,FLT* xj,FLT *yj,FLT *zj,CPX* cj,
               int iflag,FLT eps, BIGINT ms, BIGINT mt, BIGINT mu,
               CPX* fk, nufft_opts opts)
```

Type-2 3D complex nonuniform FFT.

$$c_j[j] = \sum_{k_1,k_2,k_3} f_k[k_1,k_2,k_3] \exp(+/-i (k_1 x_j[j] + k_2 y_j[j] + k_3 z_j[j]))$$

for  $j = 0, \dots, nj-1$   
where sum is over  $-ms/2 \leq k_1 \leq (ms-1)/2$ ,  $-mt/2 \leq k_2 \leq (mt-1)/2$ ,  
 $-\mu/2 \leq k_3 \leq (\mu-1)/2$

Inputs:

`nj` number of sources (int64, aka BIGINT)  
`xj,yj,zj` `x,y,z` locations of targets (each size-`nj` FLT array) in `[-3pi,3pi]`  
`fk` FLT complex array of Fourier series values (size `ms*mt*mu`,  
increasing fastest in `ms` to slowest in `mu`, ie Fortran ordering).  
(ie, stored as alternating Re & Im parts, `2*ms*mt*mu` FLTs)  
Along each dimension, `opts.modeord` sets the ordering.  
`iflag` if >=0, uses + sign in exponential, otherwise - sign (int)  
`eps` precision requested  
`ms,mt,mu` numbers of Fourier modes given in `x,y,z` (int64);  
each may be even or odd;  
in either case the mode range is integers lying in `[-m/2, (m-1)/2]`.  
`opts` struct controlling options (see `finufft.h`)

Outputs:

`cj` size-`nj` complex FLT array of target values,  
(ie, stored as `2*nj` FLTs interleaving Re, Im).  
returned value - 0 if success, else see `../docs/usage.rst`

```
int finufft3d3(BIGINT nj,FLT* xj,FLT* yj,FLT *zj, CPX* cj,
               int iflag, FLT eps, BIGINT nk, FLT* s, FLT *t,
               FLT *u, CPX* fk, nufft_opts opts)
```

Type-3 3D complex nonuniform FFT.

$$fk[k] = \sum_{j=0}^{nj-1} c[j] \exp(+i (s[k] xj[j] + t[k] yj[j] + u[k] zj[j])),$$

for  $k=0, \dots, nk-1$

Inputs:

`nj`      number of sources (int64, aka BIGINT)  
`xj,yj,zj`    `x,y,z` location of sources in  $R^3$  (each size-`nj` FLT array)  
`cj`      size-`nj` complex FLT array of source strengths  
           (ie, interleaving Re & Im parts)  
`nk`      number of frequency target points (int64)  
`s,t,u`      (`k_x,k_y,k_z`) frequency locations of targets in  $R^3$ .  
`iflag`    if  $\geq 0$ , uses + sign in exponential, otherwise - sign (int)  
`eps`      precision requested (FLT)  
`opts`     struct controlling options (see `finufft.h`)

Outputs:

`fk`      size-`nk` complex FLT array of Fourier transform values at the  
           target frequencies `sk`  
           returned value - 0 if success, else see `../docs/usage.rst`

## Interfaces from C

From C one calls the same routines as for C++, and includes the same header files (this unified interface is new as of version 1.1). To recap, one should `#include "finufft.h"` then, as above, initialize the options:

```
nufft_opts opts; finufft_default_opts(&opts);
```

Options fields may then be changed in `opts` before calling `finufft?d?` (where the wildcard `?` denotes an appropriate number).

As above, FLT indicates double or float, but now CPX indicates their complex C99-type equivalents (see `src/finufft.h` for the definitions used). For examples see `examples/example1d1c.c` (double precision) and `examples/example1d1cf.c` (single precision).

## Interfaces from fortran

We have not yet included control of the options in the fortran wrappers. (Please help create these if you want a simple user project!) The meaning of arguments is as in the C++ documentation above, apart from that now `ier` is an argument which is output to. Examples of calling the basic 9 routines from fortran are in `fortran/nufft?d_demo.f` (for double-precision) and `fortran/nufft?d_demof.f` (single-precision). `fortran/nufft2dmany_demo.f` shows how to use the many-vector interface. Here are the calling commands with fortran types for the default double-precision case (the single-precision case is analogous)

```
integer ier,iflag,ms,mt,mu,nj,ndata
real*8, allocatable :: xj(:),yj(:),zj(:), sk(:),tk(:),uk(:)
real*8 err,eps
complex*16, allocatable :: cj(:), fk(:)

call finufft1d1_f(nj,xj,cj,iflag,eps, ms,fk,ier)
call finufft1d2_f(nj,xj,cj,iflag,eps, ms,fk,ier)
call finufft1d3_f(nj,xj,cj,iflag,eps, ms,sk,fk,ier)
call finufft2d1_f(nj,xj,yj,cj,iflag,eps,ms,mt,fk,ier)
call finufft2dmany_f(ndata,nj,xj,yj,cj,iflag,eps,ms,mt,fk,ier)
```



```

call finufft2d2_f(nj,xj,yj,cj,iflag,eps,ms,mt,fk,ier)
call finufft2d2many_f(ndata,nj,xj,yj,cj,iflag,eps,ms,mt,fk,ier)
call finufft2d3_f(nj,xj,yj,cj,iflag,eps,nk,sk,tk,fk,ier)
call finufft3d1_f(nj,xj,yj,zj,cj,iflag,eps,ms,mt,mu,fk,ier)
call finufft3d2_f(nj,xj,yj,zj,cj,iflag,eps,ms,mt,mu,fk,ier)
call finufft3d3_f(nj,xj,yj,zj,cj,iflag,eps,nk,sk,tk,uk,fk,ier)

```

## Usage and design notes

- We strongly recommend you use `upsampfac=1.25` for type-3; it reduces its run-time from around 8 times the types 1 or 2, to around 3-4 times. It is often also faster for type-1 and type-2, at low precisions.
- Sizes  $\geq 2^{31}$  have been tested for C++ drivers (`test/finufft?d_test.cpp`), and work fine, if you have enough RAM. In fortran the interface is still 32-bit integers, limiting to array sizes  $< 2^{31}$ . The fortran interface needs to be improved.
- C++ is used for all main libraries, almost entirely avoiding object-oriented code. C++ `std::complex<double>` (typedef'ed to `CPX` and sometimes `dcomplex`) and FFTW complex types are mixed within the library, since to some extent our library is a glorified driver for FFTW. FFTW was considered universal and essential enough to be a dependency for the whole package.
- There is a hard-defined limit of `1e11` for the size of internal FFT arrays, set in `defs.h` as `MAX_NF`: if your machine has RAM of order 1TB, and you need it, set this larger and recompile. The point of this is to catch ridiculous-sized mallocs and exit gracefully. Note that mallocs smaller than this, but which still exceed available RAM, cause segfaults as usual. For simplicity of code, we do not do error checking on every malloc.
- As a spreading kernel function, we use a new faster simplification of the Kaiser–Bessel kernel, and eventually settled on piecewise polynomial approximation of this kernel. At high requested precisions, like the Kaiser–Bessel, this achieves roughly half the kernel width achievable by a truncated Gaussian. Our kernel is  $\exp(-\beta \sqrt{1-(2x/W)^2})$ , where  $W = \text{nsprad}$  is the full kernel width in grid units. This (and Kaiser–Bessel) are good approximations to the prolate spheroidal wavefunction of order zero (PSWF), being the functions of given support  $[-W/2, W/2]$  whose Fourier transform has minimal L2 norm outside of a symmetric interval. The PSWF frequency parameter (see [ORZ]) is  $c = \pi \cdot (1-1/2\sigma) \cdot W$  where  $\sigma$  is the upsampling parameter. See our paper in the references.



## ADVANCED INTERFACES FOR MANY VECTORS WITH SAME NONUNIFORM POINTS

It is common to need repeated NUFFTs with a fixed set of nonuniform points, but different strength or mode coefficient vectors. For large problems, performing sequential plain calls is efficient (although there would be a slight benefit to sorting only once), but when the problem size is smaller, certain start-up costs cause repeated calls to the plain interface to be slower than necessary. In particular, we note that FFTW takes around 0.1 ms per thread to look up stored wisdom, which for small problems (of order 10000 or less input and output data) can, sadly, dominate the runtime. Thus we include interfaces, described here, for multiple stacked strength or coefficient vectors with the same nonuniform points.

These have only been implemented for the 2d1 and 2d2 types so far, for which there are applications in cryo-EM.

For data types in the below, please see [data types](#).

### 2D transforms

```
int finufft2d1many(int ndata, BIGINT nj, FLT* xj, FLT *yj, CPX* c, int iflag,
                  FLT eps, BIGINT ms, BIGINT mt, CPX* fk, nufft_opts opts)
```

Type-1 2D complex nonuniform FFT for multiple strength vectors, same NU pts.

$$f[k_1, k_2, d] = \sum_{j=1}^{n_j} c[j, d] \exp(+i (k_1 x[j] + k_2 y[j]))$$

for  $-ms/2 \leq k_1 \leq (ms-1)/2$ ,  $-mt/2 \leq k_2 \leq (mt-1)/2$ ,  $d = 0, \dots, ndata-1$

The output array is in increasing  $k_1$  ordering (fast), then increasing  $k_2$  ordering (slow), then increasing  $d$  (slowest). If  $iflag > 0$  the + sign is used, otherwise the - sign is used, in the exponential.

Inputs:

- `ndata` number of data
- `nj` number of sources (int64, aka BIGINT)
- `xj, yj` x, y locations of sources (each a size-`nj` FLT array) in  $[-3\pi, 3\pi]$
- `c` a size `nj*ndata` complex FLT array of source strengths, increasing fast in `nj` then slow in `ndata`.
- `iflag` if  $\geq 0$ , uses + sign in exponential, otherwise - sign.
- `eps` precision requested ( $> 1e-16$ )
- `ms, mt` number of Fourier modes requested in x and y; each may be even or odd; in either case the mode range is integers lying in  $[-m/2, (m-1)/2]$ . `ms*mt` must not exceed  $2^{31}$ .
- `opts` struct controlling options (see `finufft.h`)

Outputs:

- `fk` complex FLT array of Fourier transform values

```

        (size ms*mt*ndata, increasing fast in ms then slow in mt then in ndata
        ie Fortran ordering).
    returned value - 0 if success, else see ../docs/usage.rst

    Note: nthreads times the RAM is needed, so this is good only for small problems.

int finufft2d2many(int ndata, BIGINT nj, FLT* xj, FLT *yj, CPX* c, int iflag,
                  FLT eps, BIGINT ms, BIGINT mt, CPX* fk, nufft_opts opts)

Type-2 2D complex nonuniform FFT for multiple coeff vectors, same NU pts.

    cj[j,d] = SUM    fk[k1,k2,d] exp(+/-i (k1 xj[j] + k2 yj[j]))
               k1,k2
    for j = 0,...,nj-1,  d = 0,...,ndata-1
    where sum is over -ms/2 <= k1 <= (ms-1)/2, -mt/2 <= k2 <= (mt-1)/2

Inputs:
    ndata  number of mode coefficient vectors
    nj     number of targets (int64, aka BIGINT)
    xj,yj  x,y locations of targets (each a size-nj FLT array) in [-3pi,3pi]
    fk     FLT complex array of Fourier transform values (size ms*mt*ndata,
    increasing fast in ms then slow in mt then in ndata, ie Fortran
    ordering). Along each dimension the ordering is set by opts.modeord.
    iflag  if >=0, uses + sign in exponential, otherwise - sign (int)
    eps    precision requested (>1e-16)
    ms,mt  numbers of Fourier modes given in x and y
           each may be even or odd;
           in either case the mode range is integers lying in [-m/2, (m-1)/2].
           ms*mt must not exceed 2^31.
    opts   struct controlling options (see finufft.h)
Outputs:
    cj     size-nj*ndata complex FLT array of target values, (ie, stored as
           2*nj*ndata FLTs interleaving Re, Im), increasing fast in nj then
           slow in ndata.
    returned value - 0 if success, else see ../docs/usage.rst

    Note: nthreads times the RAM is needed, so this is good only for small problems.

```

## Design notes

After extensive timing tests, we settled on blocking up the ndata vectors into blocks of size nthreads (the available thread number). Each block is handled together via FFTW and OpenMP parallelism. For instance, for type-1:

1. Each thread calls a single-threaded spreader, reusing a precomputed sorted index list.
2. Apply FFT on nthreads vectors of data using FFTW's "many dft" interface.
3. Each thread calls a single-threaded deconvolve function.

This requires ndata times the RAM overhead than the plain interface.

It would also be possible to call multi-threaded spreading, sequentially on each data vector; we found this slower in all cases, and so close to repeated calls to the plain interface as to not be useful.

For repeated small problems where the nonuniform points and strengths or coefficients change, but the mode grid is fixed, reusing the FFTW plan may still be beneficial; this would require a three-call "plan, execute, destroy" interface

which we have not considered worth building yet.



## MATLAB/OCTAVE INTERFACES

-----  
FINUFFT1D1

```
[f ier] = finufft1d1(x,c,sign,eps,ms)
[f ier] = finufft1d1(x,c,sign,eps,ms,opts)
```

Type-1 1D complex nonuniform FFT.

$$f(k_1) = \sum_{j=1}^{n_j} c[j] \exp(\pm i k_1 x(j)) \quad \text{for } -ms/2 \leq k_1 \leq (ms-1)/2$$

## Inputs:

x location of sources on interval  $[-3\pi, 3\pi]$ , length  $n_j$   
 c size- $n_j$  complex array of source strengths  
 sign if  $\geq 0$ , uses + sign in exponential, otherwise - sign.  
 eps precision requested ( $>1e-16$ )  
 ms number of Fourier modes computed, may be even or odd;  
     in either case the mode range is integers lying in  $[-ms/2, (ms-1)/2]$   
 opts.debug: 0 (silent, default), 1 (timing breakdown), 2 (debug info).  
 opts.nthreads sets requested number of threads (else automatic)  
 opts.spread\_sort: 0 (don't sort NU pts), 1 (do), 2 (auto, default)  
 opts.fftw: 0 (use FFTW\_ESTIMATE, default), 1 (use FFTW\_MEASURE)  
 opts.modeord: 0 (CMCL increasing mode ordering, default), 1 (FFT ordering)  
 opts.chkbnis: 0 (don't check NU points valid), 1 (do, default).  
 opts.upsampfac: either 2.0 (default), or 1.25 (low RAM, smaller FFT size)

## Outputs:

f size- $ms$  double complex array of Fourier transform values  
 ier = 0 if success, else:  
     1 : eps too small  
     2 : size of arrays to malloc exceed MAX\_NF  
     other codes: as returned by cnuftspsread

-----  
FINUFFT1D2

```
[c ier] = finufft1d2(x,sign,eps,f)
[c ier] = finufft1d2(x,sign,eps,f,opts)
```

Type-2 1D complex nonuniform FFT.

$$c[j] = \sum_{k_1} f[k_1] \exp(\pm i k_1 x[j]) \quad \text{for } j = 1, \dots, n_j$$

where sum is over  $-ms/2 \leq k_1 \leq (ms-1)/2$ .

## Inputs:

x location of NU targets on interval  $[-3\pi, 3\pi]$ , length  $n_j$

```

f      complex Fourier transform values
isign  if >=0, uses + sign in exponential, otherwise - sign.
eps    precision requested (>1e-16)
opts.debug: 0 (silent, default), 1 (timing breakdown), 2 (debug info).
opts.nthreads sets requested number of threads (else automatic)
opts.spread_sort: 0 (don't sort NU pts), 1 (do), 2 (auto, default)
opts.fftw: 0 (use FFTW_ESTIMATE, default), 1 (use FFTW_MEASURE)
opts.modeord: 0 (CMCL increasing mode ordering, default), 1 (FFT ordering)
opts.chkbnnds: 0 (don't check NU points valid), 1 (do, default).
opts.upsampfac: either 2.0 (default), or 1.25 (low RAM, smaller FFT size)
Outputs:
c      complex double array of nj answers at targets
ier - 0 if success, else:
      1 : eps too small
      2 : size of arrays to malloc exceed MAX_NF
      other codes: as returned by cnuftspread
c = complex(zeros(nj,1)); % todo: change all output to inout & prealloc...
-----
FINUFFT1D3

[f ier] = finufft1d3(x,c,isign,eps,s)
[f ier] = finufft1d3(x,c,isign,eps,s,opts)

      nj
f[k] = SUM c[j] exp(+i s[k] x[j]),      for k = 1, ..., nk
      j=1

Inputs:
x      location of NU sources in R (real line).
c      size-nj double complex array of source strengths
s      frequency locations of NU targets in R.
isign  if >=0, uses + sign in exponential, otherwise - sign.
eps    precision requested (>1e-16)
opts.debug: 0 (silent, default), 1 (timing breakdown), 2 (debug info).
opts.nthreads sets requested number of threads (else automatic)
opts.spread_sort: 0 (don't sort NU pts), 1 (do), 2 (auto, default)
opts.fftw: 0 (use FFTW_ESTIMATE, default), 1 (use FFTW_MEASURE)
opts.upsampfac: either 2.0 (default), or 1.25 (low RAM, smaller FFT size)
Outputs:
f      size-nk double complex Fourier transform values at target
      frequencies s
returned value - 0 if success, else:
      1 : eps too small
      2 : size of arrays to malloc exceed MAX_NF
-----
FINUFFT2D1

[f ier] = finufft2d1(x,y,c,isign,eps,ms,mt)
[f ier] = finufft2d1(x,y,c,isign,eps,ms,mt,opts)

Type-1 2D complex nonuniform FFT.

      nj
f[k1,k2] = SUM c[j] exp(+i (k1 x[j] + k2 y[j]))
      j=1

      for -ms/2 <= k1 <= (ms-1)/2,  -mt/2 <= k2 <= (mt-1)/2.

Inputs:

```



```

x,y    locations of NU sources on the square  $[-3\pi, 3\pi]^2$ , each length nj
c      size-nj complex array of source strengths
isign  if  $\geq 0$ , uses + sign in exponential, otherwise - sign.
eps    precision requested ( $>1e-16$ )
ms,mt  number of Fourier modes requested in x & y; each may be even or odd
       in either case the mode range is integers lying in  $[-m/2, (m-1)/2]$ 
opts.debug: 0 (silent, default), 1 (timing breakdown), 2 (debug info).
opts.nthreads sets requested number of threads (else automatic)
opts.spread_sort: 0 (don't sort NU pts), 1 (do), 2 (auto, default)
opts.fftw: 0 (use FFTW_ESTIMATE, default), 1 (use FFTW_MEASURE)
opts.modeord: 0 (CMCL increasing mode ordering, default), 1 (FFT ordering)
opts.chkbnbs: 0 (don't check NU points valid), 1 (do, default).
opts.upsampfac: either 2.0 (default), or 1.25 (low RAM, smaller FFT size)
Outputs:
f      size (ms*mt) double complex array of Fourier transform values
       (ordering given by opts.modeord in each dimension, ms fast, mt slow)
ier - 0 if success, else:
      1 : eps too small
      2 : size of arrays to malloc exceed MAX_NF
      other codes: as returned by cnuftspread
-----
FINUFFT2D1MANY

[f ier] = finufft2d1many(x,y,c,isign,eps,ms,mt)
[f ier] = finufft2d1many(x,y,c,isign,eps,ms,mt,opts)

Type-1 2D complex nonuniform FFT

      nj
f[k1,k2,d] = SUM c[j,d] exp(+i (k1 x[j] + k2 y[j]))
      j=1

for -ms/2 <= k1 <= (ms-1)/2, -mt/2 <= k2 <= (mt-1)/2, d = 1, ..., ndata

Inputs:
x,y    locations of NU sources on the square  $[-3\pi, 3\pi]^2$ , each length nj
c      size-(nj,ndata) complex array of source strengths
isign  if  $\geq 0$ , uses + sign in exponential, otherwise - sign.
eps    precision requested ( $>1e-16$ )
ms,mt  number of Fourier modes requested in x & y; each may be even or odd
       in either case the mode range is integers lying in  $[-m/2, (m-1)/2]$ 
opts.debug: 0 (silent, default), 1 (timing breakdown), 2 (debug info).
opts.nthreads sets requested number of threads (else automatic)
opts.spread_sort: 0 (don't sort NU pts), 1 (do), 2 (auto, default)
opts.fftw: 0 (use FFTW_ESTIMATE, default), 1 (use FFTW_MEASURE)
opts.modeord: 0 (CMCL increasing mode ordering, default), 1 (FFT ordering)
opts.chkbnbs: 0 (don't check NU points valid), 1 (do, default).
opts.upsampfac: either 2.0 (default), or 1.25 (low RAM, smaller FFT size)
Outputs:
f      size (ms,mt,ndata) double complex array of Fourier transform values
       (ordering given by opts.modeord in each dimension, ms fast, mt slow)
ier - 0 if success, else:
      1 : eps too small
      2 : size of arrays to malloc exceed MAX_NF
      other codes: as returned by cnuftspread

Note: nthreads copies of the fine grid are allocated, limiting this to smaller
problem sizes.

```

-----  
FINUFFT2D2

```
[c ier] = finufft2d2(x,y,isign,eps,f)
[c ier] = finufft2d2(x,y,isign,eps,f,opts)
```

Type-2 2D complex nonuniform FFT.

$$c[j] = \sum_{k_1, k_2} f[k_1, k_2] \exp(+/-i (k_1 x[j] + k_2 y[j])) \quad \text{for } j = 1, \dots, n_j$$

where sum is over  $-ms/2 \leq k_1 \leq (ms-1)/2$ ,  $-mt/2 \leq k_2 \leq (mt-1)/2$ ,

## Inputs:

*x, y* location of NU targets on the square  $[-3\pi, 3\pi]^2$ , each length *nj*  
*f* size (ms,mt) complex Fourier transform value matrix  
 (mode ordering given by *opts.modeord* in each dimension)  
*isign* if  $\geq 0$ , uses + sign in exponential, otherwise - sign.  
*eps* precision requested ( $>1e-16$ )  
*opts.debug*: 0 (silent, default), 1 (timing breakdown), 2 (debug info).  
*opts.nthreads* sets requested number of threads (else automatic)  
*opts.spread\_sort*: 0 (don't sort NU pts), 1 (do), 2 (auto, default)  
*opts.fftw*: 0 (use FFTW\_ESTIMATE, default), 1 (use FFTW\_MEASURE)  
*opts.modeord*: 0 (CMCL increasing mode ordering, default), 1 (FFT ordering)  
*opts.chkbnnds*: 0 (don't check NU points valid), 1 (do, default).  
*opts.upsampfac*: either 2.0 (default), or 1.25 (low RAM, smaller FFT size)

## Outputs:

*c* complex double array of *nj* answers at the targets.  
*ier* - 0 if success, else:  
 1 : *eps* too small  
 2 : size of arrays to malloc exceed MAX\_NF  
 other codes: as returned by *cnufftspread*

-----  
FINUFFT2D2MANY

```
[c ier] = finufft2d2many(x,y,isign,eps,f)
[c ier] = finufft2d2many(x,y,isign,eps,f,opts)
```

Type-2 2D complex nonuniform FFT.

$$c[j,d] = \sum_{k_1, k_2} f[k_1, k_2, d] \exp(+/-i (k_1 x[j] + k_2 y[j]))$$

for  $j = 1, \dots, n_j$ ,  $d = 1, \dots, ndata$   
 where sum is over  $-ms/2 \leq k_1 \leq (ms-1)/2$ ,  $-mt/2 \leq k_2 \leq (mt-1)/2$ ,

## Inputs:

*x, y* location of NU targets on the square  $[-3\pi, 3\pi]^2$ , each length *nj*  
*f* size (ms,mt,ndata) complex Fourier transform value matrix  
 (mode ordering given by *opts.modeord* in each dimension)  
*isign* if  $\geq 0$ , uses + sign in exponential, otherwise - sign.  
*eps* precision requested ( $>1e-16$ )  
*opts.debug*: 0 (silent, default), 1 (timing breakdown), 2 (debug info).  
*opts.nthreads* sets requested number of threads (else automatic)  
*opts.spread\_sort*: 0 (don't sort NU pts), 1 (do), 2 (auto, default)  
*opts.fftw*: 0 (use FFTW\_ESTIMATE, default), 1 (use FFTW\_MEASURE)  
*opts.modeord*: 0 (CMCL increasing mode ordering, default), 1 (FFT ordering)  
*opts.chkbnnds*: 0 (don't check NU points valid), 1 (do, default).  
*opts.upsampfac*: either 2.0 (default), or 1.25 (low RAM, smaller FFT size)

## Outputs:

```

c      complex double array of nj*ndata answers at the targets.
ier - 0 if success, else:
    1 : eps too small
    2 : size of arrays to malloc exceed MAX_NF
    other codes: as returned by cnufftspread

```

Note: nthreads copies of the fine grid are allocated, limiting this to smaller problem sizes.

#### FINUFFT2D3

```

[f ier] = finufft2d3(x,y,c,isign,eps,s,t)
[f ier] = finufft2d3(x,y,c,isign,eps,s,t,opts)

```

$$f[k] = \sum_{j=1}^{nj} c[j] \exp(+i (s[k] x[j] + t[k] y[j])), \quad \text{for } k = 1, \dots, nk$$

##### Inputs:

```

x,y      location of NU sources in R^2, each length nj.
c        size-nj double complex array of source strengths
s,t      frequency locations of NU targets in R^2.
isign    if >=0, uses + sign in exponential, otherwise - sign.
eps      precision requested (>1e-16)
opts.debug: 0 (silent, default), 1 (timing breakdown), 2 (debug info).
opts.nthreads sets requested number of threads (else automatic)
opts.spread_sort: 0 (don't sort NU pts), 1 (do), 2 (auto, default)
opts.fftw: 0 (use FFTW_ESTIMATE, default), 1 (use FFTW_MEASURE)
opts.upsampfac: either 2.0 (default), or 1.25 (low RAM, smaller FFT size)

```

##### Outputs:

```

f        size-nk double complex Fourier transform values at target
         frequencies s,t
returned value - 0 if success, else:
    1 : eps too small
    2 : size of arrays to malloc exceed MAX_NF

```

#### FINUFFT3D1

```

[f ier] = finufft3d1(x,y,z,c,isign,eps,ms,mt,mu)
[f ier] = finufft3d1(x,y,z,c,isign,eps,ms,mt,mu,opts)

```

Type-1 3D complex nonuniform FFT.

$$f[k_1, k_2, k_3] = \sum_{j=1}^{nj} c[j] \exp(+i (k_1 x[j] + k_2 y[j] + k_3 z[j]))$$

for  $-ms/2 \leq k_1 \leq (ms-1)/2$ ,  $-mt/2 \leq k_2 \leq (mt-1)/2$ ,  
 $-\mu/2 \leq k_3 \leq (\mu-1)/2$ .

##### Inputs:

```

x,y,z    locations of NU sources on  $[-3\pi, 3\pi]^3$ , each length nj
c        size-nj complex array of source strengths
isign    if >=0, uses + sign in exponential, otherwise - sign.
eps      precision requested (>1e-16)
ms,mt,mu number of Fourier modes requested in x,y and z; each may be
         even or odd.
         In either case the mode range is integers lying in  $[-m/2, (m-1)/2]$ 
opts.debug: 0 (silent, default), 1 (timing breakdown), 2 (debug info).

```

```

opts.nthreads sets requested number of threads (else automatic)
opts.spread_sort: 0 (don't sort NU pts), 1 (do), 2 (auto, default)
opts.fftw: 0 (use FFTW_ESTIMATE, default), 1 (use FFTW_MEASURE)
opts.modeord: 0 (CMCL increasing mode ordering, default), 1 (FFT ordering)
opts.chkbnbs: 0 (don't check NU points valid), 1 (do, default).
opts.upsampfac: either 2.0 (default), or 1.25 (low RAM, smaller FFT size)

```

Outputs:

```

f      size (ms*mt*mu) double complex array of Fourier transform values
      (ordering given by opts.modeord in each dimension, ms fastest, mu
      slowest).
ier - 0 if success, else:
      1 : eps too small
      2 : size of arrays to malloc exceed MAX_NF
      other codes: as returned by cnuftspread

```

-----

FINUFFT3D2

```

[c ier] = finufft3d2(x,y,z,sign,eps,f)
[c ier] = finufft3d2(x,y,z,sign,eps,f,opts)

```

Type-2 3D complex nonuniform FFT.

$$c[j] = \sum_{k_1, k_2, k_3} f[k_1, k_2, k_3] \exp(+/-i (k_1 x[j] + k_2 y[j] + k_3 z[j]))$$

for  $j = 1, \dots, n_j$

where sum is over  $-ms/2 \leq k_1 \leq (ms-1)/2$ ,  $-mt/2 \leq k_2 \leq (mt-1)/2$ ,  
 $-\mu/2 \leq k_3 \leq (\mu-1)/2$ .

Inputs:

```

x,y,z location of NU targets on cube [-3pi,3pi]^3, each length nj
f      size (ms,mt,mu) complex Fourier transform value matrix
      (ordering given by opts.modeord in each dimension; ms fastest to mu
      slowest).
sign  if >=0, uses + sign in exponential, otherwise - sign.
eps   precision requested (>1e-16)
opts.debug: 0 (silent, default), 1 (timing breakdown), 2 (debug info).
opts.nthreads sets requested number of threads (else automatic)
opts.spread_sort: 0 (don't sort NU pts), 1 (do), 2 (auto, default)
opts.fftw: 0 (use FFTW_ESTIMATE, default), 1 (use FFTW_MEASURE)
opts.modeord: 0 (CMCL increasing mode ordering, default), 1 (FFT ordering)
opts.chkbnbs: 0 (don't check NU points valid), 1 (do, default).
opts.upsampfac: either 2.0 (default), or 1.25 (low RAM, smaller FFT size)

```

Outputs:

```

c      complex double array of nj answers at the targets.
ier - 0 if success, else:
      1 : eps too small
      2 : size of arrays to malloc exceed MAX_NF
      other codes: as returned by cnuftspread

```

-----

FINUFFT3D3

```

[f ier] = finufft3d3(x,y,z,c,sign,eps,s,t,u)
[f ier] = finufft3d3(x,y,z,c,sign,eps,s,t,u,opts)

```

$$f[k] = \sum_{j=1}^{n_j} c[j] \exp(+/-i (s[k] x[j] + t[k] y[j] + u[k] z[j])),$$

for  $k = 1, \dots, n_k$

```

Inputs:
  x,y,z  location of NU sources in R^3, each length nj.
  c      size-nj double complex array of source strengths
  s,t,u   frequency locations of NU targets in R^3.
  isign  if >=0, uses + sign in exponential, otherwise - sign.
  eps    precision requested (>1e-16)
  opts.debug: 0 (silent, default), 1 (timing breakdown), 2 (debug info).
  opts.nthreads sets requested number of threads (else automatic)
  opts.spread_sort: 0 (don't sort NU pts), 1 (do), 2 (auto, default)
  opts.fftw: 0 (use FFTW_ESTIMATE, default), 1 (use FFTW_MEASURE)
  opts.upsampfac: either 2.0 (default), or 1.25 (low RAM, smaller FFT size)
Outputs:
  f      size-nk double complex Fourier transform values at target
         frequencies s,t,u
  returned value - 0 if success, else:
                  1 : eps too small
                  2 : size of arrays to malloc exceed MAX_NF

```

A note on integer sizes: In Matlab/MEX, mwrap uses int types, so that output arrays can only be  $<2^{31}$ . However, input arrays  $\geq 2^{31}$  have been tested, and while they don't crash, they result in wrong answers (all zeros). This has yet to be fixed (please help; an updated version of mwrap might be needed).

For a full list of error codes see [Error codes](#).



## PYTHON INTERFACE

These python interfaces are by Daniel Foreman-Mackey, Jeremy Magland, and Alex Barnett, with help from David Stein. See the installation notes for how to install these interfaces; the main thing to remember is to compile the library before trying to *pip install*. Below is the documentation for the nine routines. The 2d1 and 2d2 “many vector” interfaces are now also included.

Notes:

1. The module has been designed not to recompile the C++ library; rather, it links to the existing static library. Therefore this library must have been compiled before building python interfaces.
2. In the below, “float” and “complex” refer to double-precision for the default library. One can compile the library for single-precision, but the python interfaces are untested in this case.
3. NumPy input and output arrays are generally passed directly without copying, which helps efficiency in large low-accuracy problems. In 2D and 3D, copying is avoided when arrays are Fortran-ordered; hence choose this ordering in your python code if you are able (see `python_tests/accuracy_speed_tests.py`).
4. Fortran-style writing of the output to a preallocated NumPy input array is used. That is, such an array is treated as a pointer into which the output is written. This avoids creation of new arrays. The python call return value is merely a status indicator.

`finufft1d1`.`nufft1d1` (*x*, *c*, *isign*, *eps*, *ms*, *f*, *debug*=0, *spread\_debug*=0, *spread\_sort*=2, *fftw*=0, *mode-ord*=0, *chkbnds*=1, *upsampfac*=2.0)

1D type-1 (aka adjoint) complex nonuniform fast Fourier transform

$$f(k_1) = \sum_{j=0}^{n_j-1} c[j] \exp(+/-i k_1 x(j)) \quad \text{for } -ms/2 \leq k_1 \leq (ms-1)/2$$

### Parameters

- ***x*** (*float* [*nj*]) – nonuniform source points, valid only in  $[-3\pi, 3\pi]$
- ***c*** (*complex* [*nj*]) – source strengths
- ***isign*** (*int*) – if  $\geq 0$ , uses + sign in exponential, otherwise - sign
- ***eps*** (*float*) – precision requested ( $>1e-16$ )
- ***ms*** (*int*) – number of Fourier modes requested, may be even or odd; in either case the modes are integers lying in  $[-ms/2, (ms-1)/2]$
- ***f*** (*complex* [*ms*]) – output Fourier mode values. Should be initialized as a numpy array of the correct size
- ***debug*** (*int*, *optional*) – 0 (silent), 1 (print timing breakdown).
- ***spread\_debug*** (*int*, *optional*) – 0 (silent), 1, 2... (prints spreader info)

- **spread\_sort** (*int, optional*) – 0 (don't sort NU pts in spreader), 1 (do sort), 2 (heuristic decision to sort)
- **fftw** (*int, optional*) – 0 (use FFTW\_ESTIMATE), 1 (use FFTW\_MEASURE)
- **modeord** (*int, optional*) – 0 (CMCL increasing mode ordering), 1 (FFT ordering)
- **chkbnds** (*int, optional*) – 0 (don't check NU points valid), 1 (do)
- **upsampfac** (*float*) – either 2.0 (default), or 1.25 (low RAM & small FFT size)

---

**Note:** The output is written into the *f* array.

---

**Returns** 0 if success, 1 if eps too small, 2 if size of arrays to malloc exceed MAX\_NF, 4 at least one NU point out of range (if chkbnds true)

**Return type** int

### Example

see `python_tests/demold1.py`

`finufft.py.nufft1d2` (*x, c, isign, eps, f, debug=0, spread\_debug=0, spread\_sort=2, fftw=0, modeord=0, chkbnds=1, upsampfac=2.0*)

1D type-2 (aka forward) complex nonuniform fast Fourier transform

$$c[j] = \sum_{k1} f[k1] \exp(+/-i k1 x[j]) \quad \text{for } j = 0, \dots, nj-1$$

where sum is over  $-ms/2 \leq k1 \leq (ms-1)/2$ .

### Parameters

- **x** (*float[nj]*) – nonuniform target points, valid only in  $[-3\pi, 3\pi]$
- **c** (*complex[nj]*) – output values at targets. Should be initialized as a numpy array of the correct size
- **isign** (*int*) – if  $\geq 0$ , uses + sign in exponential, otherwise - sign
- **eps** (*float*) – precision requested ( $>1e-16$ )
- **f** (*complex[ms]*) – Fourier mode coefficients, where ms is even or odd In either case the mode indices are integers in  $[-ms/2, (ms-1)/2]$
- **debug** (*int, optional*) – 0 (silent), 1 (print timing breakdown)
- **spread\_debug** (*int, optional*) – 0 (silent), 1, 2... (print spreader info)
- **spread\_sort** (*int, optional*) – 0 (don't sort NU pts in spreader), 1 (sort), 2 (heuristic decision to sort)
- **fftw** (*int, optional*) – 0 (use FFTW\_ESTIMATE), 1 (use FFTW\_MEASURE)
- **modeord** (*int, optional*) – 0 (CMCL increasing mode ordering), 1 (FFT ordering)
- **chkbnds** (*int, optional*) – 0 (don't check NU points valid), 1 (do)
- **upsampfac** (*float*) – either 2.0 (default), or 1.25 (low RAM & small FFT size)



---

**Note:** The output is written into the c array.

---

**Returns** 0 if success, 1 if eps too small, 2 if size of arrays to malloc exceed MAX\_NF, 4 at least one NU point out of range (if chkbnds true)

**Return type** int

### Example

see `python_tests/accuracy_speed_tests.py`

```
finufftpy.nufft1d3(x, c, isign, eps, s, f, debug=0, spread_debug=0, spread_sort=2, fftw=0, upsamp-
                    fac=2.0)
```

1D type-3 (NU-to-NU) complex nonuniform fast Fourier transform

$f[k] = \sum_{j=0}^{nj-1} c[j] \exp(+i s[k] x[j]), \quad \text{for } k = 0, \dots, nk-1$
--

### Parameters

- **x** (*float[nj]*) – nonuniform source points, in R
- **c** (*complex[nj]*) – source strengths
- **isign** (*int*) – if  $\geq 0$ , uses + sign in exponential, otherwise - sign
- **eps** (*float*) – precision requested ( $>1e-16$ )
- **s** (*float[nk]*) – nonuniform target frequency points, in R
- **f** (*complex[nk]*) – output values at target frequencies. Should be initialized as a numpy array of the correct size
- **debug** (*int, optional*) – 0 (silent), 1 (print timing breakdown)
- **spread\_debug** (*int, optional*) – 0 (silent), 1, 2... (print spreader info)
- **spread\_sort** (*int, optional*) – 0 (don't sort NU pts in spreader), 1 (sort), 2 (heuristic decision to sort)
- **fftw** (*int, optional*) – 0 (use FFTW\_ESTIMATE), 1 (use FFTW\_MEASURE)
- **upsampfac** (*float*) – either 2.0 (default), or 1.25 (low RAM & small FFT size)

---

**Note:** The output is written into the f array.

---

**Returns** 0 if success, 1 if eps too small, 2 if size of arrays to malloc exceed MAX\_NF

**Return type** int

### Example

see `python_tests/accuracy_speed_tests.py`

`finufft.py.nufft2d1` (*x*, *y*, *c*, *isign*, *eps*, *ms*, *mt*, *f*, *debug*=0, *spread\_debug*=0, *spread\_sort*=2, *fftw*=0, *modeord*=0, *chkbnds*=1, *upsampfac*=2.0)  
2D type-1 (aka adjoint) complex nonuniform fast Fourier transform

$$f(k_1, k_2) = \sum_{j=0}^{n_j-1} c[j] \exp(+/-i (k_1 x[j] + k_2 y[j])),$$

for  $-ms/2 \leq k_1 \leq (ms-1)/2$ ,  $-mt/2 \leq k_2 \leq (mt-1)/2$

### Parameters

- **x** (*float* [*nj*]) – nonuniform source x-coords, valid only in  $[-3\pi, 3\pi]$
- **y** (*float* [*nj*]) – nonuniform source y-coords, valid only in  $[-3\pi, 3\pi]$
- **c** (*complex* [*nj*]) – source strengths
- **isign** (*int*) – if  $\geq 0$ , uses + sign in exponential, otherwise - sign
- **eps** (*float*) – precision requested ( $> 1e-16$ )
- **ms** (*int*) – number of Fourier modes in x-direction, may be even or odd; in either case the modes are integers lying in  $[-ms/2, (ms-1)/2]$
- **mt** (*int*) – number of Fourier modes in y-direction, may be even or odd; in either case the modes are integers lying in  $[-mt/2, (mt-1)/2]$
- **f** (*complex* [*ms*, *mt*]) – output Fourier mode values. Should be initialized as a Fortran-ordered (ie *ms* fast, *mt* slow) numpy array of the correct size
- **debug** (*int*, *optional*) – 0 (silent), 1 (print timing breakdown)
- **spread\_debug** (*int*, *optional*) – 0 (silent), 1, 2... (prints spreader info)
- **spread\_sort** (*int*, *optional*) – 0 (don't sort NU pts in spreader), 1 (sort), 2 (heuristic decision to sort)
- **fftw** (*int*, *optional*) – 0 (use FFTW\_ESTIMATE), 1 (use FFTW\_MEASURE)
- **modeord** (*int*, *optional*) – 0 (CMCL increasing mode ordering), 1 (FFT ordering)
- **chkbnds** (*int*, *optional*) – 0 (don't check NU points valid), 1 (do)
- **upsampfac** (*float*) – either 2.0 (default), or 1.25 (low RAM & small FFT size)

---

**Note:** The output is written into the *f* array.

---

**Returns** 0 if success, 1 if *eps* too small, 2 if size of arrays to malloc exceed MAX\_NF, 4 at least one NU point out of range (if *chkbnds* true)

**Return type** *int*

### Example

see `python/tests/accuracy_speed_tests.py`

`finufft.py.nufft2d1many` (*x*, *y*, *c*, *isign*, *eps*, *ms*, *mt*, *f*, *debug*=0, *spread\_debug*=0, *spread\_sort*=2, *fftw*=0, *modeord*=0, *chkbnds*=1, *upsampfac*=2.0)

**2D type-1 (aka adjoint) complex nonuniform fast Fourier transform**, for multiple strength vectors with same nonuniform points.

$$f(k_1, k_2, d) = \sum_{j=0}^{n_j-1} c[j, d] \exp(+/-i (k_1 x(j) + k_2 y[j])),$$

for  $-ms/2 \leq k_1 \leq (ms-1)/2$ ,  $-mt/2 \leq k_2 \leq (mt-1)/2$ ,  
 $d = 0, \dots, ndata-1$

### Parameters

- **x** (*float[nj]*) – nonuniform source x-coords, valid only in  $[-3\pi, 3\pi]$
- **y** (*float[nj]*) – nonuniform source y-coords, valid only in  $[-3\pi, 3\pi]$
- **c** (*complex[nj, ndata]*) – source strengths
- **isign** (*int*) – if  $\geq 0$ , uses + sign in exponential, otherwise - sign
- **eps** (*float*) – precision requested ( $> 1e-16$ )
- **ms** (*int*) – number of Fourier modes in x-direction, may be even or odd; in either case the modes are integers lying in  $[-ms/2, (ms-1)/2]$
- **mt** (*int*) – number of Fourier modes in y-direction, may be even or odd; in either case the modes are integers lying in  $[-mt/2, (mt-1)/2]$
- **f** (*complex[ms, mt, ndata]*) – output Fourier mode values. Should be initialized as a Fortran-ordered (ie ms fast, mt slow) numpy array of the correct size
- **debug** (*int, optional*) – 0 (silent), 1 (print timing breakdown)
- **spread\_debug** (*int, optional*) – 0 (silent), 1, 2... (prints spreader info)
- **spread\_sort** (*int, optional*) – 0 (don't sort NU pts in spreader), 1 (sort), 2 (heuristic decision to sort)
- **fftw** (*int, optional*) – 0 (use FFTW\_ESTIMATE), 1 (use FFTW\_MEASURE)
- **modeord** (*int, optional*) – 0 (CMCL increasing mode ordering), 1 (FFT ordering)
- **chkbnds** (*int, optional*) – 0 (don't check NU points valid), 1 (do)
- **upsampfac** (*float*) – either 2.0 (default), or 1.25 (low RAM & small FFT size)

---

**Note:** The outputs are written into the f array.

For small problems this routine will be faster than repeated calls to nufft2d1.

Nthreads copies of the fine grid are allocated, limiting this to smaller problem sizes than the plain 2d1 interface.

---

**Returns** 0 if success, 1 if eps too small, 2 if size of arrays to malloc exceed MAX\_NF, 4 at least one NU point out of range (if chkbnds true)

**Return type** int

### Example

see python/tests/accuracy\_speed\_tests.py

```
finufft.py.nufft2d2(x, y, c, isign, eps, f, debug=0, spread_debug=0, spread_sort=2, fftw=0, mode-
ord=0, chkbnds=1, upsampfac=2.0)
2D type-2 (aka forward) complex nonuniform fast Fourier transform
```

$$c[j] = \sum_{k1, k2} f[k1, k2] \exp(\pm i (k1 x[j] + k2 y[j])), \quad \text{for } j = 0, \dots, nj-1$$

where sum is over  $-ms/2 \leq k1 \leq (ms-1)/2$ ,  $-mt/2 \leq k2 \leq (mt-1)/2$

### Parameters

- **x** (*float[nj]*) – nonuniform target x-coords, valid only in  $[-3\pi, 3\pi]$
- **y** (*float[nj]*) – nonuniform target y-coords, valid only in  $[-3\pi, 3\pi]$
- **c** (*complex[nj]*) – output values at targets. Should be initialized as a numpy array of the correct size
- **isign** (*int*) – if  $\geq 0$ , uses + sign in exponential, otherwise - sign
- **eps** (*float*) – precision requested ( $> 1e-16$ )
- **f** (*complex[ms, mt]*) – Fourier mode coefficients, where ms and mt are either even or odd; in either case their mode range is integers lying in  $[-m/2, (m-1)/2]$ , with mode ordering in all dimensions given by modeord. Ordering is Fortran-style, ie ms fastest.
- **debug** (*int, optional*) – 0 (silent), 1 (print timing breakdown)
- **spread\_debug** (*int, optional*) – 0 (silent), 1, 2... (print spreader info)
- **spread\_sort** (*int, optional*) – 0 (don't sort NU pts in spreader), 1 (sort), 2 (heuristic decision to sort)
- **fftw** (*int, optional*) – 0 (use FFTW\_ESTIMATE), 1 (use FFTW\_MEASURE)
- **modeord** (*int, optional*) – 0 (CMCL increasing mode ordering), 1 (FFT ordering)
- **chkbnds** (*int, optional*) – 0 (don't check NU points valid), 1 (do)
- **upsampfac** (*float*) – either 2.0 (default), or 1.25 (low RAM & small FFT size)

---

**Note:** The output is written into the c array.

---

**Returns** 0 if success, 1 if eps too small, 2 if size of arrays to malloc exceed MAX\_NF, 4 at least one NU point out of range (if chkbnds true)

**Return type** int

### Example

see `python_tests/accuracy_speed_tests.py`

```
finufft.py.nufft2d2many(x, y, c, isign, eps, f, debug=0, spread_debug=0, spread_sort=2, fftw=0, modeord=0, chkbnds=1, upsampfac=2.0)
```

**2D type-2 (aka forward) complex nonuniform fast Fourier transform, for** multiple coefficient vectors with same nonuniform points.

$$c[j, d] = \sum_{k1, k2} f[k1, k2, d] \exp(\pm i (k1 x[j] + k2 y[j])),$$

for  $j = 0, \dots, nj-1$ , and  $d = 0, \dots, ndata-1$

where sum is over  $-ms/2 \leq k1 \leq (ms-1)/2$ ,  $-mt/2 \leq k2 \leq (mt-1)/2$

**Parameters**

- **x** (*float [nj]*) – nonuniform target x-coords, valid only in  $[-3\pi, 3\pi]$
- **y** (*float [nj]*) – nonuniform target y-coords, valid only in  $[-3\pi, 3\pi]$
- **c** (*complex [nj, ndata]*) – output values at targets. Should be initialized as a Fortran-ordered numpy array of the correct size
- **isign** (*int*) – if  $\geq 0$ , uses + sign in exponential, otherwise - sign
- **eps** (*float*) – precision requested ( $> 1e-16$ )
- **f** (*complex [ms, mt, ndata]*) – Fourier mode coefficients, where ms and mt are either even or odd; in either case their mode range is integers lying in  $[-m/2, (m-1)/2]$ , with mode ordering in all dimensions given by modeord. Ordering is Fortran-style, ie ms fastest.
- **debug** (*int, optional*) – 0 (silent), 1 (print timing breakdown)
- **spread\_debug** (*int, optional*) – 0 (silent), 1, 2... (print spreader info)
- **spread\_sort** (*int, optional*) – 0 (don't sort NU pts in spreader), 1 (sort), 2 (heuristic decision to sort)
- **fftw** (*int, optional*) – 0 (use FFTW\_ESTIMATE), 1 (use FFTW\_MEASURE)
- **modeord** (*int, optional*) – 0 (CMCL increasing mode ordering), 1 (FFT ordering)
- **chkbnds** (*int, optional*) – 0 (don't check NU points valid), 1 (do)
- **upsampfac** (*float*) – either 2.0 (default), or 1.25 (low RAM & small FFT size)

---

**Note:** The outputs are written into the c array.

For small problems this routine will be faster than repeated calls to nufft2d2.

Nthreads copies of the fine grid are allocated, limiting this to smaller problem sizes than the plain 2d2 interface.

---

**Returns** 0 if success, 1 if eps too small, 2 if size of arrays to malloc exceed MAX\_NF, 4 at least one NU point out of range (if chkbnds true)

**Return type** int

**Example**

see `python_tests/accuracy_speed_tests.py`

`finufft.py.nufft2d3(x, y, c, isign, eps, s, t, f, debug=0, spread_debug=0, spread_sort=2, fftw=0, upsampfac=2.0)`

2D type-3 (NU-to-NU) complex nonuniform fast Fourier transform

$f[k]$	$=$	$\sum_{j=0}^{nj-1} c[j] \exp(+i s[k] x[j] + t[k] y[j]),$	for $k = 0, \dots, nk-1$
--------	-----	--	--------------------------

**Parameters**

- **x** (*float [nj]*) – nonuniform source point x-coords, in R
- **y** (*float [nj]*) – nonuniform source point y-coords, in R

- **c** (*complex[nj]*) – source strengths
- **isign** (*int*) – if  $\geq 0$ , uses + sign in exponential, otherwise - sign
- **eps** (*float*) – precision requested ( $>1e-16$ )
- **s** (*float[nk]*) – nonuniform target x-frequencies, in R
- **t** (*float[nk]*) – nonuniform target y-frequencies, in R
- **f** (*complex[nk]*) – output values at target frequencies. Should be initialized as a numpy array of the correct size
- **debug** (*int, optional*) – 0 (silent), 1 (print timing breakdown)
- **spread\_debug** (*int, optional*) – 0 (silent), 1, 2... (print spreader info)
- **spread\_sort** (*int, optional*) – 0 (don't sort NU pts in spreader), 1 (sort), 2 (heuristic decision to sort)
- **fftw** (*int, optional*) – 0 (use FFTW\_ESTIMATE), 1 (use FFTW\_MEASURE)
- **upsampfac** (*float*) – either 2.0 (default), or 1.25 (low RAM & small FFT size)

---

**Note:** The output is written into the f array.

---

**Returns** 0 if success, 1 if eps too small, 2 if size of arrays to malloc exceed MAX\_NF

**Return type** int

### Example

see `python_tests/accuracy_speed_tests.py`

```
finufft.py.nufft3d1(x, y, z, c, isign, eps, ms, mt, mu, f, debug=0, spread_debug=0, spread_sort=2,
                    fftw=0, modeord=0, chkbnds=1, upsampfac=2.0)
3D type-1 (aka adjoint) complex nonuniform fast Fourier transform
```

```

      nj-1
f(k1,k2,k3) = SUM c[j] exp(+/-i (k1 x(j) + k2 y[j] + k3 z[j])),
      j=0
for -ms/2 <= k1 <= (ms-1)/2,
    -mt/2 <= k2 <= (mt-1)/2,    -mu/2 <= k3 <= (mu-1)/2
```

### Parameters

- **x** (*float[nj]*) – nonuniform source x-coords, valid only in  $[-3\pi, 3\pi]$
- **y** (*float[nj]*) – nonuniform source y-coords, valid only in  $[-3\pi, 3\pi]$
- **z** (*float[nj]*) – nonuniform source z-coords, valid only in  $[-3\pi, 3\pi]$
- **c** (*complex[nj]*) – source strengths
- **isign** (*int*) – if  $\geq 0$ , uses + sign in exponential, otherwise - sign
- **eps** (*float*) – precision requested ( $>1e-16$ )
- **ms** (*int*) – number of Fourier modes in x-direction, may be even or odd; in either case the modes are integers lying in  $[-ms/2, (ms-1)/2]$

- **mt** (*int*) – number of Fourier modes in y-direction, may be even or odd; in either case the modes are integers lying in  $[-mt/2, (mt-1)/2]$
- **mu** (*int*) – number of Fourier modes in z-direction, may be even or odd; in either case the modes are integers lying in  $[-mu/2, (mu-1)/2]$
- **f** (*complex[ms,mt,mu]*) – output Fourier mode values. Should be initialized as a Fortran-ordered (ie ms fastest) numpy array of the correct size
- **debug** (*int, optional*) – 0 (silent), 1 (print timing breakdown)
- **spread\_debug** (*int, optional*) – 0 (silent), 1, 2... (prints spreader info)
- **spread\_sort** (*int, optional*) – 0 (don't sort NU pts in spreader), 1 (sort), 2 (heuristic decision to sort)
- **fftw** (*int, optional*) – 0 (use FFTW\_ESTIMATE), 1 (use FFTW\_MEASURE)
- **modeord** (*int, optional*) – 0 (CMCL increasing mode ordering), 1 (FFT ordering)
- **chkbnds** (*int, optional*) – 0 (don't check NU points valid), 1 (do)
- **upsampfac** (*float*) – either 2.0 (default), or 1.25 (low RAM & small FFT size)

---

**Note:** The output is written into the f array.

---

**Returns** 0 if success, 1 if eps too small, 2 if size of arrays to malloc exceed MAX\_NF, 4 at least one NU point out of range (if chkbnds true)

**Return type** int

### Example

see `python_tests/accuracy_speed_tests.py`

`finufft.py.nufft3d2(x, y, z, c, isign, eps, f, debug=0, spread_debug=0, spread_sort=2, fftw=0, modeord=0, chkbnds=1, upsampfac=2.0)`  
 3D type-2 (aka forward) complex nonuniform fast Fourier transform

$$c[j] = \sum_{k1, k2, k3} f[k1, k2, k3] \exp(+/-i (k1 x[j] + k2 y[j] + k3 z[j])).$$

for  $j = 0, \dots, nj-1$ , where sum is over

$$-ms/2 \leq k1 \leq (ms-1)/2, -mt/2 \leq k2 \leq (mt-1)/2, -mu/2 \leq k3 \leq (mu-1)/2$$

### Parameters

- **x** (*float[nj]*) – nonuniform target x-coords, valid only in  $[-3\pi, 3\pi]$
- **y** (*float[nj]*) – nonuniform target y-coords, valid only in  $[-3\pi, 3\pi]$
- **z** (*float[nj]*) – nonuniform target z-coords, valid only in  $[-3\pi, 3\pi]$
- **c** (*complex[nj]*) – output values at targets. Should be initialized as a numpy array of the correct size
- **isign** (*int*) – if  $\geq 0$ , uses + sign in exponential, otherwise - sign
- **eps** (*float*) – precision requested ( $> 1e-16$ )

- **f** (*complex[ms, mt, mu]*) – Fourier mode coefficients, where ms, mt and mu are either even or odd; in either case their mode range is integers lying in  $[-m/2, (m-1)/2]$ , with mode ordering in all dimensions given by modeord. Ordering is Fortran-style, ie ms fastest.
- **debug** (*int, optional*) – 0 (silent), 1 (print timing breakdown)
- **spread\_debug** (*int, optional*) – 0 (silent), 1, 2... (print spreader info)
- **spread\_sort** (*int, optional*) – 0 (don't sort NU pts in spreader), 1 (sort), 2 (heuristic decision to sort)
- **fftw** (*int, optional*) – 0 (use FFTW\_ESTIMATE), 1 (use FFTW\_MEASURE)
- **modeord** (*int, optional*) – 0 (CMCL increasing mode ordering), 1 (FFT ordering)
- **chkbnds** (*int, optional*) – 0 (don't check NU points valid), 1 (do)
- **upsampfac** (*float*) – either 2.0 (default), or 1.25 (low RAM & small FFT size)

---

**Note:** The output is written into the c array.

---

**Returns** 0 if success, 1 if eps too small, 2 if size of arrays to malloc exceed MAX\_NF, 4 at least one NU point out of range (if chkbnds true)

**Return type** int

### Example

see `python_tests/accuracy_speed_tests.py`

`finufft.py.nufft3d3(x, y, z, c, isign, eps, s, t, u, f, debug=0, spread_debug=0, spread_sort=2, fftw=0, upsampfac=2.0)`  
3D type-3 (NU-to-NU) complex nonuniform fast Fourier transform

$f[k] = \sum_{j=0}^{nj-1} c[j] \exp(+i s[k] x[j] + t[k] y[j] + u[k] z[j]),$ <p style="text-align: right;">for <math>k = 0, \dots, nk-1</math></p>
---

### Parameters

- **x** (*float[nj]*) – nonuniform source point x-coords, in R
- **y** (*float[nj]*) – nonuniform source point y-coords, in R
- **z** (*float[nj]*) – nonuniform source point z-coords, in R
- **c** (*complex[nj]*) – source strengths
- **isign** (*int*) – if  $\geq 0$ , uses + sign in exponential, otherwise - sign
- **eps** (*float*) – precision requested ( $>1e-16$ )
- **s** (*float[nk]*) – nonuniform target x-frequencies, in R
- **t** (*float[nk]*) – nonuniform target y-frequencies, in R
- **u** (*float[nk]*) – nonuniform target z-frequencies, in R
- **f** (*complex[nk]*) – output values at target frequencies. Should be initialized as a numpy array of the correct size



- **debug**(*int*, *optional*) – 0 (silent), 1 (print timing breakdown)
- **spread\_debug**(*int*, *optional*) – 0 (silent), 1, 2... (print spreader info)
- **spread\_sort**(*int*, *optional*) – 0 (don't sort NU pts in spreader), 1 (sort), 2 (heuristic decision to sort)
- **fftw**(*int*, *optional*) – 0 (use FFTW\_ESTIMATE), 1 (use FFTW\_MEASURE)
- **upsampfac**(*float*) – either 2.0 (default), or 1.25 (low RAM & small FFT size)

---

**Note:** The output is written into the *f* array.

---

**Returns** 0 if success, 1 if eps too small, 2 if size of arrays to malloc exceed MAX\_NF

**Return type** int

### Example

see `python_tests/accuracy_speed_tests.py`



## JULIA INTERFACE

Ludvig af Klinteberg has built an interface from the [julia](#) language. This interface is found at [this github repo](#), and is actually a secondary wrapper around our python interface, so you should make sure that the latter is working first.



## RELATED PACKAGES

### Interfaces to FINUFFT from other languages

- [FINUFFT.jl](#): a [julia](#) language wrapper by Ludvig af Klinteberg (SFU). This is actually a secondary wrapper around our python interface, so you should make sure that the latter is working first.

### Packages making use of FINUFFT

Here are some packages making use of FINUFFT (please let us know others):

- [sinctransform](#): C++ and MATLAB codes to evaluate sums of the sinc and sinc<sup>2</sup> kernels between arbitrary nonuniform points in 1,2, or 3 dimensions, by Hannah Lawrence (2017 summer intern at Flatiron).



## KNOWN ISSUES

One should also check the github issues for the project page, <https://github.com/flatironinstitute/finufft/issues>

Also see notes in the `TODO` file.

### Issues with library

- When requested accuracy is  $1e-14$  or less, it is sometimes not possible to match this, especially when there are a large number of input and/or output points. This is believed to be unavoidable round-off error.
- Currently in Mac OSX, `make lib` fails to make the shared object library (.so).
- The timing of the first FFTW call is complicated, depending on whether `FFTW_ESTIMATE` (the default) or `FFTW_MEASURE` is used. Such issues are known, and discussed in other documentation, eg [https://pythonhosted.org/poppy/fft\\_optimization.html](https://pythonhosted.org/poppy/fft_optimization.html). We would like to find a way of pre-storing some Intel-specific FFTW plans (as MATLAB does) to avoid the large FFTW planning times.
- Currently, a single library name is used for single- and multi-threaded versions. Thus, i) you need to `make clean` before changing such make options, and ii) if you wish to maintain multiple such versions you need to move them around and maintain them yourself, eg by duplicating the directory.
- The overhead for small problem sizes ( $<10000$  data points) is too high, due to things such as the delay in FFTW looking up pre-stored wisdom. A unified advanced interface with a plan stage is in the works.

### Issues with interfaces

- MATLAB, octave and python cannot exceed input or output data sizes of  $2^{31}$ .
- MATLAB, octave and python interfaces do not handle single precision.
- Fortran interface does not allow control of options, nor data sizes exceeding  $2^{31}$ .

### Bug reports

If you think you have found a bug, please file an issue on the github project page, <https://github.com/flatironinstitute/finufft/issues>. Include a minimal code which reproduces the bug, along with details about your machine, operating system, compiler, and version of FINUFFT.

You may also contact Alex Barnett ([abarnett@flatironinstitute.org](mailto:abarnett@flatironinstitute.org)) with FINUFFT in the subject line.





## ACKNOWLEDGMENTS

The main code and mathematical development is by:

- Alex Barnett (Flatiron Institute)
- Jeremy Magland (Flatiron Institute)

Significant SIMD vectorization/acceleration of the spreader by:

- Ludvig af Klinteberg (SFU)

Other code contributions:

- Yu-Hsuan (“Melody”) Shih - 2d1many, 2d2many interface for many vectors same points
- Leslie Greengard and June-Yub Lee - CMCL fortran drivers and test codes
- Dan Foreman-Mackey - python wrappers
- David Stein - python wrappers
- Dylan Simon - sphinx help
- Amit Moscovich - Mac OSX build

Testing, bug reports:

- Joakim Anden - catching memory leak, Matlab/FFTW issues, performance tests
- Hannah Lawrence - user testing and finding bugs
- Marina Spivak - fortran testing
- Hugo Strand - python bugs

Helpful discussions:

- Charlie Epstein - analysis of kernel Fourier transform sums
- Christian Muller - optimization (CMA-ES) for early kernel design
- Andras Pataki - complex number speed in C++
- Timo Heister - pass/fail numdiff testing ideas
- Zydrunas Gimbutas - explanation that NFFT uses Kaiser-Bessel backwards
- Vladimir Rokhlin - piecewise polynomial approximation on complex boxes



## REFERENCES

References for this software and the underlying mathematics include:

[FIN] A parallel non-uniform fast Fourier transform library based on an “exponential of semicircle” kernel. A. H. Barnett, J. F. Magland, and L. af Klinteberg. Preprint (2018). [math.NA:1808.06736](#)

[ORZ] Prolate Spheroidal Wave Functions of Order Zero: Mathematical Tools for Bandlimited Approximation. A. Osipov, V. Rokhlin, and H. Xiao. Springer (2013).

[KK] Chapter 7. System Analysis By Digital Computer. F. Kuo and J. F. Kaiser. Wiley (1967).

[FS] Nonuniform fast Fourier transforms using min-max interpolation. J. A. Fessler and B. P. Sutton. IEEE Trans. Sig. Proc., 51(2):560-74, (Feb. 2003)

[KKP] Using NFFT3—a software library for various nonequispaced fast Fourier transforms. J. Keiner, S. Kunis and D. Potts. Trans. Math. Software 36(4) (2009).

[F] Non-equispaced fast Fourier transforms with applications to tomography. K. Fourmont. J. Fourier Anal. Appl. 9(5) 431-450 (2003).

This code builds upon the CMCL NUFFT, and the Fortran wrappers are very similar to its interfaces. For that the following are references:

[GL] Accelerating the Nonuniform Fast Fourier Transform. L. Greengard and J.-Y. Lee. SIAM Review 46, 443 (2004).

[LG] The type 3 nonuniform FFT and its applications. J.-Y. Lee and L. Greengard. J. Comput. Phys. 206, 1 (2005).

The original NUFFT analysis using truncated Gaussians is:

[DR] Fast Fourier Transforms for Nonequispaced data. A. Dutt and V. Rokhlin. SIAM J. Sci. Comput. 14, 1368 (1993).



**N**

nufft1d1() (in module finufftpy), 35  
nufft1d2() (in module finufftpy), 36  
nufft1d3() (in module finufftpy), 37  
nufft2d1() (in module finufftpy), 37  
nufft2d1many() (in module finufftpy), 38  
nufft2d2() (in module finufftpy), 39  
nufft2d2many() (in module finufftpy), 40  
nufft2d3() (in module finufftpy), 41  
nufft3d1() (in module finufftpy), 42  
nufft3d2() (in module finufftpy), 43  
nufft3d3() (in module finufftpy), 44