
# Micro-USB connectors meeting USB 2.0 Standard

# **ZX** Series



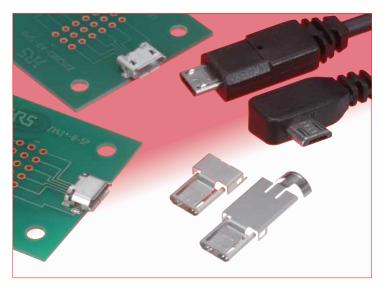

# **■**Overview

Extremely small highly reliable connectors complying with physical, electrical and environmental requirements of Micro-USB standard (USB 2.0).

Receptacles and plugs are available in a wide variety of mounting and termination styles, allowing their use in various applications.

### **■**Features

#### 1. Size reduction

Compared with the standard Mini-USB connectors, the size of ZX connectors is reduced by approximately 60% while still allowing a high-speed data transfer of 480 Mbps, specified in USB 2.0.

#### 2. Receptacle styles

Two interface configurations: Micro-B and Micro-AB in standard, mid-mount and reverse mounting styles. SMT and through-hole (shell) PC board terminations.

#### 3. Plug styles

Corresponding to the receptacle styles, two interface configurations: Micro-A and Micro-B, with direct wire or PCB wire soldering.

Several plug styles can be used for data transmission, earphone or charging applications.


#### 4. Smooth mating and unmating


A smooth mating and unmating operation results in less wear and a longer product life. The unique Hirose active latch mechanism produces a reliable and durable connector.

Even after repeated use, the user will experience a smooth click sensation when mating the connectors.

Note: The statement above only applies when using both plug and receptacles made by Hirose Electric.

# 5. Hirose was the first company to obtain a Micro-USB certification (TID number).

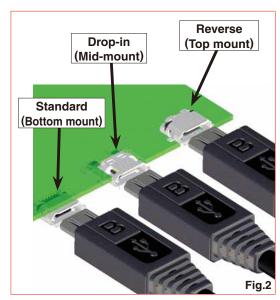

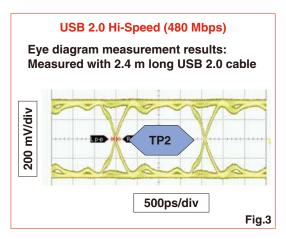

# **■**Product Specifications

	•				
		1A (per contact) or	1A (per contact) or Voltage rating		30V AC
Ratings	Current rating	1.8A (contacts No. 1 and 5) and	Operating	g temperature range	-30°C to +85°C (Note1)
		0.5A (contacts No. 2, 3, and 4)	Storage	temperature range	-30°C to +60°C
Item		Specification		Conditions	
Contact resistance		30mΩ max.		100mA	
2. Withstanding voltage		No flashover or insulation breakdown	l	100V AC / 1 minute	
3. Capacitance		2pF max.		Between adjacent contacts at 1,000Hz (AC voltage	
4. Durability		Contact resistance : Rise from initial value of	of 10mΩ max.	10,000 cycles	
5. Total insertion/removal force		Insertion force : 35N max., Removal force	ce : 8N min.	Mated with correspond	ding connector

Note1: Includes temperature rise caused by current flow.

Note2: Information contained in this catalog represents general requirements for this Series. Contact us for the drawings and specifications for a specific part number shown.

### ■Materials / Finish

### •Receptacles

Part	Material	Finish	Remarks
Insulator	LCP	Micro-B: Black, Micro-AB: Gray	UL94V-0
Contacts	Copper alloy	Selective gold plated	
Shell	Stainless steel	Tin alloy plating	

### Plugs

Part	Material	Finish	Remarks
Insulator	LCP	Micro-B: Black, Micro-AB: Gray	UL94V-0
Contacts	Copper alloy	Selective gold plated	
Shell	Stainless steel	Tin alloy plating	

# ■Product Number Structure

Refer to the chart below when determining the product specifications from the product number. Please select from the product numbers listed in this catalog when placing orders.


### Receptacles

$$\frac{ZX}{0}$$
  $\frac{62}{0}$   $\frac{RD}{0}$  -  $\frac{B}{0}$  -  $\frac{5}{0}$   $\frac{P}{0}$   $\frac{*}{0}$   $\frac{8}{0}$ 

#### Plugs

$$\frac{ZX}{0} \frac{40}{0} - \frac{B}{0} - \frac{5}{0} \frac{S}{0} * - \frac{UNIT}{0}$$

$$\frac{ZX}{0} \frac{40}{2} - \frac{B}{0} - \frac{SLDA}{9}$$

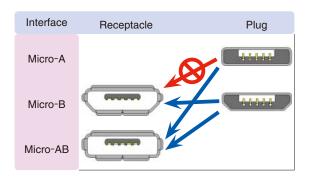

Series name	ZX
2Termination style	10's : Right-angle PCB wire, SMT
	20's : Straight, PCB wire
	40's : Direct wire
	60's : Right-angle, PCB wire
	80's : Cradle SMT
3Board mounting style Blank	Standard (Bottom mount)
(Receptacles) D	Standard (Bottom mount) through hole
R	Reverse (Top mount)
RD	Reverse (Top mount) through hole
M	Drop-in (Mid-mount)
4 Mating side configuration A	Micro-A
В	Micro-B
AB	Micro-AB
5Number of contacts	5
6Contact type P	Receptacle- Male
S	Plug – Female
Serial No.	
8Shell termination style -Blank	SMT
Receptacles 8	Through hole (solder tab length: 0.8mm)
Occupance of the second secon	Assembly (Insulator/contact/lock)
	Cover (Note 1)

Note 1 : Classifiers such as A, B, and C are entered for \*.

# **■**Configurations


	Mating side configuration	Ту		Part No.	3D Image	Page
		SM	SMT	ZX62-B-5PA(33)		4
		Standard	SMT + DIP	ZX62D-B-5PA8(30)		4
	Micro-B	Reverse	SMT	ZX62R-B-5P(30)		5
		Drop-in	SMT	ZX62M-B-5P(30)		5
ت د د		0111	SMT	ZX62-AB-5PA(31)		6
α		Standard	SMT + DIP	ZX62D-AB-5P8(30)		6
	Micro-AB	Reverse	SMT	ZX62R-AB-5P(30)		7
			SMT + DIP	ZX62RD-AB-5P8(30)		7
		Direct wire	soldering	Assembly (insulator/contacts/lock) : ZX40-B-5S-UNIT(31) Cover-top : ZX40-B-SLDA Cover-bottom : ZX40-SLDB	S M	9 and 10
	Miero D	PCB wire (straight, the	•	Assembly : ZX20-B-5S-UNIT(30) Cover : ZX20-B-SLDC	B 49	11
- L		PCB wire sold (SMT)	•	Assembly : ZX64-B-5S-UNIT(31) Cover-top : ZX64-B-SLDA Cover- bottom : ZX64-SLDB		12 and 13
		PCB wire (SM		Assembly (insulator/contacts/lock) : ZX64-B-5S-UNIT(31) Cover : ZX64-B-SLDC		12 and 13
	Micro-A	Direct wire soldering		Assembly : ZX40-A-5S-UNIT(30) Cover-top : ZX40-A-SLDA Cover- bottom : ZX40-SLDB		14 and 15
מוסו		SM		ZX80-B-5S(30)	With lock	16
	.	Micro-B +		ZX80-B-5SA(30)	Without lock	16

Note: 1 Part numbers in the Plugs section of the above table list the Assembly (insulator/contacts/locks) and the corresponding Shields/Covers.

Note: 2 Optional Printed Circuit boards for the Plugs are shown for reference only. Not supplied with applicable connectors.


Note: 3 The color of the insulators body in the Assembly (insulator/contacts/lock) shown in the 3D Image column above is blue for clarity. Refer to the Materials (Page 2) for correct colors.


# •Micro B - Standard (Bottom mount), Shell SMT

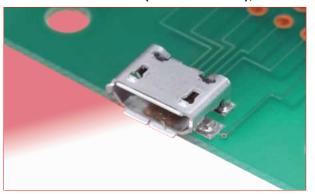

Part No.	HRS No.	Packaging
ZX62-B-5PA(33)	242-0033-8 33	3,500pcs/reel


# **▶** Recommended PCB mounting pattern

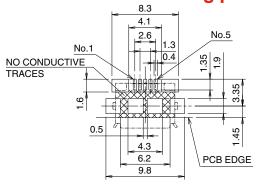

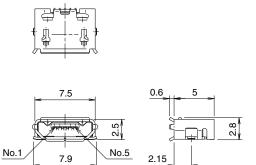


All dimensions : mm

## ●Micro B - Standard (Bottom mount), Shell through hole

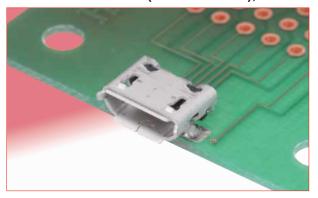


Part No.	HRS No.	Packaging
ZX62D-B-5PA8(30)	242-0056-3 30	2,000pcs/reel

# ◆ Recommended PCB mounting pattern

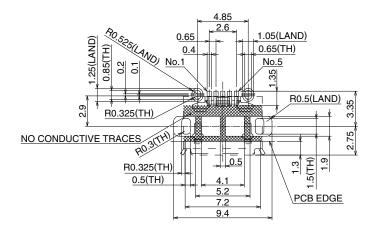









# ●Micro B - Reverse (Top mount) Shell SMT

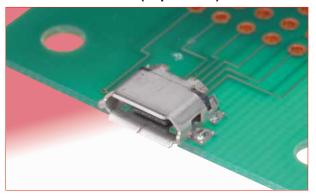


	Part No.	HRS No.	Packaging
ZX	62R-B-5P(30)	242-0028-8 30	2,000pcs/reel

# **♠** Recommended PCB mounting pattern

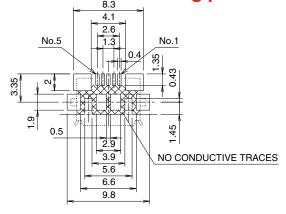









All dimensions : mm


## ●Micro B - Drop-in (Mid-mount), Shell SMT

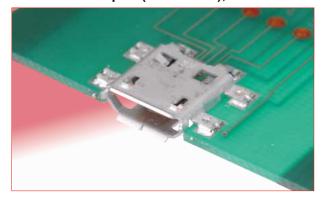


Part No.	HRS No.	Packaging
ZX62M-B-5P(30)	242-0024-7 30	1,500pcs/reel




# **●**Recommended PCB mounting pattern



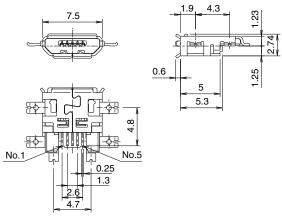


## •Micro AB - Standard (Bottom mount), Shell SMT

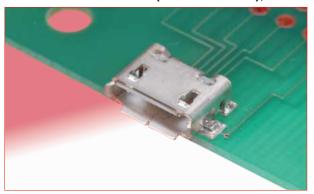



Part No.	HRS No.	Packaging
ZX62-AB-5PA(31)	242-0045-7 31	3,500pcs/reel

# ♠ Recommended PCB mounting pattern

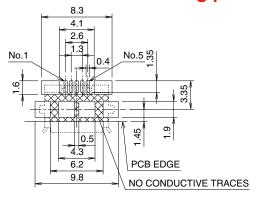









All dimensions : mm

## ●Micro AB - Standard (Bottom mount), Shell through hole

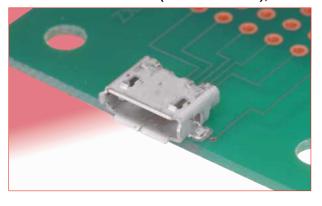



Part No.	HRS No.	Packaging
ZX62D-AB-5P8(30)	242-0027-5 30	2,000pcs/reel

# ♠ Recommended PCB mounting pattern

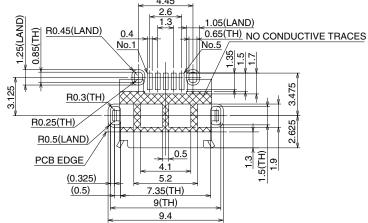










# ●Micro AB - Reverse (Top mount), Shell SMT

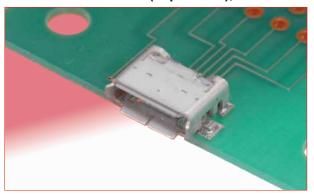

Part No.	HRS No.	Packaging
ZX62R-AB-5P(30)	242-0035-3 30	2,000pcs/reel

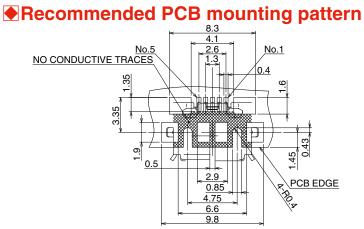







All dimensions : mm


## ●Micro AB - Reverse (Top mount), Shell through hole

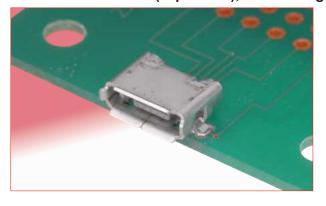

Part No.	HRS No.	Packaging
ZX62RD-AB-5P	8(30) 242-0025-0 30	2,000pcs/reel

# ♠ Recommended PCB mounting pattern

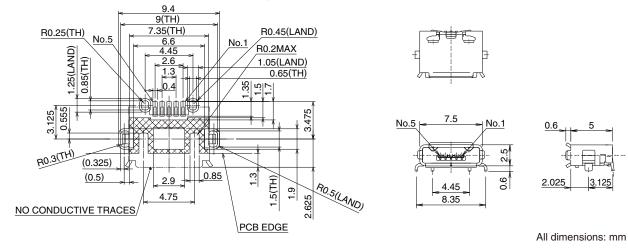

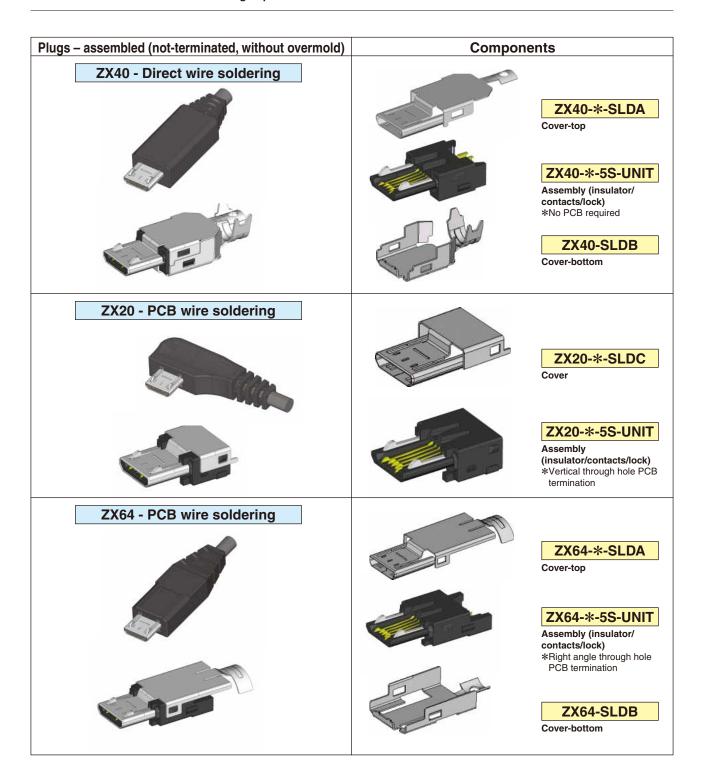


# ●Micro B - Assembly (insulator/contacts/lock) – Direct wire soldering





Part No.	HRS No.	Packaging
ZX40-B-5S-UNIT(31)	242-0002-4 31	4,000pcs/reel

Contact HRS for Cable Termination Procedure Manual.










All dimensions : mm


# ●Micro B - Component, Cover-top - Direct wire soldering



Part No.	HRS No.	Packaging
ZX40-B-SLDA	242-0003-7	4,000 pcs/reel










# ●Micro A, Micro B - Component, Cover-bottom - Direct wire soldering

















All dimensions : mm


ZX40-SLDB

ZX40-SLDB(3.3)


Part No.	HRS No.	Packaging	Cable dia.
ZX40-SLDB	242-0004-0	4.000000/real	φ3.8
ZX40-SLDB(3.3)	242-0023-4	4,000pcs/reel	φ3.3

# Assembled

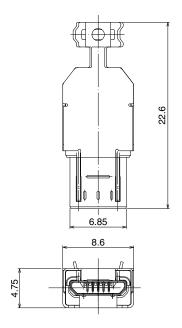




## Micro B - Assembly (insulator/contacts/lock) - Vertical through hole PCB wire soldering (non-direct)

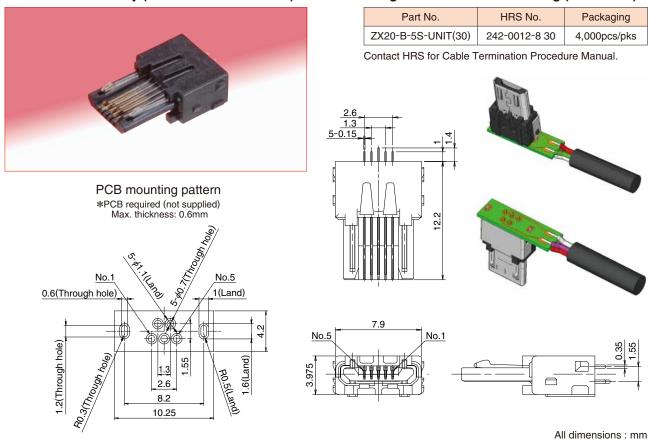

## • Micro B - Component, Cover - through hole

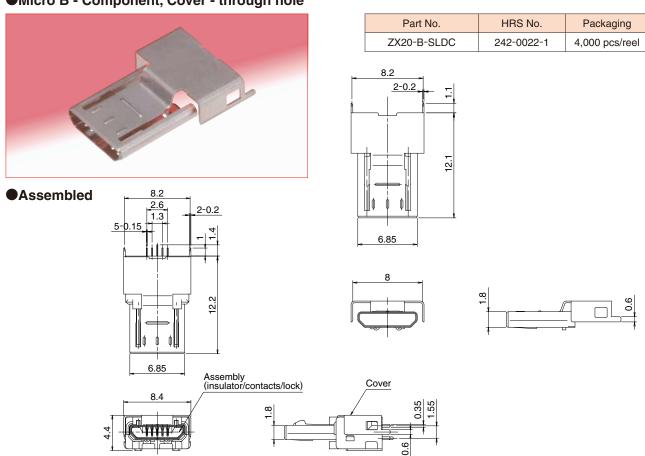



# •Micro B - Assembly (insulator/contacts/lock) - Right angle SMT





Part No.	HRS No.	Packaging
ZX64-B-5S-UNIT(31)	242-0009-3 31	1 piece

Contact HRS for Cable Termination Procedure Manual.



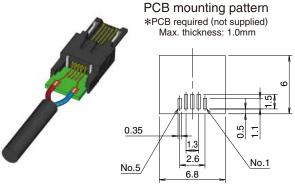






All dimensions : mm

## ●Micro B - Component, Cover-top – Right angle SMT




Part No.	HRS No.	Packaging
ZX64-B-SLDA	242-0013-0	4,000 pcs/reel








## • Micro B - Component, Cover-bottom - Right angle SMT

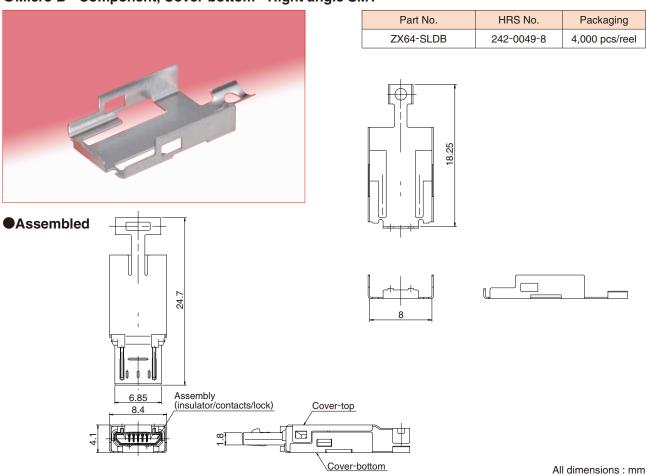

■Micro B - Component, Shell/cover – Right angle SMT




Shell/cover, without cable clamp
This shell/cover does not require ZX64-SLDB.



Part No.

ZX64-B-SLDC

	•		
● Assembled			
		16.1	
		sembly sulator/contacts/lock)	Cover-top
1.1	8.4	8	
			Cover-bottom



HRS No.

242-0018-4

Packaging


4,000 pcs/reel


# ●Micro A - Assembly (insulator/contacts/lock) - Direct wire soldering





Part No.	HRS No.	Packaging
ZX40-A-5S-UNIT(30)	242-0010-2 30	1 piece

Contact HRS for Cable Termination Procedure Manual.











All dimensions : mm


# ●Micro A - Component, Cover-top - Direct wire soldering

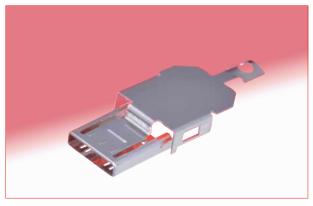

Part No.	HRS No.	Packaging
ZX40-A-SLDA	242-0011-5	4,000pcs/reel










# ●Micro A, Micro B - Component, Cover-bottom - Direct wire soldering

















All dimensions : mm

ZX40-SLDB

ZX40-SLDB(3.3)


Part No.	HRS No.	Packaging	Cable dia.
ZX40-SLDB	242-0004-0	4.000000/real	φ3.8
ZX40-SLDB(3.3)	242-0023-4	4,000pcs/reel	φ3.3




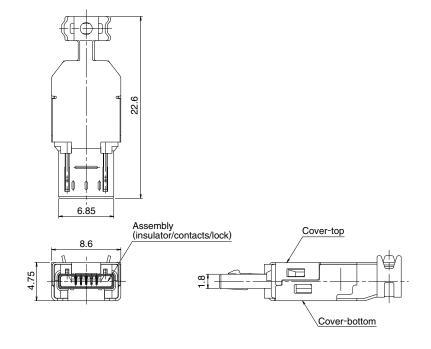


# **■Plug-Vertical, cradle mount, Shell through hole**

# ●Micro B, with lock

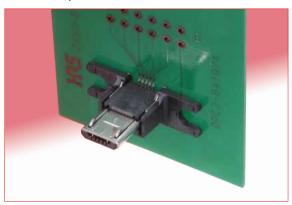

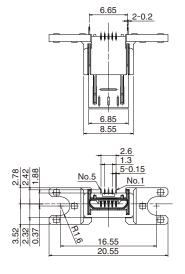






All dimensions : mm

Part No.	HRS No.	Packaging
ZX80-B-5S(30)	242-0017-1 30	100pcs/pks


# ●Micro B, without lock

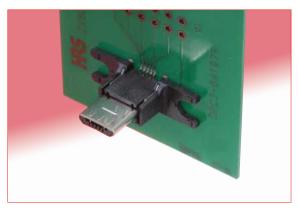

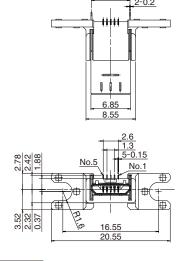




Part No.	HRS No.	Packaging
ZX80-B-5SA(30)	242-0019-7 30	100 pcs/pks

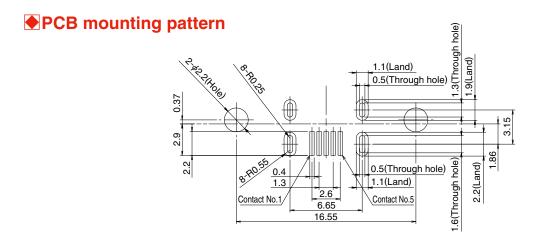

# Packaging Specifications


#### Embossed carrier tape dimensions

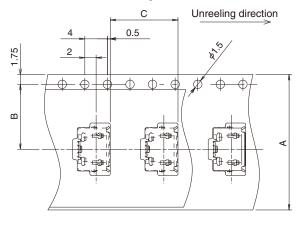

Part No.	A dimension	B dimension
ZX62-B-5PA(33)	24	11.5
ZX62-AB-5PA(31)	24	11.5

24

#### Reel Dimensions

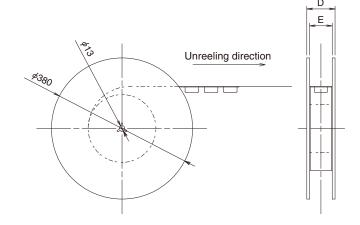

Part No.	D dimension	E dimension
ZX62-B-5PA(33)	30.4	24.4
ZX62-AB-5PA(31)	30.4	24.4
ZX62M-B-5P(30)	30.4	24.4
Other	22.4	16.4


# Recommended Temperature Profile - Receptacles

11.5

### Using lead-free solder paste

ZX62M-B-5P(30)

Other

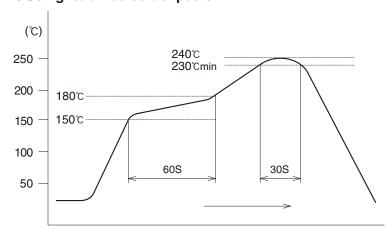

The temperature profile is based on the left conditions.

In individual applications the actual temperature may vary, depending on solder paste type, volume/ thickness and board size/thickness. Contact your solder paste and equipment manufacturer for specific recommendations.

- Note 1: Up to 2 cycles of Reflow soldering are possible under the same conditions, provided that there is a return to normal temperature between the first and second cycle.
- Note 2: The temperature profile indicates the board surface temperature at the point of contacts with the connector terminals.

# Precautions

- 1. Exercise care when handling the connectors. Do not subject them to excessive external forces when mating/un-mating.
- 2. Mate and un-mate as intended, holding by the overmolded body, in the correct direction. Do not un-mate by pulling on the cable.
- 3. Some tooling marks may be visible on the surfaces of receptacle (shell/cover). No form/fit or function is affected.
- 4. Appearance of the surface finishes on the receptacles may vary between production runs. No affect on form, fit or function.

MEMO:

MEMO:

#### USA:

#### HIROSE ELECTRIC (U.S.A.), INC. HEADQUARTERS CHICAGO OFFICE

2300 Warrenville Road. Suite 150. Downers Grove, IL 60515 Phone: +1-630-282-6700 http://www.hirose.com/us/

#### THE NETHERLANDS: HIROSE ELECTRIC EUROPE B.V.

Hogehillweg #8 1101 CC Amsterdam Z-O

Phone: +31-20-6557460 Fax: +31-20-6557469 http://www.hirose.com/eu/

#### GERMANY:

#### HIROSE ELECTRIC EUROPE B.V. HANOVER OFFICE

Bayernstr. 3, Haus C 30855 Langenhagen, Germany

Phone: +49-511 97 82 61 30 Fax: +49-511 97 82 61 35 http://www.hirose.com/eu/

#### CHINA:

#### HIROSE ELECTRIC (SHANGHAI) CO., LTD.

1601, Henderson Metropolitan, NO.300, East Nanjing Road, Huangpu District, Shanghai, China 200001

Phone: +86-21-6391-3355 Fax: +86-21-6391-3335 http://www.hirose.com/cn/

#### HONG KONG:

#### HIROSE ELECTRIC HONGKONG TRADING CO., LTD.

Room 1001, West Wing, Tsim Sha Tsui Centre, 66 Mody Road, Tsim Sha Tsui East, Kowloon, Hong Kong Phone: +852-2803-5338

Fax: +852-2591-6560 http://www.hirose.com/hk/

### SINGAPORE:

#### HIROSE ELECTRIC SINGAPORE PTE. LTD.

10 Anson Road #26-16, International Plaza 079903, Singapore

Phone: +65-6324-6113 Fax: +65-6324-6123 http://www.hirose.com/sg/

#### MALAYSIA:

#### PENANG REPRESENTATIVE OFFICE

1-21-01, Suntech @ Penang Cybercity (1164), Lintang Mayang Pasir 3,11950, Bayan Baru, Penang, Malaysia.

Phone: +604-619-2564 Fax: +604-619-2574 http://www.hirose.com/sg/

#### USA:

#### HIROSE ELECTRIC (U.S.A.), INC. SAN JOSE OFFICE

2841 Junction Ave. Suite 200 San Jose, CA, 95134 Phone: +1-408-253-9640 Fax: +1-408-253-9641 http://www.hirose.com/us/

#### HIROSE ELECTRIC EUROPE B.V. GERMAN BRANCH

Schoenbergstr. 20, 73760 ostfildern Phone: +49-711-456002-1 Fax: +49-711-456002-299

http://www.hirose.com/eu/

#### FRANCE:

#### HIROSE ELECTRIC EUROPE B.V. PARIS OFFICE

Regus La Garenne Colombes, Place de La Belgique, 71 Boulevard National La Garenne Colombes, 92250, France

Phone: +33 (0) 1 7082 3170 Fax: +33 (1) 7082 3101 http://www.hirose.com/eu/

#### CHINA:

#### HIROSE ELECTRIC (SHANGHAI) CO.,LTD. BEIJING BRANCH

A1001, Ocean International Center, Building 56# East 4th Ring Middle Road, ChaoYang District, Beijing, 100025

Phone: +86-10-5165-9332 Fax: +86-10-5908-1381 http://www.hirose.com/cn/

#### HIROSE ELECTRIC TAIWAN CO., LTD.

103 8F. No.87, Zhengzhou Rd., Taipei Phone: +886-2-2555-7377

Fax: +886-2-2555-7350 http://www.hirose.com/tw/

#### HIROSE ELECTRIC SINGAPORE PTE, LTD, DELHI LIAISON OFFICE

Office NO.552, Regus-Green Boulevard, Level5, Tower C, Sec62, Plot B-9A, Block B, Noida, 201301, Uttar Pradesh, India

Phone: +91-12-660-8018 Fax: +91-120-4804949 http://www.hirose.com/sg/

#### **THAILAND:**

#### **BANGKOK OFFICE (REPRESENTATIVE OFFICE)**

Unit 4703, 47th FL., 1 Empire Tower, South Sathorn Road, Yannawa, Sathorn, Bangkok 10120 Thailand

Phone: +66-2-686-1255 Fax: +66-2-686-3433 http://www.hirose.com/sg/

#### USA:

### HIROSE ELECTRIC (U.S.A.), INC. DETROIT OFFICE (AUTOMOTIVE)

17197 N. Laurel Park Drive. Suite 253.

Livonia, MI 48152 Phone: +1-734-542-9963 Fax: +1-734-542-9964 http://www.hirose.com/us/

#### HIROSE ELECTRIC EUROPE B.V. NUREMBERG OFFICE

Neumeverstrasse 22-26, 90411 Nurnberg

Phone: +49-911 32 68 89 63 Fax: +49-911 32 68 89 69 http://www.hirose.com/eu/

#### **UNITED KINGDOM:**

#### HIROSE ELECTRIC EUROPE BV (UK BRANCH)

4 Newton Court, Kelvin Drive, Knowlhill,

Milton Keynes, MK5 8NH Phone: +44-1908 202050 Fax: +44-1908 202058 http://www.hirose.com/eu/

#### CHINA:

#### HIROSE ELECTRIC TECHNOLOGIES (SHENZHEN) CO., LTD.

Room 09-13, 19/F, Office Tower Shun Hing Square, Di Wang Commercial Centre, 5002 Shen Nan Dong Road, Shenzhen City, Guangdong Province, 518008

Phone: +86-755-8207-0851 Fax: +86-755-8207-0873 http://www.hirose.com/cn/

# HIROSE KOREA CO.,LTD.

250, Huimanggongwon-ro, Siheung-si, Gveonggi-do, Korea, 15083 Phone: +82-31-496-7000 or 7124

Fax: +82-31-496-7100 http://www.hirose.co.kr/

#### INDIA:

#### HIROSE ELECTRIC SINGAPORE PTE. LTD. BANGALORE LIAISON OFFICE

Unit No-403, 4th Floor, No-84, Barton Centre, Mahatma Gandhi (MG) Road, Bangalore 560 001, Karnataka, India

Phone: +91-80-4120 1907 Fax: +91-80-4120 9908 http://www.hirose.com/sg/



# HIROSE ELECTRIC CO.,LTD.

2-6-3, Nakagawa Chuoh, Tsuzuki-Ku, Yokohama-Shi 224-8540, JAPAN TEL: +81-45-620-3526 Fax: +81-45-591-3726

http://www.hirose.com

http://www.hirose-connectors.com