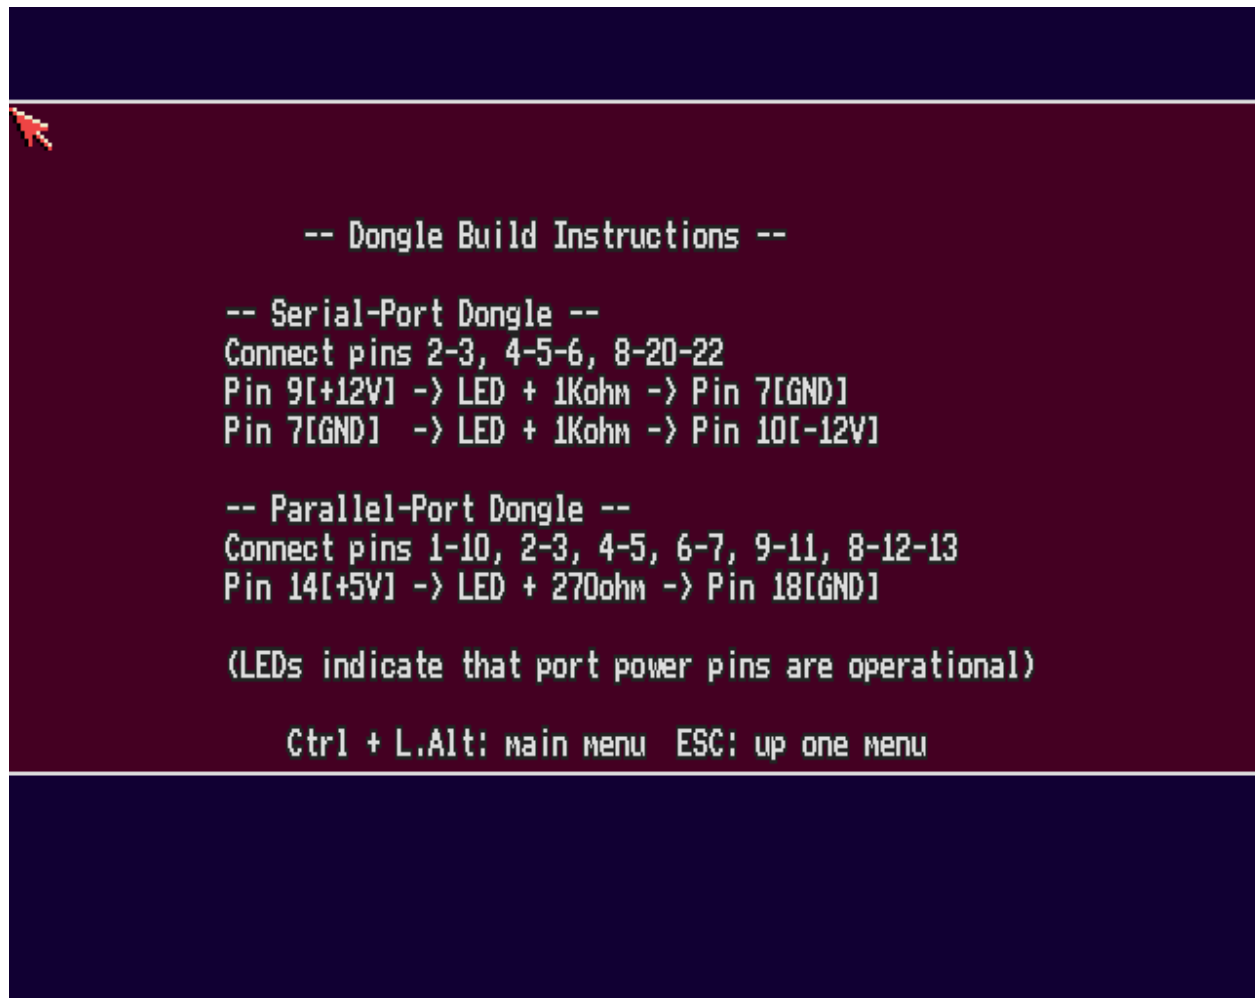


Amiga test kit loop back directions:

A screenshot of a terminal window with a dark blue background and a lighter blue header. The text is displayed in a monospaced font. A mouse cursor is visible in the top left corner of the terminal area.

```
-- Dongle Build Instructions --  
  
-- Serial-Port Dongle --  
Connect pins 2-3, 4-5-6, 8-20-22  
Pin 9[+12V] -> LED + 1Kohm -> Pin 7[GND]  
Pin 7[GND] -> LED + 1Kohm -> Pin 10[-12V]  
  
-- Parallel-Port Dongle --  
Connect pins 1-10, 2-3, 4-5, 6-7, 9-11, 8-12-13  
Pin 14[+5V] -> LED + 270ohm -> Pin 18[GND]  
  
(LEDs indicate that port power pins are operational)  
  
Ctrl + L.Alt: main menu  ESC: up one menu
```