


1	2	3	4	5	6	7	8	9	10	11
HANDSET REV A / SYSTEM SCHEMATIC INDEX										
Engineering draft. Retained ESP32–S3 / MakerFocus 3000 mAh / external display / all peripheral interfaces.										
A	ESP32 host, boot and reset			Key matrix and trackball			USB–C data and ESD			
	File: core.kicad_sch			File: keys.kicad_sch			File: usb.kicad_sch			
B	Fused USB input and eFuse			USB–C source detection and permission			Battery, thermistor and programmable charger			
	File: usb–input.kicad_sch			File: usb–detect.kicad_sch			File: power.kicad_sch			
C	Power control and fuel gauge			Main 3.3 V buck–boost supply			Auxiliary 5 V and 1.8 V supplies			
	File: power–control.kicad_sch			File: reg3.kicad_sch			File: aux–power.kicad_sch			
D	Regulated modem supply and enable			SX1262 LoRa radio			CC1101 sub–GHz radio			
	File: modem–power.kicad_sch			File: radios.kicad_sch			File: cc–radio.kicad_sch			
E	125 kHz reader analog circuit			LF reader logic translation			GNSS receiver and passive antenna			
	File: lf–radio.kicad_sch			File: lf–support.kicad_sch			File: gnss–antennas.kicad_sch			
F	NFC reader, oscillator and local supplies			Media speaker amplifier and digital microphone			Cellular adapter and call–audio harnesses			
	File: nfc.kicad_sch			File: audio.kicad_sch			File: interfaces.kicad_sch			
G	Protected external module port			MicroSD and case–mounted Infrared			External display, touch and backlight			
	File: protection.kicad_sch			File: storage–lr.kicad_sch			File: display.kicad_sch			
H										
Sheet: / File: handset.kicad_sch										
Title:										
Size: A2 Date:										Rev:
KiCad E.D.A. 10.0.6										Id: 1/22

ESP32 host, boot and reset

Retain N16R8. Module pads 28/29/30 belong to octal PSRAM. USB programming uses the USB sheet.

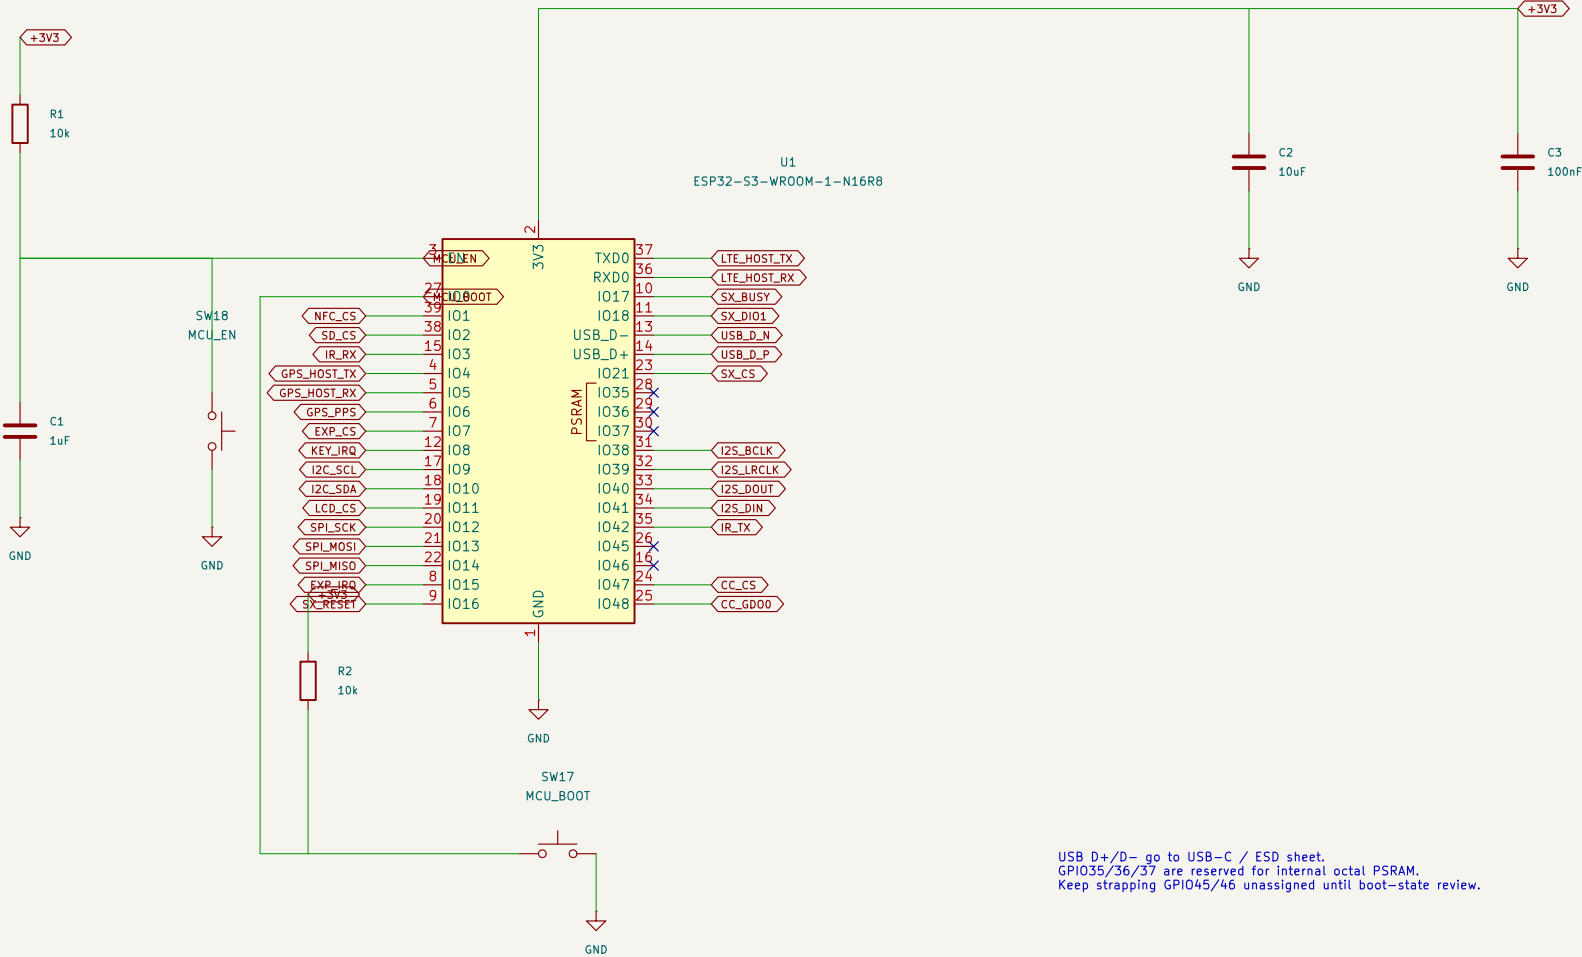

USB D+/D- go to USB-C / ESD sheet.
GPIO35/36/37 are reserved for internal octal PSRAM.
Keep strapping GPIO45/46 unassigned until boot-state review.

RESET / EN: 10k pull-up + 1uF
BOOT held low during reset selects download mode.

Circuit review in progress – not released for fabrication

Sheet: /ESP32 host, boot and reset/
File: core.kicad_sch






Title: ESP32 host, boot and reset

Size: A3
Date: 2026-09-24

Rev: A – engineering draft
Id: 2/22

Key matrix and trackball

TCAB418: 4 rows x 4 columns; remaining pins are firmware-configured GPIO. Confirm PIM447 harness orientation.

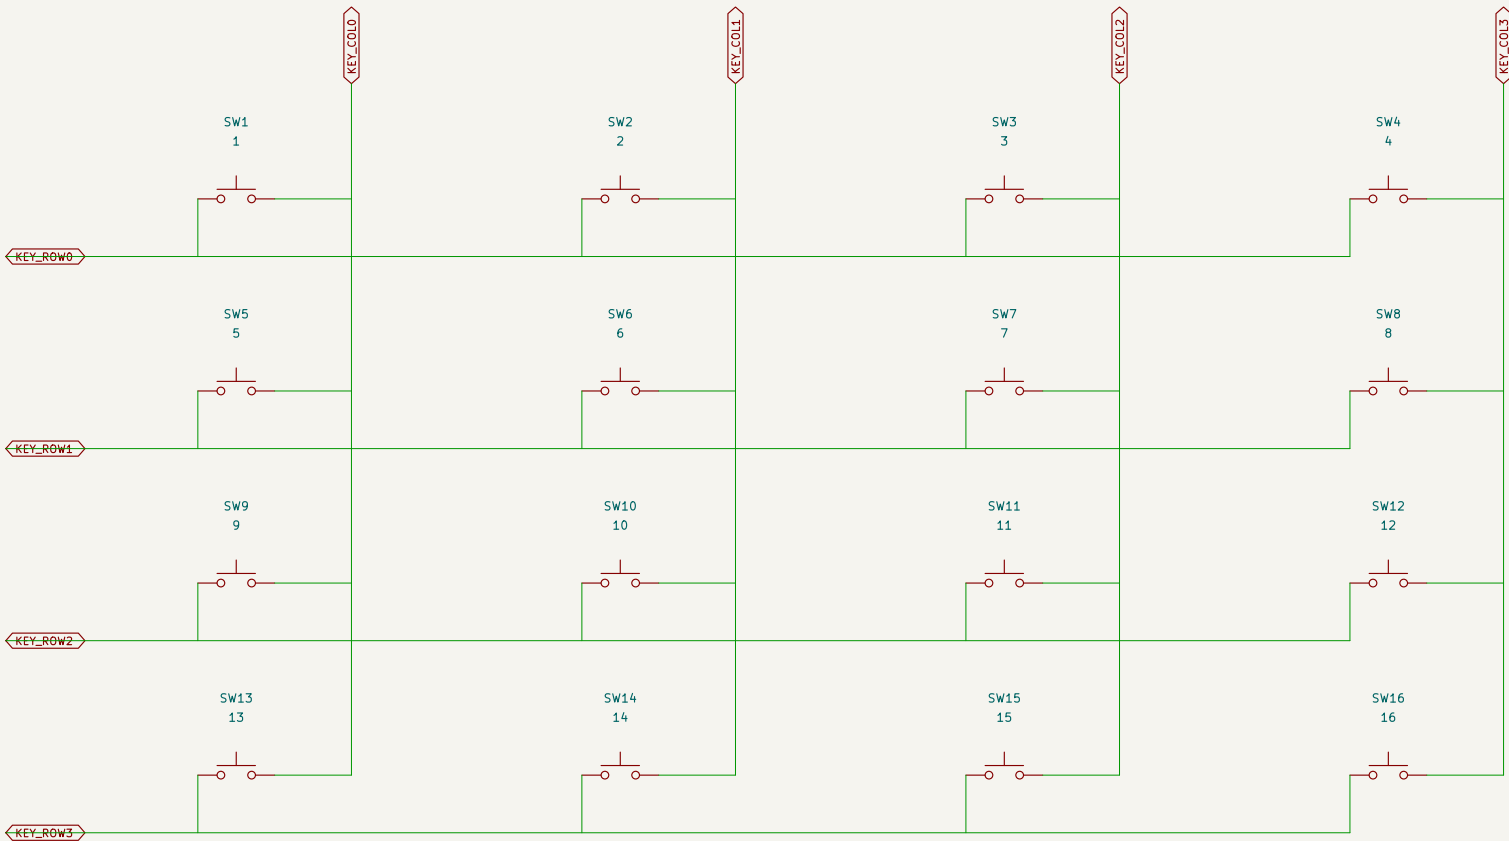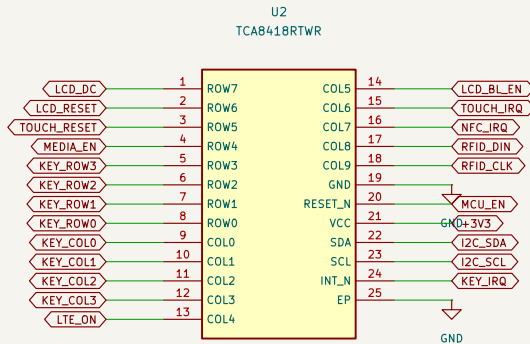

Circuit review in progress – not released for fabrication

Sheet: /Key matrix and trackball/
File: keys.kicad_sch

Title: Key matrix and trackball



Size: A3
Date: 2026-09-24

KiCad E.D.A. 10.0.6

Rev: A – engineering draft
Id: 3/22

USB-C data and ESD

CC1/CC2 terminate at the sink controller on usb-detect. Data pair goes to the ESP32. Shield/ground return needs layout review.

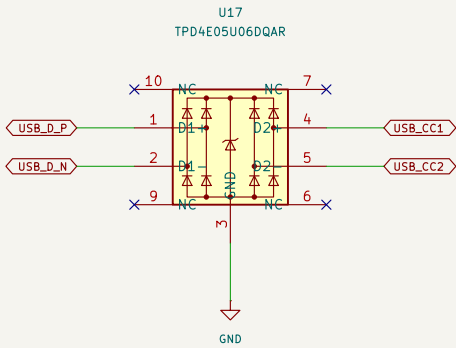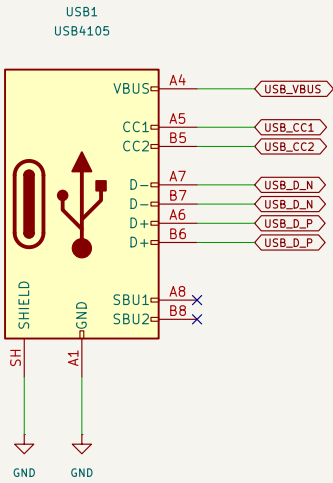

Circuit review in progress – not released for fabrication

Sheet: /USB-C data and ESD/
File: usb.kicad_sch







Title: USB-C data and ESD

Size: A3 Date: 2026-09-24
KiCad E.D.A. 10.0.6

Rev: A – engineering draft
Id: 4/22

Fused USB input and eFuse

TPS25200 R_ILIM = 100k, 1%. F1/TVS pulse coordination requires bench validation. No USB PD negotiation.

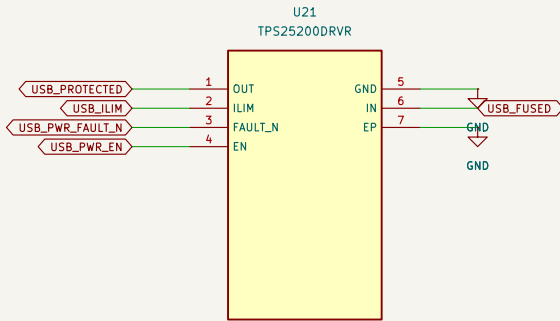

Supply flag: external USB VBUS through F1. No internal source is implied.

Circuit review in progress – not released for fabrication

Sheet: /Fused USB input and eFuse/
File: usb-input.kicad_sch

Title: **Fused USB input and eFuse**


Size: A3
KiCad E.D.A. 10.0.6

Date: 2026-09-24

Rev: **A – engineering draft**
Id: 5/22


USB-C source detection and permission

Sink-only internal Rd. OUT1 low authorizes Type-C 1.5A/3A. Legacy permission requires USB enumeration; see charger-policy.json.

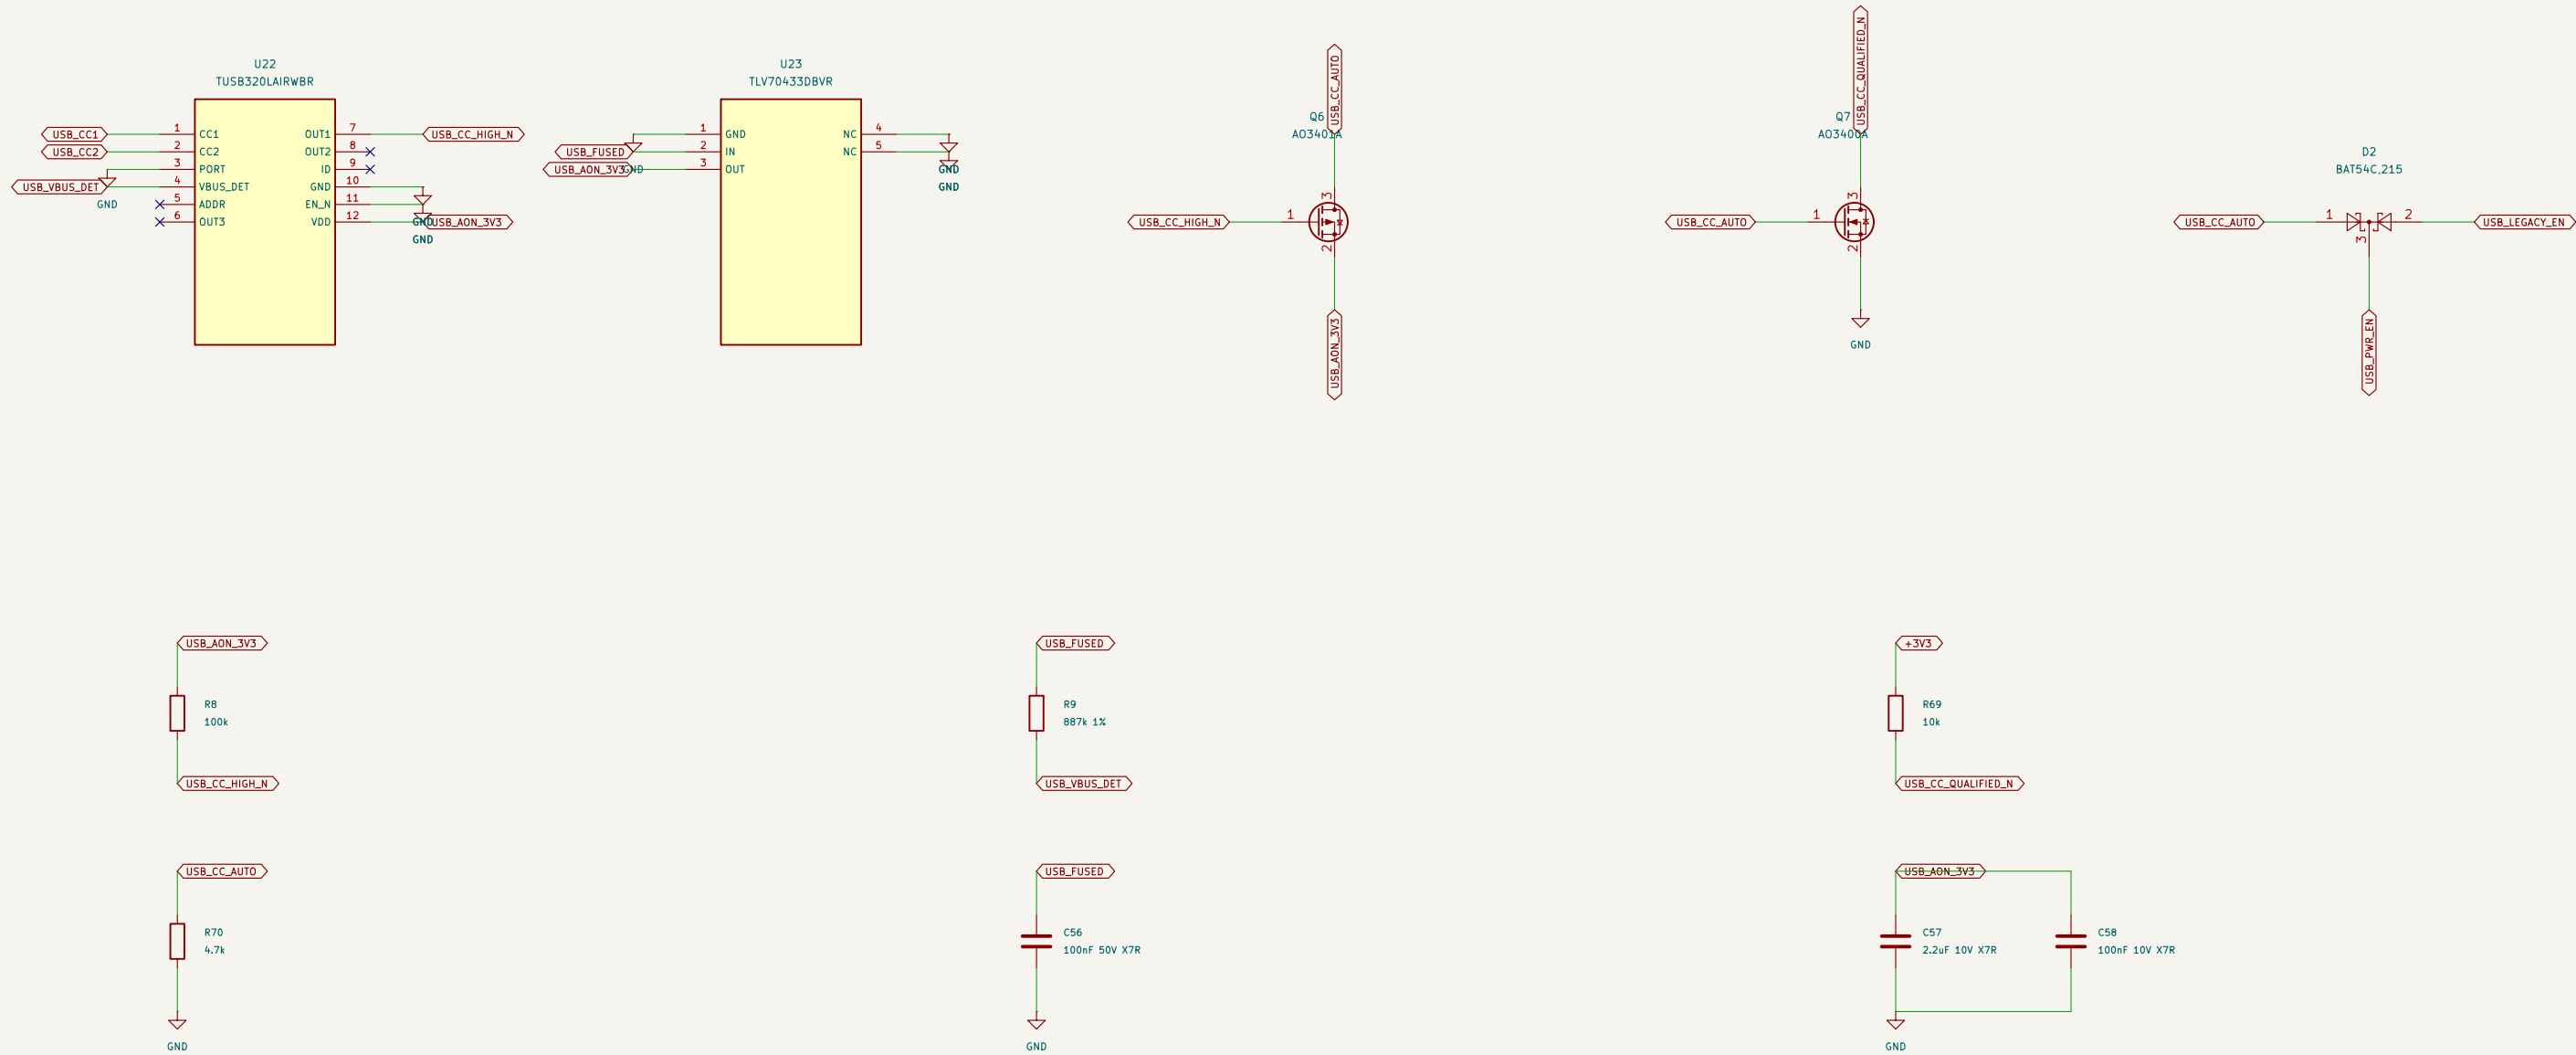

Battery, thermistor and programmable charger

Verify actual battery polarity. J2 is a battery-mounted 10k B3435 NTC. CE defaults OFF. Firmware must apply charger-policy.json.

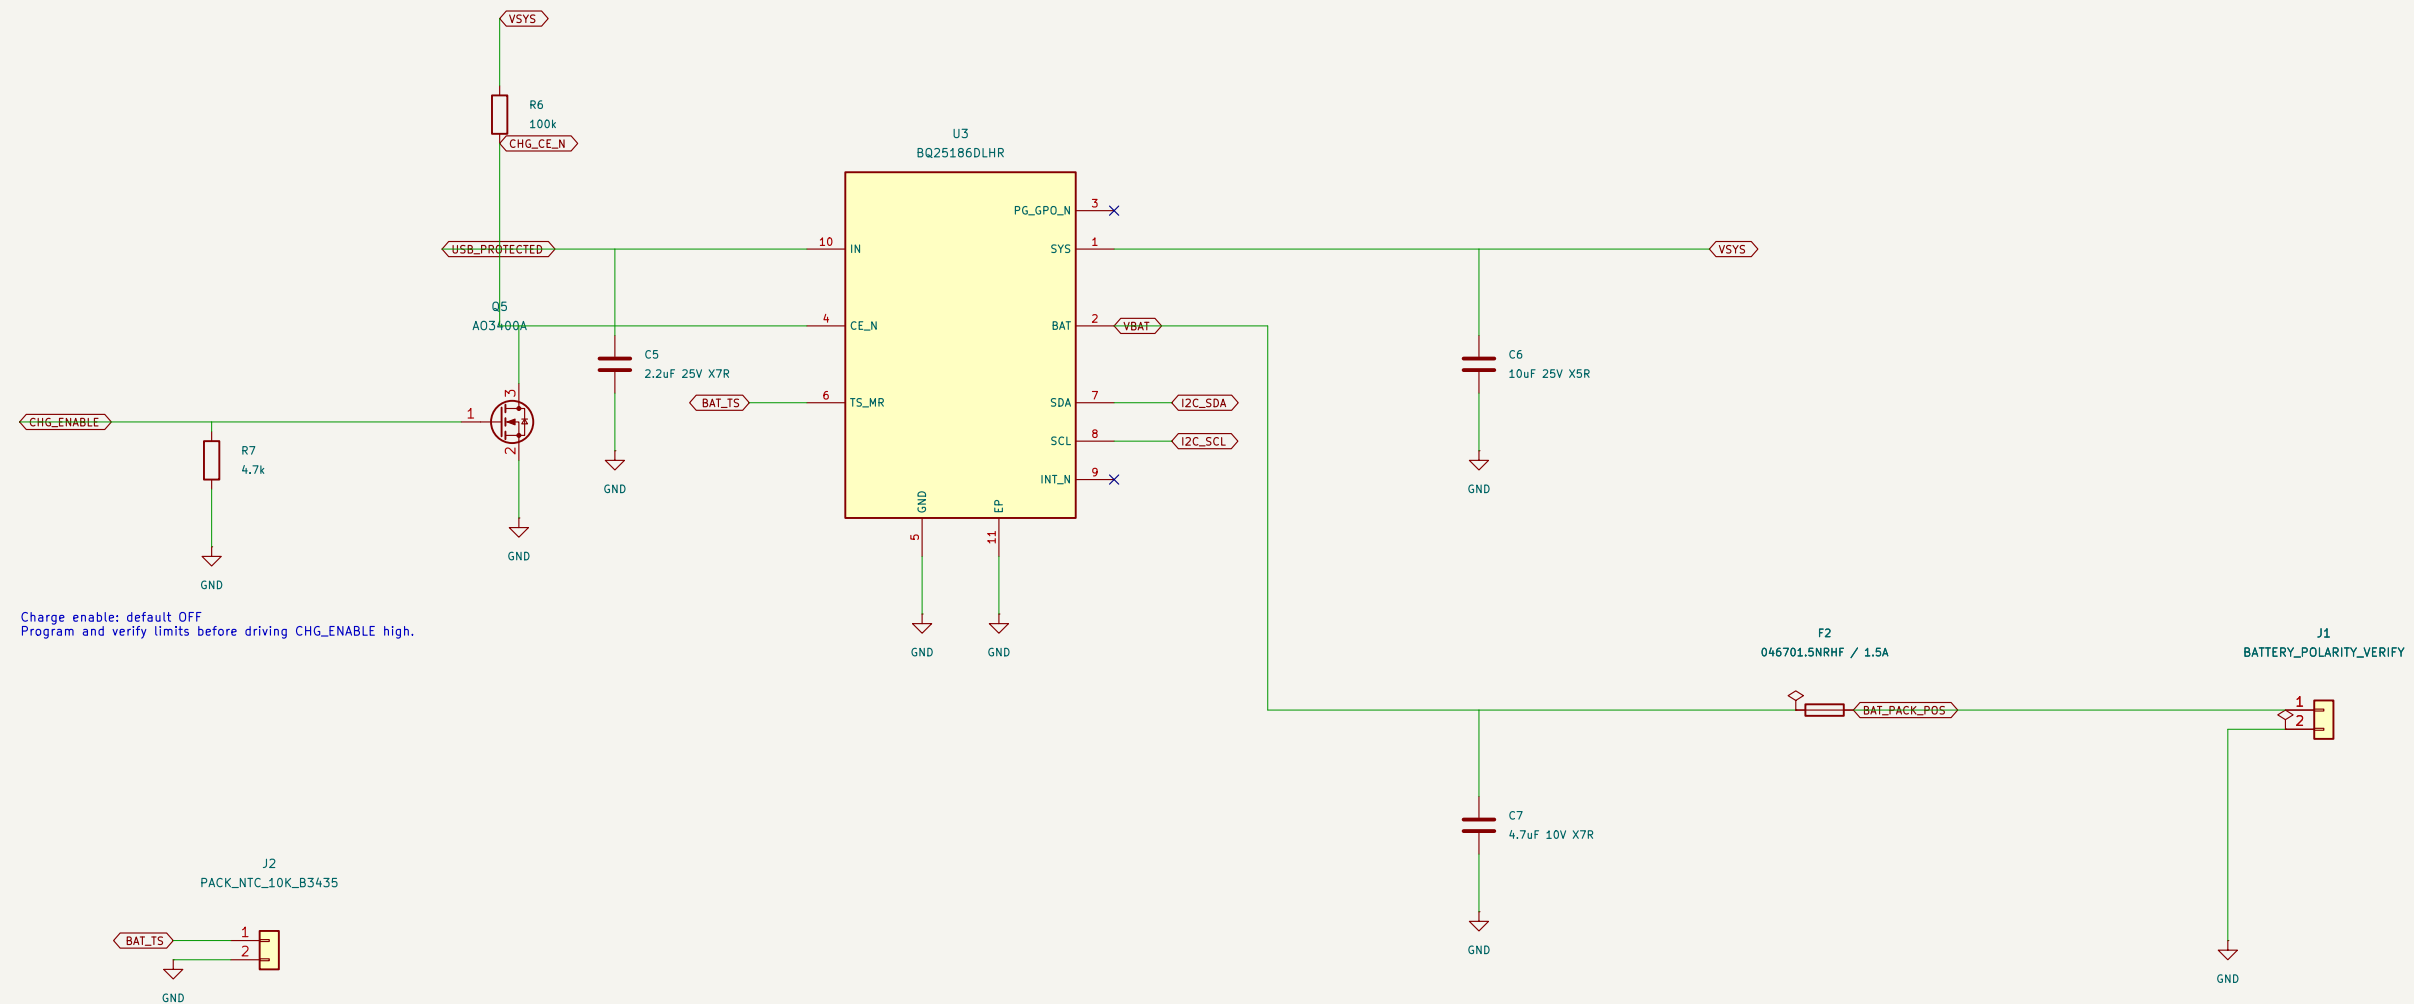

Battery-mounted thermistor
Do not substitute a fixed resistor.

Protected 103665 pack / 3000 mAh
F2 does not enforce the pack operating-current limit.

Supply flags identify the external protected pack through F2 and its return.

Circuit review in progress – not released for fabrication

Sheet: /Battery, thermistor and programmable charger/
File: power.kicad_sch

Title: Battery, thermistor and programmable charger

Size: A3




Date: 2026-09-24

Rev: A – engineering draft

Id: 7/22

Power control and fuel gauge

I2C: TCA9536 0x41, MAX17048 0x36, charger 0x6A. Preload low output latches before enabling charger-control outputs.

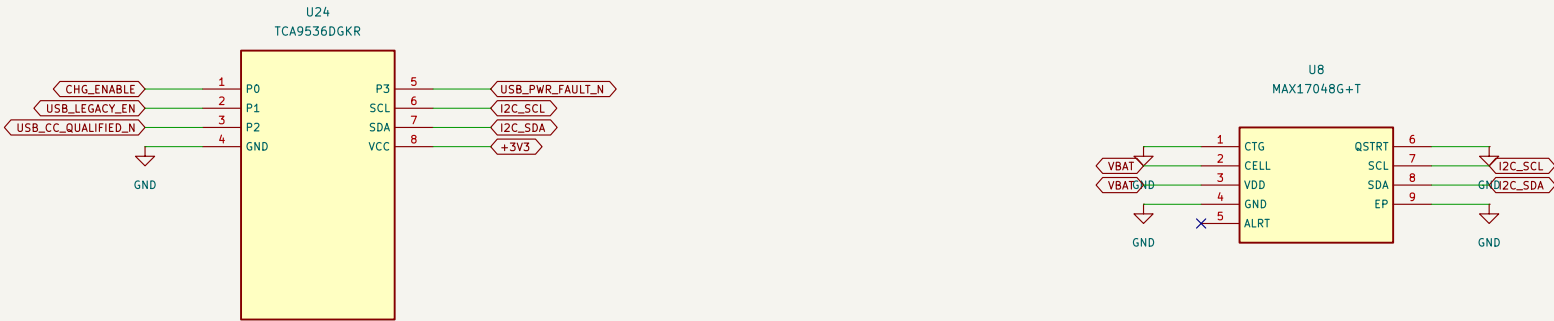

Circuit review in progress – not released for fabrication

Sheet: /Power control and fuel gauge/
File: power-control.kicad_sch

Title: Power control and fuel gauge


Size: A3
KiCad E.D.A. 10.0.6

Date: 2026-09-24

Rev: A – engineering draft
Id: 8/22

Main 3.3 V buck–boost supply

TPS63802 local PCB copper is routed. External distribution, effective capacitance, thermal limits and load transients remain to qualify.

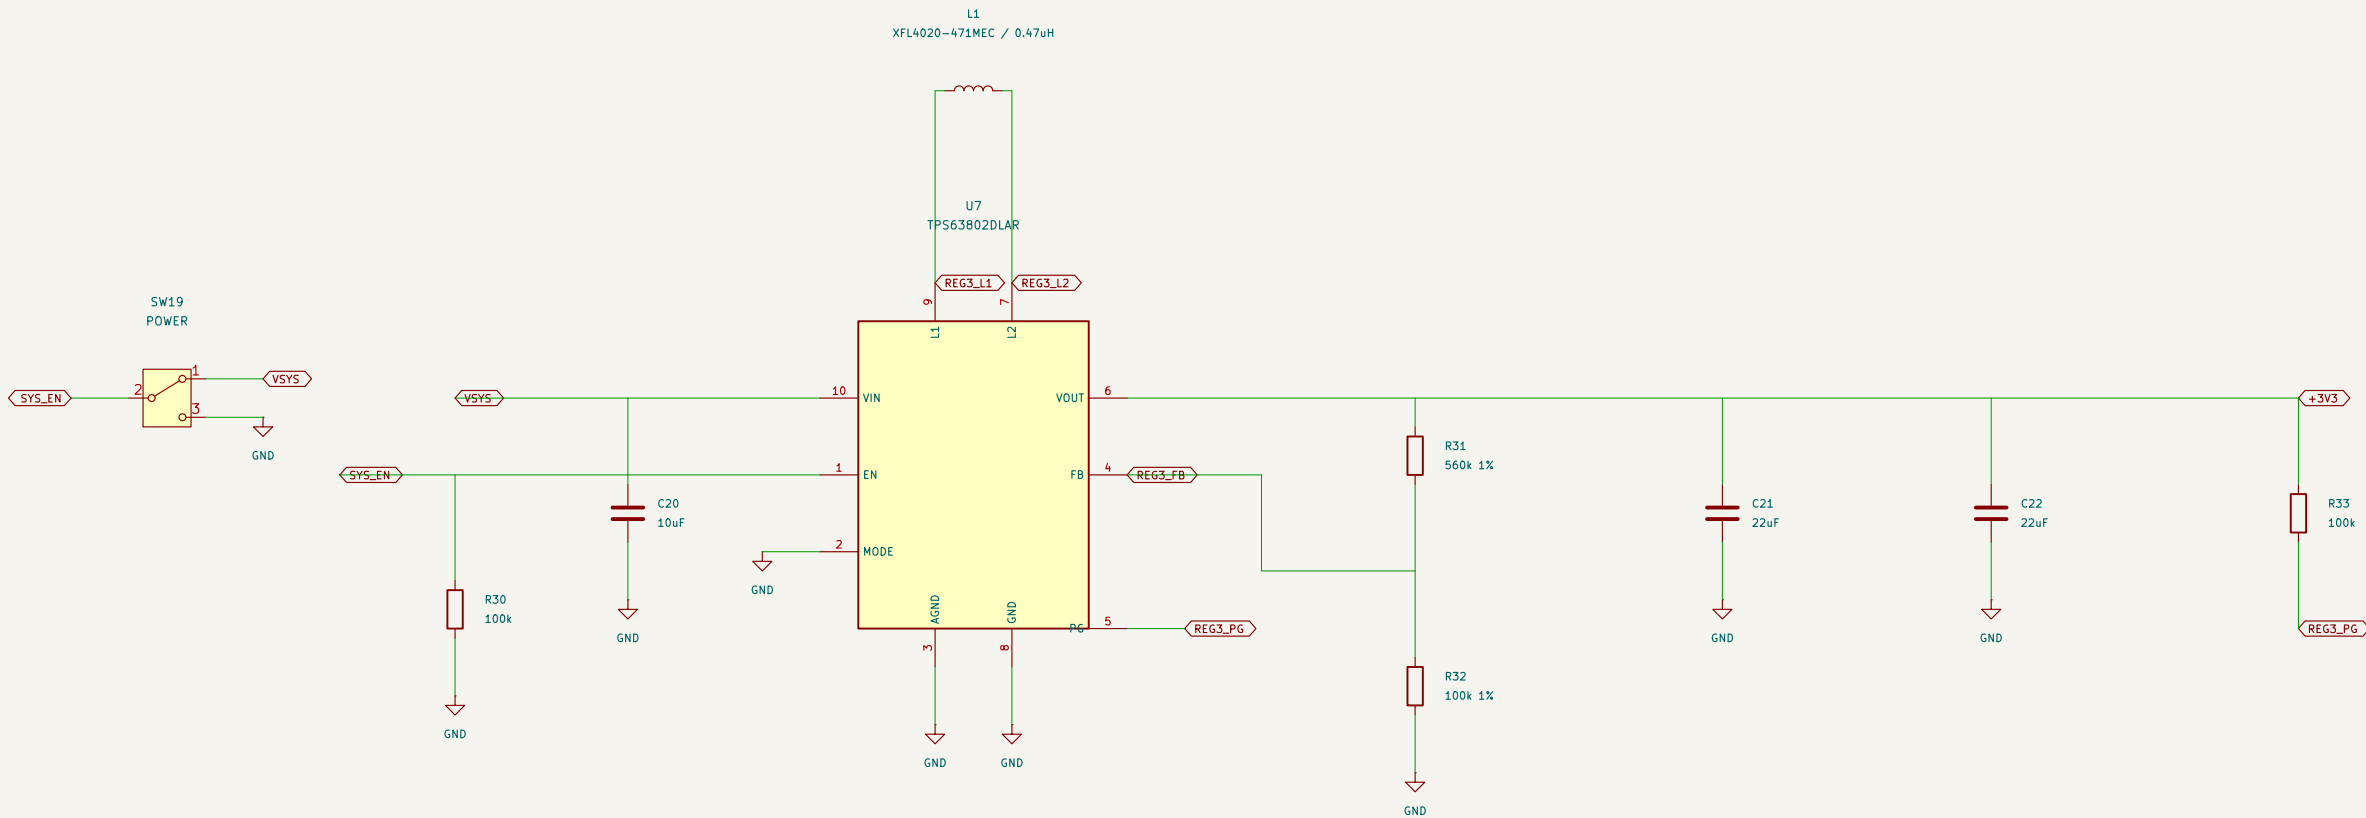

0.6 V reference x (1 + 560k / 100k) = 3.3 V nominal.
Feedback senses the output capacitor node; keep it clear of the switching loop.

SW19 controls SYS_EN.
Battery / charger circuitry can remain energized while logic rails are off.

Circuit review in progress – not released for fabrication

Sheet: /Main 3.3 V buck–boost supply/
File: reg3.kicad_sch

Title: Main 3.3 V buck–boost supply







Size: A3
KiCad E.D.A. 10.0.6

Date: 2026–09–24

Rev: A – engineering draft
Id: 9/22

Auxiliary 5 V and 1.8 V supplies

Switching loops must be short in PCB layout. The 5 V rail also supplies display backlight and the LF reader.

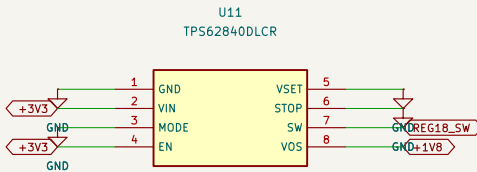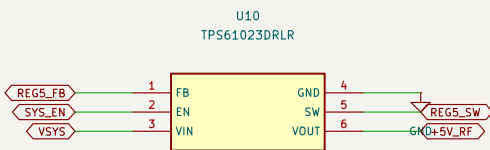

Circuit review in progress – not released for fabrication

Sheet: /Auxiliary 5 V and 1.8 V supplies/
File: aux-power.kicad_sch

Title: Auxiliary 5 V and 1.8 V supplies













Size: A3
KiCad E.D.A. 10.0.6

Date: 2026-09-24

Rev: A – engineering draft
Id: 10/22

Regulated modem supply and enable

Nominal output 3.792 V. Exact modem burst current and MakerFocus pack current budget are unresolved release blockers.

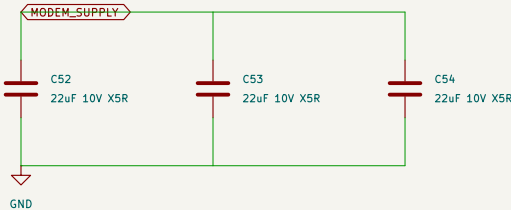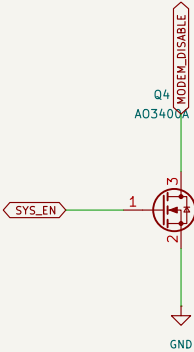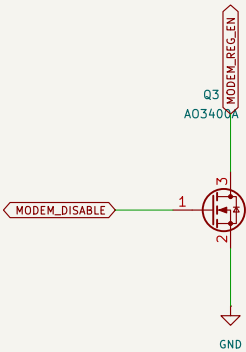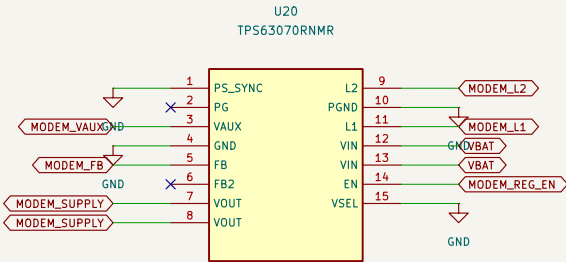

Circuit review in progress – not released for fabrication

Sheet: /Regulated modem supply and enable/
File: modem-power.kicad_sch

Title: Regulated modem supply and enable





Size: A3
KiCad E.D.A. 10.0.6

Date: 2026-09-24

Rev: A – engineering draft
Id: 11/22

SX1262 LoRa radio

902–928 MHz design intent. Clock, DC–DC and RF matching must follow the selected Semtech reference circuit.

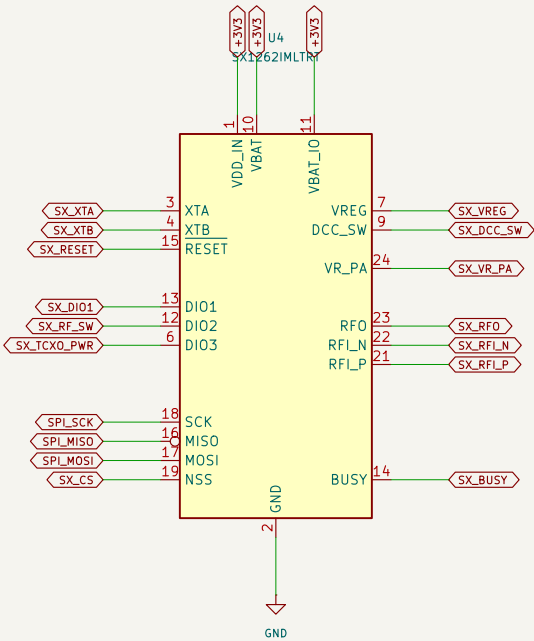

Circuit review in progress – not released for fabrication

Sheet: /SX1262 LoRa radio/
File: radios.kicad_sch

Title: SX1262 LoRa radio


Size: A3
KiCad E.D.A. 10.0.6

Date: 2026–09–24

Rev: A – engineering draft
Id: 12/22

CC1101 sub-GHz radio

868/915MHz frontend: TI SWRR045 rev3.0 / SWS061l Fig11. RF layout and tuning are NOT qualified. Separate 50-ohm antenna.

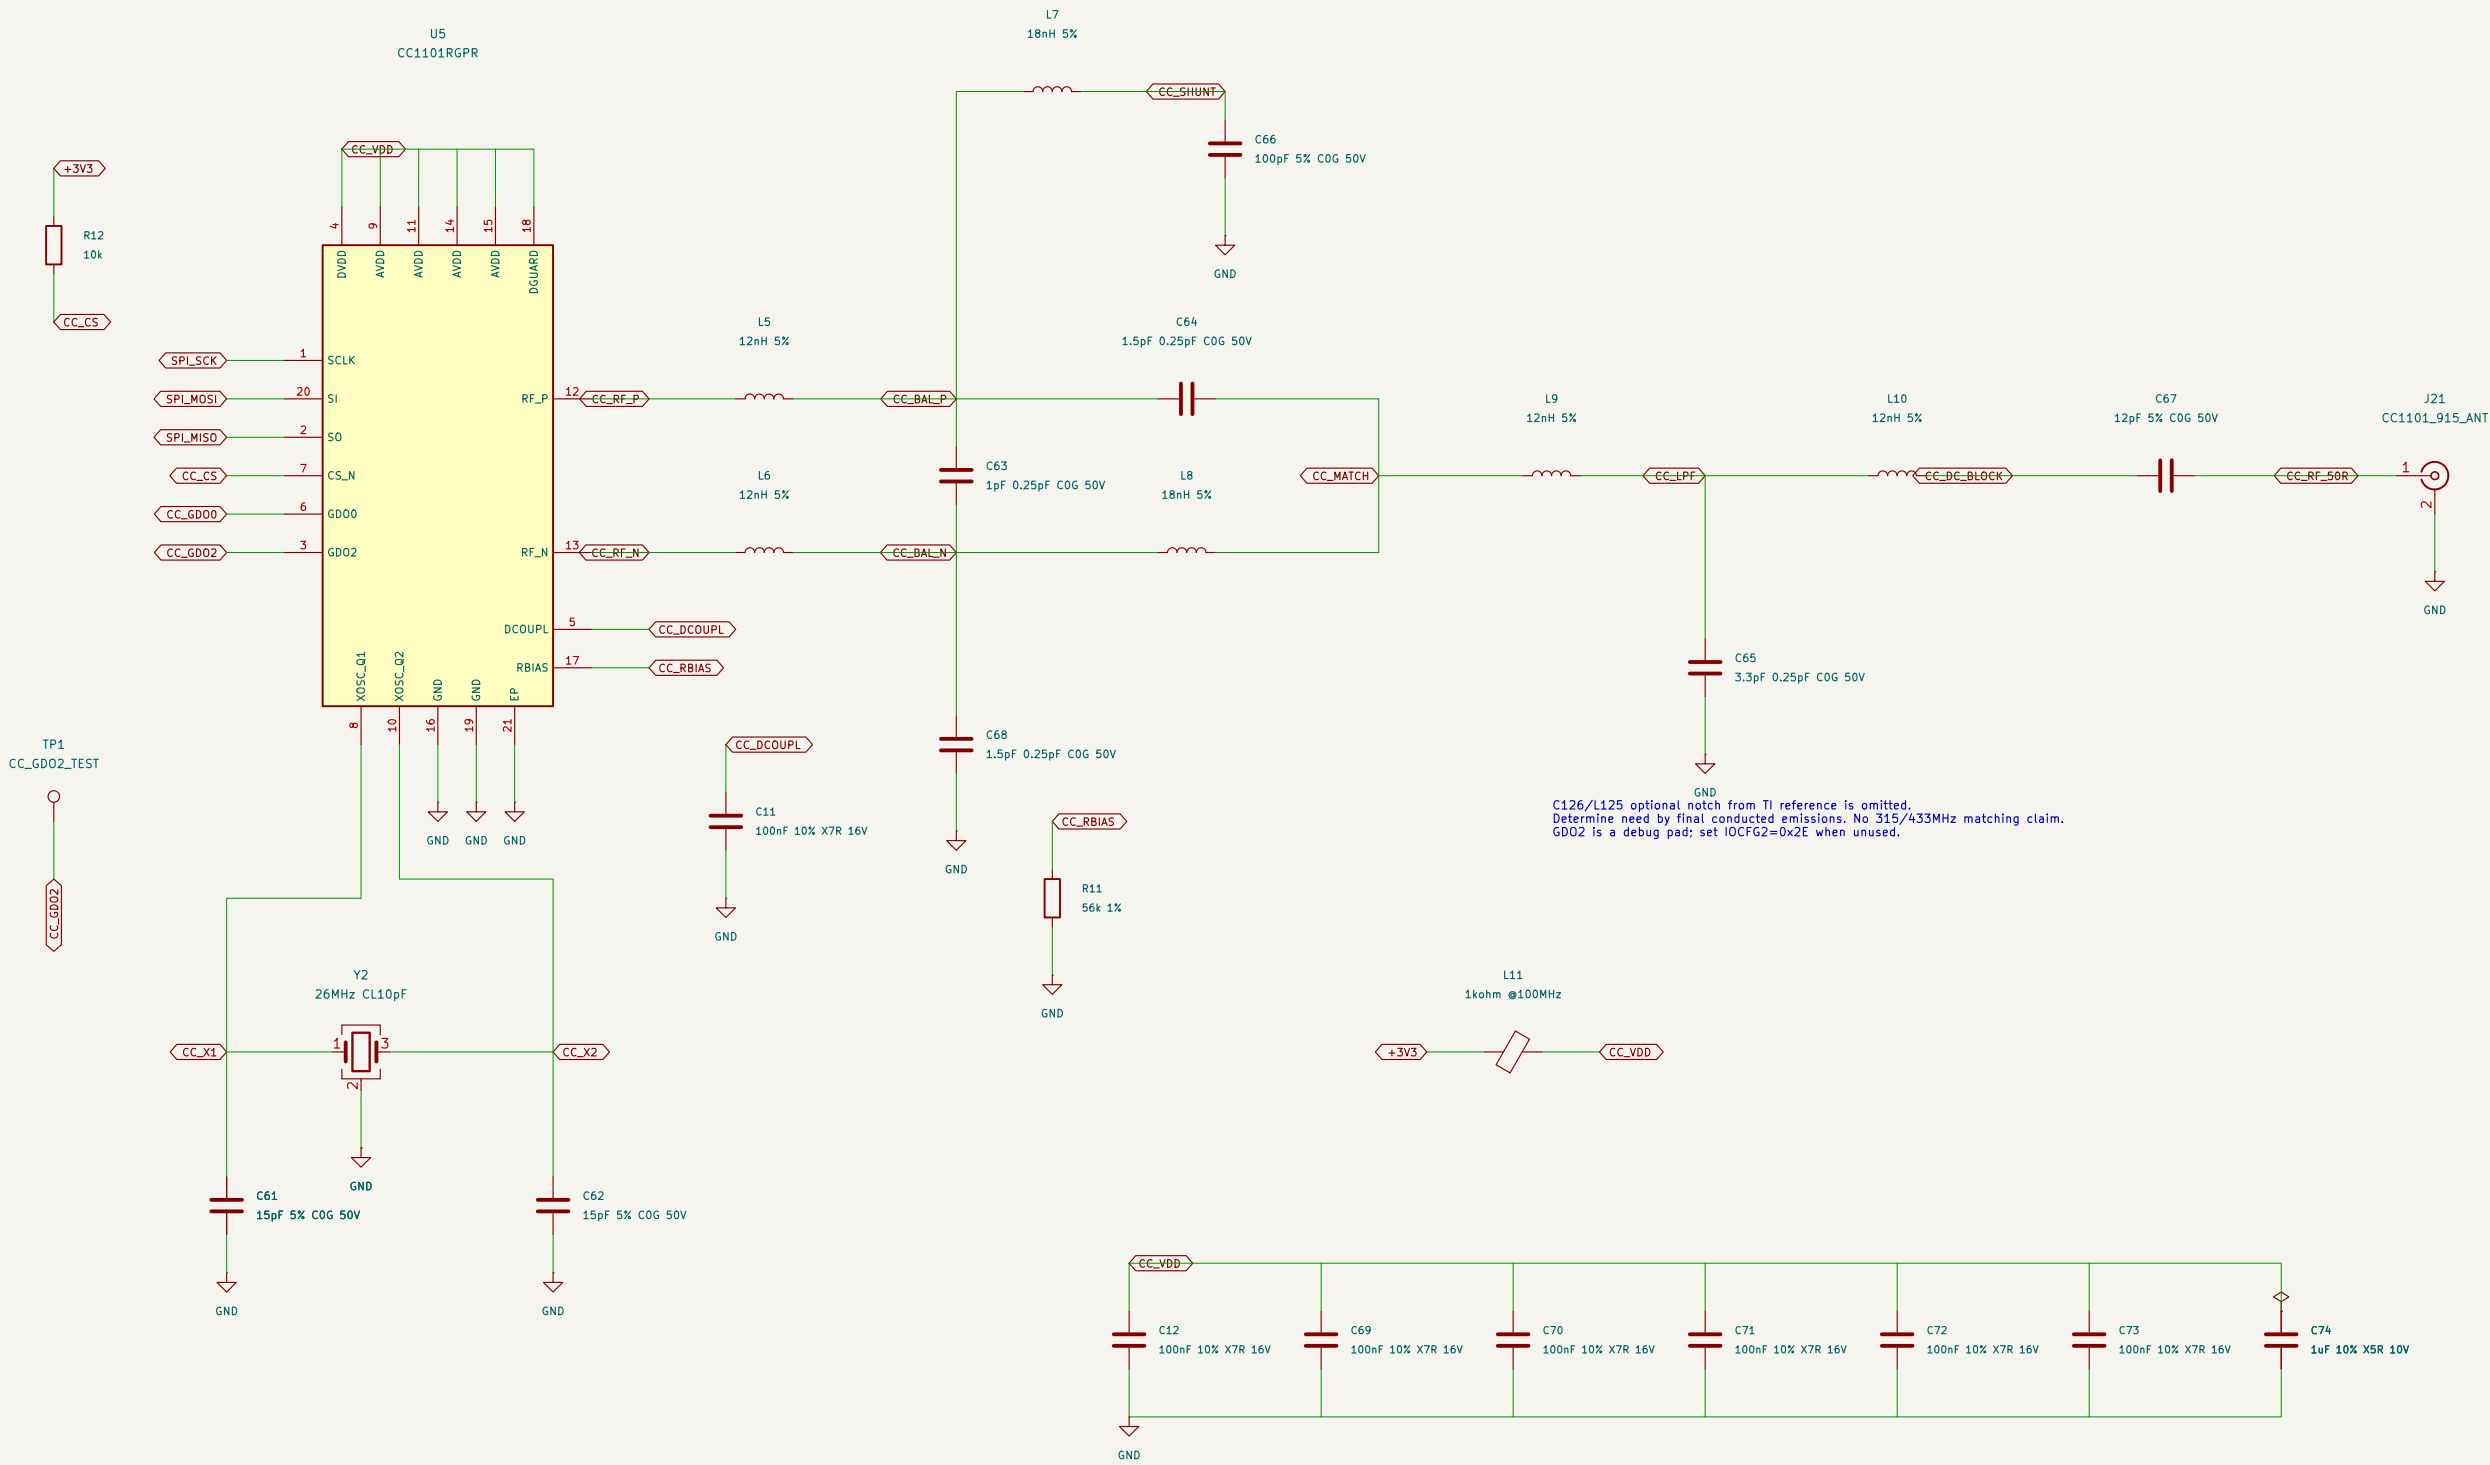

Y2: ABM8-26.000MHZ-10-D-1-G-T
CL = 15pF / 2 + estimated 2.5pF stray = 10pF.
Measure oscillator frequency, startup and drive level.

C126/L125 optional notch from TI reference is omitted.
Determine need by final conducted emissions. No 315/433MHz matching claim.
GD02 is a debug pad; set IOCFG2=0x2E when unused.

CC_VDD flag: main +3V3 through passive L11; not an independent source.
Place one 100nF at each supply pin group, plus local 1uF bulk.

Circuit review in progress – not released for fabrication

Sheet: /CC1101 sub-GHz radio/
File: cc-radio.kicad_sch

Title: CC1101 sub-GHz radio

Size: A3 Date: 2026-09-24



KiCad E.D.A. 10.0.6

Rev: A – engineering draft

Id: 13/22

125 kHz reader analog circuit

HTRC110 requires its oscillator, QGND/CEXT bypass, resonant coil network and a timing-capable host interface.

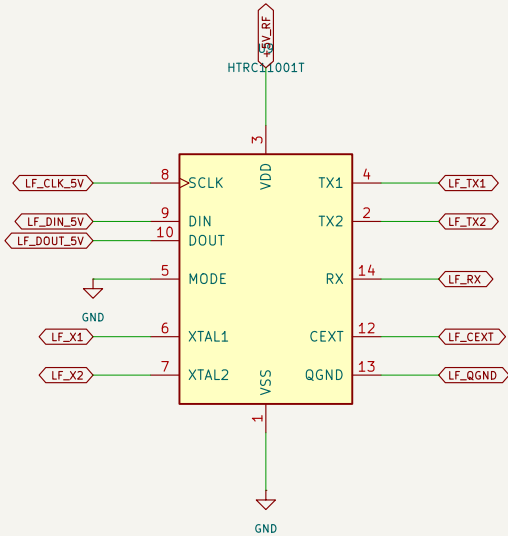

Circuit review in progress – not released for fabrication

Sheet: /125 kHz reader analog circuit/
File: lf-radio.kicad_sch

Title: 125 kHz reader analog circuit





Size: A3
KiCad E.D.A. 10.0.6

Date: 2026-09-24

Rev: A – engineering draft
Id: 14/22

LF reader logic translation

AHCT inputs accept 3.3 V logic at 5 V supply; LVC return buffer is powered at 3.3 V. Host timing remains a design requirement.

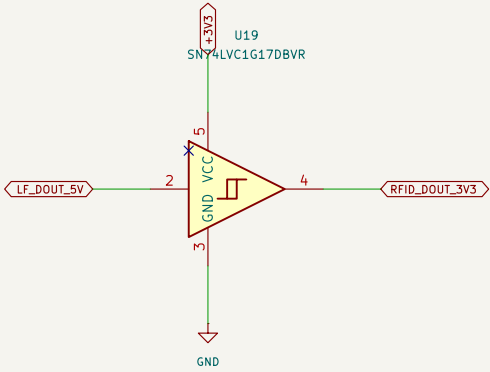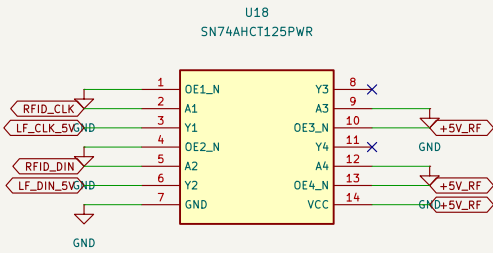

Circuit review in progress – not released for fabrication

Sheet: /LF reader logic translation/
File: lf-support.kicad_sch



Title: LF reader logic translation

Size: A3
Date: 2026-09-24

Rev: A – engineering draft
Id: 15/22

GNSS receiver and passive antenna

MAX-M10S passive antenna. V_BCKP remains open: cold starts after power removal. No direct LiPo connection.

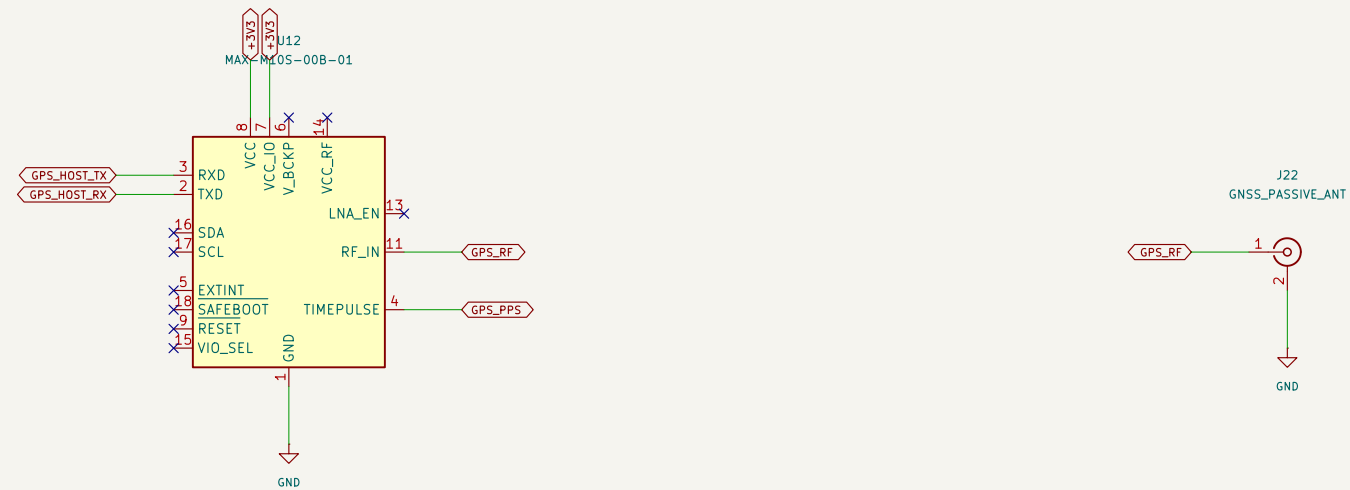

Circuit review in progress – not released for fabrication






Sheet: /GNSS receiver and passive antenna/
File: gnss-antennas.kicad_sch

Title: GNSS receiver and passive antenna

Size: A3	Date: 2026-09-24	Rev: A – engineering draft
KiCad E.D.A. 10.0.6		Id: 16/22

NFC reader, oscillator and local supplies

ST25R3916B needs a tuned case-mounted loop and TX/RX matching network. Verify crystal load against the selected crystal.

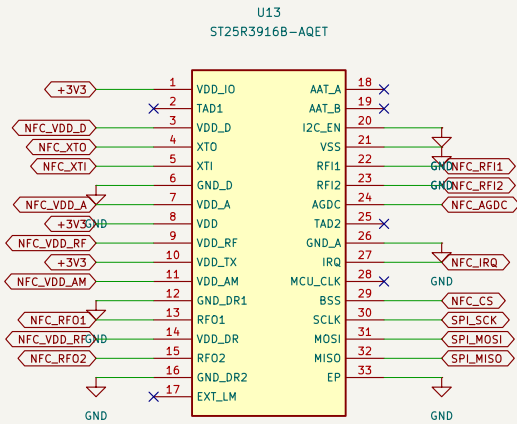

Circuit review in progress – not released for fabrication

Sheet: /NFC reader, oscillator and local supplies/
File: nfc.kicad_sch






Title: NFC reader, oscillator and local supplies

Size: A3
Date: 2026-09-24

Rev: A – engineering draft
Id: 17/22

Media speaker amplifier and digital microphone

Top-mounted media speaker uses differential outputs: neither speaker wire is ground. Digital microphone is case-bottom mounted.

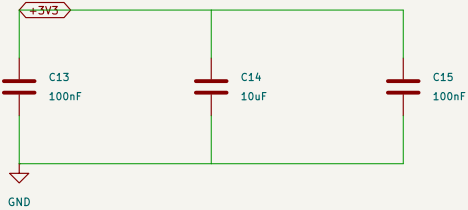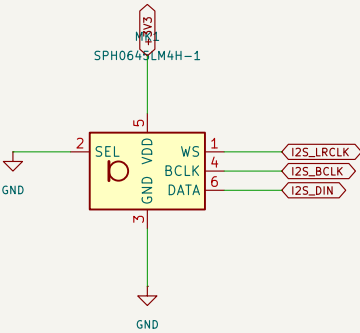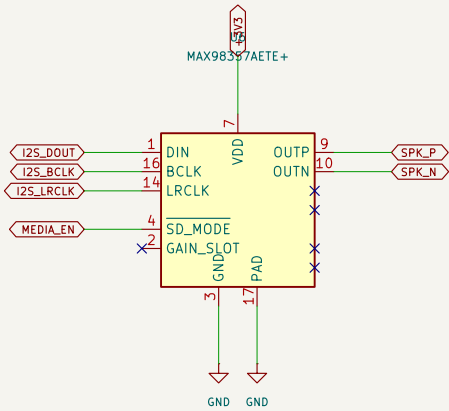

Circuit review in progress – not released for fabrication


Sheet: /Media speaker amplifier and digital microphone/
File: audio.kicad_sch

Title: Media speaker amplifier and digital microphone

Size: A3	Date: 2026-09-24	Rev: A – engineering draft
KiCad E.D.A. 10.0.6		Id: 18/22

Cellular adapter and call–audio harnesses

Replaceable modem adapter owns SIM, cellular RF and modem–level translation. No universal–carrier guarantee. Speaker top / mic bottom.

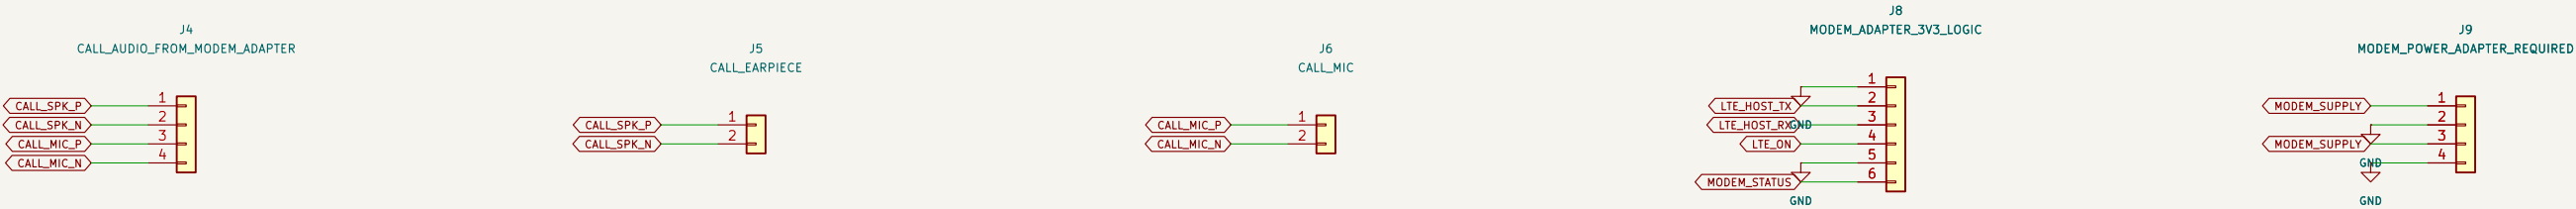

Circuit review in progress – not released for fabrication













Sheet: /Cellular adapter and call–audio harnesses/
File: interfaces.kicad_sch

Title: Cellular adapter and call–audio harnesses

Size: A3	Date: 2026–09–24	Rev: A – engineering draft
KiCad E.D.A. 10.0.6		Id: 19/22

Protected external module port


J16 pin order retained. Switch accessories with power off. TPS2553 limit and ESD path require qualification.

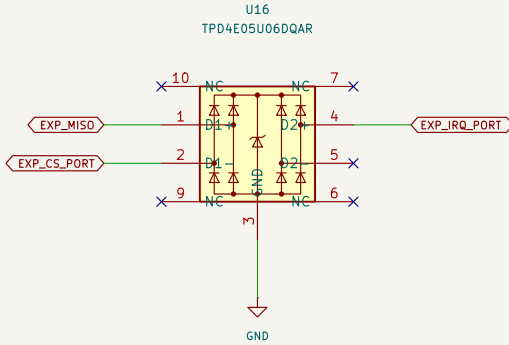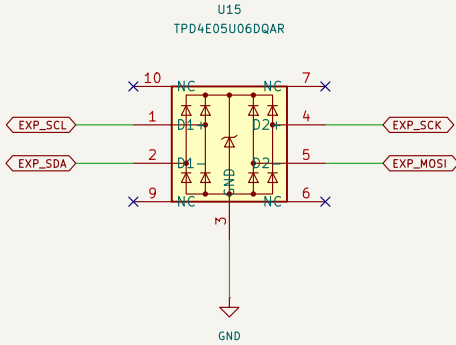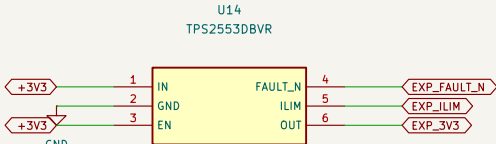

Circuit review in progress – not released for fabrication		
Sheet: /Protected external module port/ File: protection.kicad_sch		
Title: Protected external module port		
Size: A3	Date: 2026-09-24	Rev: A – engineering draft
KiCad E.D.A. 10.0.6		Id: 20/22

MicroSD and case-mounted infrared

SPI microSD, transistor-driven IR LED, filtered receiver supply. Confirm case LED/receiver polarity and GPIO3 boot behavior.

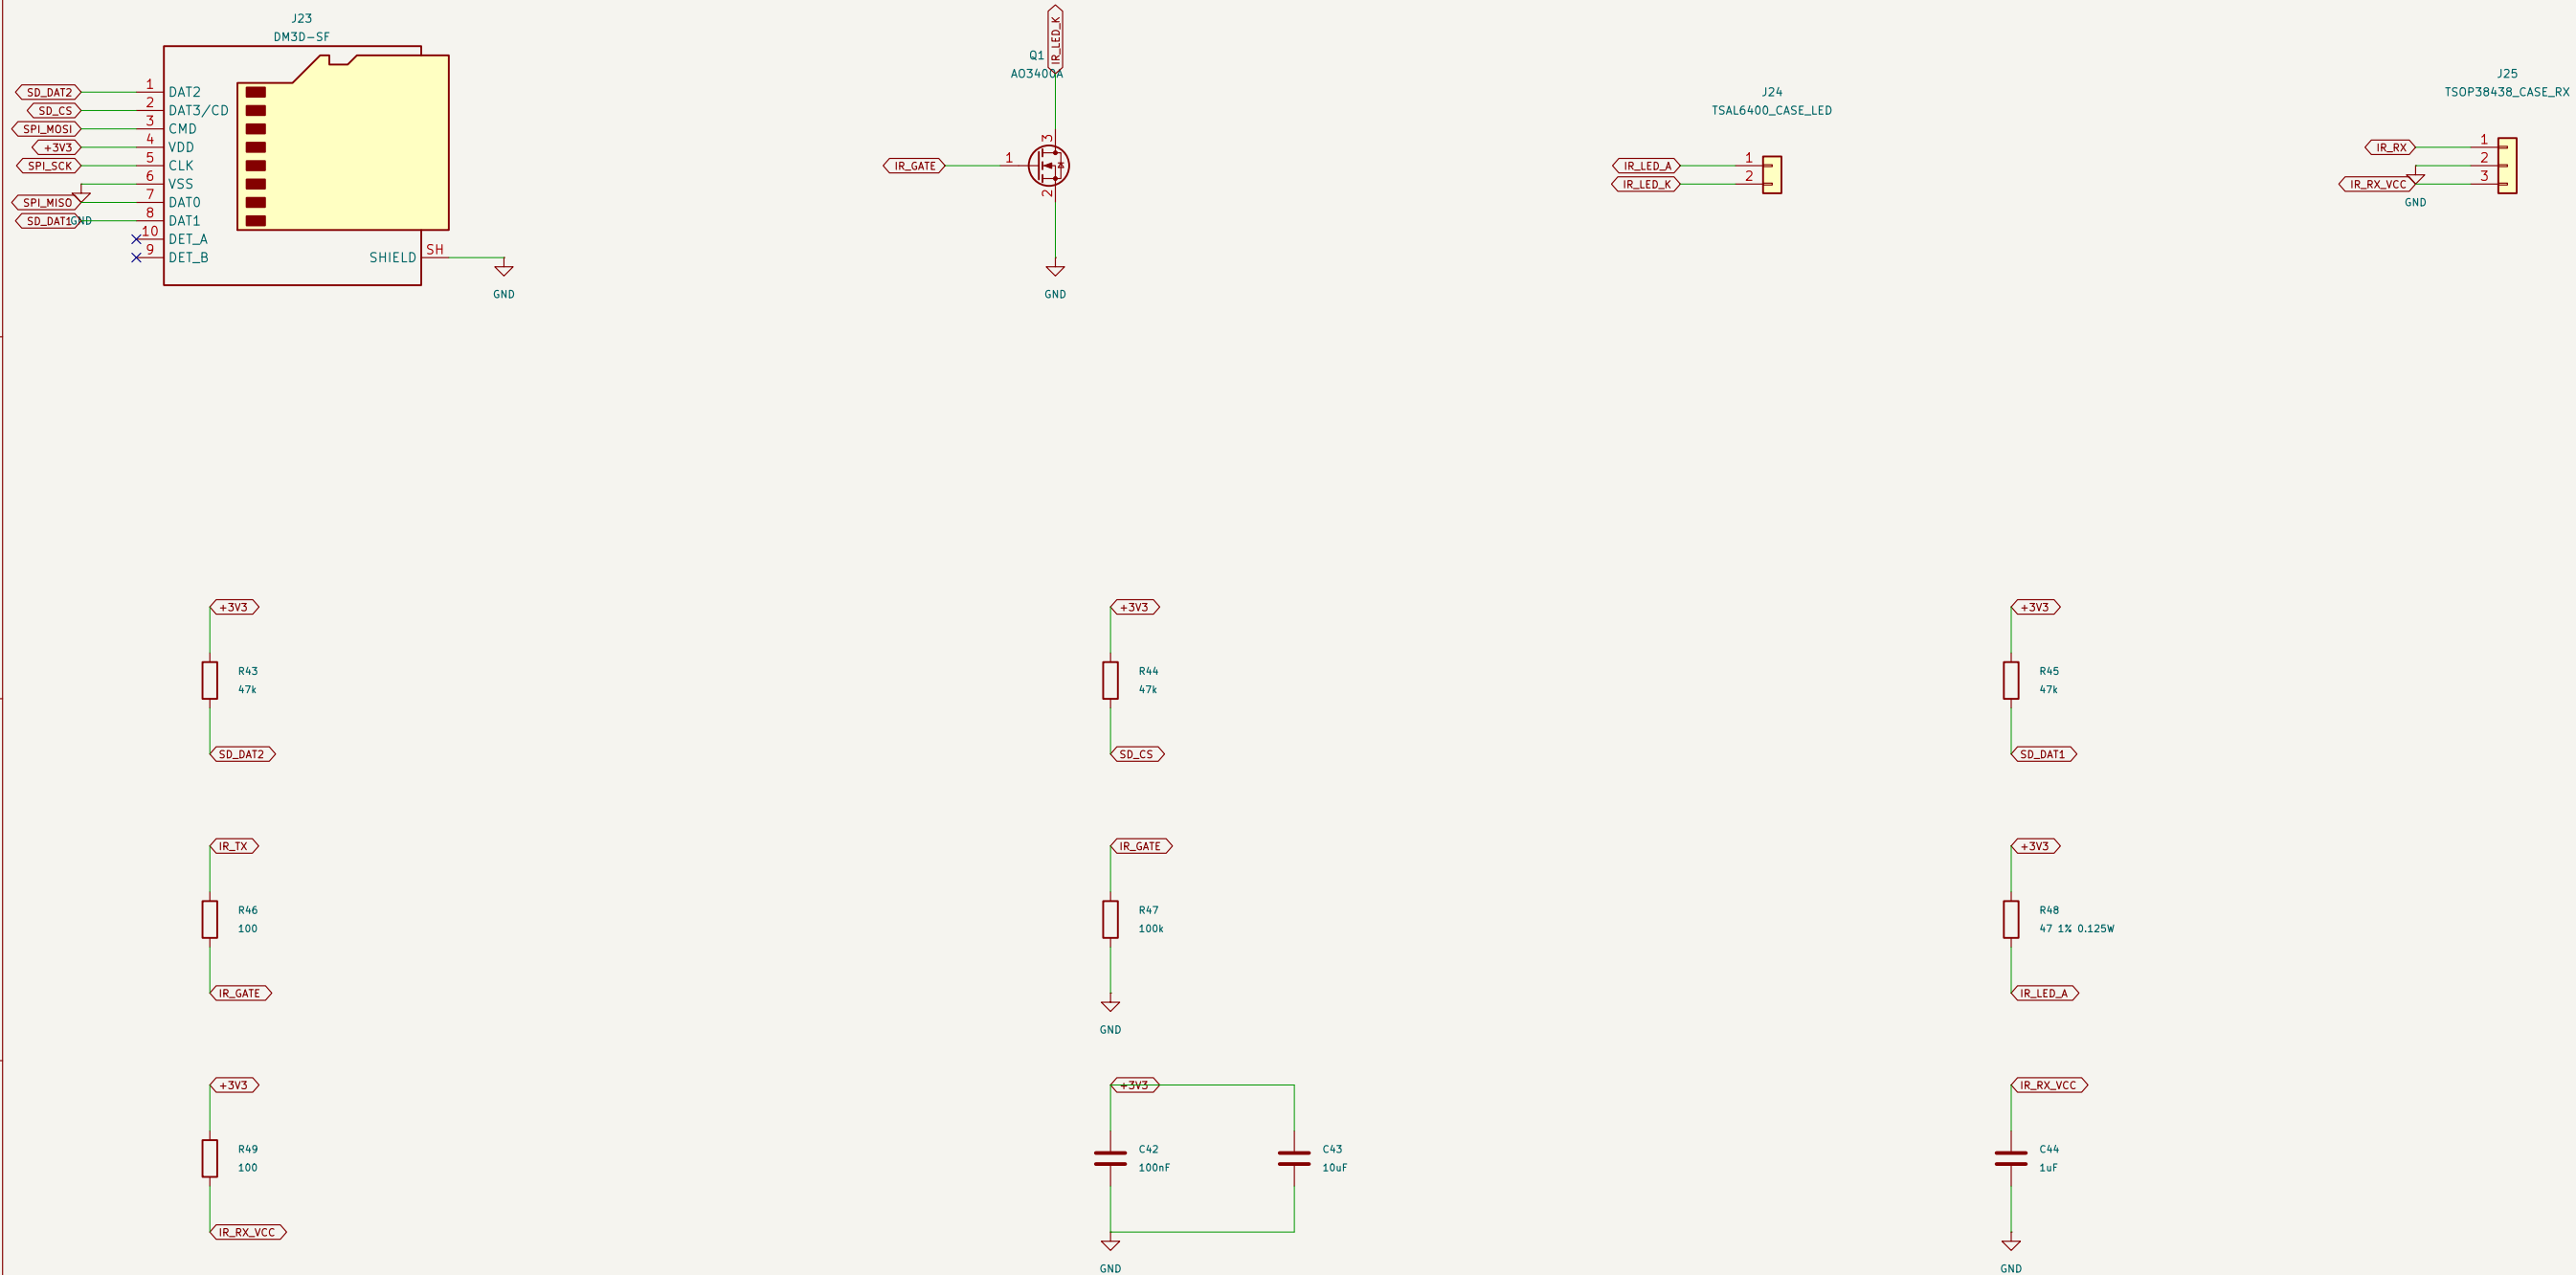

Circuit review in progress – not released for fabrication

Sheet: /MicroSD and case-mounted infrared/
File: storage-ir.kicad_sch

Title: MicroSD and case-mounted infrared

Size: A3


Date: 2026-09-24

Rev: A – engineering draft

Id: 21/22

External display, touch and backlight

ER-TFT024IPS-3 connector contract. Verify purchased CTP option, FPC orientation, LED branches and supply tolerances.

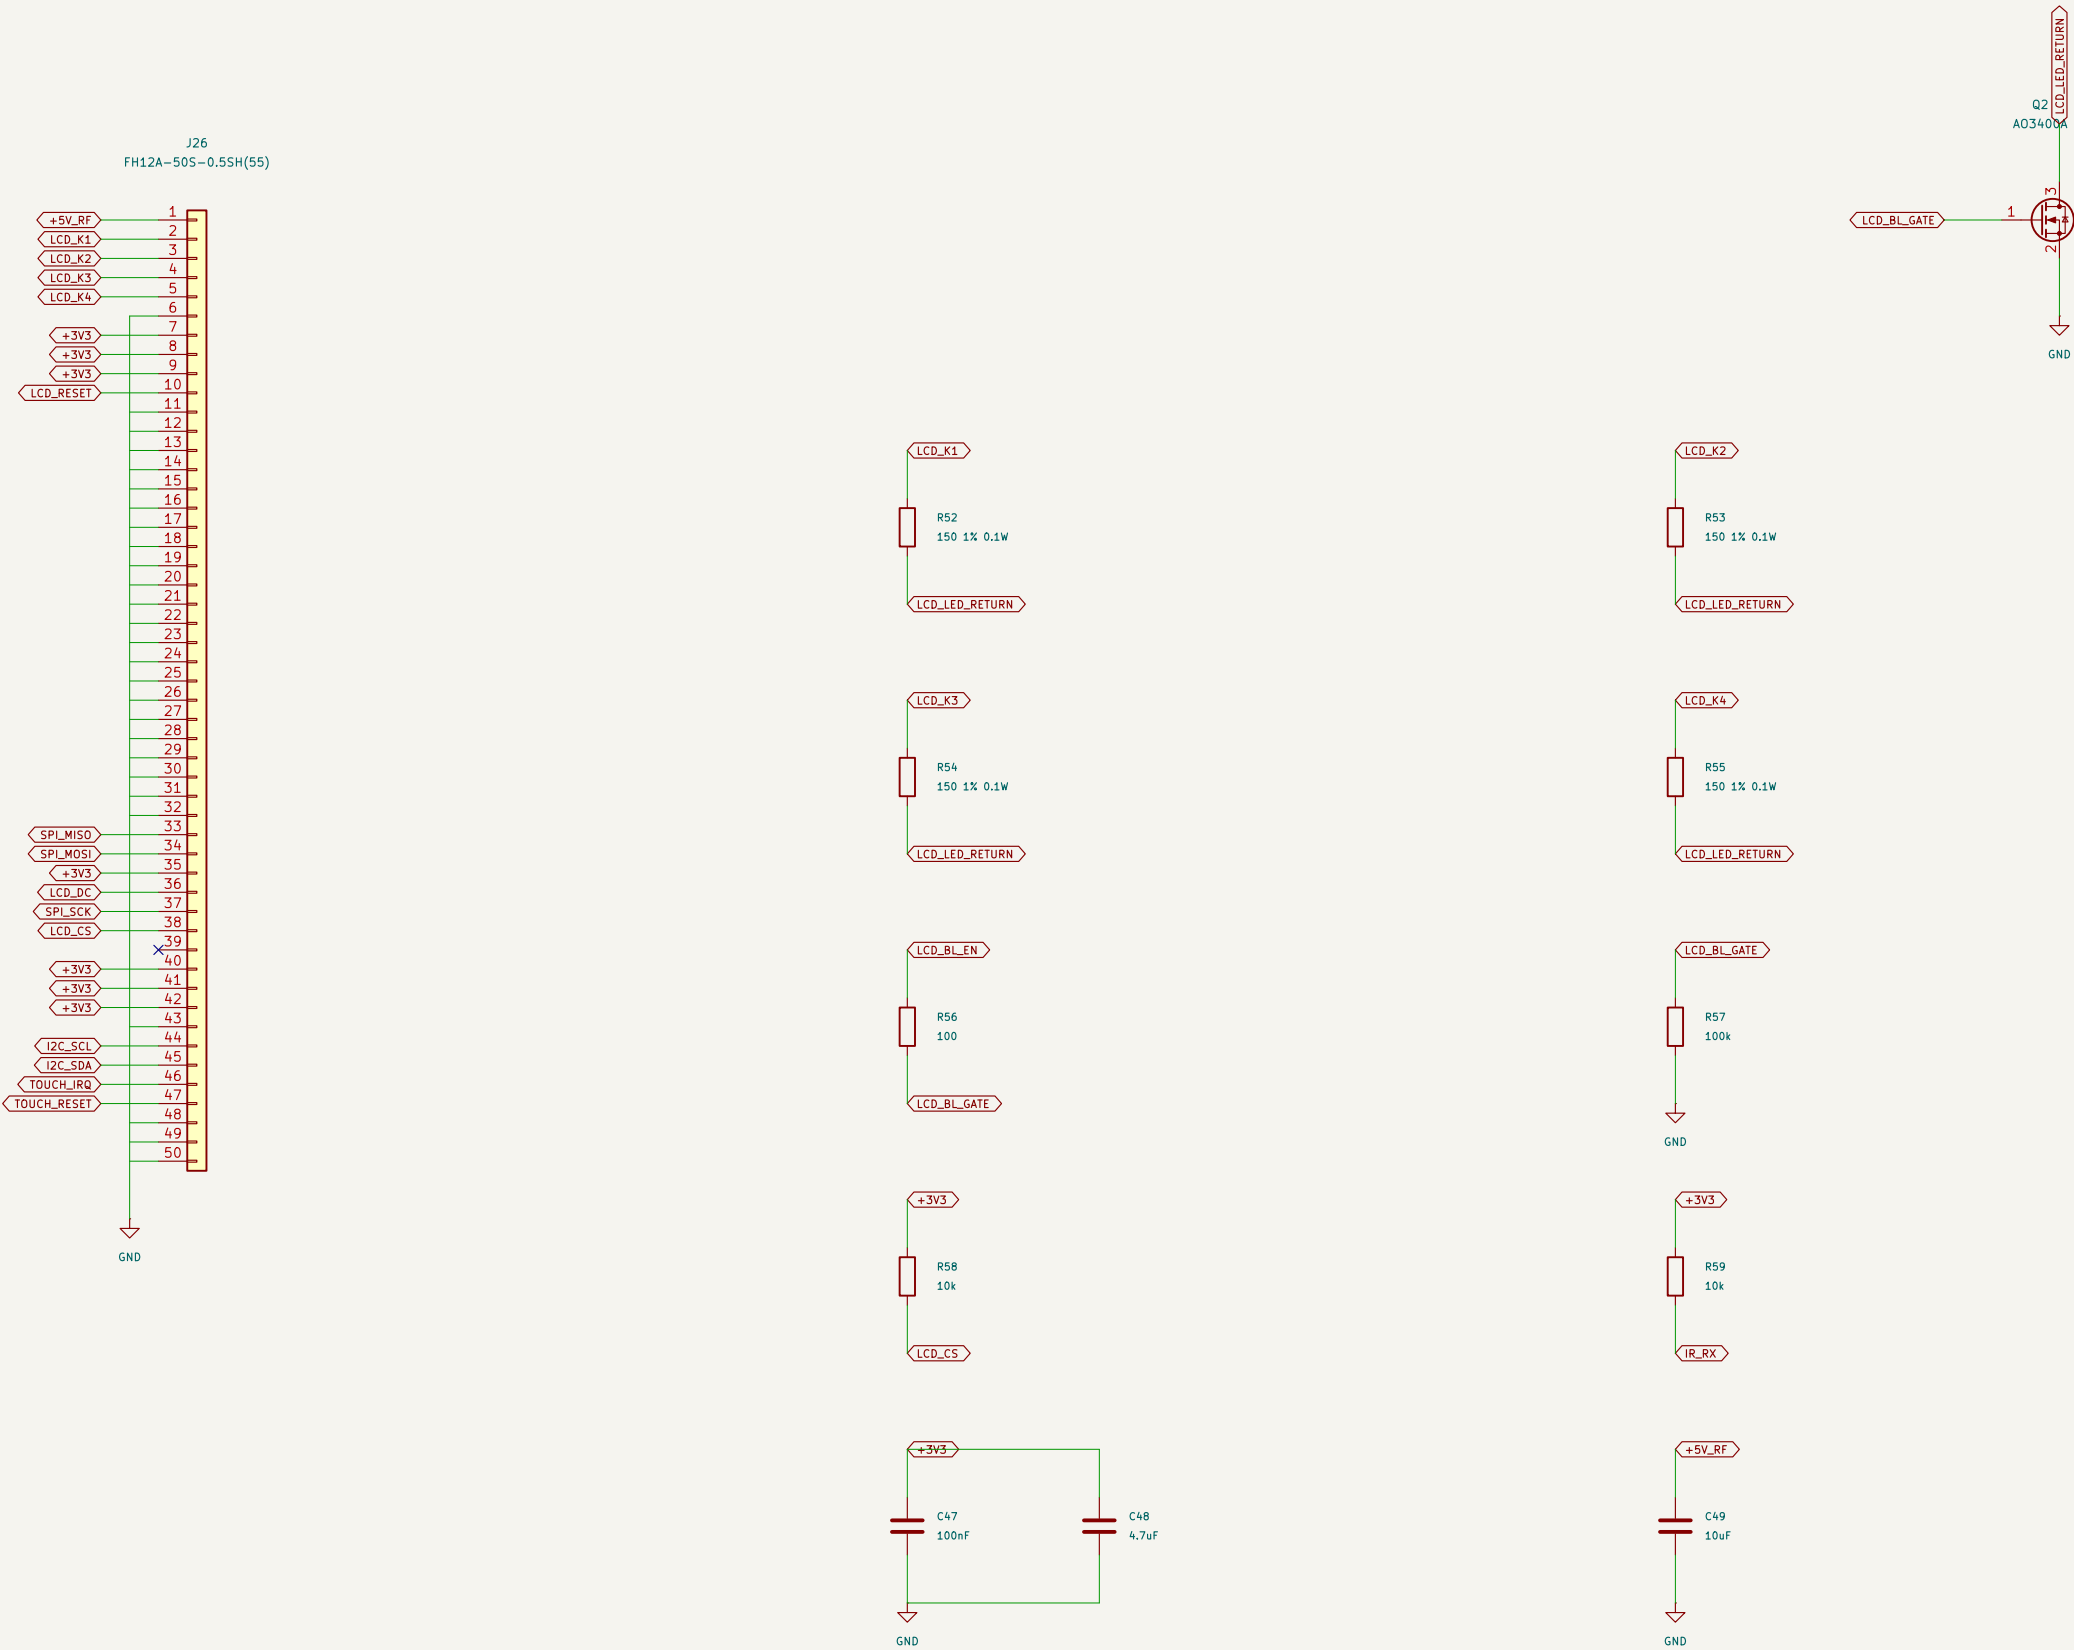

Circuit review in progress – not released for fabrication

Sheet: /External display, touch and backlight/
File: display.kicad_sch

Title: External display, touch and backlight

Size: A3
KiCad E.D.A. 10.0.6

Date: 2026-09-24

Rev: A – engineering draft
Id: 22/22