



Instructions for ordering PCB with assembly

Here, using JLCPCB as an example, ordering from other manufacturers will be similar.


1. Get your files ready, generally at least need all Gerber files. If you also need assembly, get BOM and CPL file ready.
2. Go to jlcpcb.com:

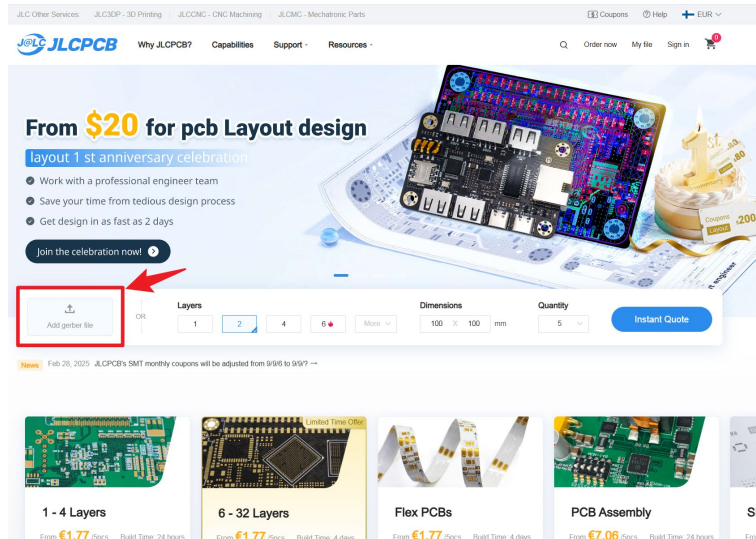


3. Drag the “Gerber files.rar” to the box, and wait until it shows the PCB:

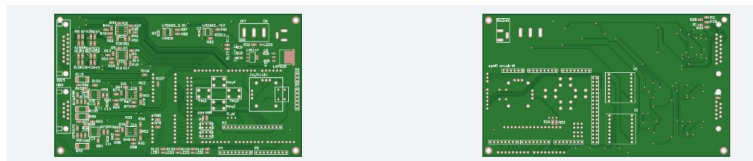

4. Activate the “PCB Assembly” option, and select Qty as you need:

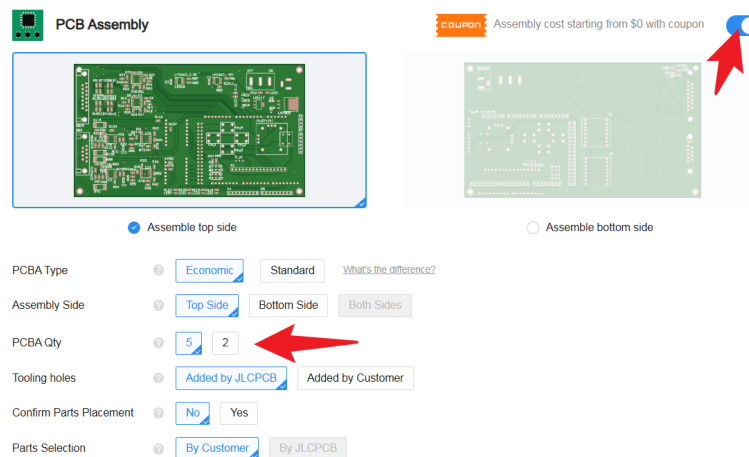


5. Other options can be modified as needed. Otherwise, the default can be used. Then click Next. Select Top side for assembly.

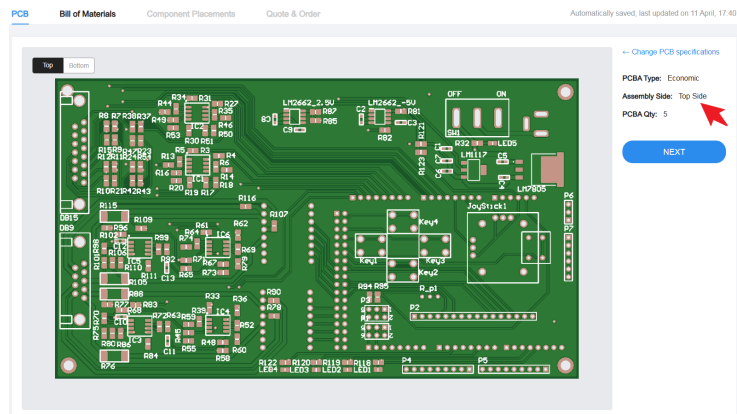


6. Click Next and add BOM and CPL file.



7. Click "Process BOM & CPL", then click to open and check them one by one. if all components are right, then click "Next".

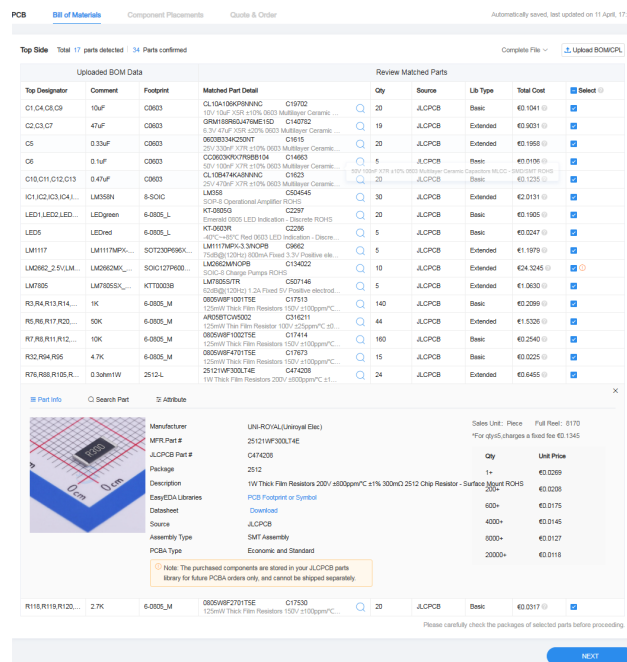

8. Then check and make sure all components are at right position, otherwise modify the CPL file. If all right, click Next.

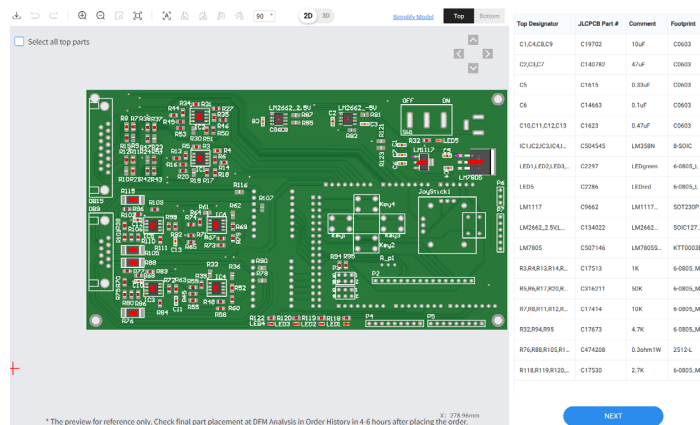

9. Then, place the order if you make sure everything is right and you indeed need it.