
Unit Fader

SKU:U123











Description

Unit Fader is a **slider potentiometer/fader** integrated with indicator lights, designed with a **35mm travel slider potentiometer** and **14x SK6812 programmable RGB lights**. The fader features **center positioning**, and its excellent sliding damping provides smoother, more stable, and precise control. The integrated LEDs support digital addressing, meaning you can individually control the color and brightness of each LED to achieve various lighting effects. This product is suitable for applications such as lighting and music control.

Features

- Center positioning
- Comfortable sliding damping
- Single 10kΩ adjustable resistor
- Programmable RGB lights
- GROVE interface
- Development platforms:
  - Arduino, UIFlow

Includes

- 1 x Unit Fader

- 1 x HY2.0-4P Grove connection cable (20cm)


Applications

- Human-computer interaction
- Lighting and music control
- Adjustment switches
- Potentiometer level signal input

Specifications

Specification	Parameter
Fader Travel	35mm
Fader Handle Length	10mm
Single Resistor	10kΩ
Output Voltage	0-3.3V (when powered by 5V)
RGB LED	14x SK6812 programmable RGB lights
Working Current	90.04mA (light brightness at 50%, fader max output)
Net Weight	32g
Gross Weight	40g
Product Size	64.0 x 24.0 x 22.8mm
Packaging Dimensions	136 x 92 x 24mm

Schematics

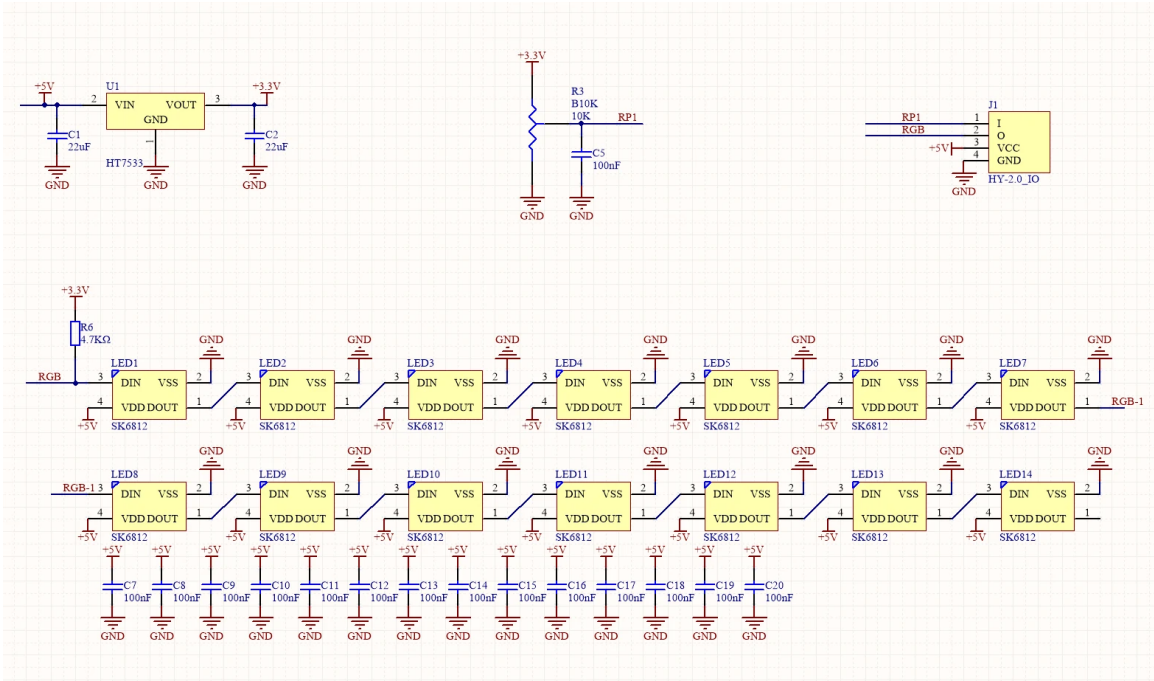


PinMap

Unit Fader

HY2.0-4P	Black	Red	Yellow	White
PORT.B	GND	5V	RGB	Analog Input

Model Size

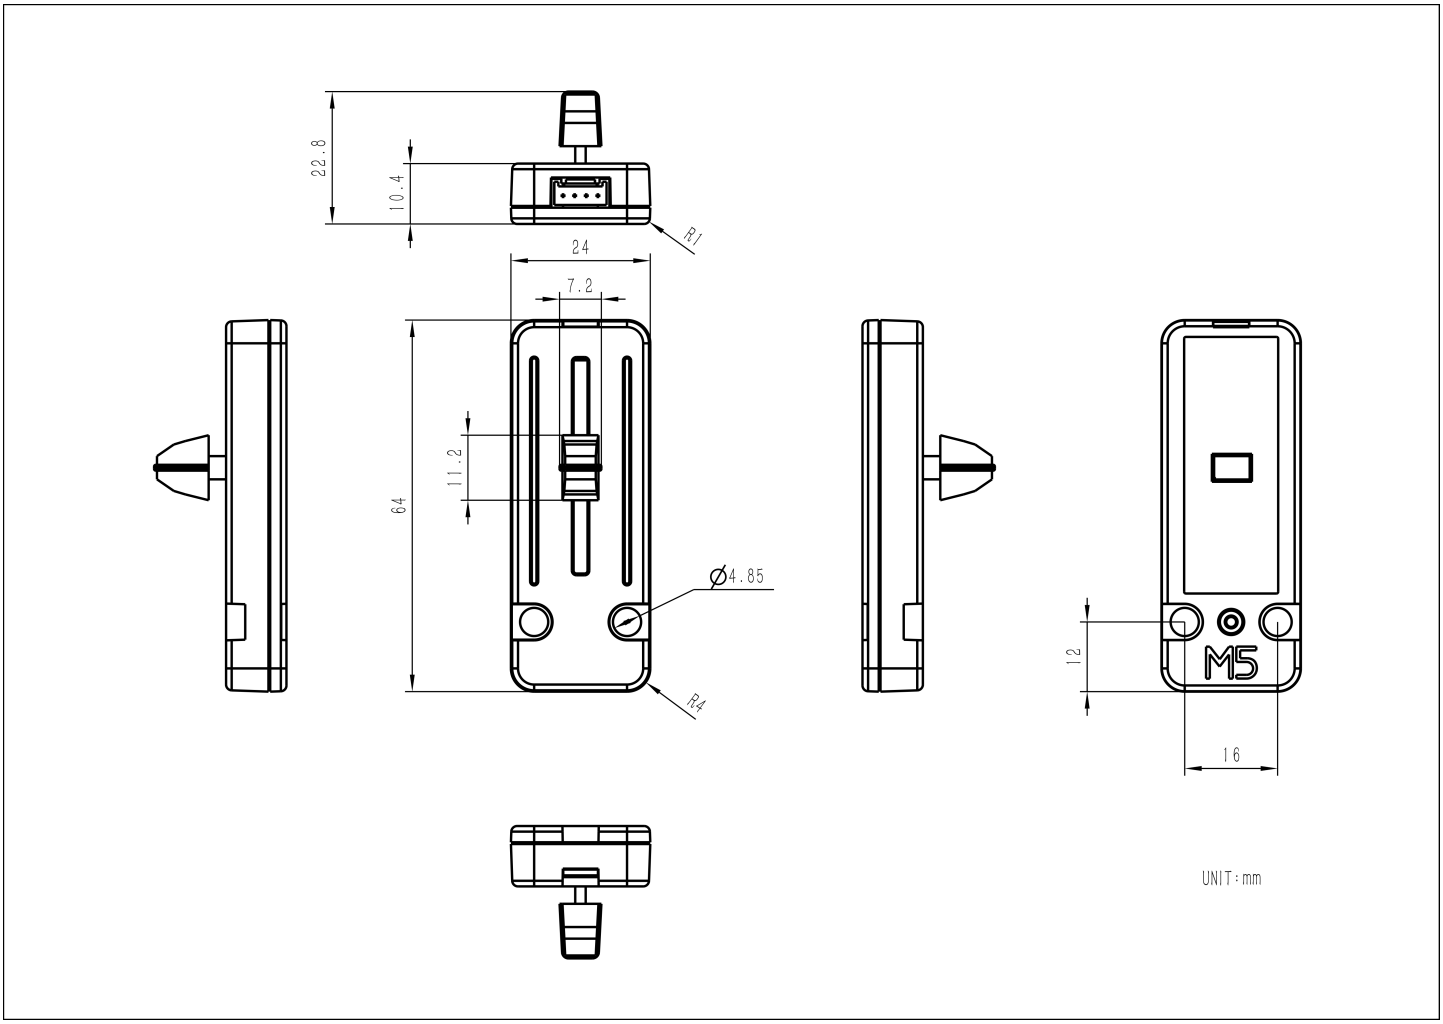

Structure

- Unit Fader Structure Files

Softwares

Arduino

- Unit Fader Example with M5Core
- FastLED Arduino Library

UiFlow1

- Unit Fader UiFlow1 Docs

UiFlow2

- Unit Fader UiFlow2 Docs

Home Assistant

- Home Assistant Integration

Video

FADER_UNIT_VIDEO.mp4