
Faces QWERTY

SKU:A003









Description

Faces QWERTY is a full-featured keyboard panel compatible with FACE_BOTTOM, featuring 35 keys. Each key can be reused through key combinations to output different characters. It integrates an **MEGA328** processor internally and operates in slave mode via the I2C communication protocol (0x08). The "sym" and "Fn" function keys are used for shift switching, while the "aA" function key is used for case switching. A single click on the corresponding function key activates single-character input with the indicator light on, while a double click makes the indicator light blink, enabling continuous input. Clicking again restores the previous state.

Features

- I2C communication (0X08)
- Multi-functional key reuse
- Input status indicator
- Development platforms: UIFlow, MicroPython, Arduino

Includes

- 1 x Faces QWERTY

Applications


- Data entry
- Human-computer interaction

Specifications

Specification	Parameter
Communication Interface	I2C @0x08
MCU	MEGA838P
Communication Method	I2C @0x08
Button Layout	QWERTY full keyboard
Input Status Indicator	Blue LED x 2
Case Material	Plastic (PC)
Product Size	58.2 x 54.2 x 10.4mm
Product Weight	21.0g
Package Size	95.0 x 65.0 x 25.0mm
Gross Weight	41.0g


Schematics

Faces QWERTY

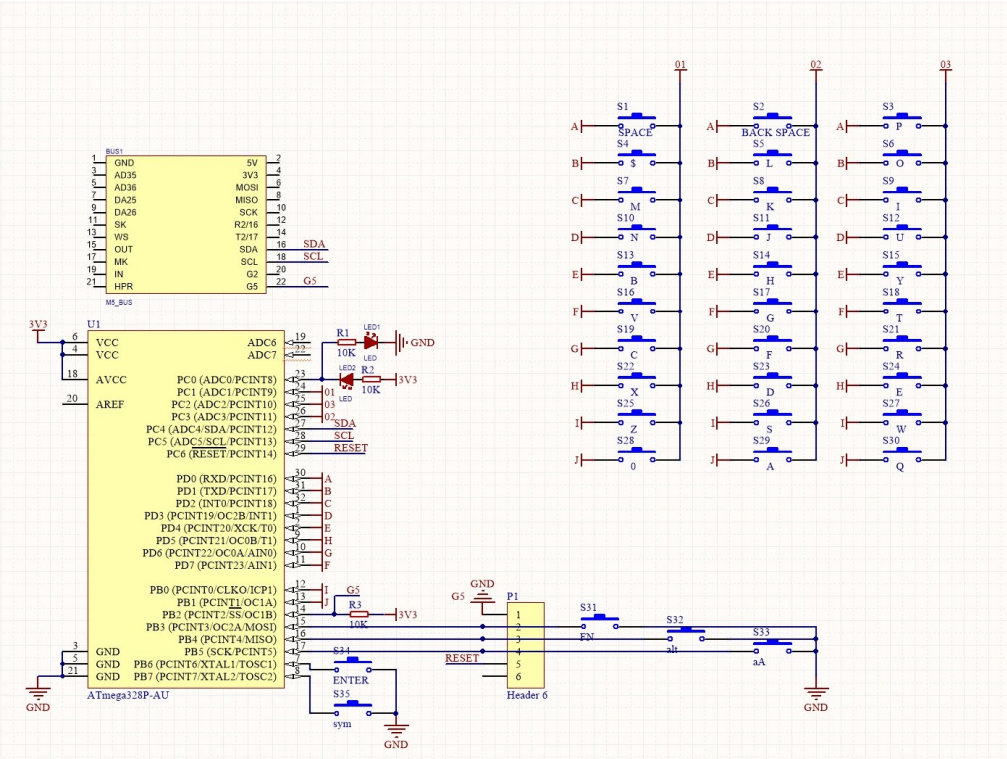

PinMap

Mega328 ISP Download Interface Pin Definition

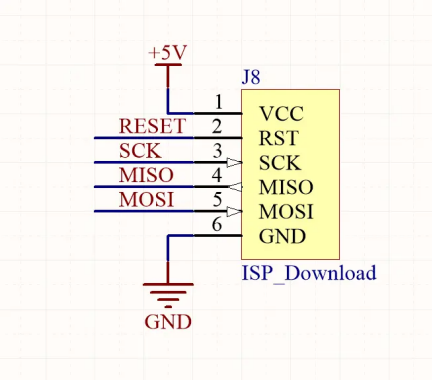

Faces Panel Bus

PIN	LEFT	RIGHT	PIN
	1	2	
	3	4	
	5	6	
	7	8	
	9	10	
	11	12	
	13	14	
	15	16	SDA
	17	18	SCL
	19	20	
	21	22	INT

Softwares

Arduino

- Faces QWERTY Example with M5Core

UiFlow1

- Faces QWERTY UiFlow1 Docs

Internal Firmware

- Faces QWERTY Internal Firmware

Easyloader

Easyloader	Download Link	Notes
Faces GameBoy BladeBuster Easyloader with M5Core	download	/
Faces Factory Test with M5Core	download	/

Video

FACES.mp4