Unit Neco

SKU:U163














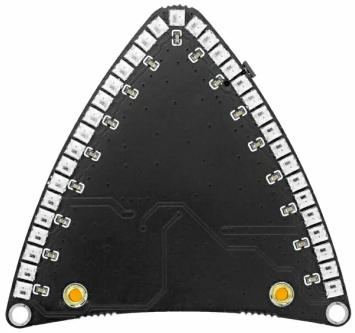

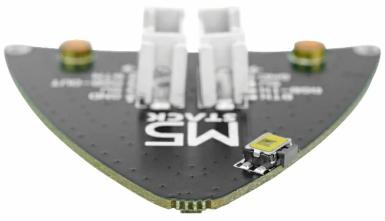

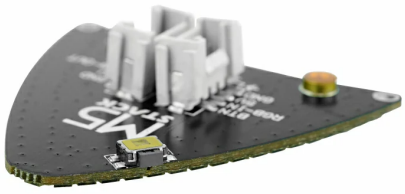



Description

Unit Neco is an RGB lighting panel unit with a "cat ear" design, equipped with 35 **WS2812C-2020** RGB LEDs. It features two 4-pin grove ports to connect to an M5 host device and expand more units. Additionally, it has a **tactile button** that allows interaction with the host to switch between various lighting effects. It is suitable for home decoration, party ambiance, stage performances, and more.

It is best not to keep it fully lit for long periods to avoid damaging the LEDs. A brightness setting around 20 is recommended.

Features

- WS2812C-2020 RGB
- HY2.0-4P
- Tactile switch
- Compatible with multiple development platforms:
  - UIFlow
  - Arduino

Includes

- 2 × Unit Neco
- 1 x HY2.0-4P Grove Cable (20cm)
- 1 x HY2.0-4P Grove Cable (1m)
- 2 × Plastic coated iron wires

Applications


- Home decoration
- Party ambiance
- Stage performance

Specifications

Specification	Parameter
LED Model	WS2812C-2020
Current per LED	5mA
Brightness Levels	256 levels
Connection Type	Serial cascading interface
Operating Temperature	0-85°C
Number of Colors	16,777,216 colors
Product Size	44.6 x 43.0 x 10.1mm
Product Weight	9.6g
Package Size	99.0 x 66.0 x 27.0mm
Gross Weight	52.8g

Schematics

- Unit Neco Schematics PDF

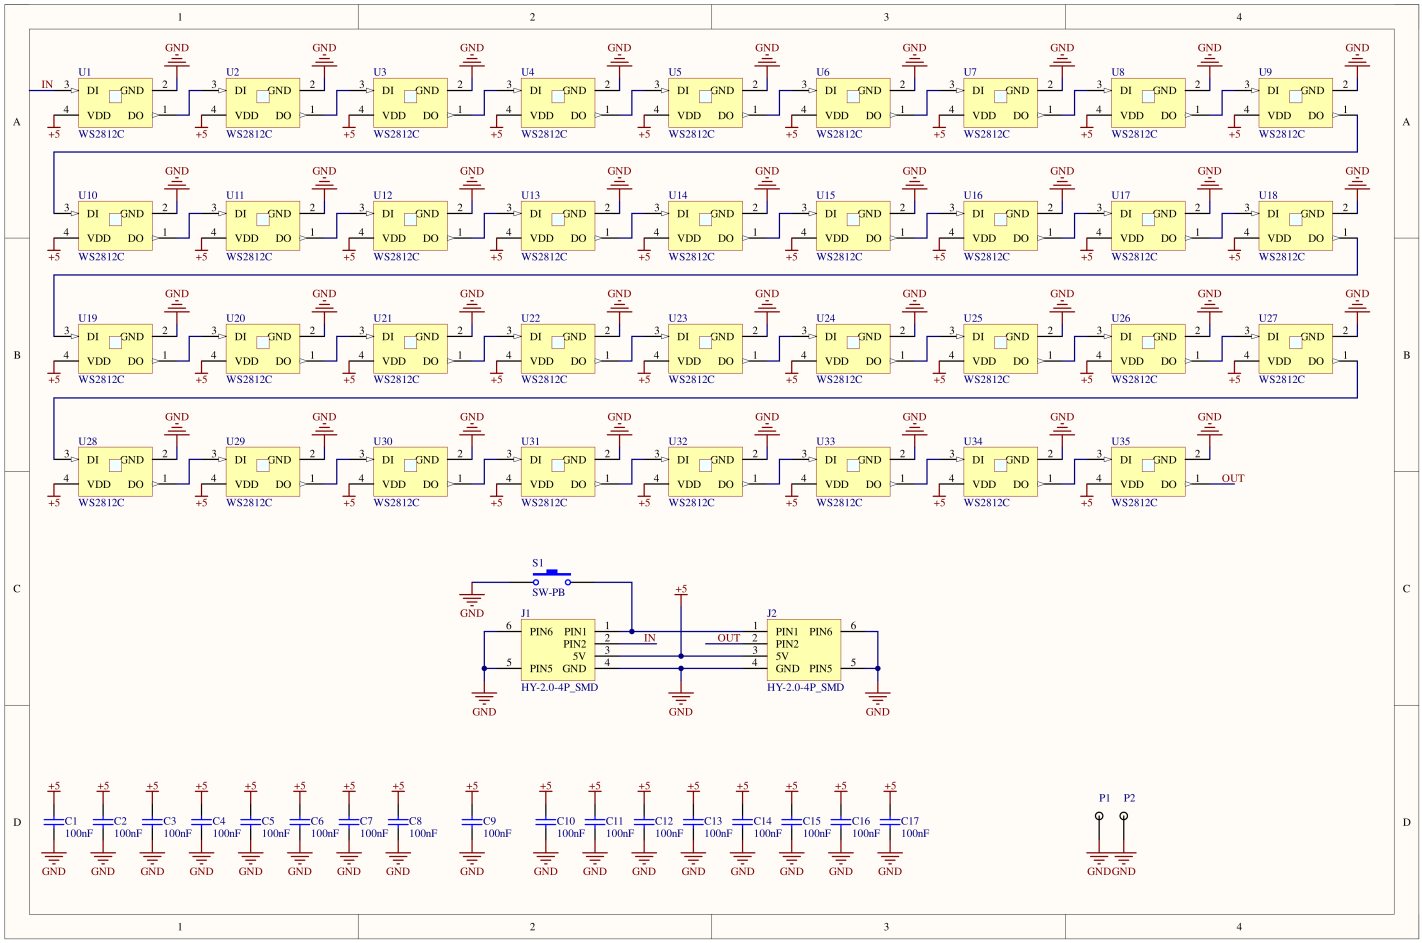


PinMap

Unit Neco

HY2.0-4P	Black	Red	Yellow	White
PORT.B	GND	5V	DATA	BTN

Model Size

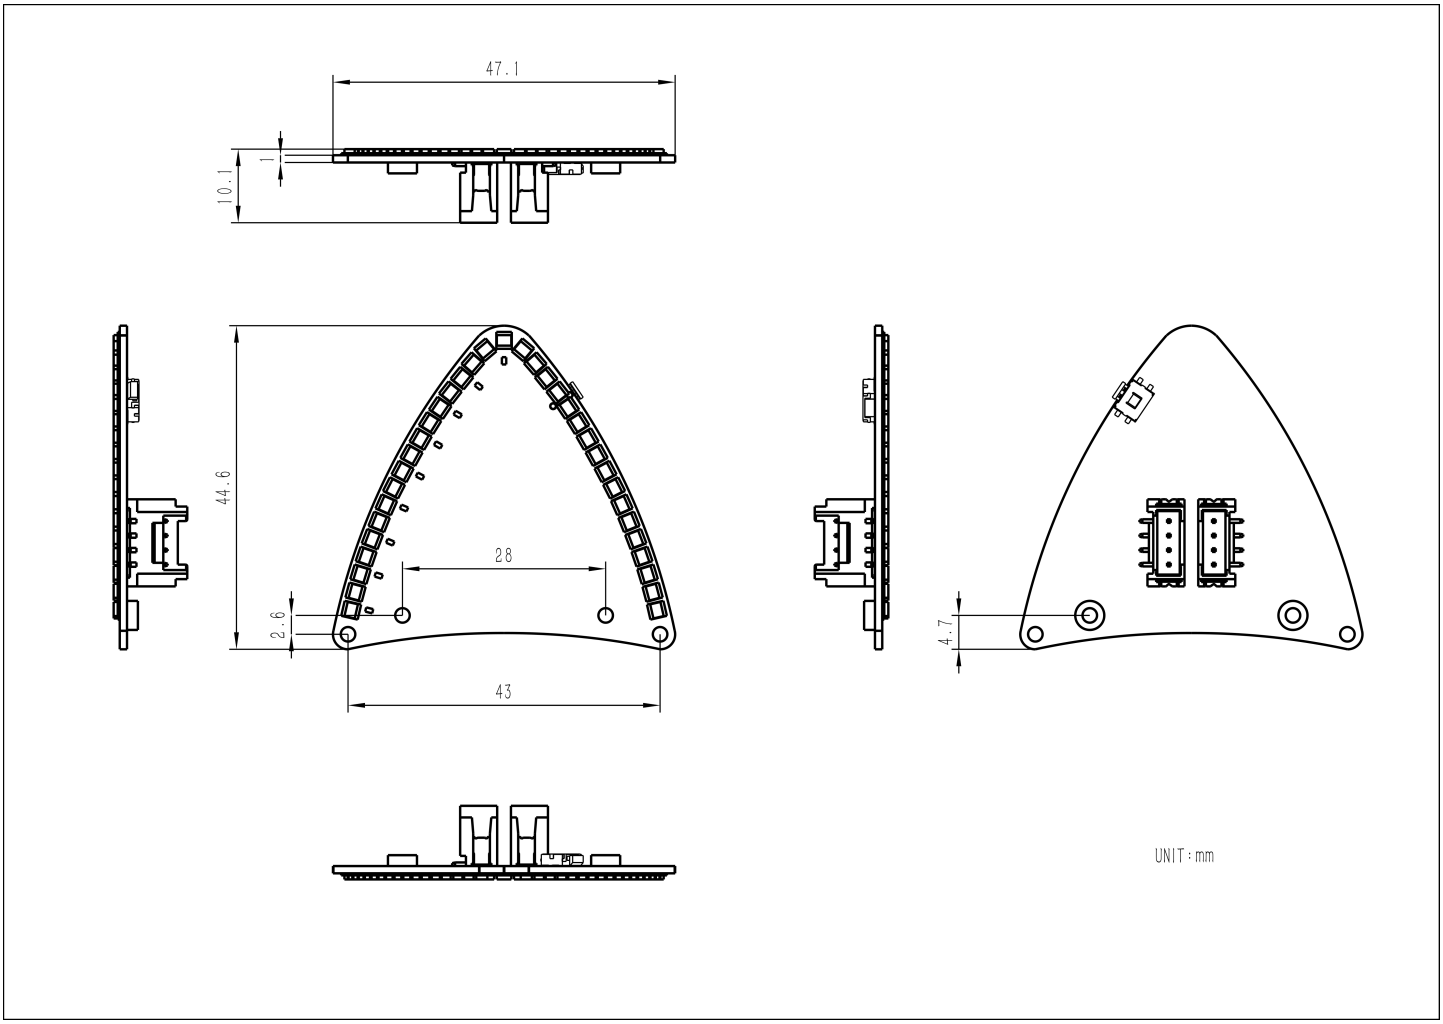

Structure

- Unit Neco 3D Stp

Datasheets

- WS2812C-2020 Datasheet

Softwares

Arduino


```
#include <Adafruit_NeoPixel.h>
#define PIN        2 // M5AtomS3
#define NUMPIXELS 70
Adafruit_NeoPixel pixels(NUMPIXELS, PIN, NEO_GRB + NEO_KHZ800);
#define DELAYVAL 100

void setup() {
pixels.setBrightness(20);
  pixels.begin();
}
```

```
void loop() {
  pixels.clear();
  for (int i=0; i<NUMPIXELS; i++) {
    pixels.setPixelColor (i, pixels.Color(244, 24, 208) );
  }
  pixels.show();
}
```

UIFlow

- Unit Neco Test Example

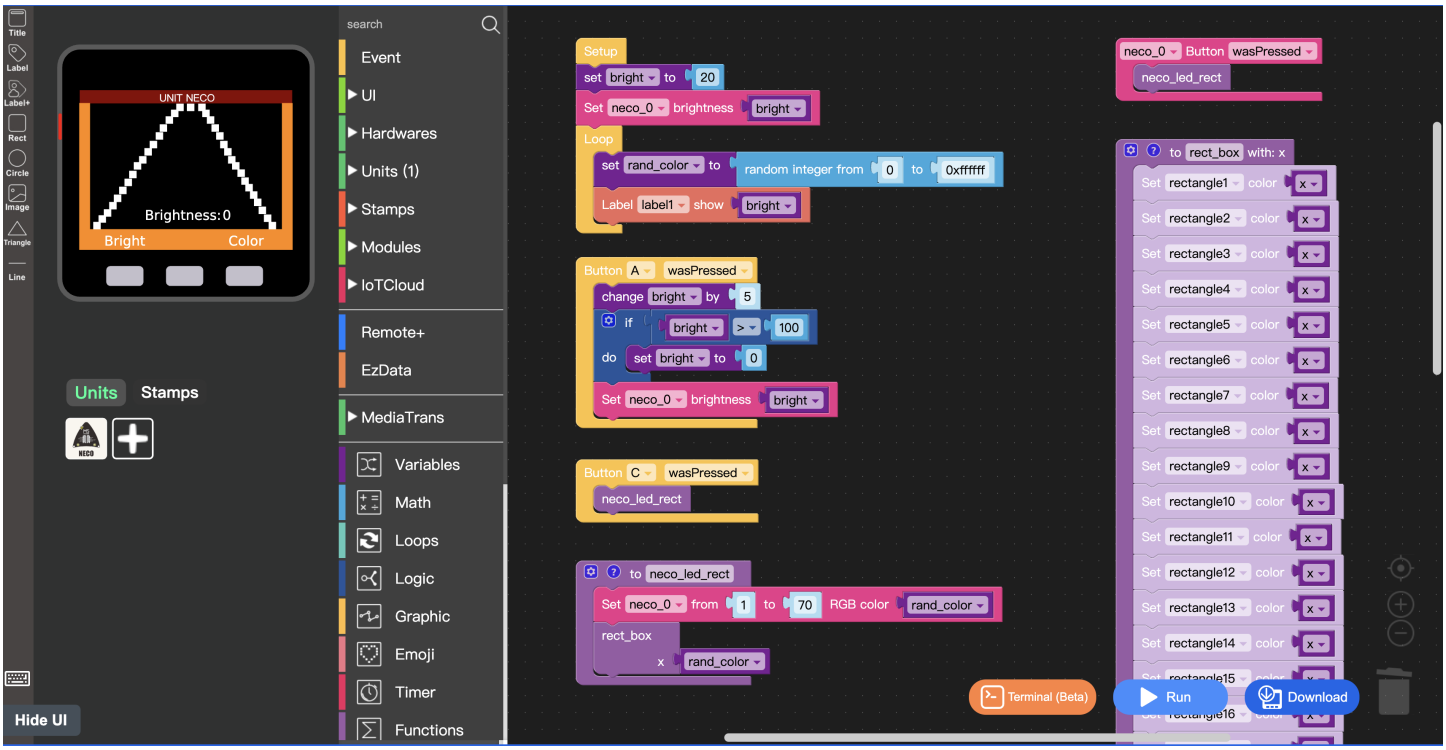

UiFlow2

- Unit Neco UiFlow2 Docs