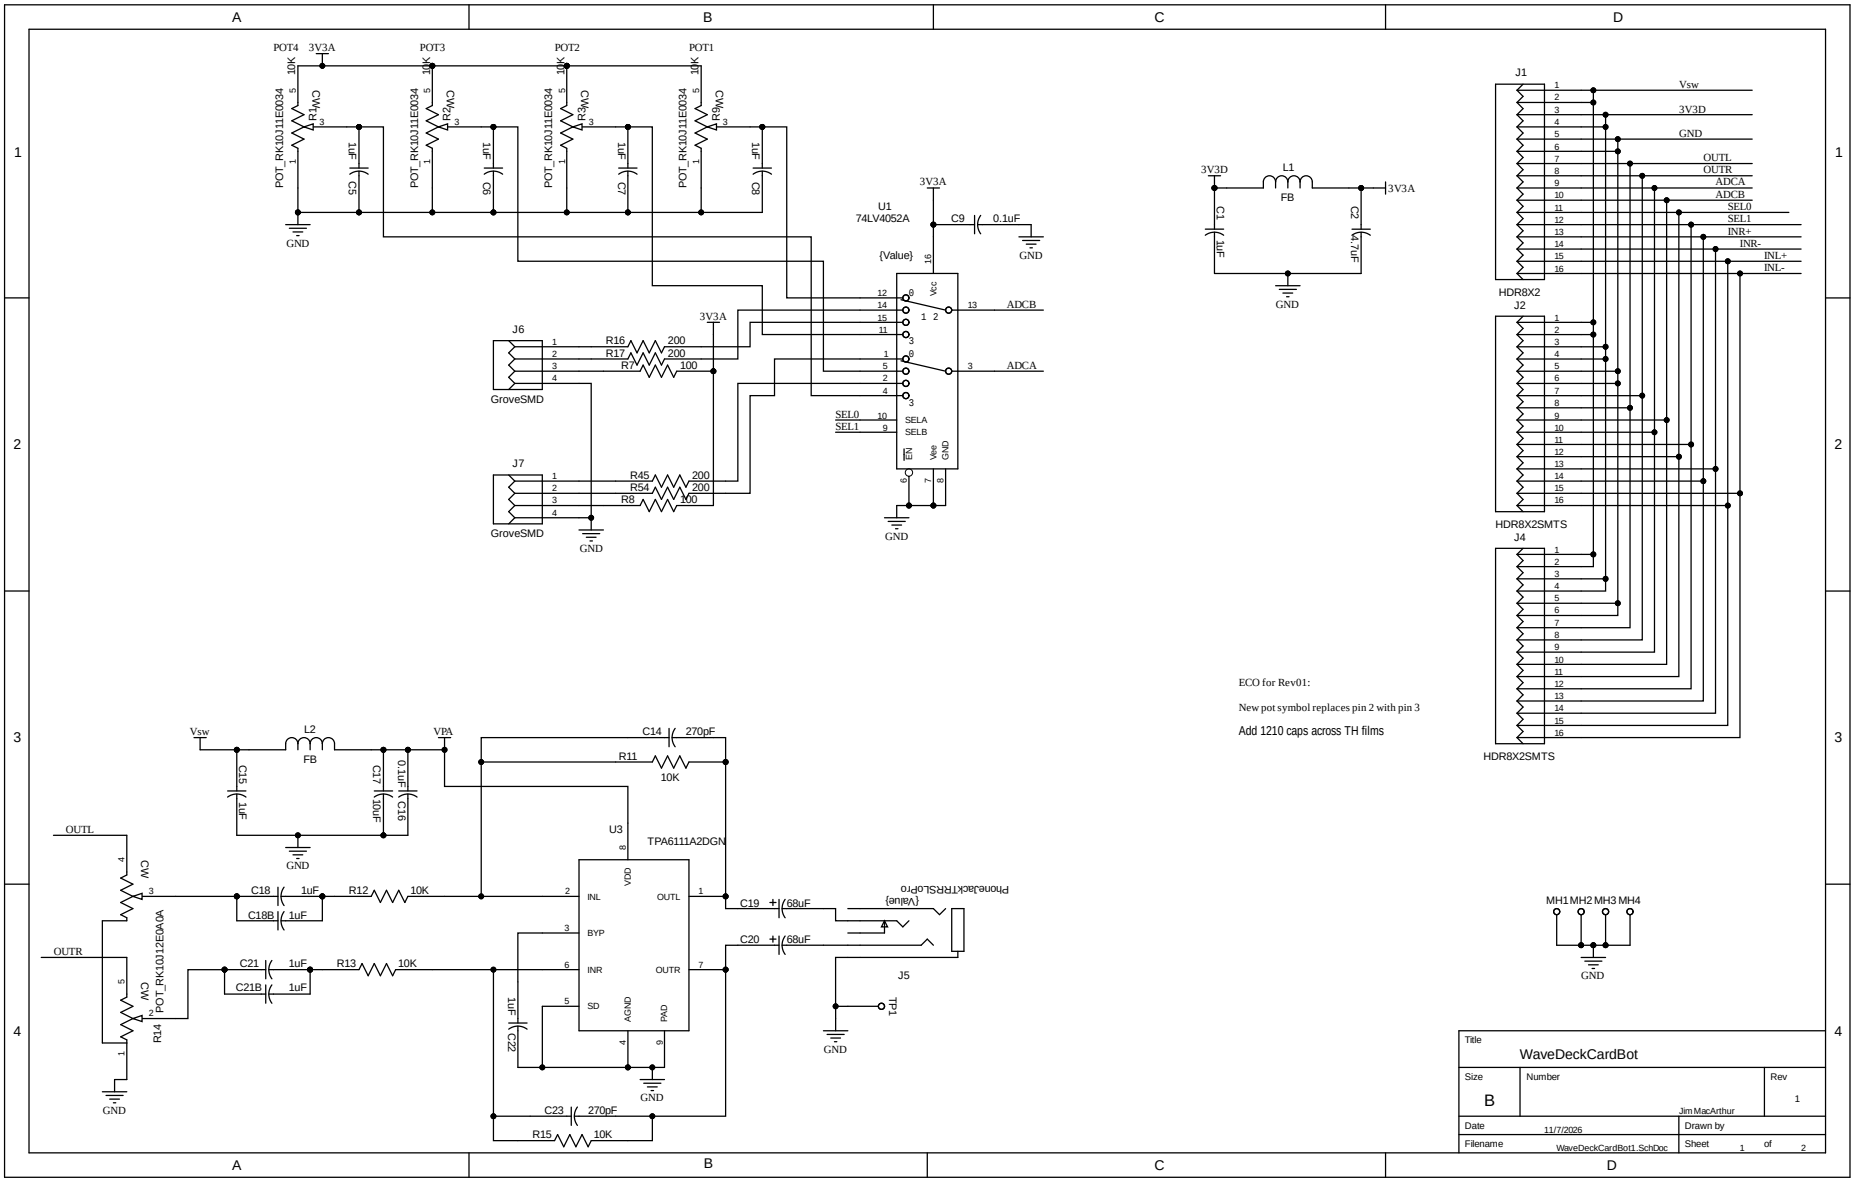
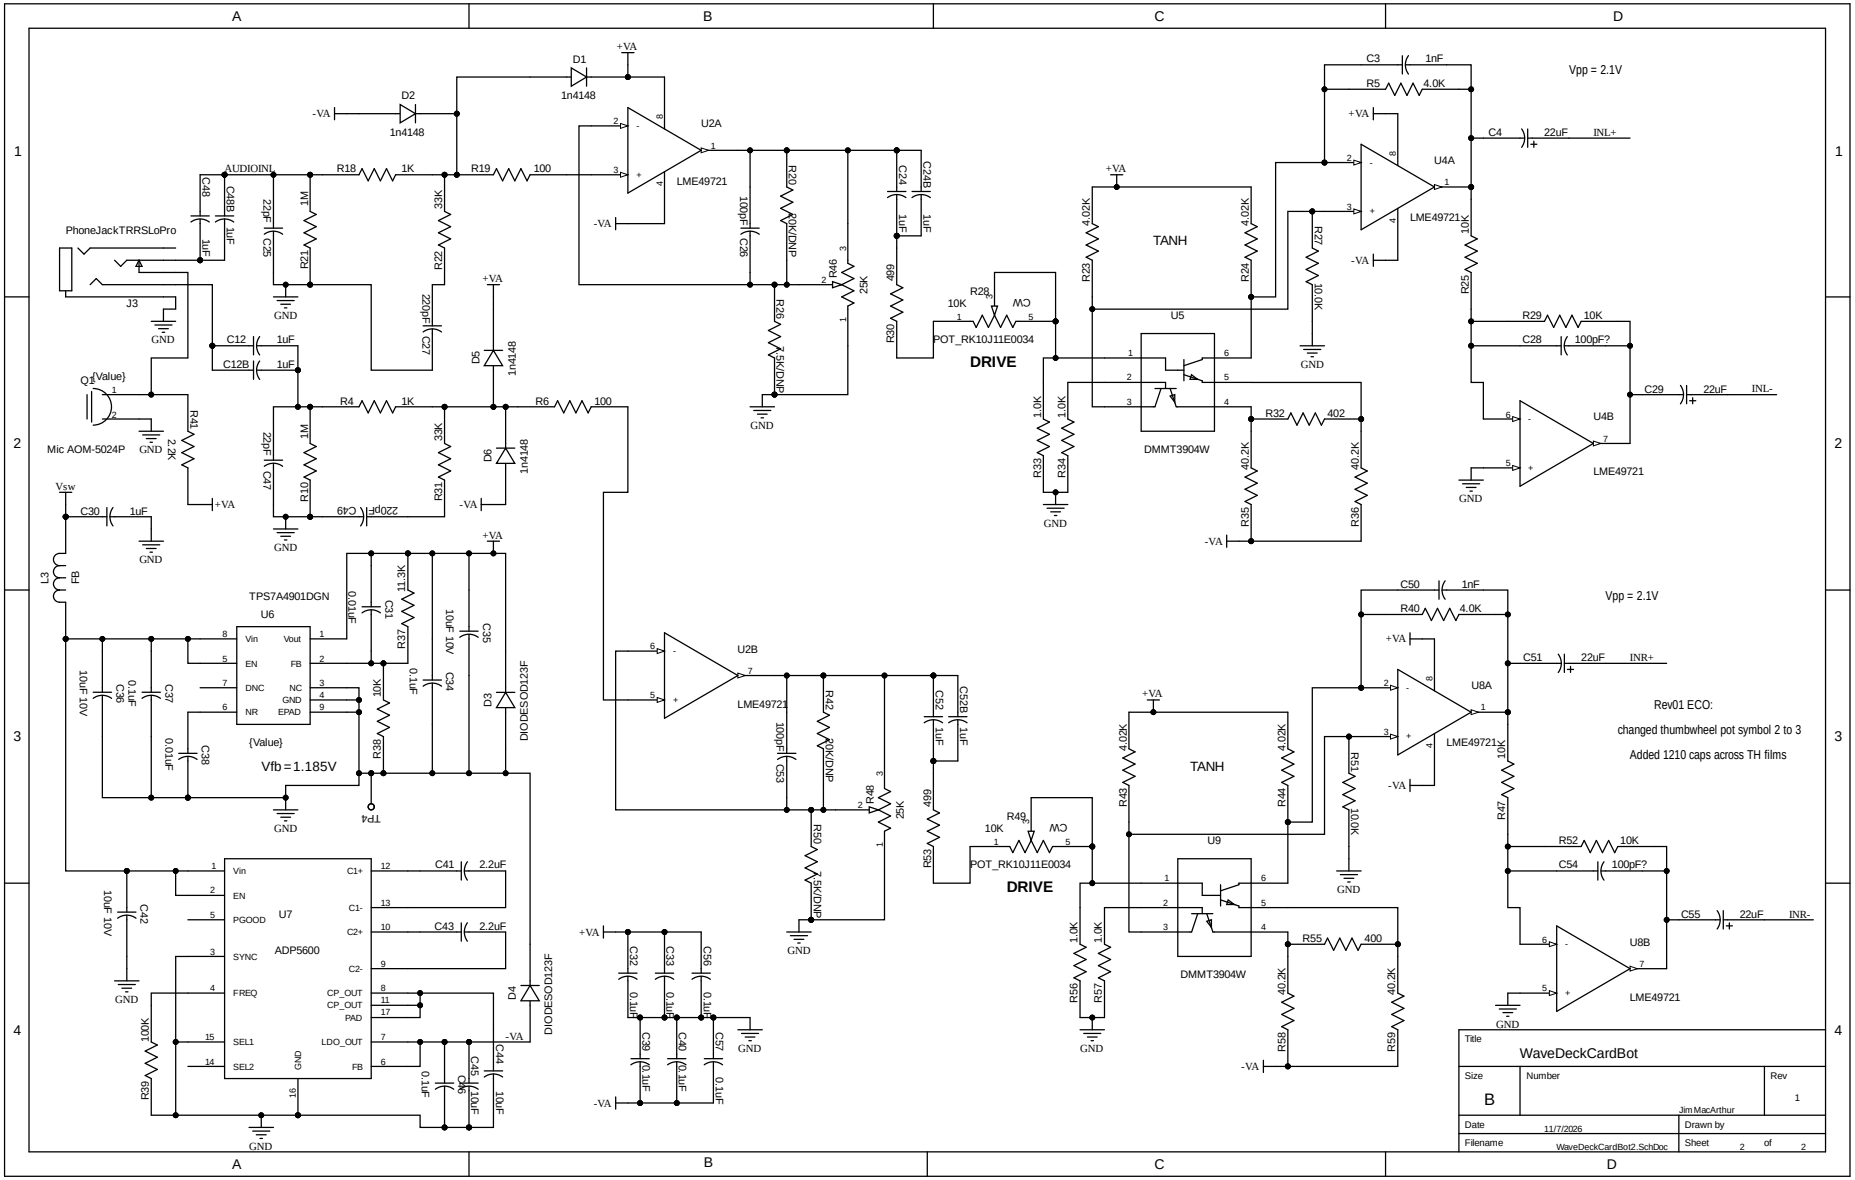


ECO for Rev01:

New pot symbol replaces pin 2 with pin 3

Add 1210 caps across TH films

Title	WaveDeckCardBot	
Size: B	Number	Rev: 1
Date: 11/7/2026	Drawn by: Jim MacArthur	
Filename: WaveDeckCardBot1.SchDoc	Sheet 1 of 2	


A
B
C
D
1
2
3
4
D1
1n4148
D2
1n4148
+VA
-VA
U2A
LME49721
AUDIOINL
R18 1K
R19 100
C48
C48B 1uF
1uF
22pF C25
1M R21
33K R22
220pF C27
PhoneJackTRRSLoPro
J3
GND
C12 1uF
C12B 1uF
Q1 {Value}
Mic AOM-5024P
R41 2.2K
D5 1n4148
R4 1K
R6 100
22pF C47
1M R10
33K R31
220P C49
D6 1n4148
Vsw
C30 1uF
L3 FB
TPS7A4901DGN
U6
Vin Vout EN FB DNC NC GND NR EPAD
{Value}
Vfb = 1.185V
0.01uF C31
13K R37
0.1uF C34
10uF 10V C35
D3 DIODESOD123F
10K R38
TP4
10uF 10V C36
0.1uF C37
0.01uF C38
C42 10uF 10V
U7
ADP5600
Vin EN PGOOD SYNC FREQ SEL1 SEL2 GND
C1+ C1- C2+ C2- CP_OUT CP_OUT PAD LDO_OUT FB
C41 2.2uF
C43 2.2uF
D4 DIODESOD123F
100K R39
0.1uF C46
C45 10uF
C44 10uF
-VA
U2B
LME49721
100pF C53
20K/DNP R42
25K R48
499 R53
7.5K/DNP R50
C52 1uF
C52B 1uF
C32 0.1uF
C33 0.1uF
C56 0.1uF
C39 0.1uF
C40 0.1uF
C57 0.1uF
100pF C26
20K/DNP R20
25K R46
499 R30
4.5K/DNP R26
C24 1uF
C24B 1uF
R28 10K CW
POT_RK10J11E0034
DRIVE
TANH
U5
4.02K R23
4.02K R24
10.0K R27
1.0K R33
1.0K R34
DMMT3904W
R32 402
40.2K R35
40.2K R36
C3 1nF
R5 4.0K
U4A
LME49721
C4 22uF INL+
10K R25
R29 10K
C28 100pF?
U4B
LME49721
C29 22uF INL-
Vpp = 2.1V
C50 1nF
R40 4.0K
U8A
LME49721
C51 22uF INR+
R49 10K CW
POT_RK10J11E0034
DRIVE
TANH
U9
4.02K R43
4.02K R44
10.0K R51
1.0K R56
1.0K R57
DMMT3904W
R55 400
40.2K R58
40.2K R59
10K R47
R52 10K
C54 100pF?
U8B
LME49721
C55 22uF INR-
Vpp = 2.1V
Rev01 ECO:
changed thumbwheel pot symbol 2 to 3
Added 1210 caps across TH films
Title
WaveDeckCardBot
Size B
Number
Rev 1
Jim MacArthur
Date 11/7/2026
Drawn by
Filename WaveDeckCardBot2.SchDoc
Sheet 2 of 2