
A. PANEL DOOR / OPERATOR CONTROL STATION


CONTROL PANEL DOOR – FRONT VIEW
NOT TO SCALE

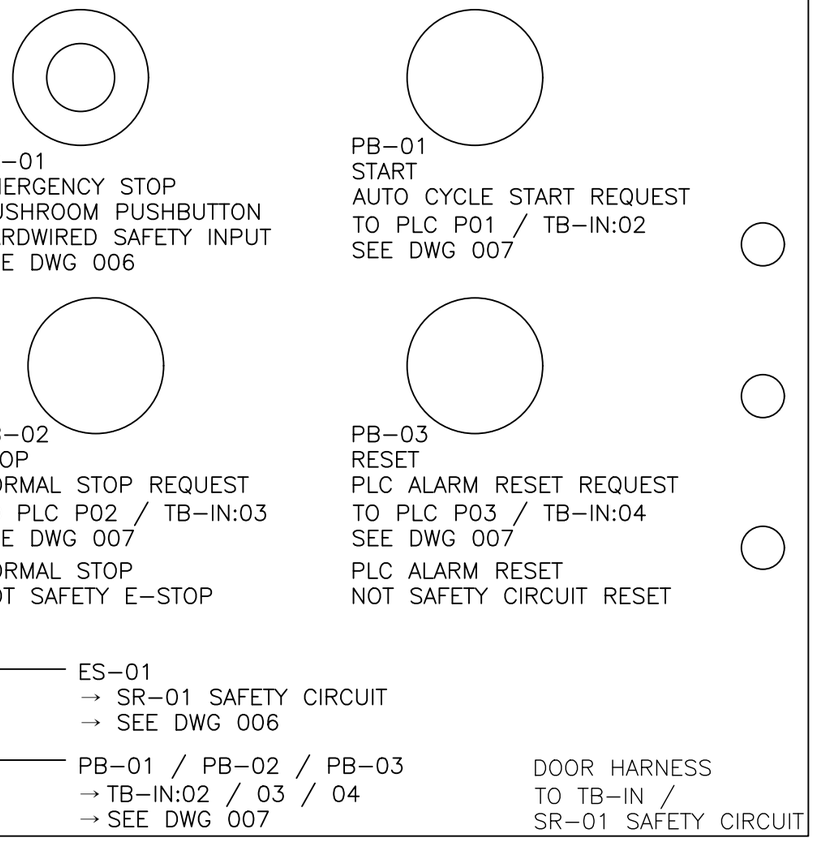

DOOR HARNESS
FLEXIBLE WIRE LOOP / DOOR CABLE

B. MACHINE CELL / FIELD DEVICE LOCATION

CONCEPTUAL PROCESS CELL LAYOUT – NOT TO SCALE

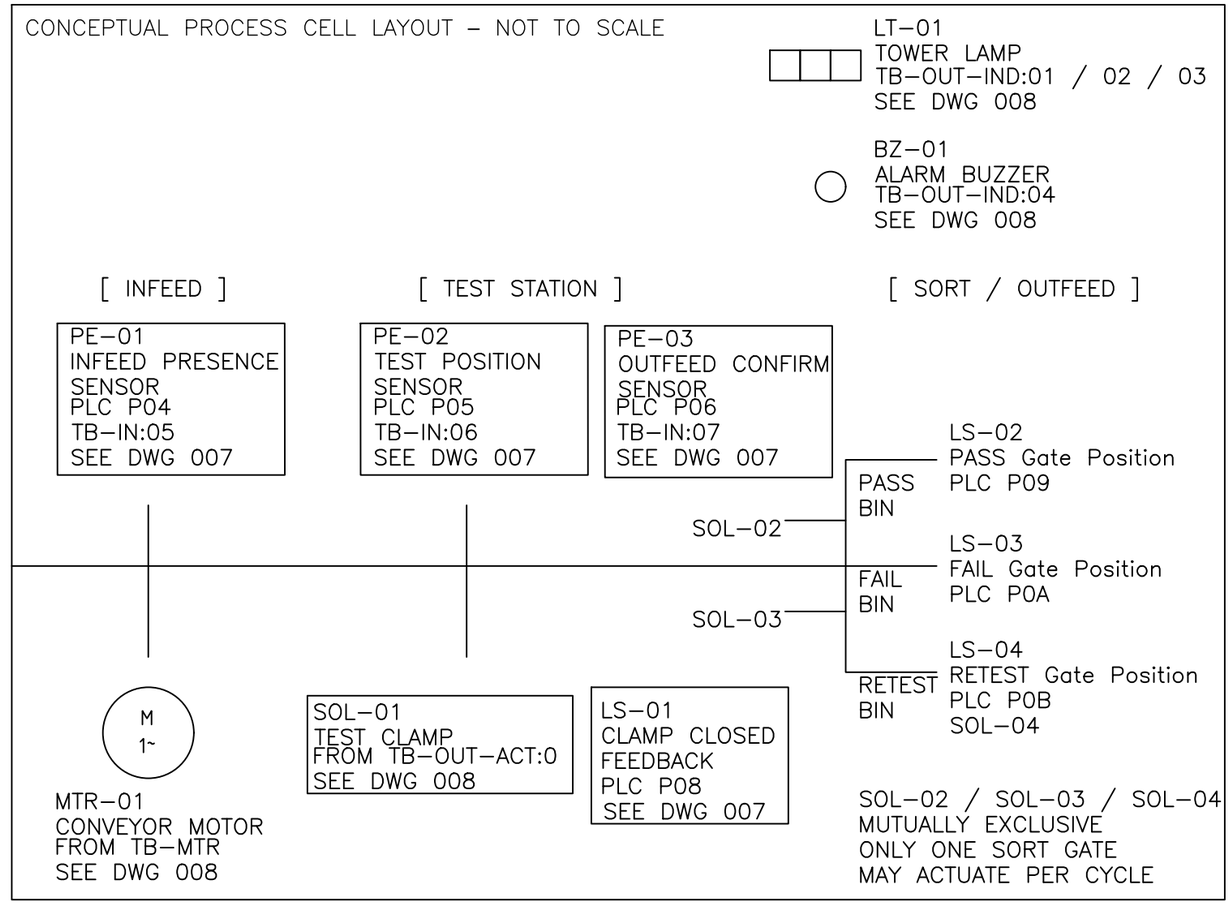

DR–01 GUARD DOOR INTERLOCK HARDWIRED SAFETY INPUT SEE DWG 006	DR–01–AUX PLC DOOR CLOSED MONITOR PLC P07 SEE DWG 007

[GENERAL NOTES]

[1] PANEL DOOR OPERATOR DEVICES ARE SHOWN FOR CONCEPTUAL LOCATION ONLY. FINAL CUTOUT SIZE SHALL BE VERIFIED FROM ACTUAL PUSHBUTTON AND E–STOP DEVICE DATA SHEETS.

[2] ES–01 AND DR–01 SHALL BE HARDWIRED TO SR–01 SAFETY CIRCUIT. PLC INPUTS SHALL NOT BE USED AS THE PRIMARY SAFETY FUNCTION.

[3] PB–02 IS A NORMAL PLC STOP REQUEST AND SHALL NOT BE CONSIDERED AS A SAFETY EMERGENCY STOP DEVICE.

[4] PB–03 IS A PLC ALARM RESET REQUEST ONLY. SAFETY RESET SHALL FOLLOW THE SR–01 SAFETY CIRCUIT DESIGN.

[5] DR–01–AUX SHALL BE USED FOR PLC DOOR STATUS MONITORING ONLY. SAFETY CONTACTS OF DR–01 ARE SHOWN ON DWG 006.

[6] ALL PNP FIELD SENSORS SHALL BE CONNECTED THROUGH TB–24V, TB–0V, AND TB–IN AS SHOWN ON DWG 007.

[7] SOL–01 THROUGH SOL–04 SHALL BE FED FROM +24V_SAFE_ACT. ACTUATOR POWER SHALL BE REMOVED DURING E–STOP OR SAFETY CHAIN OPEN CONDITION.

[8] LT–01 AND BZ–01 SHALL BE FED FROM +24V_CTRL_OUT TO ALLOW ALARM INDICATION DURING SAFETY ACTUATOR POWER REMOVAL.

[9] MOTOR POWER AND MOTOR CABLE CG–04 SHALL BE ROUTED SEPARATELY FROM SENSOR, RS–485, AND LOW–VOLTAGE LOGIC WIRING.

[10] SOL–02, SOL–03, AND SOL–04 ARE MUTUALLY EXCLUSIVE. ONLY ONE SORT GATE SHALL BE ACTUATED PER SORTING CYCLE.

[11] FIELD DEVICE, CABLE GROUP, AND TERMINAL. SCHEDULES: SEE DWG 010

NO.	DATE	REVISION
A	2026–09–07	INITIAL RELEASE

DWG TITLE

EDS Wafer Map Linked Package
Final Test and Multi–Bin Sorting Cell

PANEL DOOR /
EXTERNAL FIELD DEVICE LAYOUT

DRAWN BY	DATE
J. H. KO	2026–09–07

DWG NO
009

SHEET NO
2 OF 2