

Omnidirectional Microphone with Bottom Port and I²S Digital Output

底部端口全向麦克风及I²S数字输出

GENERAL DESCRIPTION 一般说明

The INMP441 is a high-performance, low power, digital-output, omnidirectional MEMS microphone with a bottom port. The complete INMP441 solution consists of a MEMS sensor, signal conditioning, an analog-to-digital converter, anti-aliasing filters, power management, and an industry-standard 24-bit I²S interface. The I²S interface allows the INMP441 to connect directly to digital processors, such as DSPs and microcontrollers, without the need for an audio codec in the system. 该完整的INMP441解决方案包含一个MEMS传感器、信号调理、模数转换器、抗混叠滤波器、电源管理以及行业标准的24位I²S接口。I²S接口使INMP441能够直接连接至数字处理器，例如数字信号处理器（DSP）和微控制器，而无需音频编解码器。

The INMP441 has a high SNR, making it an excellent choice for near-field applications. The INMP441 has a flat wideband frequency response, resulting in a natural sound with high intelligibility. INMP441具有高信噪比，使其成为近场应用。INMP441具有平坦的宽带频率响应，带来自然且清晰度极高的声音。

The INMP441 is available in a thin 4.72 × 3.76 × 1 mm surface-mount package. It is reflow solder compatible with no sensitivity degradation. The INMP441 is halide-free. 该INMP441采用薄型4.72 × 3.76 × 1毫米表面贴装封装，可提供无退化。它兼容回流焊，灵敏度不会下降。INMP441是无卤化物。 Protected by U.S. Patents 7,449,356; 7,625,484; 7,885,423; and 7,961,897. Other patents are pending. 受美国专利7,449,356、7,625,484、7,885,423和7,961,897保护。其他专利正在申请中。


APPLICATIONS 应用

- Teleconferencing Systems 电话会议系统
- Remote Controls 遥控器
- Gaming Consoles 游戏主机
- Mobile Devices 移动设备
- Laptops 笔记本电脑
- Tablets 平板电脑
- Security Systems 安全系统

FEATURES 功能

- Digital I²S Interface with High-Precision 24-Bit Data High SNR of 61 dBA 60分贝A计权的高信噪比
- High Sensitivity of -26 dBFS 灵敏度高达-26 dBFS
- Flat Frequency Response from 60 Hz to 15 kHz 60赫兹至15千赫兹的平坦频率响应
- Low Current Consumption of 1.4 mA 1.4毫安的低电流消耗
- High PSR of -75 dBFS 高电源抑制比，达-75 dBFS
- Small 4.72 × 3.76 × 1 mm Surface-Mount Package 体积小，表面贴装封装尺寸小，4.72毫米兼容锡/铅和无铅焊接工艺
- Compatible with Sn/Pb and Pb-Free Solder Process ROHS/WECC Compliant 符合ROHS/WECC标准

FUNCTIONAL BLOCK DIAGRAM 功能框图

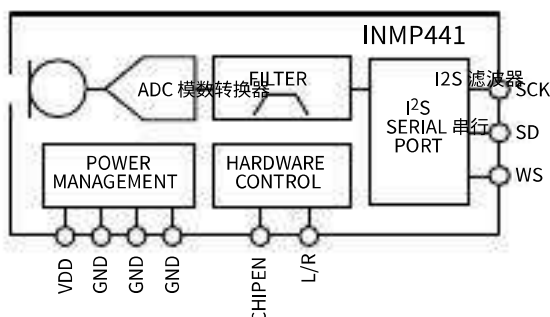

ORDERING INFORMATION 订购信息


PART	TEMP RANGE
INMP441ACEZ-R0*	-40°C to +85°C
INMP441ACEZ-R7†	-40°C to +85°C
EV_INMP441	—
EV_INMP441-FX	—

* - 13" Tape and Reel

† - 7" Tape and reel to be discontinued. Contact sales@invensense.com for availability.



BOTTOM



TOP



TABLE OF CONTENTS

General Description	1
Applications	1
Features	1
Functional Block Diagram	1
Ordering Information.....	1
Specifications	4
Table 1. Electrical Characteristics	4
Table 2. I ² S Digital Input/Output Characteristics	5
Table 3. Serial Data Port Timing Specifications.....	5
Timing Diagram.....	5
Absolute Maximum Ratings.....	6
Table 4. Absolute Maximum Ratings	6
ESD Caution	6
Soldering Profile.....	7
Table 5. Recommended Soldering Profile.....	7
Pin Configurations And Function Descriptions	8
Table 6. Pin Function Descriptions.....	8
Typical Performance Characteristics.....	9
Theory of Operation	10
Understanding Sensitivity.....	10
Power Management	10
Normal Operation	10
Standby Mode	10
Power-Down Mode	10
Startup	10
I ² S Data Interface.....	11
Data Output Mode.....	11
Data Word Length.....	11
Data-Word Format.....	11
Digital Microphone Sensitivity	12
Synchronizing Microphones	13
Digital Filter Characteristics	13
High-Pass Filter	13
Table 7. High Pass Filter Characteristics	13
Low-Pass Filter	13
Applications Information	14
Power-Supply Decoupling.....	15



Supporting Documents	16
Evaluation Board User Guide.....	16
Application Notes (Product Specific)	16
Application Notes (General)	16
PCB Design And Land Pattern Layout	17
PCB Material And Thickness	18
Handling Instructions.....	18
Pick And Place Equipment	18
Reflow Solder	18
Board Wash.....	18
Outline Dimensions.....	19
Ordering Guide	20
Revision History	20
Compliance Declaration Disclaimer:	21
Environmental Declaration Disclaimer:	21



SPECIFICATIONS

TABLE 1. ELECTRICAL CHARACTERISTICS

($T_A = -40$ to 85°C , $V_{DD} = 1.8$ to 3.3 V, $\text{CLK} = 2.4$ MHz, $C_{LOAD} = 30$ pF, unless otherwise noted. All minimum and maximum specifications are guaranteed across temperature, voltage, and clock frequency specified in Table 1, Table 2, Table 3, unless otherwise noted. Typical specifications are not guaranteed.)

PARAMETER		CONDITIONS	MIN	TYP	MAX	UNITS	NOTES
PERFORMANCE							
Directionality				Omni			
Sensitivity		1 kHz 94 dB SPL	-29	-26	-23	dBFS	1
Signal-to-Noise Ratio (SNR)		20 Hz to 20 kHz A-weighted		61		dBA	
Equivalent Input Noise (EIN)		20 Hz to 20 kHz A-weighted		33		dB SPL	
Dynamic Range		Derived from EIN and maximum acoustic input		87		dB	
Frequency Response		Low frequency -3 dB point		60		Hz	2
		High frequency -3 dB point		15		kHz	
Total Harmonic Distortion (THD)		105 dB SPL			3	%	
Power-Supply Rejection (PSR)		217 Hz, 100 mVp-p square wave superimposed on $V_{DD} = 1.8$ V		-75		dBFS	
Maximum Acoustic Input		Peak		120		dB SPL	
Noise Floor		20 Hz to 20 kHz, A-weighted RMS		-87		dBFS	
POWER SUPPLY							
Supply Voltage (V_{DD})			1.62		3.63	V	
Supply Current (I_c)							
$V_{DD} = 1.8$ V	Normal Mode			1.4	1.6	mA	
	Standby				0.8	mA	
	Power Down				2	μA	
$V_{DD} = 3.3$ V	Normal Mode			2.2	2.5	mA	
	Standby				0.8	mA	
	Power Down				4.5	μA	
DIGITAL FILTER							
Group Delay					17.2/fs	sec	
		$f_s = 48$ kHz			359	μs	
		$f_s = 16$ kHz			1078	μs	
Pass-Band Ripple					+0.04	dB	
Stop-Band Attenuation				60		dB	
Pass Band		$0.423 \times f$		20.3		kHz	

Note 1: The peak-to-peak amplitude relative to peak-to-peak amplitude of $(2^{24} - 1)$. The stimulus is a 104 dB SPL sinusoid having RMS amplitude of 3.16. Sensitivity is relative to 1 Pa.

Note 2: See Figure 4 and Figure 5.



TABLE 2. I²S DIGITAL INPUT/OUTPUT CHARACTERISTICS

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS	NOTES
DIGITAL INPUT						
Input Voltage High (V_{IH})	L/R, WS, SCK	$0.7 \times V_{DD}$		V_{DD}	V	1
Input Voltage Low (V_{IL})	L/R, WS, SCK	0		$0.25 \times V_{DD}$	V	1
SD DIGITAL INPUT						
Voltage Output Low (VOL)	$V_{DD} = 1.8 \text{ V}$, $I_{SINK} = 0.25 \text{ mA}$			$0.1 \times V_{DD}$	V	1
Voltage Output Low (VOL)	$V_{DD} = 1.8 \text{ V}$, $I_{SINK} = 0.7 \text{ mA}$			$0.3 \times V_{DD}$	V	1
Voltage Output High (VOH)	$V_{DD} = 1.8 \text{ V}$, $I_{SINK} = 0.7 \text{ mA}$	$0.7 \times V_{DD}$			V	1
Voltage Output High (VOH)	$V_{DD} = 1.8 \text{ V}$, $I_{SINK} = 0.25 \text{ mA}$	$0.9 \times V_{DD}$			V	1
Voltage Output Low (VOL)	$V_{DD} = 3.3 \text{ V}$, $I_{SINK} = 0.5 \text{ mA}$			$0.1 \times V_{DD}$	V	1
Voltage Output Low (VOL)	$V_{DD} = 3.3 \text{ V}$, $I_{SINK} = 1.7 \text{ mA}$			$0.3 \times V_{DD}$	V	1
Voltage Output High (VOH)	$V_{DD} = 3.3 \text{ V}$, $I_{SINK} = 1.7 \text{ mA}$	$0.7 \times V_{DD}$			V	1
Voltage Output High (VOH)	$V_{DD} = 3.3 \text{ V}$, $I_{SINK} = 0.5 \text{ mA}$	$0.9 \times V_{DD}$			V	1

Note 1: Limits based on characterization results; not production tested.

TABLE 3. SERIAL DATA PORT TIMING SPECIFICATIONS

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS	NOTES
t_{SCH}	SCK high	50			ns	
t_{SCL}	SCK low	50			ns	
t_{SCP}	SCK period	312			ns	
f_{SCK}	SCK frequency	0.5		3.2	MHz	
t_{WSS}	WS setup	0			ns	
t_{WSH}	WS hold	20			ns	
f_{WS}	WS frequency	7.8		50	kHz	

TIMING DIAGRAM

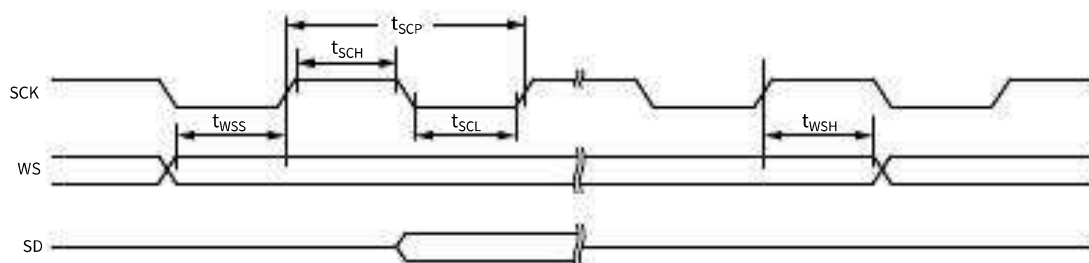


Figure 1. Serial Data Port Timing



ABSOLUTE MAXIMUM RATINGS

Stress above those listed as Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only; extended operation of the device at these conditions is not implied. Exposure to the absolute maximum ratings conditions for extended periods may affect device reliability.

TABLE 4. ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING
Supply Voltage (V_{DD})	-0.3 V to +3.63 V
Digital Pin Input Voltage	-0.3 V to $V_{DD} + 0.3$ V or 3.63 V, whichever is less
Sound Pressure Level	160 dB
Mechanical Shock	10,000 g
Vibration	Per MIL-STD-883 Method 2007, Test Condition B
Temperature Range	
Biased	-40°C to +85°C
Storage	-55°C to +150°C

ESD CAUTION



ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore proper ESD precautions should be taken to avoid performance degradation or loss of functionality.



SOLDERING PROFILE

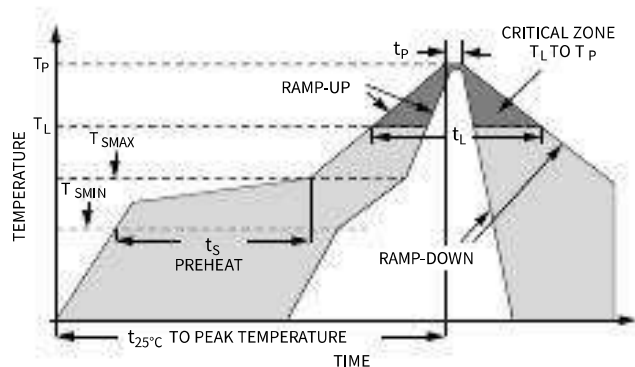


Figure 2. Recommended Soldering Profile Limits

TABLE 5. RECOMMENDED SOLDERING PROFILE*

PROFILE FEATURE		Sn63/Pb37	Ph-Free
Average Ramp Rate (T_L to T_P)		1.25°C/sec max	1.25°C/sec max
Preheat	Minimum Temperature (T_{SMIN})	100°C	100°C
	Minimum Temperature (T_{SMAX})	150°C	200°C
	Time (T_{SMIN} to T_{SMAX})	60 sec to 75 sec	60 sec to 75 sec
Ramp-Up Rate (T_{SMAX} to T_L)		1.25°C/sec	1.25°C/sec
Time Maintained Above Liquidous (T_L to Peak Temperature) (t_p)		45 sec to 75 sec	~50 sec
Liquidous Temperature (T_L)		183°C	217°C
Peak Temperature (T_P)		215°C +3°C/-3°C	260°C +0°C/-5°C
Time Within +5°C of Actual Peak Temperature ($t_{\pm 5}$)		20 sec to 30 sec	20 sec to 30 sec
Ramp-Down Rate		3°C/sec max	3°C/sec max
Time +25°C (t_{+25}) to Peak Temperature		5 min max	5 min max

*The reflow profile in Table 5 is recommended for board manufacturing with InvenSense MEMS microphones. All microphones are also compatible with the J-STD-020 profile.



PIN CONFIGURATIONS AND FUNCTION DESCRIPTIONS

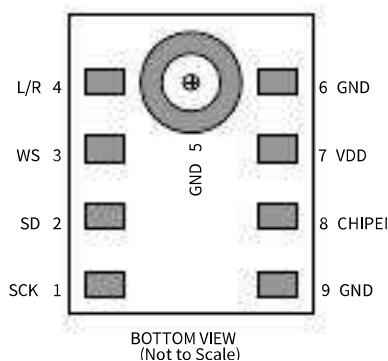


Figure 3. Pin Configuration

TABLE 6. PIN FUNCTION DESCRIPTIONS

PIN	NAME	FUNCTION
1	SCK	Serial-Data Clock for I ² S Interface
2	SD	Serial-Data Output for I ² S Interface. This pin tri-states when not actively driving the appropriate output channel. The SD trace should have a 100 k Ω pulldown resistor to discharge the line during the time that all microphones on the bus have tri-stated their outputs.
3	WS	Serial Data-Word Select for I ² S Interface
4	L/R	Left/Right Channel Select. When set low, the microphone outputs its signal in the left channel of the I ² S frame. When set high, the microphone outputs its signal in the right channel.
5	GND	Ground. Connect to ground on the PCB.
6	GND	Ground. Connect to ground on the PCB.
7	VDD	Power, 1.8 V to 3.3 V. This pin should be decoupled to Pin 6 with a 0.1 μ F capacitor.
8	CHIPEN	Microphone Enable. When set low (ground), the microphone is disabled and put in power-down mode. When set high (VDD), the microphone is enabled.
9	GND	Ground. Connect to ground on the PCB.



TYPICAL PERFORMANCE CHARACTERISTICS

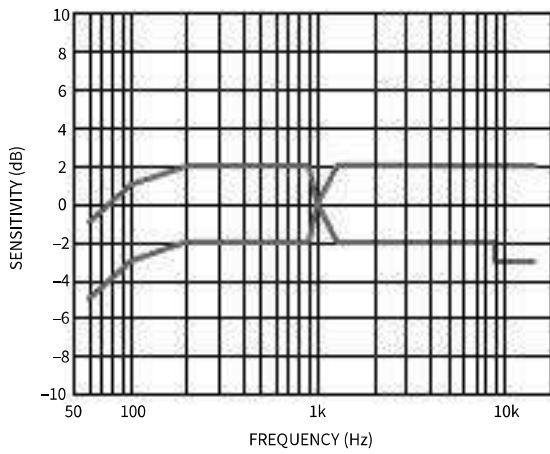


Figure 4. Frequency Response Mask

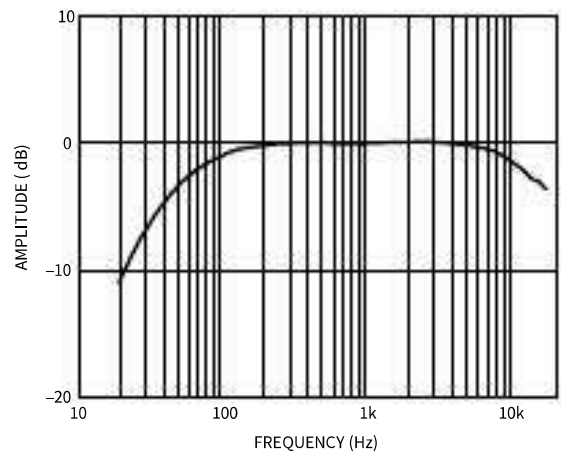


Figure 5. Typical Frequency Response (Measured)

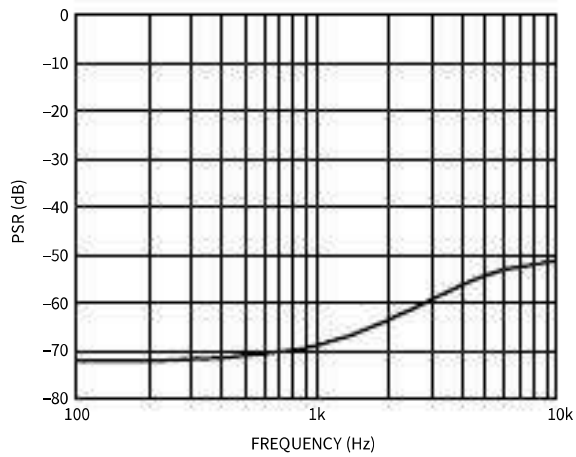


Figure 6. Power-Supply Rejection (PSR) vs. Frequency



THEORY OF OPERATION

The INMP441 is a high-performance, low-power, digital-output, omni-directional MEMS microphone with a bottom port. The complete INMP441 solution consists of a MEMS sensor, signal conditioning, an analog-to-digital converter, anti-aliasing filter, power management, and an industry-standard 24-bit I²S interface.

The INMP441 complies with the TIA-920 Telecommunications Telephone Terminal Equipment Transmission Requirement Wideband Digital Wireline Telephones standard.

UNDERSTANDING SENSITIVITY

The casual user of digital microphones may have difficulty understanding the sensitivity specification. Unlike an analog microphone (whose specification is easily confirmed with an oscilloscope), the digital microphone output has no obvious unit of measurement.

The INMP441 has a nominal sensitivity of -26 dBFS at 1 kHz with an applied sound pressure level of 94 dB. The units are referred to full scale. The INMP441 default full-scale peak output word is $2^{23} - 1$ (integer representation), and -26 dBFS of 1 Pa is $(2^{23} - 1) \times 10^{(-26/20)} = 420,426$. A pure acoustic tone at 1 kHz having a 1Pa RMS amplitude results in an output digital signal peak amplitude is 420,426.

Although the industry uses a standard specification of 94 dB SPL, the INMP441 test method applies a 104 dB SPL signal. The sound pressure level reduces noise and improves repeatability. The INMP441 has excellent gain linearity, and the sensitivity result at 94 dB is derived with very high confidence from the test data.

POWER MANAGEMENT

The INMP441 has three different power states: normal operation, standby mode, and power-down mode.

Normal Operation

The microphone becomes operational 2^{18} clock cycles (85 ms with SCK at 3.072 MHz) after initial power-up. The CHIPEN pin controls the power modes. The part is in normal operation mode when SCK is active and the CHIPEN pin is high.

Standby Mode

The microphone enters standby mode when the serial-data clock SCK stops and CHIPEN is high. Normal operation resumes 2^{17} clock cycles (5 ms with SCK at 3.072 MHz) after SCK restarts.

The INMP441 should not be transitioned from standby to power-down mode, or vice versa. Standby mode is only intended to be entered from the normal operation state.

Power-Down Mode

The microphone enters power-down mode when CHIPEN is low, regardless of the SCK operation. Normal mode operation resumes 2^{17} SCK clock cycles (43 ms with SCK at 3.072 MHz) after CHIPEN returns high while SCK is active.

It always takes 2^{17} clock cycles to restart the INMP441 after V_{DD} is applied.

It is not recommended to supply active clocks (WS and SCK) to the INMP441 while there is no power supplied to VDD. Doing so continuously turns on ESD protection diodes, which may affect long-term reliability of the microphone.

Startup

The microphones have zero output for the first 2^{18} SCK clock cycles (85ms with SCK at 3.072 MHz) following power-up.



I²S DATA INTERFACE

The slave serial-data port's format is I²S, 24-bit, two's complement. There must be 64 SCK cycles in each WS stereo frame, 32 cycles per data-word. The L/R control pin determines whether the INMP441 outputs data in the left or right channel. For a stereo application, the SD pins of the left and right INMP441 microphones should be tied together as shown in Figure 7. The format of a stereo I²S data stream is shown in Figure 8. Figures 9 and 10 show the formats of a mono microphone data stream for left and right microphones, respectively.

Data Output Mode

The output data pin (SD) is tri-stated when it is not actively driving I²S output data. SD immediately tri-states after the LSRX so that another microphone can drive the common data line.

The SD trace should have a pull-down resistor to discharge the line during the time that all microphones on the bus have their outputs tri-stated. A 100 kΩ resistor is sufficient for this, as shown in Figure 7.

Data Word Length

The output data word length is 24 bits per channel. The INMP441 must always have 64 clock cycles for every stereo data-word ($64 \times f_{WS}$).

Data-Word Format

The default data format is I²S (two's complement), MSB-first. In this format, the MSB of each word is delayed by one SCK from the start of each half-frame.

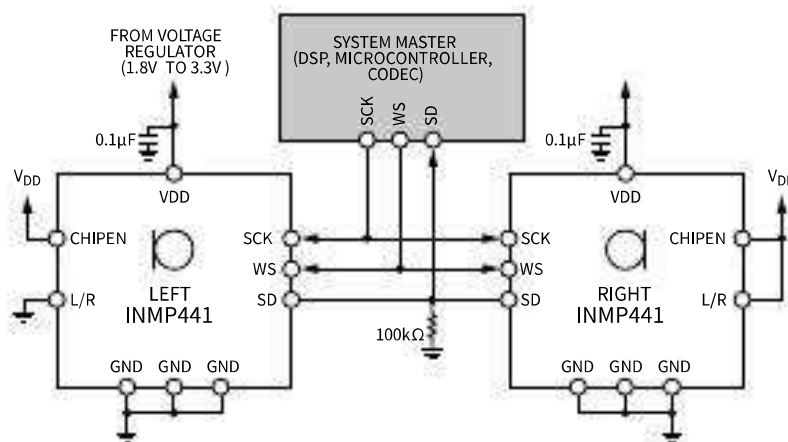


Figure 7. System Block Diagram



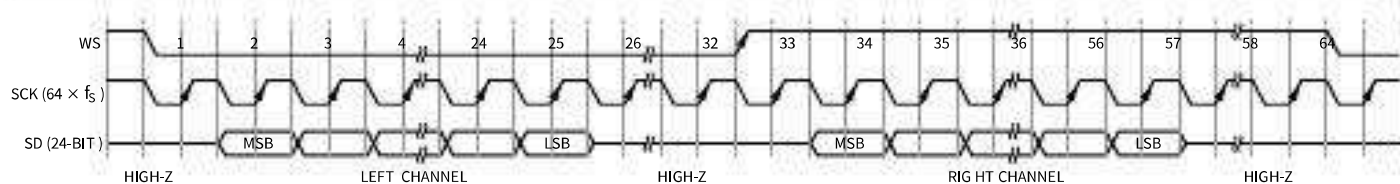


Figure 8. Stereo-Output I²S Format

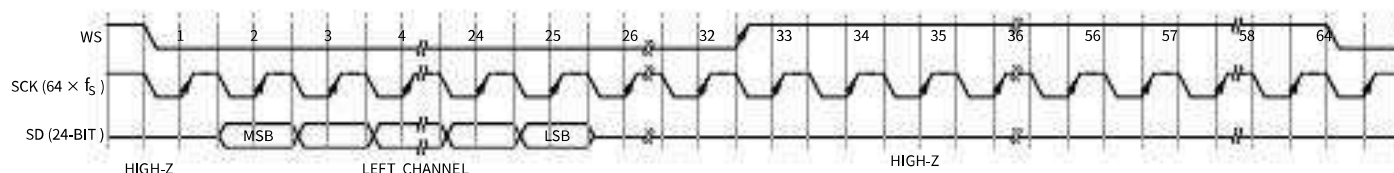


Figure 9. Mono-Output I²S Format Left Channel (L/R = 0)

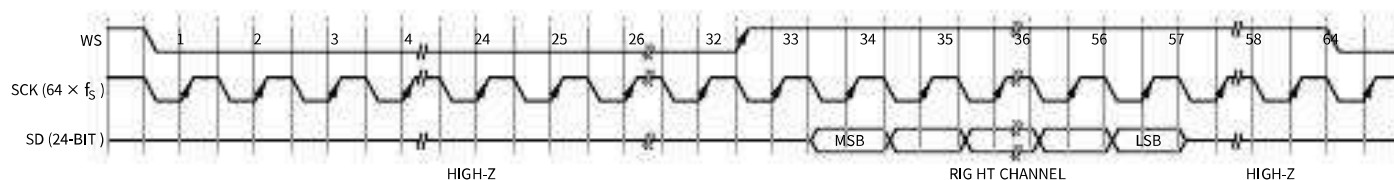


Figure 10. Mono-Output I²S Format Right Channel (L/R = 1)

DIGITAL MICROPHONE SENSITIVITY

The sensitivity of a PDM output microphone is specified in units of dBFS (decibels relative to a full-scale digital output). A sine wave is defined as a signal whose peak just touches the full-scale code of the digital word (see Figure 5). This measurement convention means that signals with a different crest factor may have an RMS level higher than 0dBFS. For example, a full-square wave has an RMS level of 3dBFS.

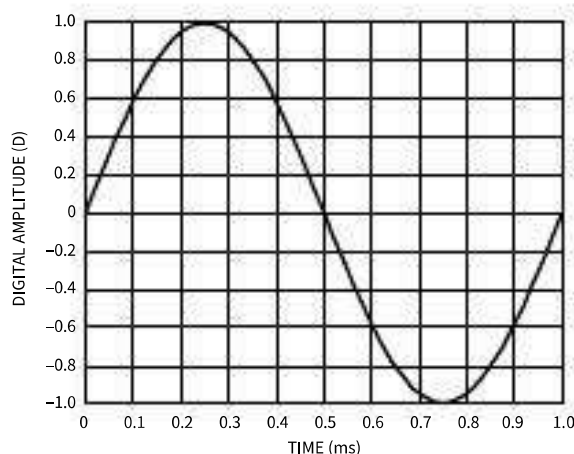


Figure 11. 1 kHz, 0 dBFS Sine Wave

The definition of a 0 dBFS signal must be understood when measuring the sensitivity of the INMP441. An acoustic input signal of a 1 kHz sine wave at 94 dB SPL applied to the INMP441 results in an output signal with a -26 dBFS level. This means that the digital word peaks at -26 dB below the digital full-scale level. A common misunderstanding is that the output has an RMS -29 dBFS; however, this is not the case because of the definition of a 0 dBFS sine wave.



There is no commonly accepted unit of measurement to express the instantaneous level of a digital signal output from the microphone, as opposed to the RMS level of the signal. Some measurement systems express the instantaneous level of a sample in units of D, where 1.0 D is digital full scale (see Figure 11). In this case, a -26 dBFS sine wave has peaks at 0.05 D.

For more information about digital microphone sensitivity, see the AN-1112 Application Note, Microphone Specifications.

SYNCHRONIZING MICROPHONES

Stereo INMP441 microphones are synchronized by the WS signal, so audio captured from two microphones sharing the same WS signal will be in sync. If the mics are enabled separately, this synchronization may take up to 0.35 ms after the enable signal is asserted while internal data paths are flushed.

DIGITAL FILTER CHARACTERISTICS

The INMP441 has an internal digital band-pass filter. A high-pass filter eliminates unwanted low-frequency signals. A low-pass filter allows the user to scale the pass band with the sampling frequency, as well as perform required noise reduction.

HIGH-PASS FILTER

The INMP441 incorporates a high-pass filter to remove unwanted DC and very low frequency components. This shows the characteristics for a nominal sampling rate of 48 kHz. The cutoff frequency scales with changes in sampling rate.

TABLE 7. HIGH PASS FILTER CHARACTERISTICS

FREQUENCY	ATTENUATION
3.7 Hz	-3 dB
10.4 Hz	-0.5 dB
21.6 Hz	-0.1 dB

This digital filter response is in addition to the natural high-pass response of the INMP441 MEMS acoustic transducer that has a cutoff of 60 Hz.

LOW-PASS FILTER

The analog-to-digital converter in the INMP441 is a single-bit, high-order, sigma-delta ($\Sigma\Delta$) running at a high oversampling rate. The noise shaping of the converter pushes the majority of the noise well above the audio band and gives the microphone a wide dynamic range. However, it does require a good quality low-pass filter to eliminate the high-frequency noise.

Figure 12 shows the response of this digital low-pass filter included in the microphone. The pass band of the filter extends to f_s and, in that band, has an unnoticeable 0.04 dB of ripple. The high-frequency cutoff of -6 dB occurs at $0.5 \times f_s$. A 48 kHz sampling rate results in a pass band of 20.3 kHz and a half amplitude corner at 24 kHz. The stop-band attenuation of the filter is greater than 60 dB. Note that these filter specifications scale with sampling frequency.



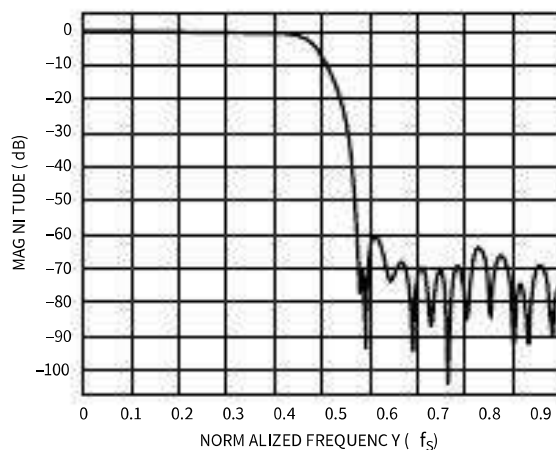


Figure 12. Digital Low-Pass Filter Magnitude Response



APPLICATIONS INFORMATION

POWER-SUPPLY DECOUPLING

For best performance and to avoid potential parasitic artifacts, placing a 0.1 μF ceramic type X7R or better capacitor between (VDD) and ground is strongly recommended. The capacitor should be placed as close to Pin 7 as possible.

The connections to each side of the capacitor should be as short as possible, and the trace should stay on a single layer w. For maximum effectiveness, locate the capacitor equidistant from the power and ground pins, or if equidistant placement is possible, slightly closer to the power pin. Thermal connections to the ground planes should be made on the far side of the capacitor as shown in Figure 13.




Figure 13. Recommended Power-Supply Bypass Capacitor Layout



SUPPORTING DOCUMENTS

For additional information, see the following documents.

EVALUATION BOARD USER GUIDE

UG-303, EV_INMP441Z-FX: Bottom Port I²S Output MEMS Microphone Evaluation Board

UG-362, EV_INMP441Z SDP Daughter Board for the INMP441 I²S MEMS Microphone

APPLICATION NOTES (PRODUCT SPECIFIC)

AN-0208, High Performance Digital MEMS Microphone's Simple Interface to SigmaDSP Audio Processor

AN-0266, High Performance Digital MEMS Microphone Standard Digital Audio Interface to Blackfin DSP

APPLICATION NOTES (GENERAL)

AN-1003, Recommendations for Mounting and Connecting the InvenSense, Inc., Bottom-Ported MEMS Microphones

AN-1068, Reflow Soldering of the MEMS Microphone

AN-1112, Microphone Specifications Explained

AN-1124, Recommendations for Sealing InvenSense, Inc., Bottom-Port MEMS Microphones from Dust and Liquid Ingress


AN-1140, Microphone Array Beamforming



PCB DESIGN AND LAND PATTERN LAYOUT


Lay out the PCB land pattern for the INMP441 at a 1:1 ratio to the solder pads on the microphone package (see Figure 14.) to avoid applying solder paste to the sound hole in the PCB. Figure 15 shows a suggested solder paste stencil pattern layout. The response of the INMP441 is not affected by the PCB hole size, as long as the hole is not smaller than the sound port of the microphone (0.25 mm, or 0.010 inch, in diameter). A 0.5 mm to 1 mm (0.020 inch to 0.040 inch) diameter for the hole is recommended.

Align the hole in the microphone package with the hole in the PCB. The exact degree of the alignment does not affect the performance of the microphone as long as the holes are not partially or completely blocked.

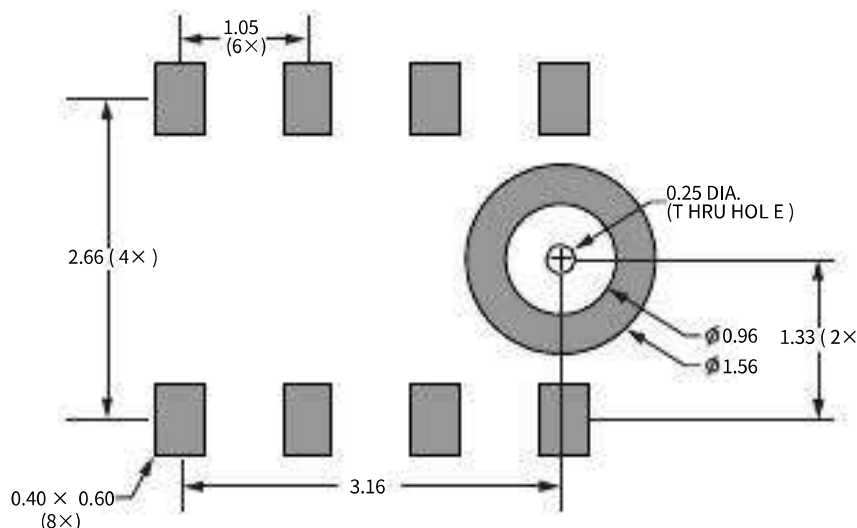

DIMENSIONS SHOWN IN MILLIMETERS

Figure 14. Suggested PCB Land Pattern Layout

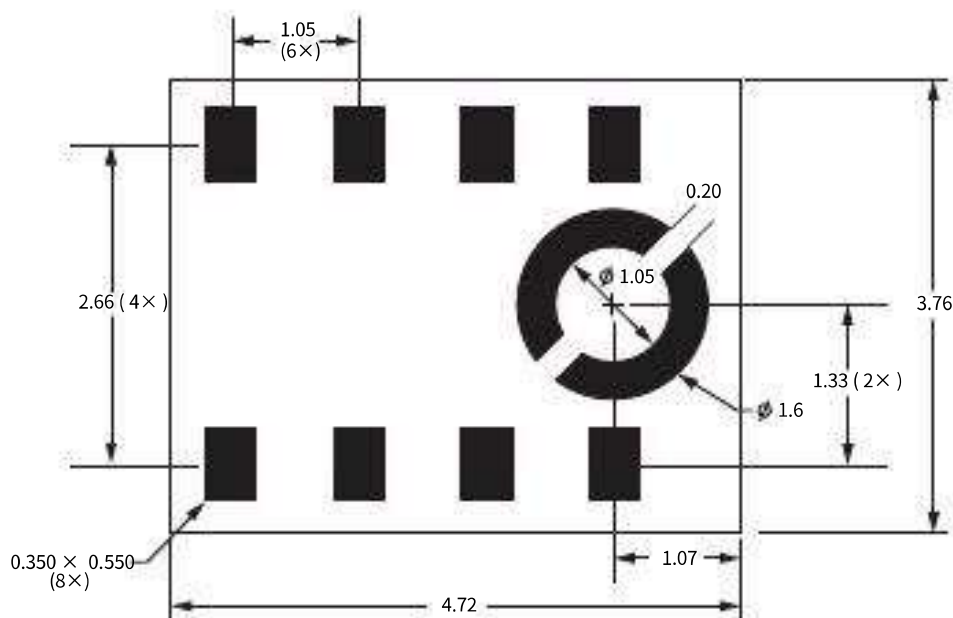

DIMENSIONS SHOWN IN MILLIMETERS

Figure 15. Suggested Solder Paste Stencil Pattern Layout



PCB MATERIAL AND THICKNESS

The performance of the INMP441 is not affected by PCB thickness. The INMP441 can be mounted on either a rigid or flexible PCB with the microphone can be attached directly to the device housing with an adhesive layer. This mounting method offers a reliable seal around the sound port while providing the shortest acoustic path for good sound quality.

HANDLING INSTRUCTIONS

PICK AND PLACE EQUIPMENT

The MEMS microphone can be handled using standard pick-and-place and chip shooting equipment. Take care to avoid damage to the MEMS microphone structure as follows:

- Use a standard pickup tool to handle the microphone. Because the microphone hole is on the bottom of the package, the pickup tool can make contact with any part of the lid surface.
- Do not pick up the microphone with a vacuum tool that makes contact with the bottom side of the microphone.
- Do not pull air out of or blow air into the microphone port.
- Do not use excessive force to place the microphone on the PCB.

REFLOW SOLDER

For best results, the soldering profile must be in accordance with the recommendations of the manufacturer of the solder paste used to attach the MEMS microphone to the PCB. It is recommended that the solder reflow profile not exceed the limit conditions shown in Figure 2 and Table 5.

BOARD WASH

When washing the PCB, ensure that water does not make contact with the microphone port. Do not use blow-off procedure or ultrasonic cleaning.



OUTLINE DIMENSIONS

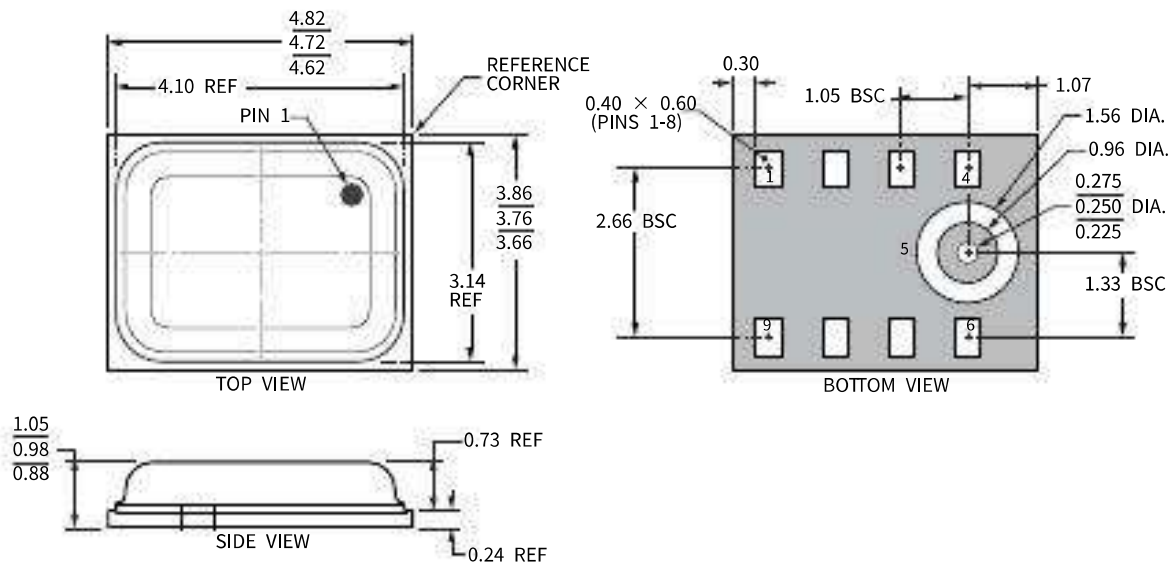


Figure 16. 9-Terminal Chip Array Small Outline No Lead Cavity [LGA_CAV]
4.72 mm × 3.76 mm × 1.00 mm Body
Dimensions shown in millimeters




Figure 17. Package Marking Specification (Top View)



ORDERING GUIDE

PART	TEMP RANGE	PACKAGE	QUANTITY
INMP441ACEZ-R0*	-40°C to +85°C	9-Terminal LGA_CAV	4,500
INMP441ACEZ-R7†	-40°C to +85°C	9-Terminal LGA_CAV	1,000
EV_INMP441-EX	—	Flexible Evaluation Board	—
EV_INMP441	—	Evaluation Board	—

* – 13" Tape and Reel

† – 7" Tape and reel to be discontinued. Contact sales@invensense.com for availability.

REVISION HISTORY

REVISION DATE	REVISION	DESCRIPTION
02/06/2014	1.0	Initial Release



Compliance Declaration Disclaimer:

InvenSense believes this compliance information to be correct but cannot guarantee accuracy or completeness. Conform documents for the above component constitutes are on file. InvenSense subcontracts manufacturing and the information herein is based on data received from vendors and suppliers, which has not been validated by InvenSense

Environmental Declaration Disclaimer:

InvenSense believes this environmental information to be correct but cannot guarantee accuracy or completeness. Conform documents for the above component constitutes are on file. InvenSense subcontracts manufacturing and the information herein is based on data received from vendors and suppliers, which has not been validated by InvenSense

This information furnished by InvenSense is believed to be accurate and reliable. However, no responsibility is assumed by InvenSense for its use, or for any infringements of patents or other rights of third parties that may result from its use. Specifications are subject to change without notice. InvenSense reserves the right to make changes to this product, including its circuits and software, in order to improve its design and/or performance, without prior notice. InvenSense makes no warranties, neither expressed nor implied, regarding the information and specifications contained in this document. InvenSense assumes no responsibility for any claims or damages arising from information contained in this document, or from the use of product or services detailed therein. This includes, but is not limited to, claims or damages based on the infringement of patents, copyrights, mask work and/or other intellectual property rights.

Certain intellectual property owned by InvenSense and described in this document is patent protected. No license is granted by implication or otherwise under any patent or patent rights of InvenSense. This publication supersedes and replaces all information previously supplied. Trademarks that are registered trademarks are the property of their respective companies. InvenSense should not be used or sold in the development, storage, production or utilization of any conventional or mass-destructive weapons or for any other weapons or life threatening applications, as well as in any other life critical applications such as medical equipment, transportation, aerospace and nuclear instruments, undersea equipment, power plant equipment, disaster prevention and safety prevention equipment.

©2014 InvenSense, Inc. All rights reserved. InvenSense, MotionTracking, MotionProcessing, MotionProcessor, MotionFusion, MotionApps, DMP, AAR, and the InvenSense logo are trademarks of InvenSense, Inc. Other company and product names are trademarks of the respective companies with which they are associated.



©2014 InvenSense, Inc. All rights reserved.

