

1. Description

1.1. Project

Project Name	stm32cubemx_f303re
Board Name	NUCLEO-F303RE
Generated with:	STM32CubeMX 4.19.0
Date	02/28/2017

1.2. MCU


MCU Series	STM32F3
MCU Line	STM32F303
MCU name	STM32F303RETx
MCU Package	LQFP64
MCU Pin number	64

3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
2	PC13	I/O	GPIO_EXTI13	B1 [Blue PushButton]
3	PC14-OSC32_IN	I/O	RCC_OSC32_IN	
4	PC15-OSC32_OUT	I/O	RCC_OSC32_OUT	
5	PF0-OSC_IN	I/O	RCC_OSC_IN	
7	NRST	Reset		
12	VSSA	Power		
13	VDDA	Power		
14	PA0	I/O	ADC1_IN1	
16	PA2	I/O	USART2_TX	USART_TX
17	PA3	I/O	USART2_RX	USART_RX
18	VSS	Power		
19	VDD	Power		
20	PA4 *	I/O	GPIO_Output	LD2 [Green Led]
21	PA5	I/O	SPI1_SCK	
22	PA6	I/O	SPI1_MISO	
23	PA7	I/O	SPI1_MOSI	
31	VSS	Power		
32	VDD	Power		
38	PC7 *	I/O	GPIO_Input	TC_Busyn
44	PA11	I/O	CAN_RX	
45	PA12	I/O	CAN_TX	
46	PA13	I/O	SYS_JTMS-SWDIO	TMS
47	VSS	Power		
48	VDD	Power		
49	PA14	I/O	SYS_JTCK-SWCLK	TCK
58	PB6 *	I/O	GPIO_Output	SPI1_CS _n
60	BOOT0	Boot		
63	VSS	Power		
64	VDD	Power		

* The pin is affected with an I/O function

4. Clock Tree Configuration

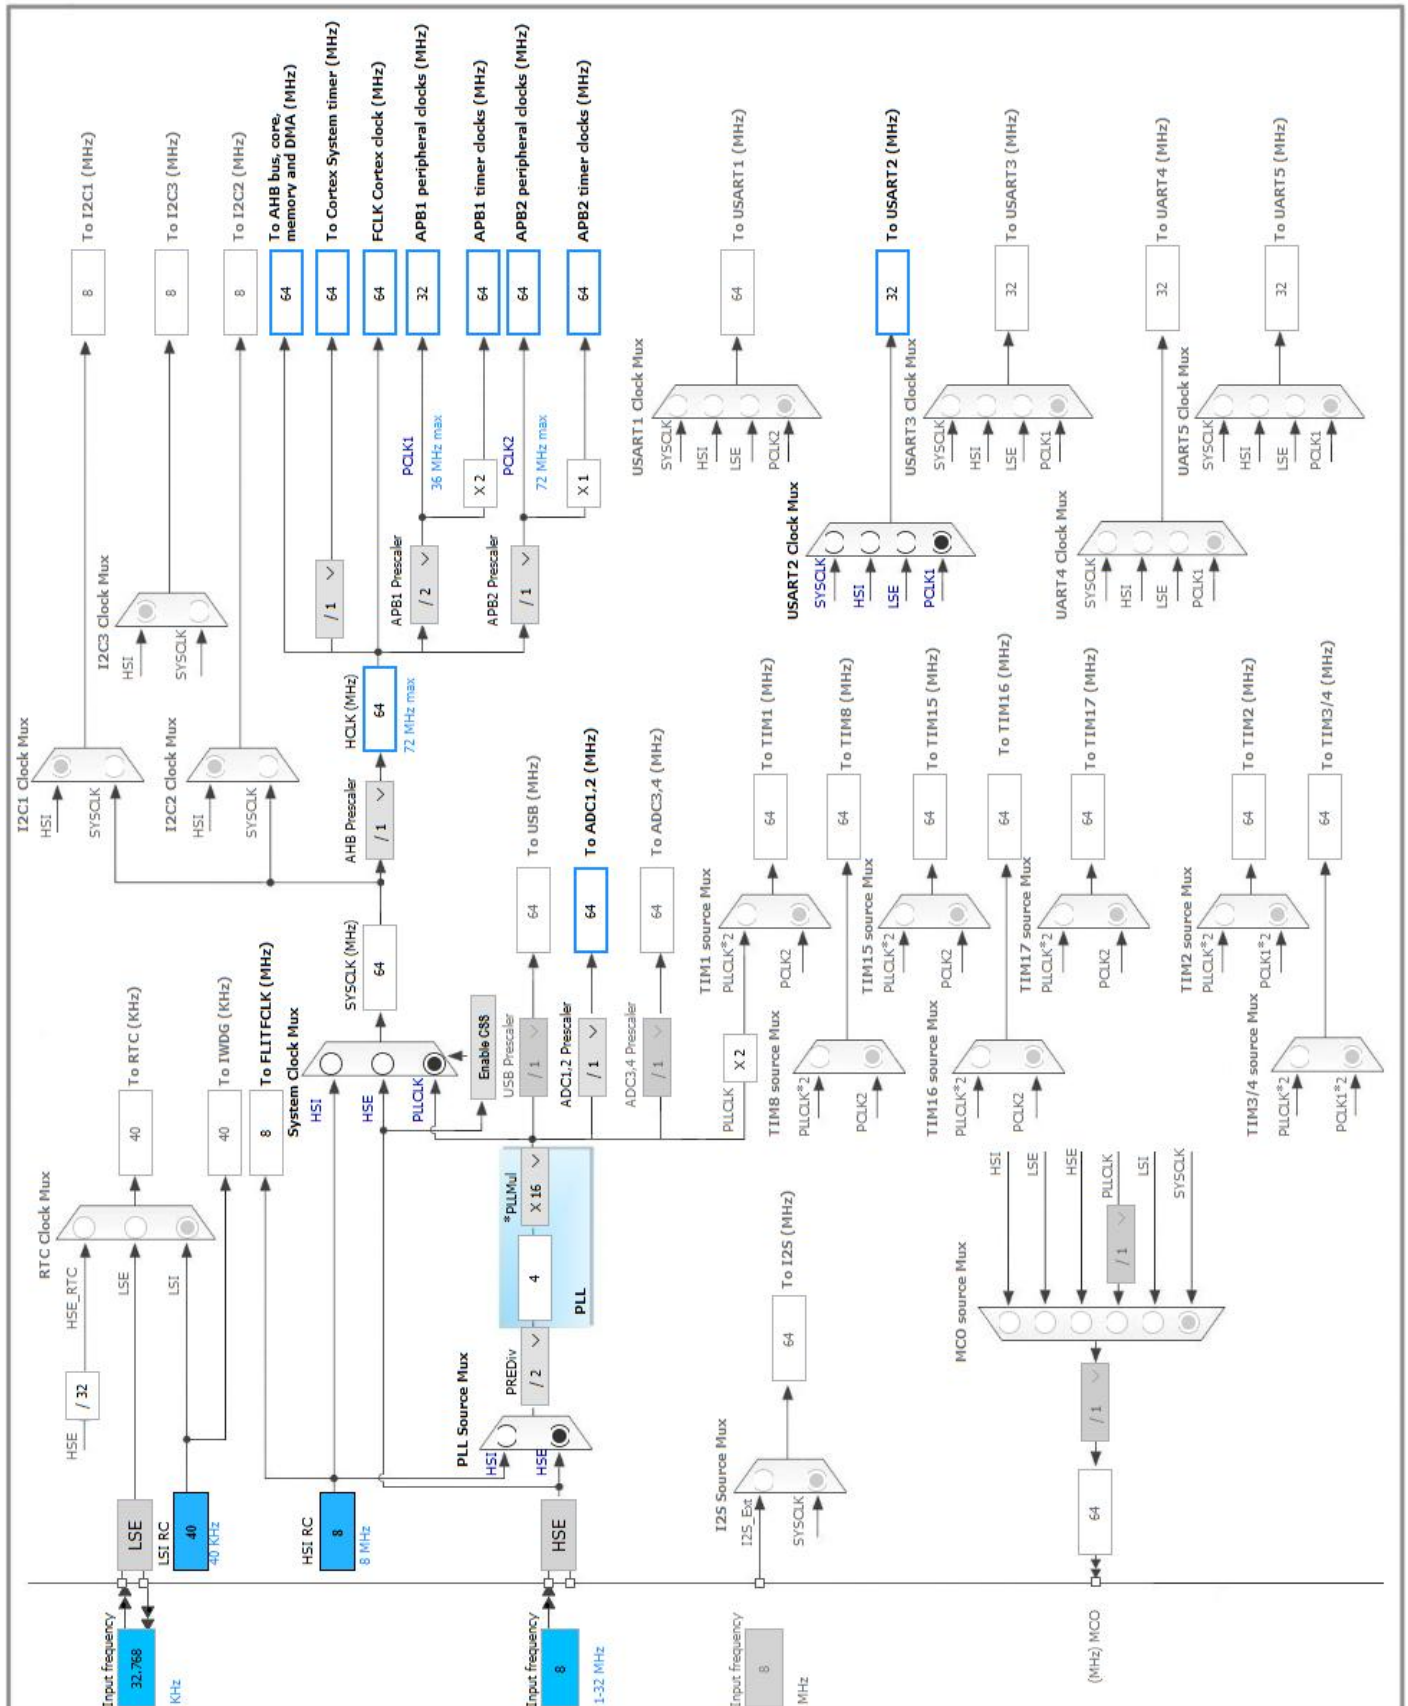

5. IPs and Middleware Configuration

5.1. ADC1

IN1: IN1 Single-ended

5.1.1. Parameter Settings:

ADCs_Common_Settings:

Mode	Independent mode
DMA Access Mode	DMA access mode disabled
Delay between 2 sampling phases	1 Cycle

ADC_Settings:

Clock Prescaler	ADC Asynchronous clock mode
Resolution	ADC 12-bit resolution
Data Alignment	Right alignment
Scan Conversion Mode	Disabled
Continuous Conversion Mode	Disabled
Discontinuous Conversion Mode	Disabled
DMA Continuous Requests	Disabled
End Of Conversion Selection	End of single conversion
Overrun behaviour	Overrun data overwritten
Low Power Auto Wait	Disabled

ADC_Regular_ConversionMode:

Enable Regular Conversions	Enable
Number Of Conversion	1
External Trigger Conversion Source	Regular Conversion launched by software
External Trigger Conversion Edge	None
Rank	1
Channel	Channel 1
Sampling Time	1.5 Cycles
Offset Number	No offset
Offset	0

ADC_Injected_ConversionMode:

Enable Injected Conversions	Enable
Number Of Conversions	0

Analog Watchdog 1:

Enable Analog WatchDog1 Mode	false
------------------------------	-------

Analog Watchdog 2:

Enable Analog WatchDog2 Mode	false
------------------------------	-------

Analog Watchdog 3:

Enable Analog WatchDog3 Mode false

5.2. CAN

mode: Mode

5.2.1. Parameter Settings:

Bit Timings Parameters:

Prescaler (for Time Quantum)	2 *
Time Quantum	62.5 *
Time Quanta in Bit Segment 1	13 Times *
Time Quanta in Bit Segment 2	2 Times *
Time for one Bit	1000
ReSynchronization Jump Width	1 Time

Basic Parameters:

Time Triggered Communication Mode	Disable
Automatic Bus-Off Management	Disable
Automatic Wake-Up Mode	Disable
No-Automatic Retransmission	Disable
Receive Fifo Locked Mode	Disable
Transmit Fifo Priority	Disable

Advanced Parameters:

Operating Mode	Normal
----------------	--------

5.3. RCC

High Speed Clock (HSE): BYPASS Clock Source

Low Speed Clock (LSE) : Crystal/Ceramic Resonator

5.3.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Prefetch Buffer	Enabled
Flash Latency(WS)	2 WS (3 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

5.4. SPI1

Mode: Full-Duplex Master

5.4.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	8 Bits *
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	32 *
Baud Rate	2.0 MBits/s *
Clock Polarity (CPOL)	High *
Clock Phase (CPHA)	2 Edge *

Advanced Parameters:

CRC Calculation	Disabled
NSS Signal Type	Software

5.5. SYS

Debug: Serial Wire

Timebase Source: SysTick

5.6. USART2

Mode: Asynchronous

5.6.1. Parameter Settings:

Basic Parameters:

Baud Rate	38400
Word Length	7 Bits (including Parity)
Parity	None

Stop Bits	1
Advanced Parameters:	
Data Direction	Receive and Transmit
Over Sampling	16 Samples
Single Sample	Disable
Advanced Features:	
Auto Baudrate	Disable
TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

* User modified value

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
ADC1	PA0	ADC1_IN1	Analog mode	No pull up pull down	n/a	
CAN	PA11	CAN_RX	Alternate Function Push Pull	No pull up pull down	High *	
	PA12	CAN_TX	Alternate Function Push Pull	No pull up pull down	High *	
RCC	PC14-OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	
	PF0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
SPI1	PA5	SPI1_SCK	Alternate Function Push Pull	No pull up pull down	High *	
	PA6	SPI1_MISO	Alternate Function Push Pull	No pull up pull down	High *	
	PA7	SPI1_MOSI	Alternate Function Push Pull	No pull up pull down	High *	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	TMS
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	TCK
USART2	PA2	USART2_TX	Alternate Function Push Pull	*	Low	USART_TX
	PA3	USART2_RX	Alternate Function Push Pull	*	Low	USART_RX
GPIO	PC13	GPIO_EXTI13	External Event Mode with Rising edge trigger detection *	No pull up pull down	n/a	B1 [Blue PushButton]
	PA4	GPIO_Output	Output Push Pull	No pull up pull down	Low	LD2 [Green Led]
	PC7	GPIO_Input	Input mode	No pull up pull down	n/a	TC_Busyn
	PB6	GPIO_Output	Output Push Pull	No pull up pull down	Low	SPI1_CSn

6.2. DMA configuration

nothing configured in DMA service

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
USB high priority or CAN_TX interrupts	true	0	0
USB low priority or CAN_RX0 interrupts	true	0	0
CAN_RX1 interrupt	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
ADC1 and ADC2 interrupts	unused		
CAN_SCE interrupt	unused		
SPI1 global interrupt	unused		
USART2 global interrupt / USART2 wake-up interrupt through EXTI line 26	unused		
Floating point unit interrupt	unused		

* User modified value

7. Power Consumption Calculator report

7.1. Microcontroller Selection

Series	STM32F3
Line	STM32F303
MCU	STM32F303RETx
Datasheet	026415_Rev4

7.2. Parameter Selection

Temperature	25
Vdd	3.6

8. Software Project

8.1. Project Settings

Name	Value
Project Name	stm32cubemx_f303re
Project Folder	C:\Users\jmc_t\Documents\Git\fixSPIforDisplay
Toolchain / IDE	SW4STM32
Firmware Package Name and Version	STM32Cube FW_F3 V1.7.0

8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No