

Click Biometric System Quick User Guide - Hardware



Hardware

17/02/2023



Item	Description	Machine	Click Here
1	How to register thumbprint, card and password with Enroll ID?	WE-88i,WE-68plus,CL-TFS12	2
2	How to download data?		4
3	How to change the machine time?		5
4	How to delete enrol ID?		5
5	How to setup and check the network?		6
6	How to register face, thumbprint, card, password and ID?	CL365A,CL385B,CL573,WE-68PlusN	7
7	How to download data?		8
8	How to change the machine time?		9
9	How to delete enrol ID?		9
10	How to setup and check the network?		10
11	How to register AI face, thumbprint, card, password and ID?	AI07F	11
12	How to download data?		13
13	How to change the machine time?		14
14	How to delete enrol ID?		14
15	How to setup and check the network?		15

a) How to register thumbprint, card and password with Enroll ID? [WE-88i, WE-68plus, CL-TFS12]

Go to machine press Menu → Register → Choose “User” for normal staff. Choose “Admin” for full access all function. Choose “Sup.User” for doing registration staff only. → New reg.

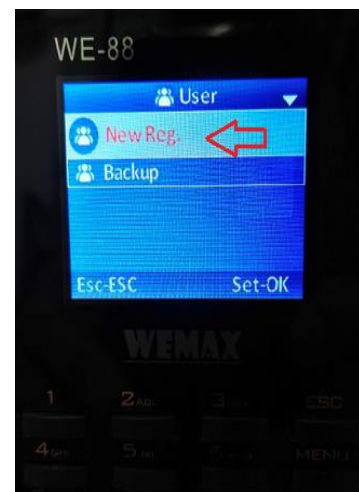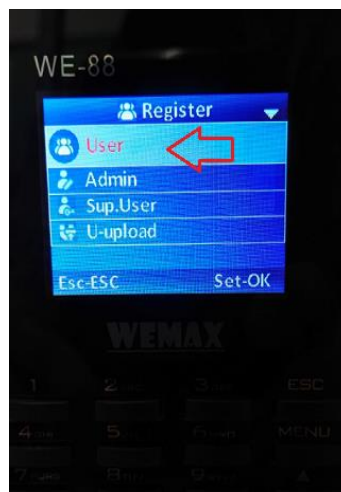

--> Choose which one you prefer “finger, card or password”. Example here we choose “Finger”.
→ Enter Enroll ID → Name. You can type your name here or press “ESC” to skip this process.
You can also use our TMS software sync the name to the device later.

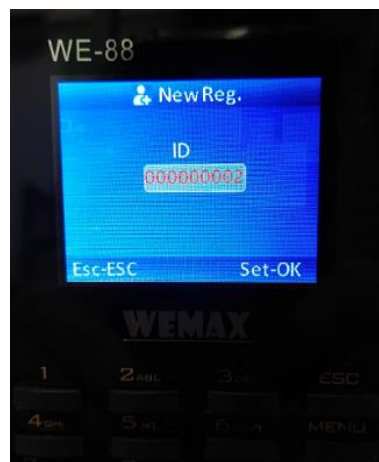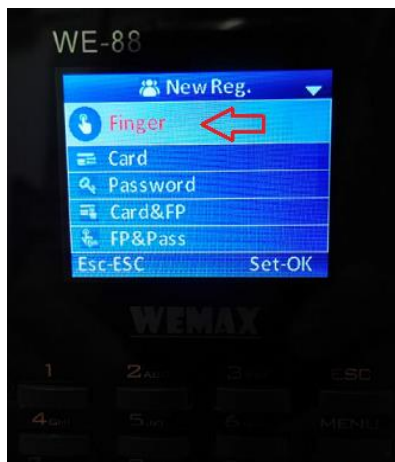


To key in the name into device, press the number keypad with alphabet. Example to key in character A, press **2** and then press **OK**. A series of number will appear on top of characters. If you want capital A, choose **1** and press **OK**. Do the same way to others alphabet you want.



After set the name, you can begin to scan your finger 3 times. Some machine 2 times. Must use same finger to register. After 3 times scan your finger, system will ask "Do you wish to continue?" If you want to continue to register 2nd finger, press **OK**. Otherwise press **ESC** to exist from setting.



To register "Password", go to Menu → Register → Choose "User" → New reg. → Key in the Enroll ID and press **OK** → type the password you want to set and repeat 2nd time.

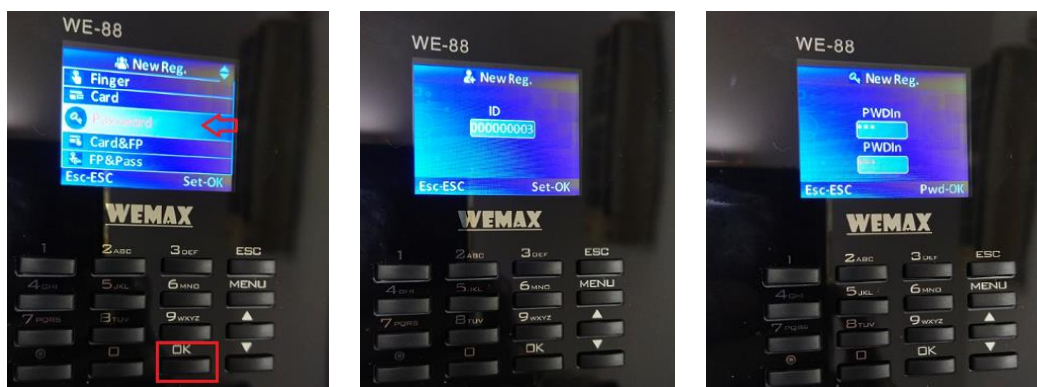

To register **Card**, go to Menu → Register → Choose “User” → New reg. → Card → Key in the Enroll ID and press **OK** → scan your access card and press **OK**.




b) How to download data?

Slot in pendrive to machine first. Make sure the pendrive size is less than 16GB. Then go to Menu → Set Comm → U-Disk Mng. → Download → All Glog



c) How to change the machine time?

Go to Menu → Advanced → Set Date Time → Set Date Time.

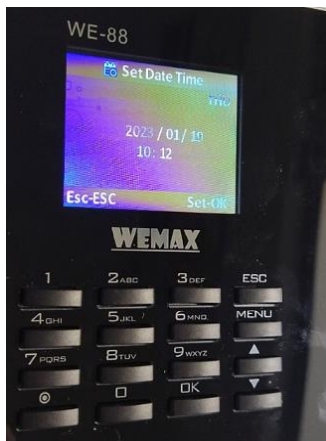


d) How to delete enrol ID?

Go to Menu → Delete → Choose "Delete" for individual → key in the ID you want to delete → Press OK.



If you want to delete all user ID in the machine, choose “Delete AllUsers”. The password is 123456.

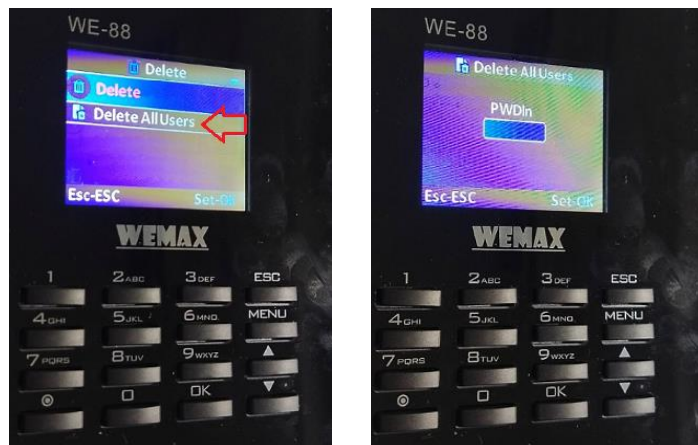


e) How to setup and check the network?

There are 2 ways to connect the device online – WIFI or Lan network. Go to Menu → Set Comm → Choose Wifi or Ethernet (Lan network) → Search your WIFI ID and set the password. Set the correct IP address to connect with TMS. If you want to connect to Lan network, just plugin the network cable and go to Ethernet set the correct IP address.




I. How to register face, thumbprint, card, password and ID? [CL365A,CL385B,CL573,WE-68PlusN]

Go to machine MENU → Choose Users → Enroll → Key the ID and name. You can press “@#” pad to change the character. → Face → Follow the instruction is given to finish register. Must NOT wearing mask during registration.

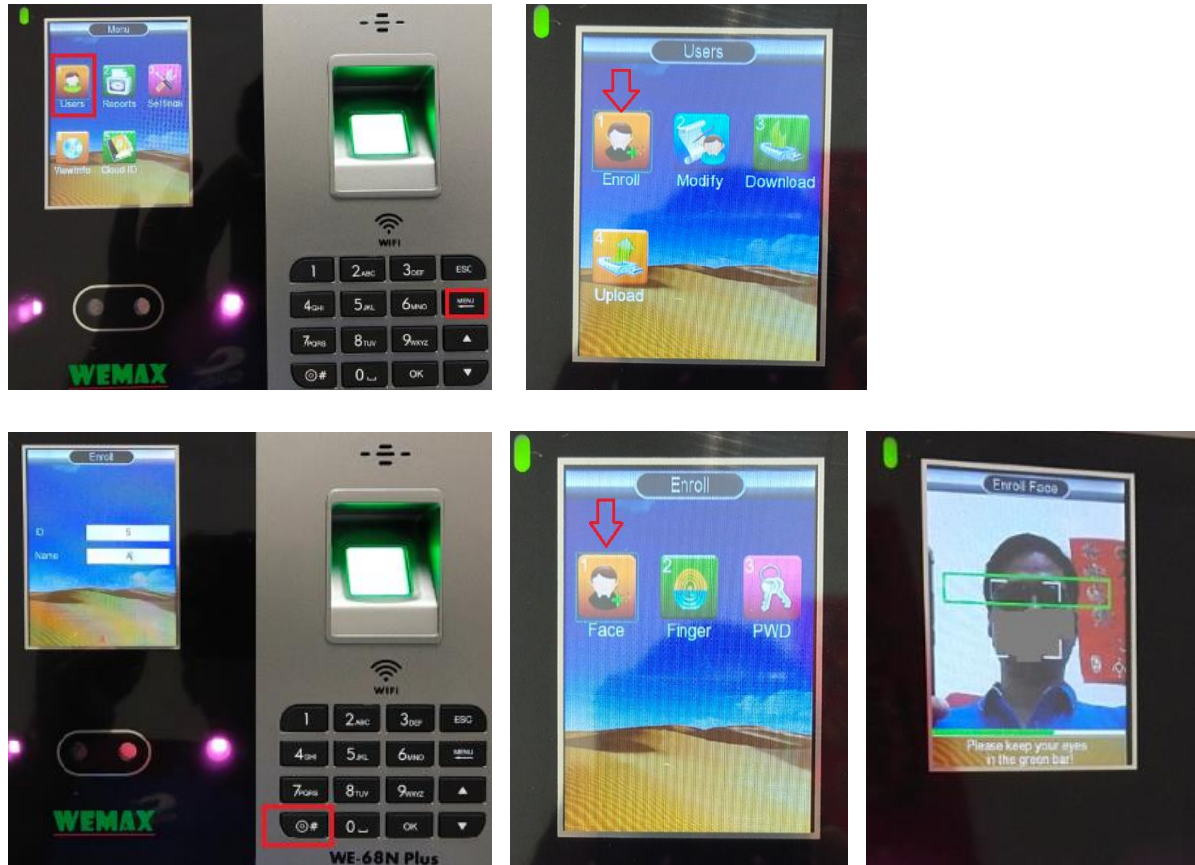


You can register figure too. Go to Menu → Users → Enroll → Key the ID and name. You can press “@#” pad to change the character. → Finger → Set your finger into the scanner and do it repeatedly 3 times.

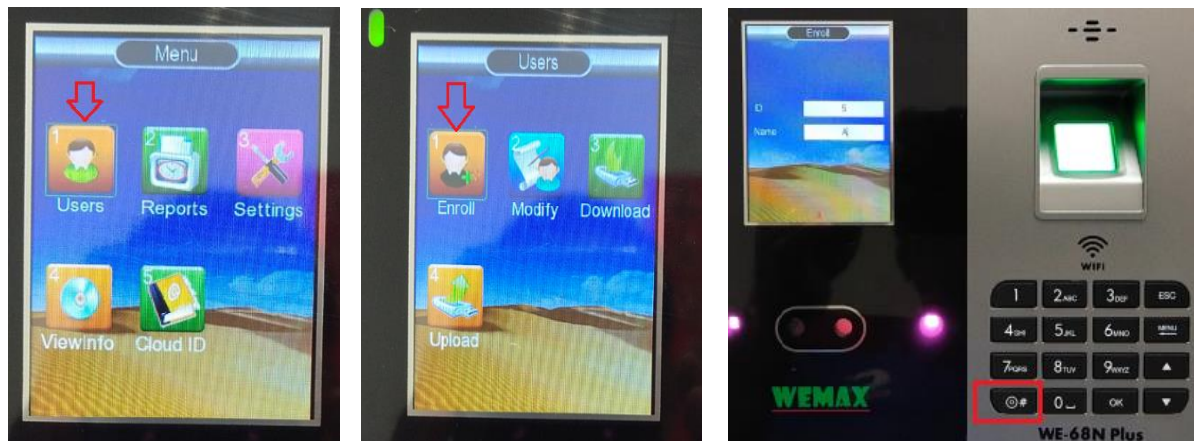




If you want to register user using password, go to Menu → Users → Enroll → Key the ID and name.
You can press “@#” pad to change the character. → PWD → Set your desire password and press OK.

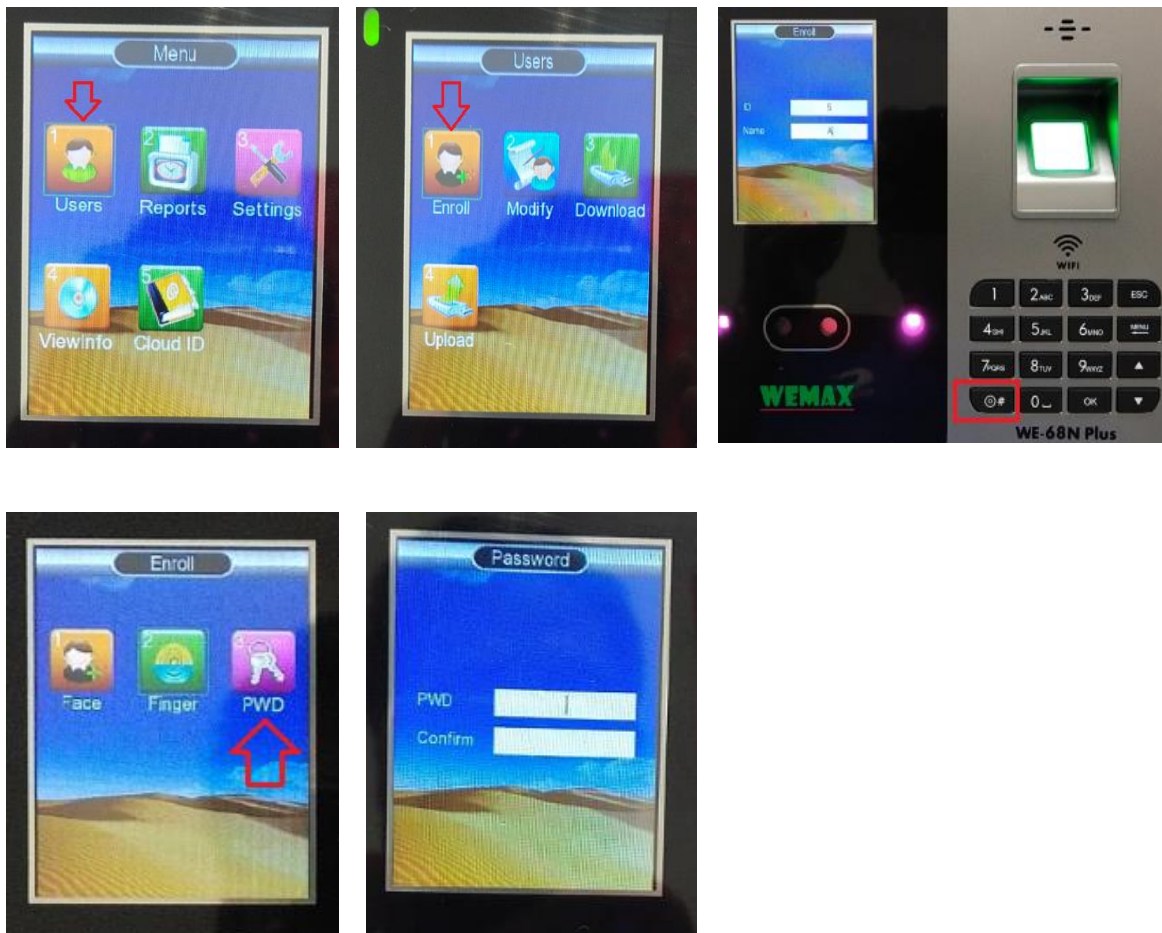


II. How to download data?

First, slot in the pendrive (not more than 16GB). The USB port located at the left side or bottom of the machine. Go to machine Menu → Reports → Logs → Set the desire date to download. Some machine may not have this feature. → Press “ESC” key when you see message “Encrypt data?”

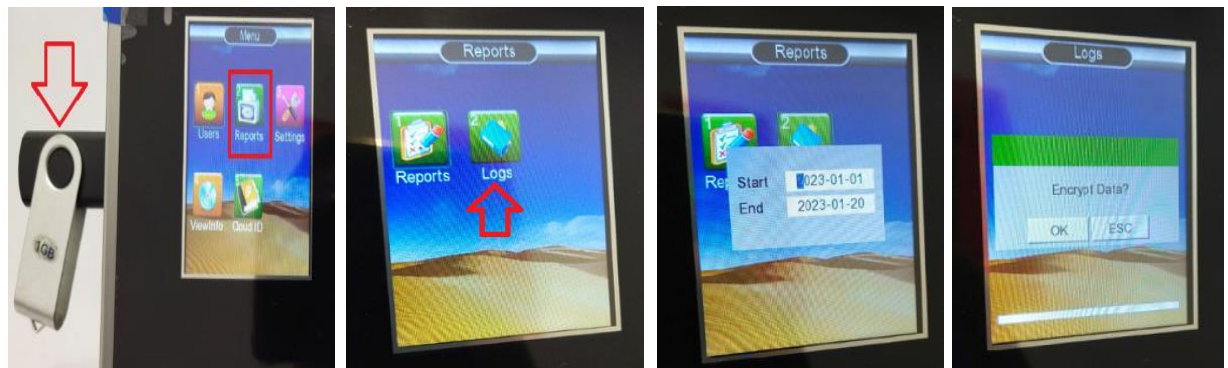


III. How to change the machine time?

Go to machine Menu → Settings → Time. You can change the date and time.

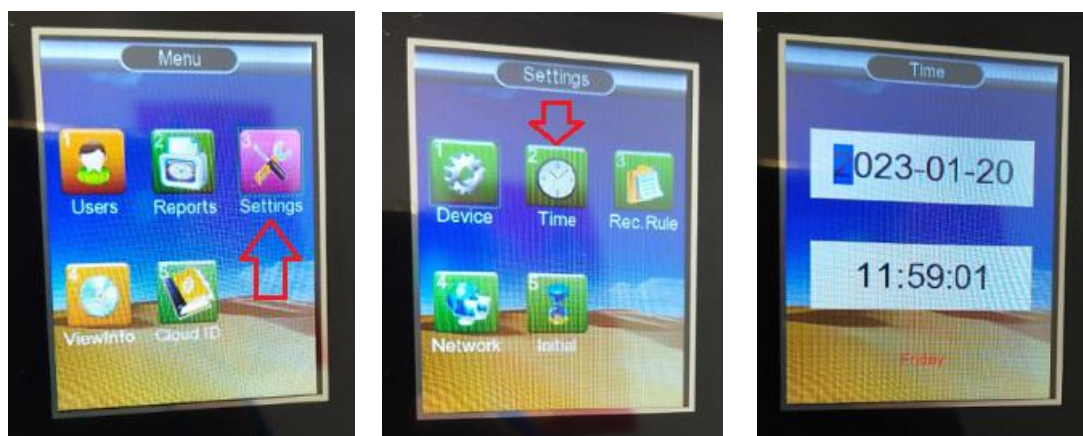


IV. How to delete enrol ID?

Go to machine Menu → Users → Modify → Choose the ID want to delete → Pick the option 8 Delete the ID.

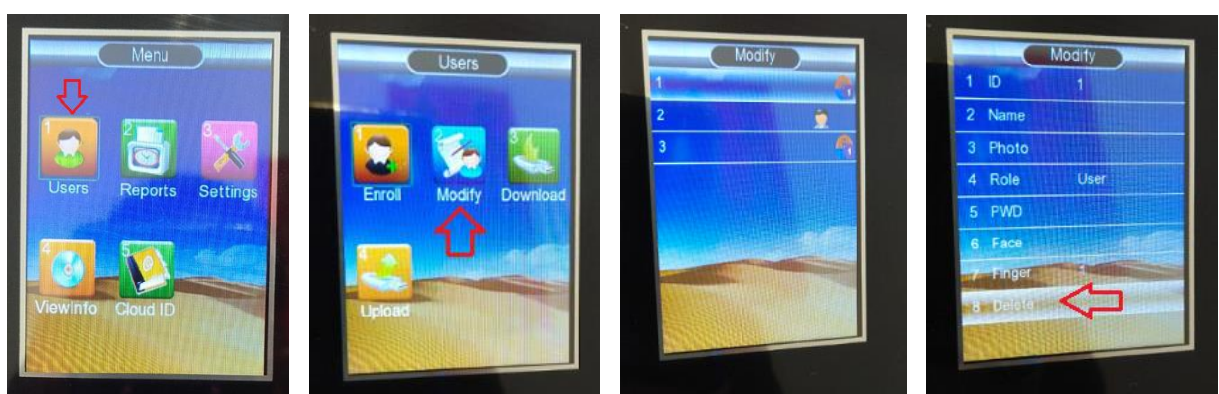


If you want to delete ALL ID, go to Menu → Settings → Initial → Delete All Users. The password is 8282.

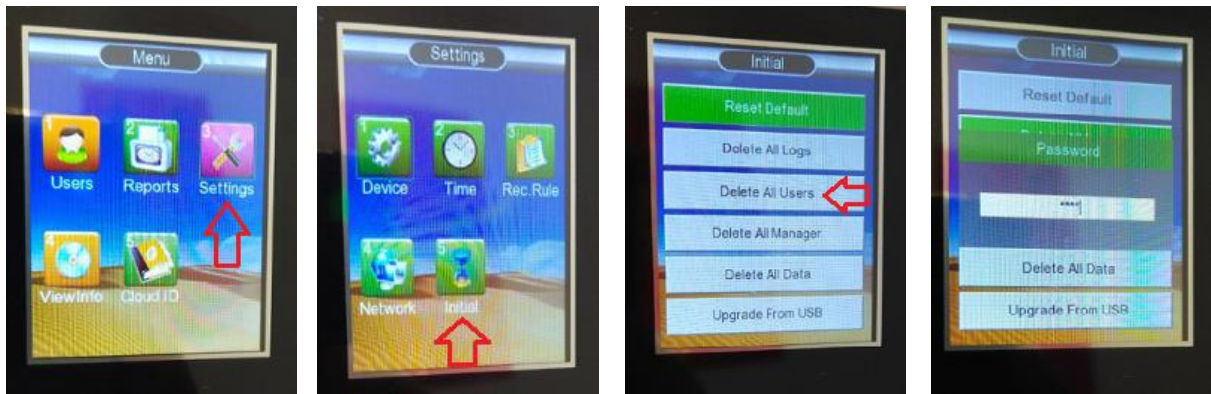


V. How to setup and check the network?

Go to machine Menu → Settings → Network → Choose either ETH (Lan network) and WIFI. If choose WIFI, go to option 8 search your WIFI ID.

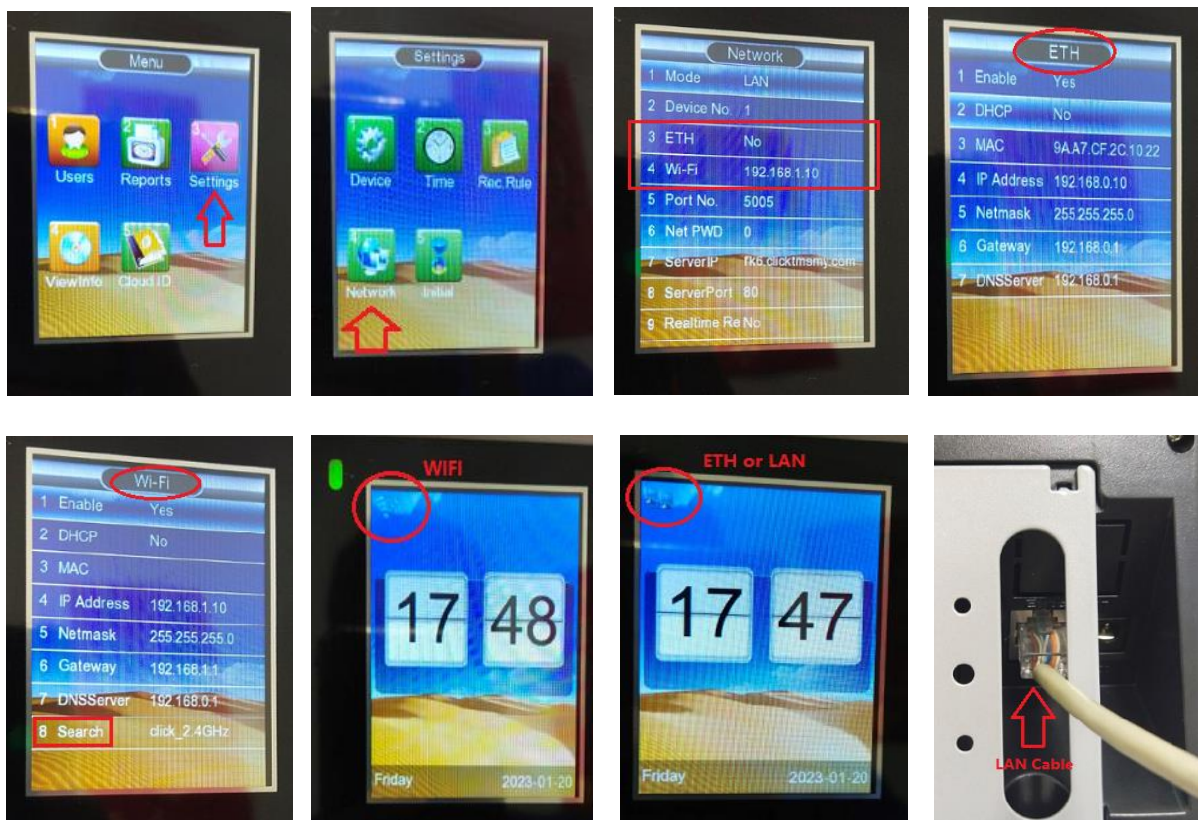




a. How to register AI face, thumbprint, card, password and ID?

Touch the screen surface, choose Menu → User Mgt → Add User → key in ID and name. Press “Add User” → Choose Face → scan your face in blue box and choose “Enroll” to save the picture.




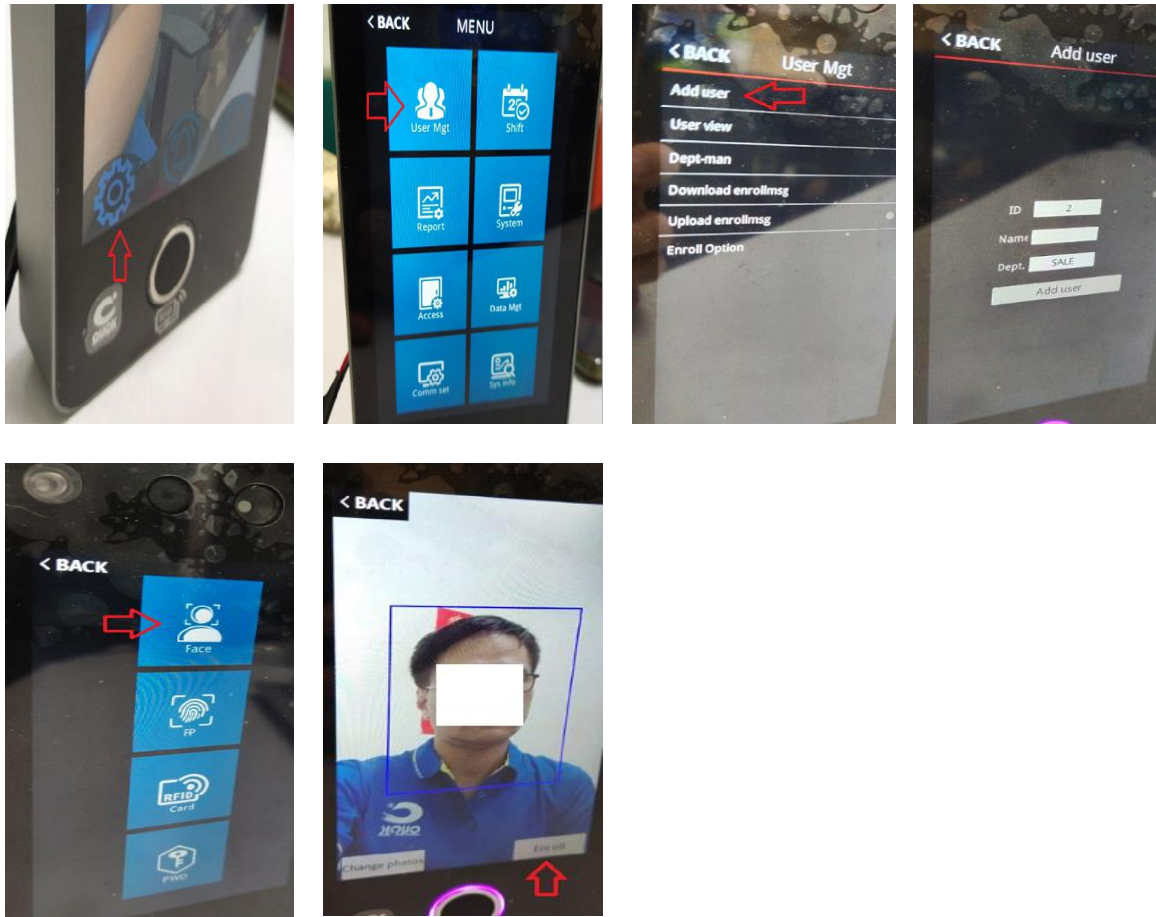


To register finger, go to Menu → User Mgt → Add User → key in ID and name → Choose FP → start scan your finger 3 times.



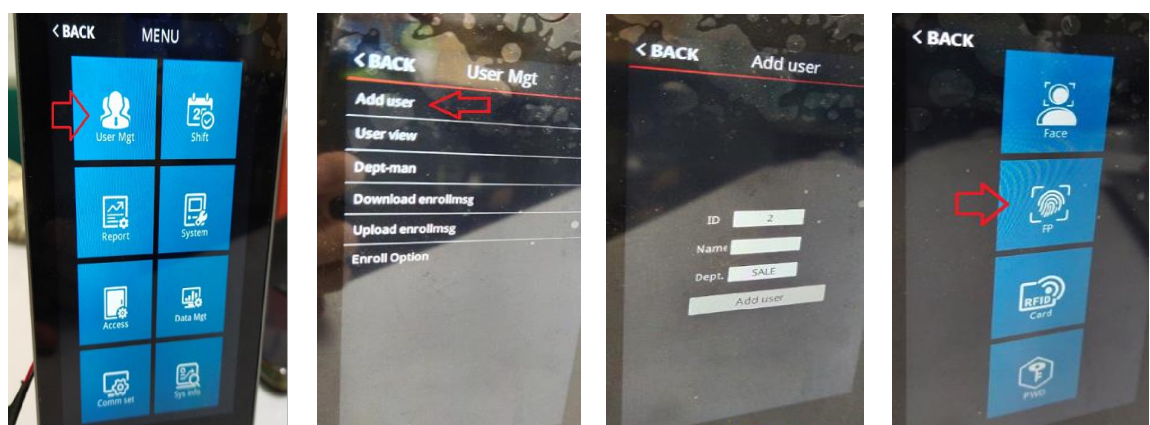


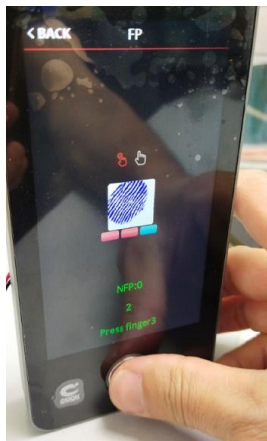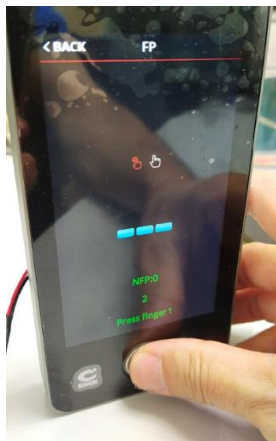

To register access card, go to Menu → User Mgt → Add user → Key in ID and name → choose card → Place the proximity card close to device and accept the number was read.

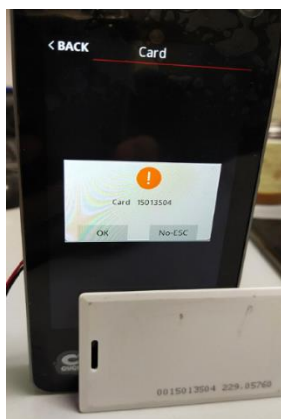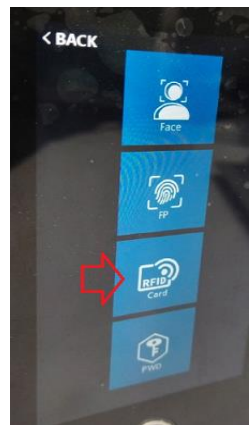
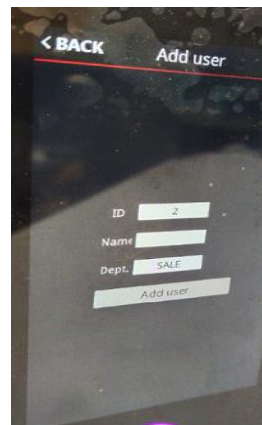
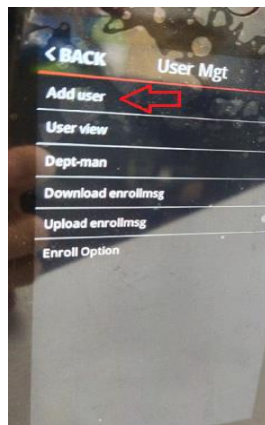


To register the Password, go to Menu → User Mgt → Add user → PWD → Insert the password.

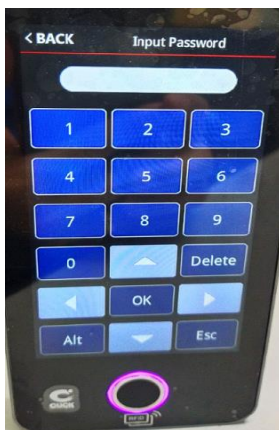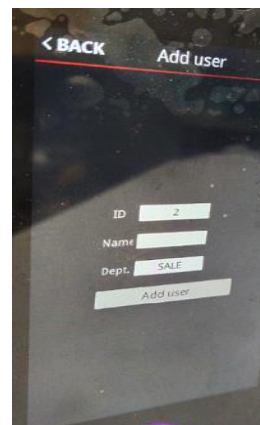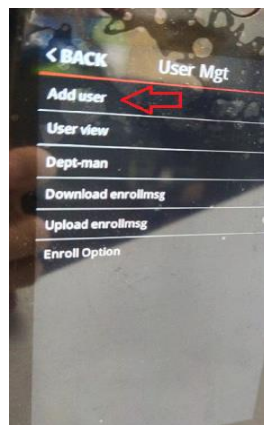


b) How to download data?

Go to Menu → Plugin pendrive , choose Data Mgt → Down all GLog.

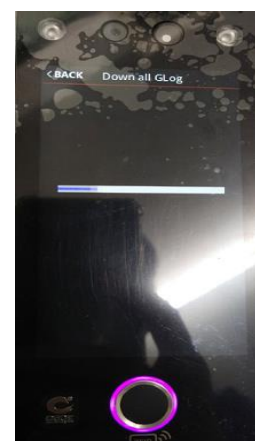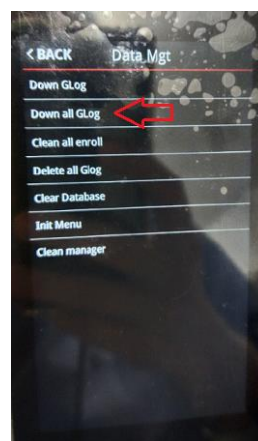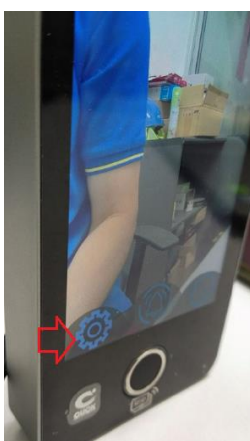


c) How to change machine time?

Go to Menu → System → Time Option → Time → set the new timing.

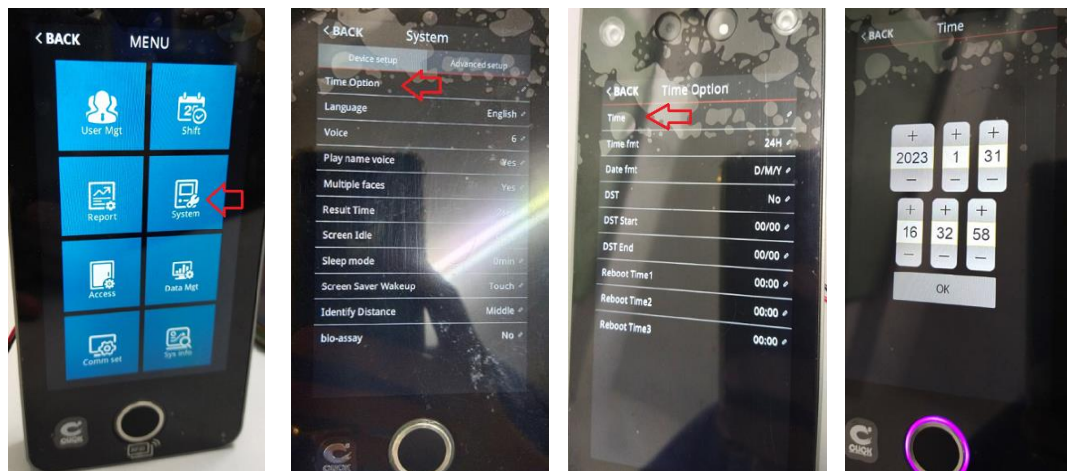


d) How to delete enrol ID?

Go to Menu → User Mgt → User view → Choose the ID you want to delete →

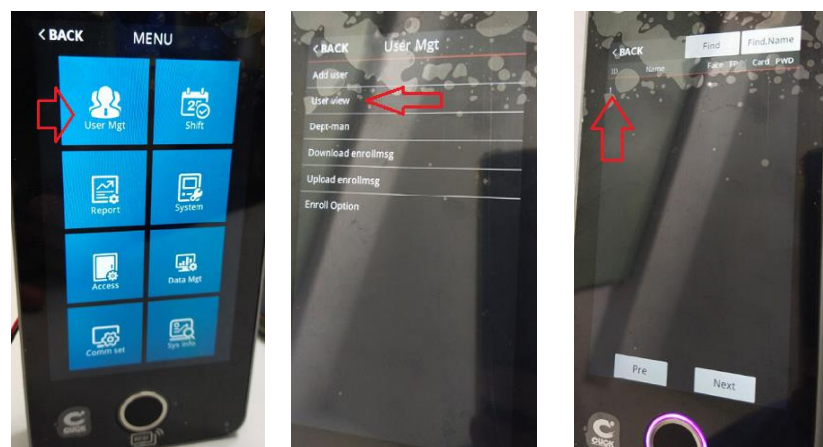

e. How to setup and check the network?

Go to Menu → Comm Set → Ethernet, check IP address. Make sure the LAN network cable is connected at the machine behind.

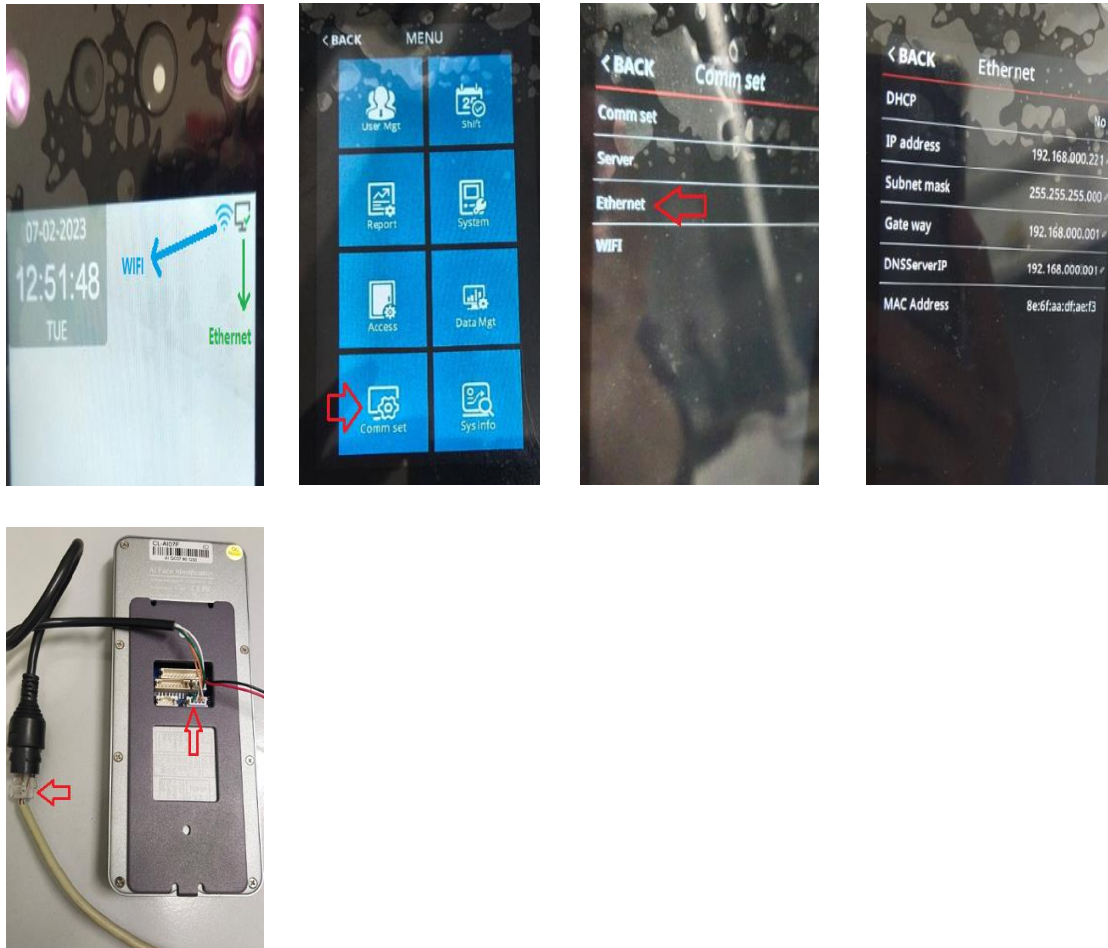

If the device is connection thru WIFI, go to Menu → Comm Set → WIFI → Search your WIFI ID and key in the password.

