# A separation-of-variable dynamic stiffness ~~matrix~~ method for the free vibration of thin orthotropic rectangular ~~thin~~ plates with general homogeneous boundary conditions

Shiyi Mei[a], Colin Caprani[a,*], Daniel Cantero[b]

[a] *Department of Civil Engineering, Monash University, Melbourne, Victoria, Australia*
[b] *Department of Structural Engineering, Norwegian University of Science & Technology NTNU, Trondheim, Norway*

**Abstract**

A separation-of-variable dynamic stiffness ~~matrix~~ method (SOV-DSM) is proposed for the free vibration analysis of an ~~orthotropic rectangular thin~~ thin orthotropic rectangular plate with general homogeneous boundary conditions. Firstly, the exact SOV solution satisfying Rayleigh's principle is extended to handle arbitrary boundary conditions and then applied to develop closed-form dynamic stiffness formulations. Then, an enhanced Wittrick–Williams (W-W) algorithm is used to solve the eigenvalue problem rather than solving the highly nonlinear eigenvalue equations. The $J_0$ count problem involved in applying the W-W algorithm is addressed by providing an explicit and closed-form expression for the $J_0$ term based on the characteristics of the SOV solution. Furthermore, a numerical technique is provided to calculate the mode shape of the plate with any arbitrary boundary conditions. The accuracy of the proposed method is validated through numerical experiments by comparison with other analytical solutions.

*Corresponding author
*Email addresses:* shiyi.mei1@monash.edu (Shiyi Mei), colin.caprani@monash.edu (Colin Caprani), daniel.cantero@ntnu.no (Daniel Cantero)

## 1. Introduction

Rectangular plates play an important role in many engineering fields, including civil, mechanical, and aerospace engineering [1]. The free vibration of plates has been a fundamental research problem for over two centuries. The earliest exact solutions for this problem are the Navier [2] and Levy [3] solutions, which require at least one pair of opposite edges to be simply supported or guided. To solve problems with other boundary conditions, approximate solutions such as the Rayleigh–Ritz method [4–8], the Galerkin method [9–13] and finite element method (FEM) [14–18] have been widely applied. For most approximation methods, beam functions [19–22], polynomials [23–27], trigonometric functions [28–32], and their combinations [33–37] are commonly used as the assumed approximate functions. The accuracy of these solutions depends on how well the assumed approximate functions represent the displacement of the plate.

Besides the ~~approximation~~ approximate methods, several analytical methods have been developed over past decades, including the Kantorovich-Krylov method [38–44], the symplectic method [45–50], the separation-of-variable (SOV) method [46, 51–59], the dynamic stiffness ~~matrix~~ (DSM) method [60–71], and series expansion-based methods [72–90]. The series expansion-based methods include the superposition method [72–77], Fourier series method [78–82], the finite integral transform method [83–87], and other series methods [88–90]. These methods represent the plate displacement in terms of an infinite series and mostly are capable of handling any general boundary conditions. However, sufficient truncation of the series is required to ensure the accuracy and convergence of the results, and the eigenvalue equation is generally difficult to express explicitly. Therefore, solving the corresponding eigenvalue problem can be computationally expensive.

Despite being a powerful method for the dynamic analysis of plate assemblies, the FEM requires a sufficient number of elements and is computationally expensive to accurately capture higher-order modes. Thus, the

DSM method was developed as an accurate and efficient analytical approach to alternatively solve complex plate structures [63, 64]. The DSM can be considered ~~as~~ an analytical FEM since the mode functions of the plate are expressed ~~by~~ through analytical solutions, ~~where~~ typically using Levy-type ~~solution~~ formulations [65] or components of Fourier series [66–70]~~are applied.~~. Recently, the DSM formulation using higher-order theories has been proposed to study the free vibration of composite beams and laminated reinforced panels [62, 91]. The higher-order displacement fields based on the Carrera Unified Formulation (CUF) provide a generalised polynomial-expansion framework [92], enabling the use of Taylor [93], Lagrange [94], Chebyshev [95] , and hierarchical Legendre polynomials [96] for beams, plates, and shells. To avoid solving the cumbersome transcendental frequency equation directly, the Wittrick-Williams (W-W) algorithm [97] can be applied to the eigenvalue problem. The W-W algorithm determines the lower and upper bounds of natural frequencies to arbitrary precision rather than solving the frequency equation directly. Thus, the DSM has the potential to be effectively and systematically solved using the W-W algorithm. However, a critical part in applying the W-W algorithm is to determine all natural frequencies of the fully clamped structure within the interested frequency range, *a priori*. Strategies such as using a sufficiently fine mesh or including a sufficient number of terms in series expansions [67] can ensure that all fully clamped frequencies are accounted for, thereby maintaining the accuracy of the algorithm. However, these approaches are computationally expensive and complex, posing a significant obstacle to the wider adoption and application of the DSM method based on the W-W algorithm [98, 99]. To resolve the fully clamped plate problem, Liu and Banerjee [71] suggested that the frequencies can be indirectly obtained from the simply supported plate problem, where the Navier solution serves as the analytical solution. This idea provides a significant enhancement to the W-W algorithm, increasing the efficiency of applying DSM methods [69, 70]. However, most solutions applied in these DSM methods

are not explicit and closed-form, but are expressed in an infinite series form, where a sufficient number of truncation terms might be required to ensure accuracy.

Inspired by the Navier and Levy solutions, Xing and Liu [51] proposed the SOV method, which provides concise and explicit eigensolutions. The mode shape function has a separable form, $\phi(x)\psi(y)$, requiring only one $\phi(x)$ and one $\psi(y)$ for each mode order, allowing each eigenvalue equation to be explicitly expressed. However, this SOV method is not suitable to deal with plates with free boundary conditions. Therefore, an extended SOV method [52, 53] based on the Rayleigh quotient was proposed to accommodate plates with all four classical boundary conditions, i.e., simply supported, clamped, guided, and free. Based on the Rayleigh quotient model, alternative iterative and improved SOV methods have been subsequently proposed [54]. Although SOV methods provide concise closed-form analytical solutions, they require solving a specific set of highly nonlinear eigenvalue equations for each type of boundary condition. However, even when considering only the four classic homogeneous cases, it becomes evident that 55 different boundary condition combinations exist for a rectangular plate, making the process tedious.

In this study, a separation-of-variable dynamic stiffness ~~matrix~~ (SOV-DSM) method is proposed to avoid solving transcendental eigenvalue equations in SOV methods. It also fills the gap caused by the limitation of closed-form dynamic stiffness formulations available for existing plate structures. Firstly, the SOV method is further extended to analyze the vibrations of plates with elastically restrained edges based on Rayleigh's principle. This extended SOV solution is then employed to construct dynamic stiffness matrices that accommodate general homogeneous boundary conditions. By taking advantage of both the SOV and DSM methods, an enhanced W–W algorithm is developed to solve the eigenvalue problem without directly solving the eigenvalue equations. This enhanced approach resolves the challenge of determining fully clamped frequencies, also called the $J_0$ count problem, a

well-known limitation in the application of the W-W algorithm. Two types of explicit and closed-form expressions for the $J_0$ term, based on specific support types such as simply supported, guided, or their combinations, are provided to improve the computational efficiency of the eigenvalue problem. In addition, a novel numerical technique is proposed to compute the mode shape coefficients.

The paper is structured as follows: Section 2 presents the SOV-DSM formulations derived from the extended SOV method, which accommodates elastically restrained boundary conditions. In Section 3, an enhanced W-W algorithm that resolves the $J_0$ count problem is provided to solve the dynamic stiffness matrices. The explicit and closed-form expression for the $J_0$ term is provided. In addition, a novel numerical technique is proposed to compute the mode shape of the plate with arbitrary boundary conditions. Section 4 validates the proposed method through numerical experiments by comparison under several boundary conditions. Finally, the conclusions of this paper are presented in Section 5.

## 2. Separation-of-variable dynamic stiffness matrix formulation

In this section, the SOV-DSM formulations for the free vibration analysis of orthotropic rectangular thin plates are developed. Section 2.1 introduces the governing equation used in the traditional SOV method. Section 2.2 presents the mathematical model of the extended ~~separation-of-variable~~ SOV method. Then, the SOV-DSM formulations based on the extended SOV method in the $x$- and $y$-directions are developed separately in Section 2.3 and Section 2.4, according to the boundary conditions of the plate.

### *2.1. ~~Mathematical model~~ Governing equation for traditional separation-of-variable method*

Consider a thin orthotropic rectangular plate of length $2a$ and width $2b$, with all four edges restrained by vertical translational springs ~~$k^v$ and~~

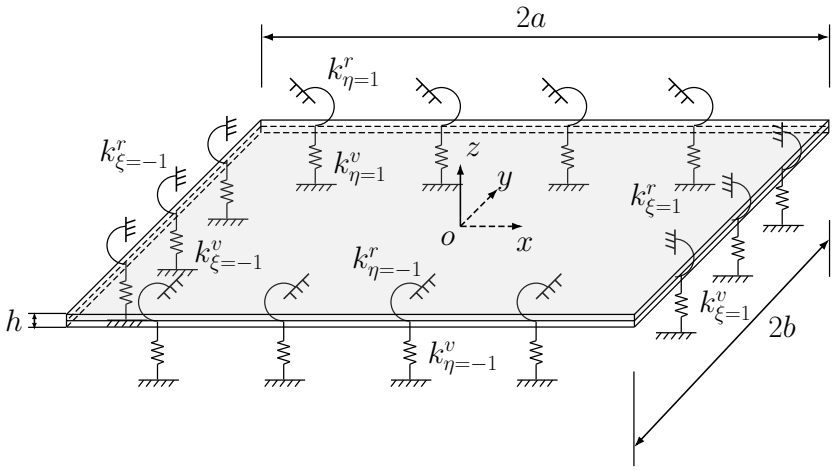



Figure 1: The orthotropic rectangular plate with all edges elastically restrained.

rotational springs $k^r$ $k^v_\xi$ and $k^v_\eta$, and rotational springs $k^r_\xi$ and $k^r_\eta$, as shown in Figure 1. The coordinate origin is located at the center of the plate.

The In the traditional SOV method, the strong-form governing differential equation for the free vibration of a thin orthotropic plate is given by [54]:

$$D_{11}\frac{\partial^4 w}{\partial \xi^4}\frac{\partial^4 W}{\partial \xi^4} + 2D_3\chi^2\frac{\partial^4 w}{\partial \xi^2\partial \eta^2}\frac{\partial^4 W}{\partial \xi^2\partial \eta^2} + D_{22}\chi^4\frac{\partial^4 w}{\partial \eta^4}\frac{\partial^4 W}{\partial \eta^4} = \rho h a^4\omega^2 wW, \quad (1)$$

where $W(\xi,\eta)$ is the mode shape function; $\chi = a/b$ is the aspect ratio; $\xi = x/a$ and $\eta = y/b$ are the normalized coordinates, and the bending stiffness parameters are defined as:

$$D_{11} = \frac{E_1 h^3}{12(1-v_{12}v_{21})}\frac{E_1 h^3}{12(1-\nu_{12}\nu_{21})}, \qquad D_{22} = \frac{E_2 h^3}{12(1-v_{12}v_{21})}\frac{E_2 h^3}{12(1-\nu_{12}\nu_{21})},$$
$$D_{66} = \frac{G_{12}h^3}{12}, \quad D_{12} = v\nu_{12}D_{22} = v\nu_{21}D_{11}, \quad D_3 = D_{12} + 2D_{66}, \quad (2)$$

where $\rho$ and $h$ denote the mass density and thickness of the plate, respectively; $E_1$ and $E_2$ are the Young's moduli in the $x$- and $y$-directions, respectively; $G_{12}$ is the shear modulus, and ~~$v_{12}$ and $v_{21}$~~ $\nu_{12}$ and $\nu_{21}$ are the Poisson's

ratios.

The traditional SOV method is based on the strong-form governing equation in Equation (1), and the details are not given here; more information can be found in [51]. However, the traditional SOV method cannot deal with free boundary conditions, thus the extended SOV method is proposed.

### *2.2. Mathematical model for extended separation-of-variable method*

Instead of solving the free vibration problem of the thin orthotropic plate using ~~Equation (1), it is suggested~~ the strong-form governing equation in Equation (1), the extended SOV method suggests that the vibration ~~of the thin plate can also be solved using~~ characteristics can alternatively be obtained through the Rayleigh quotient variational principle [52], which is also the formulation adopted in the present paper:

$$\delta U = \delta T, \tag{3}$$

where $\delta$ denotes variation, $U$ is the magnitude of the potential energy of the plate, and $T$ represents the magnitude of the kinetic energy of the plate. ~~The~~ It should be noted that the formulation of Rayleigh's principle used here focuses only on undamped vibration, and the dissipation energy is therefore ignored in this study. The dissipation energy arising from internal damping [100] within the plate could contribute to the governing differential equations of the plate, while the effects of external damping [101] could contribute to the transcendental equations corresponding to the boundary conditions. The application of such damping mechanisms is beyond the scope of the present study, but provides a meaningful direction for future research. The potential

energy of the plate can be expressed as [53]:

$$U^I = \frac{1}{2}\iint \left[ D_{11}\left(\frac{\partial^2 W}{\partial x^2}\frac{\partial^2 w}{\partial x^2}\right)^2 + 2D_{12}\frac{\partial^2 W}{\partial x^2}\frac{\partial^2 W}{\partial y^2}\frac{\partial^2 w}{\partial x^2}\frac{\partial^2 w}{\partial y^2} + D_{22}\left(\frac{\partial^2 W}{\partial y^2}\frac{\partial^2 w}{\partial y^2}\right)^2 + 4D_{66}\left(\frac{\partial^2 W}{\partial x \partial y}\frac{\partial^2 w}{\partial x \partial y}\right)^2 \right] \mathrm{d}x\,\mathrm{d}y. \tag{4}$$

And the kinetic energy is:

$$T = \frac{1}{2}\iint \rho h \left(\frac{\partial W}{\partial t}\frac{\partial w}{\partial t}\right)^2 \mathrm{d}x\,\mathrm{d}y. \tag{5}$$

Assuming the solution of the deflection ~~$W(x,y;t) = w(x,y)e^{i\omega t}$~~ $w(x,y;t) = W(x,y)e^{i\omega t}$ for harmonic plate motion, where i $= \sqrt{-1}$, ~~$w(x,y)$~~ $W(x,y)$ is the mode shape, and $\omega$ is the radial frequency. By substituting ~~$W(x,y;t) = w(x,y)e^{i\omega t}$~~ $w(x,y;t) = W(x,y)e^{i\omega t}$ into Equations (4) and (5) and expressing the system in dimensionless coordinates, we have:

$$U^I = \frac{ab}{2}\iint \left[ \frac{D_{11}}{a^4}\left(\frac{\partial^2 w}{\partial \xi^2}\frac{\partial^2 W}{\partial \xi^2}\right)^2 + \frac{2D_{12}}{a^2b^2}\frac{\partial^2 w}{\partial \xi^2}\frac{\partial^2 w}{\partial \eta^2}\frac{\partial^2 W}{\partial \xi^2}\frac{\partial^2 W}{\partial \eta^2} + \frac{D_{22}}{b^4}\left(\frac{\partial^2 w}{\partial \eta^2}\frac{\partial^2 W}{\partial \eta^2}\right)^2 + \frac{4D_{66}}{a^2b^2}\left(\frac{\partial^2 w}{\partial \xi \partial \eta}\frac{\partial^2 W}{\partial \xi \partial \eta}\right)^2 \right] \mathrm{d}\xi\,\mathrm{d}\eta, \tag{6}$$

and

$$T = \omega^2 \frac{ab}{2}\rho h \iint wW^2\,\mathrm{d}\xi\,\mathrm{d}\eta = \omega^2 T_0, \tag{7}$$

where, $T_0$ is defined as the coefficient of the kinetic energy.

The separable form of the mode shape function $w(\xi, \eta)$ is given by:

$$wW(\xi, \eta) = \phi(\xi)\psi(\eta), \tag{8}$$

where $\phi(\xi)$ and $\psi(\eta)$ can be expressed as:

$$\phi(\xi) = A_1 \sin(\alpha_1 \xi) + A_2 \cos(\alpha_1 \xi) + A_3 \sinh(\beta_1 \xi) + A_4 \cosh(\beta_1 \xi), \tag{9a}$$

$$\psi(\eta) = B_1 \sin(\alpha_2 \eta) + B_2 \cos(\alpha_2 \eta) + B_3 \sinh(\beta_2 \eta) + B_4 \cosh(\beta_2 \eta). \tag{9b}$$

~~Based on Equation (3), the frequencies~~ In the extended SOV method, by assuming the mode shape $\psi(\eta)$ corresponding to the $y$-direction is known, then we can get the governing differential equation from Rayleigh principle Equation (3) in the $x$-direction with the corresponding frequency $\omega_x$ ~~and $\omega_y$, corresponding to the mode shapes~~ , and in this case the Rayleigh principle is written in the form in Equation (15). Similarly, by assuming the mode shape $\phi(\xi)$ is known, we can get another governing differential equation from Equation (3) in the $y$-direction with the corresponding frequency $\omega_y$, and in this case the Rayleigh principle is written in the form in Equation (30) . It should be noted that $\omega_x$ and ~~$\psi(\eta)$, respectively,~~ $\omega_y$ are assumed to be independent of each other ~~. This is a common and important assumption in SOV methods, and $\omega_x$~~ and ~~$\omega_y$~~ can be different in a mathematical sense ~~[53].~~ in the extended SOV method [53]. The SOV formulation used in the present work bases on this extended SOV method, and more details of the derivation will be given in the following.

### *2.3. Dynamic stiffness matrix corresponding to $\omega_x$*

For given general homogeneous boundary conditions, we can first assume that the mode shape $\psi(\eta)$ corresponding to the $y$-direction is known. Supposing the edges of the plate in both the $x$- and $y$-directions are elastically restrained by homogeneous vertical translational and rotational springs. The vertical translational and rotational springs at the $\xi = -1$ end are denoted

as $k^v_{\xi=-1}$ and $k^r_{\xi=-1}$, respectively, and at the $\xi = 1$ end as $k^v_{\xi=1}$ and $k^r_{\xi=1}$, respectively. Thus, the potential energy along the supported edge in the $x$-direction can be expressed by:

$$\begin{aligned} U^x = &\int \left[ k^r_{\xi=-1} \left( \frac{\partial W}{\partial x} \frac{\partial w}{\partial x} \right)^2 + k^v_{\xi=-1} \left( W w \right)^2 \right]_{x=-a} \mathrm{d}y \\ &+ \int \left[ k^r_{\xi=1} \left( \frac{\partial W}{\partial x} \frac{\partial w}{\partial x} \right)^2 + k^v_{\xi=1} \left( W w \right)^2 \right]_{x=a} \mathrm{d}y. \end{aligned} \tag{10}$$

From Equation (10), the magnitude of potential energy along the plate edges in the $x$-direction, expressed in dimensionless coordinates, is obtained as:

$$\begin{aligned} U^x = ab &\int \left[ \frac{k^r_{\xi=-1}}{a^3} \left( \frac{\partial w}{\partial \xi} \frac{\partial W}{\partial \xi} \right)^2 + \frac{k^v_{\xi=-1}}{a} \left( w W \right)^2 \right]_{\xi=-1} \mathrm{d}\eta \\ &+ ab \int \left[ \frac{k^r_{\xi=1}}{a^3} \left( \frac{\partial w}{\partial \xi} \frac{\partial W}{\partial \xi} \right)^2 + \frac{k^v_{\xi=1}}{a} \left( w W \right)^2 \right]_{\xi=1} \mathrm{d}\eta. \end{aligned} \tag{11}$$

The magnitude of total potential energy of the plate in the $x$-direction can be obtained from Equations (6) and (11) as:

$$
\begin{aligned}
U &= U^I + U^x \\
&= \frac{ab}{2}\iint\left[\frac{D_{11}}{a^4}\left(\frac{\partial^2 w}{\partial\xi^2}\frac{\partial^2 W}{\partial\xi^2}\right)^2 + \frac{2D_{12}}{a^2b^2}\frac{\partial^2 w}{\partial\xi^2}\frac{\partial^2 w}{\partial\eta^2}\frac{\partial^2 W}{\partial\xi^2}\frac{\partial^2 W}{\partial\eta^2} + \frac{D_{22}}{b^4}\left(\frac{\partial^2 w}{\partial\eta^2}\frac{\partial^2 W}{\partial\eta^2}\right)^2\right. \\
&\quad \left. + \frac{4D_{66}}{a^2b^2}\left(\frac{\partial^2 w}{\partial\xi\partial\eta}\frac{\partial^2 W}{\partial\xi\partial\eta}\right)^2\right]\mathrm{d}\xi\,\mathrm{d}\eta \\
&\quad + ab\int\left[\frac{k^r_{\xi=1}}{a^3}\left(\frac{\partial w}{\partial\xi}\frac{\partial W}{\partial\xi}\right)^2 + \frac{k^v_{\xi=1}}{a}\left(wW\right)^2\right]_{\xi=1}\mathrm{d}\eta \\
&\quad + ab\int\left[\frac{k^r_{\xi=-1}}{a^3}\left(\frac{\partial w}{\partial\xi}\frac{\partial W}{\partial\xi}\right)^2 + \frac{k^v_{\xi=-1}}{a}\left(wW\right)^2\right]_{\xi=-1}\mathrm{d}\eta
\end{aligned}
\tag{12}
$$

By substituting Equation (8) into Equation (12), we have:

$$
\begin{aligned}
U &= \frac{ab}{2}\int_{-1}^{1}\left[\frac{D_{11}}{a^4}I_1\left(\frac{\mathrm{d}^2\phi}{\mathrm{d}\xi^2}\right)^2 + \frac{2D_{12}}{a^2b^2}I_2\frac{\mathrm{d}^2\phi}{\mathrm{d}\xi^2}\phi + \frac{D_{22}}{b^4}I_4\phi^2\right. \\
&\quad \left. + \frac{4D_{66}}{a^2b^2}I_3\left(\frac{\mathrm{d}\phi}{\mathrm{d}\xi}\right)^2\right]\mathrm{d}\xi \\
&\quad + abI_1\left[\frac{k^r_{\xi=-1}}{a^3}\left(\frac{\mathrm{d}\phi}{\mathrm{d}\xi}\right)^2 + \frac{k^v_{\xi=-1}}{a}(\phi)^2\right]_{\xi=-1} \\
&\quad + abI_1\left[\frac{k^r_{\xi=1}}{a^3}\left(\frac{\mathrm{d}\phi}{\mathrm{d}\xi}\right)^2 + \frac{k^v_{\xi=1}}{a}(\phi)^2\right]_{\xi=1},
\end{aligned}
\tag{13}
$$

where the integral parameters $I_1$, $I_2$, $I_3$, and $I_4$ are defined and expressed in Appendix A.

By taking Equation (8) into account, the coefficient $T_0$ of the kinetic energy from Equation (7) for the plate in the $x$-direction can be expressed

as:

$$T_0 = \frac{ab}{2}\rho h \iint \underline{w}\underline{W}^2 \,\mathrm{d}\xi \,\mathrm{d}\eta = \frac{ab}{2}\rho h I_1 \int_{-1}^{1} \phi^2 \,\mathrm{d}\xi. \tag{14}$$

Taking the Rayleigh principle in the form:

$$\delta U = \omega_x^2 \,\delta T_0, \tag{15}$$

and by substituting Equations (13) and (14) into Equation (15), and relieving $\delta\phi$ and $\delta\frac{\mathrm{d}\phi}{\mathrm{d}\xi}$ in Equation (15) by calculus of variations, yields:

$$\begin{aligned}
0 = \int_{-1}^{1} \Bigg[ & \frac{D_{11}}{a^4} I_1 \frac{\mathrm{d}^4\phi}{\mathrm{d}\xi^4} + \left( \frac{2D_{12}}{a^2b^2} I_2 - \frac{4D_{66}}{a^2b^2} I_3 \right) \frac{\mathrm{d}^2\phi}{\mathrm{d}\xi^2} \\
& + \left( \frac{D_{22}}{b^4} I_4 - \omega_x^2 \rho h I_1 \right) \phi \Bigg] \delta\phi \,\mathrm{d}\xi \\
& + \frac{2k^v_{\xi=-1}}{a} I_1 \Big( \phi \,\delta\phi \Big)_{\xi=-1} + \frac{2k^v_{\xi=1}}{a} I_1 \Big( \phi \,\delta\phi \Big)_{\xi=1} \\
& + \left[ \left( \frac{4D_{66}}{a^2b^2} I_3 - \frac{D_{12}}{a^2b^2} I_2 \right) \frac{\mathrm{d}\phi}{\mathrm{d}\xi} - \frac{D_{11}}{a^4} I_1 \frac{\mathrm{d}^3\phi}{\mathrm{d}\xi^3} \right] \delta\phi \Big|_{\xi=-1}^{\xi=1} \\
& + \left( \frac{D_{12}}{a^2b^2} I_2 \phi + \frac{D_{11}}{a^4} I_1 \frac{\mathrm{d}^2\phi}{\mathrm{d}\xi^2} \right) \delta \frac{\mathrm{d}\phi}{\mathrm{d}\xi} \Big|_{\xi=-1}^{\xi=1} \\
& + \frac{2k^r_{\xi=-1}}{a^3} I_1 \left( \frac{\mathrm{d}\phi}{\mathrm{d}\xi} \delta \frac{\mathrm{d}\phi}{\mathrm{d}\xi} \right)_{\xi=-1} + \frac{2k^r_{\xi=1}}{a^3} I_1 \left( \frac{\mathrm{d}\phi}{\mathrm{d}\xi} \delta \frac{\mathrm{d}\phi}{\mathrm{d}\xi} \right)_{\xi=1}.
\end{aligned} \tag{16}$$

Thus, the governing differential equation in the $x$-direction can be obtained from the integration part of Equation (16) as:

$$\frac{\mathrm{d}^4\phi}{\mathrm{d}\xi^4} + 2\chi^2 \left( \frac{D_{12}I_2}{D_{11}I_1} - 2\frac{D_{66}I_3}{D_{11}I_1} \right) \frac{\mathrm{d}^2\phi}{\mathrm{d}\xi^2} + \left( \chi^4 \frac{D_{22}I_4}{D_{11}I_1} - a^4\Omega_x^4 \right) \phi = 0, \tag{17}$$

where $\Omega_x = \sqrt[4]{\omega_x^2 \rho h / D_{11}}$. By substituting $\phi(\xi) = Ae^{\mu\xi}$ into Equation (17),

we obtain:

$$\mu^4 + 2\chi^2 \left( \frac{D_{12} I_2}{D_{11} I_1} - 2 \frac{D_{66} I_3}{D_{11} I_1} \right) \mu^2 + \left( \chi^4 \frac{D_{22} I_4}{D_{11} I_1} - a^4 \Omega_x^4 \right) = 0. \tag{18}$$

And so the solution for $\mu$ can be expressed as:

$$\mu_{1,2} = \pm i\alpha_1, \qquad \mu_{3,4} = \pm \beta_1, \tag{19}$$

where,

$$\alpha_1 = \chi \sqrt{ \sqrt{ \left( \frac{D_{12} I_2}{D_{11} I_1} - 2 \frac{D_{66} I_3}{D_{11} I_1} \right)^2 - \frac{D_{22} I_4}{D_{11} I_1} + b^4 \Omega_x^4 } + \frac{D_{12} I_2}{D_{11} I_1} - 2 \frac{D_{66} I_3}{D_{11} I_1} }, \tag{20a}$$

$$\beta_1 = \chi \sqrt{ \sqrt{ \left( \frac{D_{12} I_2}{D_{11} I_1} - 2 \frac{D_{66} I_3}{D_{11} I_1} \right)^2 - \frac{D_{22} I_4}{D_{11} I_1} + b^4 \Omega_x^4 } - \frac{D_{12} I_2}{D_{11} I_1} + 2 \frac{D_{66} I_3}{D_{11} I_1} }. \tag{20b}$$

The boundary conditions along the edges in the $x$-direction can be obtained from the remaining $\delta\phi$ and $\delta \frac{\mathrm{d}\phi}{\mathrm{d}\xi}$ parts in Equation (16). The shear force equilibrium can be obtained from the $\delta\phi$ part:

$$\begin{aligned} &\left[ \left( \frac{4 D_{66}}{a^2 b^2} I_3 - \frac{D_{12}}{a^2 b^2} I_2 \right) \frac{\mathrm{d}\phi}{\mathrm{d}\xi} - \frac{D_{11}}{a^4} I_1 \frac{\mathrm{d}^3 \phi}{\mathrm{d}\xi^3} \right] \Big|_{\xi=-1}^{\xi=1} \\ &\qquad + \frac{2 k^v_{\xi=-1}}{a} I_1 \left( \phi \right)_{\xi=-1} + \frac{2 k^v_{\xi=1}}{a} I_1 \left( \phi \right)_{\xi=1} = 0, \end{aligned} \tag{21}$$

and from the $\delta \frac{\mathrm{d}\phi}{\mathrm{d}\xi}$ part, the bending moment equilibrium is:

$$\begin{aligned} &\left( \frac{D_{12}}{a^2 b^2} I_2 \phi + \frac{D_{11}}{a^4} I_1 \frac{\partial^2 \phi}{\partial \xi^2} \right) \Big|_{\xi=-1}^{\xi=1} \\ &\qquad + \frac{2 k^r_{\xi=-1}}{a^3} I_1 \left( \frac{\partial \phi}{\partial \xi} \right)_{\xi=-1} + \frac{2 k^r_{\xi=1}}{a^3} I_1 \left( \frac{\partial \phi}{\partial \xi} \right)_{\xi=1} = 0. \end{aligned} \tag{22}$$

Thus, we can obtain the shear force and bending moment equilibrium along

the edges $\xi = -1$ and $\xi = 1$ from Equations (21) and (22), respectively, as:

$$\frac{\mathrm{d}^3\phi}{\mathrm{d}\xi^3} - \chi^2\left(\frac{4D_{66}I_3}{D_{11}I_1} - \frac{D_{12}I_2}{D_{11}I_1}\right)\frac{\mathrm{d}\phi}{\mathrm{d}\xi} + \frac{2a^3k^v_{\xi=-1}}{D_{11}}\phi = 0, \qquad \xi = -1, \tag{23a}$$

$$\frac{\mathrm{d}^2\phi}{\mathrm{d}\xi^2} + \frac{\chi^2 D_{12}I_2}{D_{11}I_1}\phi - \frac{2ak^r_{\xi=-1}}{D_{11}}\frac{\mathrm{d}\phi}{\mathrm{d}\xi} = 0, \qquad \xi = -1, \tag{23b}$$

$$\frac{\mathrm{d}^3\phi}{\mathrm{d}\xi^3} - \chi^2\left(\frac{4D_{66}I_3}{D_{11}I_1} - \frac{D_{12}I_2}{D_{11}I_1}\right)\frac{\mathrm{d}\phi}{\mathrm{d}\xi} - \frac{2a^3k^v_{\xi=1}}{D_{11}}\phi = 0, \qquad \xi = 1, \tag{23c}$$

$$\frac{\mathrm{d}^2\phi}{\mathrm{d}\xi^2} + \frac{\chi^2 D_{12}I_2}{D_{11}I_1}\phi + \frac{2ak^r_{\xi=1}}{D_{11}}\frac{\mathrm{d}\phi}{\mathrm{d}\xi} = 0, \qquad \xi = 1. \tag{23d}$$

Substituting Equation (9a) into Equation (23), and denoting $k^{v*}_{\xi} \equiv \frac{2a^3k^v_{\xi}}{D_{11}}$, $k^{r*}_{\eta} \equiv \frac{2ak^r_{\xi}}{D_{11}}$, $S_{\alpha_1} \equiv \sin\alpha_1$, $C_{\alpha_1} \equiv \cos\alpha_1$, $Sh_{\beta_1} \equiv \sinh\beta_1$, and $Ch_{\beta_1} \equiv \cosh\beta_1$, we have:

$$\begin{bmatrix} \gamma_1 C_{\alpha_1} - k^{v*}_{\xi=-1}S_{\alpha_1} & \gamma_1 S_{\alpha_1} + k^{v*}_{\xi=-1}C_{\alpha_1} & \gamma_2 Ch_{\beta_1} - k^{v*}_{\xi=-1}Sh_{\beta_1} \\ \gamma_3 S_{\alpha_1} + k^{r*}_{\xi=-1}\alpha_1 C_{\alpha_1} & -\gamma_3 C_{\alpha_1} + k^{r*}_{\xi=-1}\alpha_1 S_{\alpha_1} & \gamma_4 Sh_{\beta_1} + k^{r*}_{\xi=-1}\beta_1 Ch_{\beta_1} \\ -\gamma_1 C_{\alpha_1} + k^{v*}_{\xi=1}S_{\alpha_1} & \gamma_1 S_{\alpha_1} + k^{v*}_{\xi=1}C_{\alpha_1} & -\gamma_2 Ch_{\beta_1} + k^{v*}_{\xi=1}Sh_{\beta_1} \\ \gamma_3 S_{\alpha_1} + k^{r*}_{\xi=1}\alpha_1 C_{\alpha_1} & \gamma_3 C_{\alpha_1} - k^{r*}_{\xi=1}\alpha_1 S_{\alpha_1} & \gamma_4 Sh_{\beta_1} + k^{r*}_{\xi=1}\beta_1 Ch_{\beta_1} \end{bmatrix}$$
$$\begin{bmatrix} -\gamma_2 Sh_{\beta_1} + k^{v*}_{\xi=-1}Ch_{\beta_1} \\ -\gamma_4 Ch_{\beta_1} - k^{r*}_{\xi=-1}\beta_1 Sh_{\beta_1} \\ -\gamma_2 Sh_{\beta_1} + k^{v*}_{\xi=1}Ch_{\beta_1} \\ \gamma_4 Ch_{\beta_1} + k^{r*}_{\xi=1}\beta_1 Sh_{\beta_1} \end{bmatrix} \begin{Bmatrix} A_1 \\ A_2 \\ A_3 \\ A_4 \end{Bmatrix} = \begin{Bmatrix} 0 \\ 0 \\ 0 \\ 0 \end{Bmatrix}, \tag{24}$$

or,

$$\mathbf{R}_x\mathbf{A} = \mathbf{0}, \tag{25}$$

where,

$$\begin{aligned}
\gamma_1 &= -\alpha_1^3 - \chi^2\left(\frac{4D_{66}S_3}{D_{11}I_1} - \frac{D_{12}I_2}{D_{11}I_1}\right)\alpha_1,\\
\gamma_2 &= \beta_1^3 - \chi^2\left(\frac{4D_{66}S_3}{D_{11}I_1} - \frac{D_{12}I_2}{D_{11}I_1}\right)\beta_1,\\
\gamma_3 &= -\alpha_1^2 + \frac{\chi^2 D_{12}I_2}{D_{11}I_1},\\
\gamma_4 &= \beta_1^2 + \frac{\chi^2 D_{12}I_2}{D_{11}I_1}.
\end{aligned} \tag{26}$$

Note that the classic boundary conditions can be obtained by selecting extremely large or small spring stiffness constants. For non-trivial solutions, the characteristic equation or eigenvalue equation is obtained from the determinant of the matrix $\mathbf{R}_x$ in Equation (25), which must be zero. However, solving these transcendental equations is cumbersome and so the DSM is introduced to avoid such a computation.

To develop the plate's dynamic stiffness matrix, with the help of Equation (9a), the vertical displacement and rotation corresponding to the mode shape $\phi(\xi)$ along the $x$-direction at edges $\xi = -1$ and $\xi = 1$ can be expressed as:

$$\begin{Bmatrix} \phi_{\xi=-1} \\ \frac{\mathrm{d}\phi}{\mathrm{d}\xi}_{\xi=-1} \\ \phi_{\xi=1} \\ \frac{\mathrm{d}\phi}{\mathrm{d}\xi}_{\xi=1} \end{Bmatrix} = \begin{bmatrix} -S_{\alpha_1} & C_{\alpha_1} & -Sh_{\beta_1} & Ch_{\beta_1} \\ \alpha_1 C_{\alpha_1}/a & \alpha_1 S_{\alpha_1}/a & \beta_1 Ch_{\beta_1}/a & -\beta_1 Sh_{\beta_1}/a \\ S_{\alpha_1} & C_{\alpha_1} & Sh_{\beta_1} & Ch_{\beta_1} \\ \alpha_1 C_{\alpha_1}/a & -\alpha_1 S_{\alpha_1}/a & \beta_1 Ch_{\beta_1}/a & \beta_1 Sh_{\beta_1}/a \end{bmatrix} \begin{Bmatrix} A_1 \\ A_2 \\ A_3 \\ A_4 \end{Bmatrix}, \tag{27}$$

or,

$$\underline{\delta}\boldsymbol{\Phi}_x = \mathbf{Q}_x\mathbf{A}. \tag{28}$$

Solving for the eigenvector $\mathbf{A}$, and then substituting into Equation (25), we obtain:

$$\mathbf{R}_x\mathbf{A} = \mathbf{R}_x\mathbf{Q}_x^{-1}\underline{\delta}\boldsymbol{\Phi}_x = \mathbf{0}. \tag{29}$$

where the dynamic stiffness matrix, denoted as $\mathbf{K}_x = \mathbf{R}_x\mathbf{Q}_x^{-1}$, can be obtained from Equation (29). This matrix can be used to compute the natural frequencies of the system instead of solving the eigenvalue equation, and the method for the computation will be given in Section 3.

### *2.4. Dynamic stiffness matrix corresponding to $\omega_y$*

In this section, the mode shape $\phi(\xi)$ derived in *Section* 2.3 is utilized to obtain the dynamic stiffness matrix in the $y$-direction. The vertical translational and rotational springs at $\eta = -1$ are denoted as $k^v_{\eta=-1}$ and $k^r_{\eta=-1}$, respectively, while those at $\eta = 1$ are represented by $k^v_{\eta=1}$ and $k^r_{\eta=1}$.

Following the same steps as for the $x$-direction, the Rayleigh principle is expressed in the form:

$$\delta U = \omega_y^2\, \delta T_0, \tag{30}$$

from which the governing ~~differntial~~ differential equation in the $y$-direction for $\psi$ is ~~obatained~~ obtained as:

$$\frac{\mathrm{d}^4\psi}{\mathrm{d}\eta^4} + \frac{2}{\chi^2}\left(\frac{D_{12}J_2}{D_{22}J_1} - 2\frac{D_{66}J_3}{D_{22}J_1}\right)\frac{\mathrm{d}^2\psi}{\mathrm{d}\eta^2} + \left(\frac{D_{11}J_4}{\chi^4 D_{22}J_1} - \frac{b^4 D_{11}}{D_{22}}\Omega_y^4\right)\psi = 0, \tag{31}$$

where $\Omega_y = \sqrt[4]{\omega_y^2\rho h/D_{11}}$, and the integral parameters $J_1$, $J_2$, $J_3$, and $J_4$ are defined in Appendix A. By substituting $\psi(\eta) = Be^{\lambda\eta}$ into Equation (31), we get:

$$\lambda^4 + \frac{2}{\chi^2}\left(\frac{D_{12}J_2}{D_{22}J_1} - 2\frac{D_{66}J_3}{D_{22}J_1}\right)\lambda^2 + \left(\frac{D_{11}J_4}{\chi^4 D_{22}J_1} - \frac{b^4 D_{11}}{D_{22}}\Omega_y^4\right) = 0. \tag{32}$$

The solution for $\lambda$ can be expressed as:

$$\lambda_{1,2} = \pm i\alpha_2, \qquad \lambda_{3,4} = \pm\beta_2, \tag{33}$$

where,

$$\alpha_2 = \frac{1}{\chi}\sqrt{\sqrt{\left(\frac{D_{12}J_2}{D_{22}J_1} - 2\frac{D_{66}J_3}{D_{22}J_1}\right)^2 - \frac{D_{11}J_4}{D_{22}J_1} + \frac{a^4 D_{11}}{D_{22}}\Omega_y^4} + \frac{D_{12}J_2}{D_{22}J_1} - 2\frac{D_{66}J_3}{D_{22}J_1}}, \tag{34a}$$

$$\beta_2 = \frac{1}{\chi}\sqrt{\sqrt{\left(\frac{D_{12}J_2}{D_{22}J_1} - 2\frac{D_{66}J_3}{D_{22}J_1}\right)^2 - \frac{D_{11}J_4}{D_{22}J_1} + \frac{a^4 D_{11}}{D_{22}}\Omega_y^4} - \frac{D_{12}J_2}{D_{22}J_1} + 2\frac{D_{66}J_3}{D_{22}J_1}}. \tag{34b}$$

Similarly to the $x$-direction, from the shear force and bending moment equilibrium, and by denoting $k_\eta^{v*} \equiv \frac{2b^3 k_\eta^v}{D_{22}}$, $k_\eta^{r*} \equiv \frac{2bk_\eta^r}{D_{22}}$, $S_{\alpha_2} \equiv \sin\alpha_2$, $C_{\alpha_2} \equiv \cos\alpha_2$, $Sh_{\beta_2} \equiv \sinh\beta_2$, and $Ch_{\beta_2} \equiv \cosh\beta_2$, we obtain:

$$\begin{bmatrix} \zeta_1 C_{\alpha_2} - k^{v*}_{\eta=-1} S_{\alpha_2} & \zeta_1 S_{\alpha_2} + k^{v*}_{\eta=-1} C_{\alpha_2} & \zeta_2 Ch_{\beta_2} - k^{v*}_{\eta=-1} Sh_{\beta_2} \\ \zeta_3 S_{\alpha_2} + k^{r*}_{\eta=-1}\alpha_2 C_{\alpha_2} & -\zeta_3 C_{\alpha_2} + k^{r*}_{\eta=-1}\alpha_2 S_{\alpha_2} & \zeta_4 Sh_{\beta_2} + k^{r*}_{\eta=-1}\beta_2 Ch_{\beta_2} \\ -\zeta_1 C_{\alpha_2} + k^{v*}_{\eta=1} S_{\alpha_2} & \zeta_1 S_{\alpha_2} + k^{v*}_{\eta=1} C_{\alpha_2} & -\zeta_2 Ch_{\beta_2} + k^{v*}_{\eta=1} Sh_{\beta_2} \\ \zeta_3 S_{\alpha_2} + k^{r*}_{\eta=1}\alpha_2 C_{\alpha_2} & \zeta_3 C_{\alpha_2} - k^{r*}_{\eta=1}\alpha_2 S_{\alpha_2} & \zeta_4 Sh_{\beta_2} + k^{r*}_{\eta=1}\beta_2 Ch_{\beta_2} \end{bmatrix}$$
$$\begin{bmatrix} -\zeta_2 Sh_{\beta_2} + k^{v*}_{\eta=-1} Ch_{\beta_2} \\ -\zeta_4 Ch_{\beta_2} - k^{r*}_{\eta=-1}\beta_2 Sh_{\beta_2} \\ -\zeta_2 Sh_{\beta_2} + k^{v*}_{\eta=1} Ch_{\beta_2} \\ \zeta_4 Ch_{\beta_2} + k^{r*}_{\eta=1}\beta_2 Sh_{\beta_2} \end{bmatrix} \begin{Bmatrix} B_1 \\ B_2 \\ B_3 \\ B_4 \end{Bmatrix} = \begin{Bmatrix} 0 \\ 0 \\ 0 \\ 0 \end{Bmatrix}, \tag{35}$$

or,

$$\mathbf{R}_y \mathbf{B} = \mathbf{0}, \tag{36}$$

where,

$$\begin{aligned}
\zeta_1 &= -\alpha_2^3 - \left(\frac{4D_{66}J_3}{\chi^2 D_{22}J_1} - \frac{D_{12}J_2}{\chi^2 D_{22}J_1}\right)\alpha_2, \\
\zeta_2 &= \beta_2^3 - \left(\frac{4D_{66}T_3}{\chi^2 D_{22}J_1} - \frac{D_{12}J_2}{\chi^2 D_{22}J_1}\right)\beta_2, \\
\zeta_3 &= -\alpha_2^2 + \frac{D_{12}J_2}{\chi^2 D_{22}J_1}, \\
\zeta_4 &= \beta_2^2 + \frac{D_{12}J_2}{\chi^2 D_{22}J_1}.
\end{aligned} \tag{37}$$

With the help of Equation (9b), the vertical displacement and rotation corresponding to the mode shape $\psi$ along the $y$-direction at the edges $\eta = -1$ and $\eta = 1$ can then be expressed as:

$$\begin{Bmatrix} \psi_{\eta=-1} \\ \frac{\mathrm{d}\psi}{\mathrm{d}\eta}_{\eta=-1} \\ \psi_{\eta=1} \\ \frac{\mathrm{d}\psi}{\mathrm{d}\eta}_{\eta=1} \end{Bmatrix} = \begin{bmatrix} -S_{\alpha_2} & C_{\alpha_2} & -Sh_{\beta_2} & Ch_{\beta_2} \\ \alpha_2 C_{\alpha_2}/b & \alpha_2 S_{\alpha_2}/b & \beta_2 Ch_{\beta_2}/b & -\beta_2 Sh_{\beta_2}/b \\ S_{\alpha_2} & C_{\alpha_2} & Sh_{\beta_2} & Ch_{\beta_2} \\ \alpha_2 C_{\alpha_2}/b & -\frac{\alpha_2 S_{\alpha_2}}{b} & \beta_2 Ch_{\beta_2}/b & \beta_2 Sh_{\beta_2}/b \end{bmatrix} \begin{Bmatrix} B_1 \\ B_2 \\ B_3 \\ B_4 \end{Bmatrix}, \tag{38}$$

or,

$$\underline{\delta}\boldsymbol{\Psi}_y = \mathbf{Q}_y \mathbf{B}. \tag{39}$$

Solving for the eigenvector $\mathbf{B}$, and then substituting into Equation (36), we obtain:

$$\mathbf{R}_y \mathbf{B} = \mathbf{R}_y \mathbf{Q}_x^{-1} \underline{\delta}\boldsymbol{\Psi}_y = \mathbf{0}, \tag{40}$$

where the dynamic stiffness matrix, denoted as $\mathbf{K}_y = \mathbf{R}_y \mathbf{Q}_y^{-1}$, can be obtained from Equation (40).

### *2.5. Remarks*

(i) For the SOV methods, six independent unknown eigenvalues ($\alpha_1$, $\beta_1$, $\Omega_x$, $\alpha_2$, $\beta_2$, $\Omega_y$) need to be determined for each mode shape $\phi(\xi)\psi(\eta)$. To solve these six variables, four eigenvalue equations are provided in

Equations (20a), (20b), (34a) and (34b), while the remaining two transcendental eigenvalue equations are obtained from the determinants of $\mathbf{R}_x$ in Equation (25) for the $x$-direction and $\mathbf{R}_y$ in Equation (36) for the $y$-direction, respectively. For classical boundary conditions such as simply supported (S), clamped (C), guided (G), and free (F) edges, these two transcendental equations have been simplified and summarized in previous works [53–55]. However, the process of selecting appropriate transcendental equations for the existing 55 different boundary-condition combinations remains tedious, and further simplification becomes challenging when non-classical boundary conditions are applied. By simply setting the translational springs ($\cancel{k^v}\, k^v_\xi,\ k^v_\eta$) and rotational springs ($\cancel{k^r}\, k^r_\xi,\ k^r_\eta$) along the $x$- or $y$-direction edges to either zero or infinity, the classical boundary conditions can be recovered. In this case, the transcendental equations obtained from the determinants of $\mathbf{R}_x$ and $\mathbf{R}_y$ are identical to those summarized in the existing SOV methods.

(ii) In the existing SOV methods, numerical techniques such as the Newton–Raphson method, homotopy method and optimization methods method have been applied to solve these six unknown variables. Although all six eigenvalue equations can be solved simultaneously, the computation is very expensive and convergence issues may arise [56, 57]. Therefore, an iterative procedure [52, 56–59] is preferred, in which three eigenvalue equations corresponding to ($\alpha_1$, $\beta_1$, $\Omega_x$) and the remaining three corresponding to ($\alpha_2$, $\beta_2$, $\Omega_y$) are solved separately. In fact, by substituting Equations (20a) and (20b) into the eigenvalue equation corresponding to $\mathbf{R}_x$ and Equations (34a) and (34b) into the eigenvalue equation corresponding to $\mathbf{R}_y$, two highly nonlinear eigenvalue equations, involving only one variable $\Omega_x$ and $\Omega_y$, respectively, can be obtained. However, these equations are difficult to solve using conventional numerical methods. To address this issue, the dynamic stiffness matrices $\mathbf{K}_x(\Omega_x)$ and $\mathbf{K}_y(\Omega_y)$ are developed, whose determi-

nants are identical to the eigenvalue equations corresponding to $\mathbf{R}_x(\Omega_x)$ and $\mathbf{R}_y(\Omega_y)$, respectively. In this case, the dynamic stiffness matrices $\mathbf{K}_x(\Omega_x)$ and $\mathbf{K}_y(\Omega_y)$ can be solved efficiently using the W–W algorithm, which enhances computational robustness and ensures that no frequencies are missed.

## 3. Frequency and mode shape computation

The dynamic stiffness matrices $\mathbf{K}_x(\Omega_x)$ and $\mathbf{K}_y(\Omega_y)$ serve as the eigenvalue equations for $\Omega_x$ and $\Omega_y$, respectively, and a powerful W–W algorithm based on the SOV-DSM method is introduced in Section 3.1 to compute these eigenvalues. Section 3.2 proposes a novel technique to calculate the mode shapes. Finally, the iterative procedure for applying the proposed method is presented in Section 3.3.

### *3.1. Wittrick–Williams algorithm and enhancement*

The Wittrick–Williams (W-W) algorithm [97] is an effective method for determining the natural frequencies from the dynamic stiffness matrix with high reliability. Instead of directly solving the equations, the algorithm computes the total number $J$ of natural frequencies below a given frequency $\omega^*$, which is represented as:

$$J(\omega^*) = J_0(\omega^*) + s\{\mathbf{K}^{\Delta}(\omega^*)\} = J_0(\omega^*) + J_k(\omega^*), \tag{41}$$

where $J_0$ represents the number of natural frequencies of the structure with all ends fully clamped, $\mathbf{K}^{\Delta}$ is the upper triangular matrix obtained from the dynamic stiffness matrix $\mathbf{K}$ after applying Gaussian elimination, and $J_k(\omega^*)$ denotes the number of negative elements in the leading diagonal of $\mathbf{K}^{\Delta}$.

It should be noted that the $J_0$ count is a crucial aspect when applying the W-W algorithm. Many previous studies use a sufficiently fine mesh or enough terms in series expansions to capture all fully clamped natural frequencies, ensuring computational accuracy [67]. However, this approach can make the

application process cumbersome. To address this issue, the fully clamped problem can be replaced with a simply supported problem, where the Navier solution for the simply supported plate is used to count $J_0$ [71]. Nevertheless, since analytical solutions in DSM methods involve an infinite series of Fourier terms, a sufficient number of truncation terms is required to ensure accuracy and convergence.

In fact, $J_0$ can be indirectly determined by evaluating the number of natural frequencies $J$ of the structure under specific boundary conditions, which are generally different from the original boundary conditions [98]:

$$J_0(p_1, \omega^*) = J(\bar{p}_1, \omega^*) - J_k(\bar{p}_1, \omega^*), \tag{42}$$

where $p_1$ denotes the fully clamped supports, and $\bar{p}_1$ denotes specific supports, which are typically simply supported, guided, or a combination of the two. For these specific boundary conditions, the eigenvalue equations of SOV type solution take the form of a single harmonic function. By substituting Equation (42) into Equation (41) we get the algorithm as:

$$J(p, \omega^*) = J(\bar{p}_1, \omega^*) - J_k(\bar{p}_1, \omega^*) + J_k(p, \omega^*) \tag{43}$$

where $p$ represents the original boundary conditions of the structure. Therefore, the challenge of determining $J_0(p_1, \omega^*)$ can be transformed into the problem of solving $J(\bar{p}_1, \omega^*)$ instead.

By taking fully S-S boundary conditions as the basis, the eigenvalue equation corresponding to the natural frequency parameter $\Omega_x$ can be obtained from the determinant of the coefficient matrix $\mathbf{R}_x$ in Equation (24), as given by:

$$\sin 2\alpha_1 = 0. \tag{44}$$

With the help of Equations (20a) and (44), the closed-form solution of the $n_x$-th S-S boundary conditions frequency $\Omega_{x,n_x}$ for the given $n_y$-order $\psi_{n_y}(\eta)$

can be expressed as:

$$b\Omega_{x,n_x}^4 = \left[\left(\frac{n_x\pi}{2\chi}\right)^2 - \frac{D_{12}I_2}{D_{11}I_1} + 2\frac{D_{66}I_3}{D_{11}I_1}\right]^2 - \left(\frac{D_{12}I_2}{D_{11}I_1} - 2\frac{D_{66}I_3}{D_{11}I_1}\right)^2 + \frac{D_{22}I_4}{D_{11}I_1}. \tag{45}$$

For $\Omega_{x,n_x} \leq \Omega_x^* < \Omega_{x,n_{x+1}}$, $J(\bar{p}_1, \Omega_x^*) = n_x$.

Similarly, the closed-form solution of the $n_y$-th S-S boundary conditions frequency $\Omega_{y,n_y}$ for the given $n_x$-order $\phi_{n_x}(\xi)$ can be expressed as:

$$a\Omega_{y,n_y}^4 = \frac{D_{22}}{D_{11}}\left\{\left[\left(\frac{n_y\pi\chi}{2}\right)^2 - \frac{D_{12}J_2}{D_{22}J_1} + 2\frac{D_{66}J_3}{D_{22}J_1}\right]^2 - \left(\frac{D_{12}J_2}{D_{22}J_1} - 2\frac{D_{66}J_3}{D_{22}J_1}\right)^2 + \frac{D_{11}J_4}{D_{22}J_1}\right\}. \tag{46}$$

For $\Omega_{y,n_y} \leq \Omega_y^* < \Omega_{y,n_{y+1}}$, $J(\bar{p}_1, \Omega_y^*) = n_y$.

It should be noted that the G-G boundary conditions have the same eigenvalue equations with the S-S boundary conditions, thus the G-G boundary conditions frequencies can also be directly obtained from Equations (45) and (46). The closed-form expression for the S-G boundary conditions can be found in Appendix B.

According to the relationships $\Omega_x^4 = \omega_x^2\rho h/D_{11}$ and $\Omega_y^4 = \omega_y^2\rho h/D_{11}$, the values of $J(\bar{p}_1, \omega_x^*)$ and $J(\bar{p}_1, \omega_y^*)$ can be derived from $J(\bar{p}_1, \Omega_x^*)$ and $J(\bar{p}_1, \Omega_y^*)$, respectively. Therefore, this enhanced W-W algorithm can be applied to estimate the lower and upper bounds of the frequency range, denoted as $\omega_l$ and $\omega_u$, yielding an approximation for the frequency $\omega_a \in (\omega_l, \omega_u)$ to arbitrary precision.

### *3.2. Mode shape computation*

The mode shape coefficients $A_1$ to $A_4$ and $B_1$ to $B_4$ in the eigenvectors $\mathbf{A}$ and $\mathbf{B}$ for all classic boundary conditions are provided in [53, 54]. Alter-

natively, these coefficients can also be obtained through a simple numerical method, which this work presents as an approach. Here, we illustrate solving the eigenvector $\mathbf{A}$ as an example. By assuming the exact natural frequency as $\omega_k$, we can expand the coefficient matrix $\mathbf{R}_x$ in Equation (24) using a first-order Taylor series about $\omega_a$:

$$\mathbf{R}_{x,k}(\omega_k)\mathbf{A}_k = \mathbf{R}_{x,a}\mathbf{A}_k + (\omega_k - \omega_a)\mathbf{R}'_{x,a}\mathbf{A}_k + O\left((\omega_k - \omega_a)^2\right) = 0. \tag{47}$$

Ignoring higher-order terms, an eigenvalue problem can be derived from Equation (47):

$$(\mathbf{R}^{'}_{x,a})^{-1}\mathbf{R}_{x,a}\mathbf{A} = (\omega_a - \omega_k)\mathbf{A} = \tau\mathbf{A}. \tag{48}$$

This eigenvalue problem can be solved using the inverse iteration procedure [102]:

$$\bar{\mathbf{A}}^{(i+1)} = \mathbf{R}^{-1}_{x,a}\mathbf{R}^{'}_{x,a}\mathbf{A}^{(i)}, \tag{49}$$

where the initial guess for $\mathbf{A}^{(0)}$ is a column vector consisting of four randomly generated elements, each of which falls within the range (0,1). The updated eigenvalue for the next step can be obtained as:

$$\tau^{(i+1)} = \frac{1}{\bar{A}^{(i+1)}_j}, \tag{50}$$

where,

$$\mid \bar{A}^{(i+1)}_j \mid = \max(\mid \bar{A}^{(i+1)}_1 \mid, \mid \bar{A}^{(i+1)}_2 \mid, \mid \bar{A}^{(i+1)}_3 \mid, \mid \bar{A}^{(i+1)}_4 \mid). \tag{51}$$

The updated eigenvector can be obtained as:

$$\mathbf{A}^{(i+1)} = \tau^{(i+1)}\bar{\mathbf{A}}^{(i+1)}. \tag{52}$$

The procedure can be controlled by the error tolerance $\epsilon$ or maximum allowed steps $i_{\max}$:

$$\max \mid A_n^{(i+1)} - A_n^{(i)} \mid < \epsilon, \tag{53a}$$

$$i = i_{\max}. \tag{53b}$$

Note that the mode shape coefficients $A_1$ to $A_4$ obtained from $\mathbf{A}^{(i+1)}$ are applied for the elastically restrained boundary conditions.

### *3.3. Numerical procedure*

The procedure of the proposed method is as follows:

- **Step 1** Assume initial integral parameters $I_1^{(0)}, I_2^{(0)}, I_3^{(0)}$, and $I_4^{(0)}$ in the $y$-direction. Using the given boundary conditions at $\xi = -1$ and $\xi = 1$, determine $\mathbf{K}_x^{(0)}$ from Equation (29). Then, apply the computational algorithms in Section 3.1 to compute the lower and upper bounds of the $n_x$-th non-dimensional frequency parameter, $2a\Omega_{l,x,n_x}^{(0)}$ and $2a\Omega_{u,x,n_x}^{(0)}$, and take the average $2a\Omega_{x,n_x}^{(0)} = (2a\Omega_{l,x,n_x}^{(0)} + 2a\Omega_{u,x,n_x}^{(0)})/2$ along with its corresponding mode shape $\phi_{n_x}^{(0)}$, where $n_x = 1, 2, 3, \ldots$.

- **Step 2** Use $\phi_{n_x}^{(0)}$ as the prescribed mode to determine $\mathbf{K}_y^{(1)}$ in Equation (40), considering the boundary conditions at $\eta = -1$ and $\eta = 1$. Apply the computational algorithms to obtain the $n_y$-th frequency parameter $2a\Omega_{y,n_y}^{(1)}$ and its corresponding mode shape $\psi_{n_y}^{(1)}$, where $n_y = 1, 2, 3, \ldots$. This completes the first iteration cycle.

- **Step 3** Use $\psi_{n_y}^{(1)}$ as the prescribed $n_y$-th mode shape in the $y$-direction to compute $\mathbf{K}_x^{(1)}$ from Equation (29), then determine the $n_x$-th frequency parameter $2a\Omega_{x,n_x}^{(1)}$ and its corresponding mode shape $\phi_{n_x}^{(1)}$.

- **Step 4** Use $\phi_{n_x}^{(1)}$ as the prescribed mode in the $x$-direction to compute the $n_y$-th frequency parameter $2a\Omega_{y,n_y}^{(2)}$ and its corresponding mode shape $\psi_{n_y}^{(2)}$, completing the second iteration cycle.

- **Step 5** Stop the iteration if $|2a\Omega^{(i)}_{x,n_x} - 2a\Omega^{(i+1)}_{x,n_x}| \leq \Delta 2a\Omega$ or $|2a\Omega^{(i)}_{y,n_y} - 2a\Omega^{(i+1)}_{y,n_y}| \leq \Delta 2a\Omega$, where $\Delta 2a\Omega = 2a\Omega_u - 2a\Omega_l$. Here, $2a\Omega_l$ and $2a\Omega_u$ are the lower and upper bounds of the frequency parameter range, within which the actual frequency parameter $2a\Omega$ lies, i.e., $2a\Omega \in (2a\Omega_l, 2a\Omega_u)$. The quantity $\Delta 2a\Omega$ represents the frequency parameter interval used in the W-W algorithm.

- **Step 6** Finally, construct the $(n_x, n_y)$-th mode shape as ~~$w(\xi,\eta) = \phi_{n_x}(\xi)\psi_{n_y}(\eta)$~~ $W(\xi,\eta) = \phi_{n_x}(\xi)\psi_{n_y}(\eta)$ using Equation (8).

### *3.4. Remarks*

(i) The traditional W–W algorithm requires a prior expression of $J_0(p_1)$ under the C–C boundary conditions ($p_1$). However, the transcendental eigenvalue equation for C–C boundaries is complex, making it difficult to obtain a closed-form solution for the $J_0(p_1)$ term. To overcome this difficulty, $J_0(p_1)$ can be indirectly determined if the $J(\bar{p}_1)$ term is known, where the reference boundary condition $\bar{p}_1$ may correspond to any other, more tractable boundary condition. Consequently, to apply the W–W algorithm, at least one prior solution for a specific boundary condition is required. Thanks to the SOV solution, the S–S, G–G, and S–G boundary conditions yield the simplest eigenvalue equations, involving only a single sine or cosine function. Therefore, an explicit closed-form expression of $J(\bar{p}_1)$ can be readily obtained when $\bar{p}_1$ corresponds to one of these boundary conditions. In numerical calculations, to approximate infinite stiffness, the translational springs (~~$k^v$~~ $k^v_\xi, k^v_\eta$) and rotational springs (~~$k^r$~~ $k^r_\xi, k^r_\eta$) are assigned sufficiently large values.

(ii) In the existing SOV methods, the mode shape coefficients $A_1$ to $A_4$ and $B_1$ to $B_4$ are obtained from different types of transcendental eigenvalue equations for each boundary condition, resulting in distinct expressions for different boundary conditions. However, the dynamic stiffness matrix $\mathbf{K}$ is applicable to all boundary conditions. Therefore, a general

approach is developed to compute the mode shape coefficients for arbitrary boundary conditions, and a novel yet simple numerical technique has been introduced to implement this procedure efficiently.

## 4. Numerical Results

This section aims to validate the SOV-DSM method by comparing its results with some existing methods. In Section 4.1, the results are compared with those obtained from the extended SOV method under classical boundary conditions. In Section 4.2, the results are further compared with the finite integral transform method and numerical methods for rotationally restrained boundary conditions.

For all numerical calculations, the initial integral parameters are assumed as $I_1^{(0)} = 1$, $I_2^{(0)} = 1$, $I_3^{(0)} = 1$, and $I_4^{(0)} = 10$ in the $y$-direction, serving as the starting point of **Step 1** for any mode in all boundary conditions. $\bar{p}_1$ is selected as the S–S boundary condition. In this section, the interval between the upper and lower bounds of the non-dimensional frequency parameter, $2a\Delta\Omega$, is set to 0.005, although any desired level of precision can be used. According to our numerical calculations, two iteration cycles are generally sufficient to meet the convergence requirement (i.e., $|2a\Omega_x^{(i)} - 2a\Omega_x^{(i+1)}| \leq \Delta 2a\Omega$ or $|2a\Omega_y^{(i)} - 2a\Omega_y^{(i+1)}| \leq \Delta 2a\Omega$) for most cases, with at most three cycles required when applying the iterative procedure in Section 3.3.

### *4.1. Classical boundary conditions*

In this subsection, the proposed method is validated by comparison with the extended SOV method [53]. The properties of the orthotropic plate, consistent with those in [53], are as follows: $E_1 = 185$ GPa, $E_2 = 10.5$ GPa, $G_{12} = 7.3$ GPa, $\rho = 1600$ kg m$^{-1}$, and $\nu_{12} = 0.28$.

The translational springs (~~$k^v$~~ $k_\xi^v$, $k_\eta^v$) and rotational springs (~~$k^r$~~ $k_\xi^r$, $k_\eta^r$) along all edges can be set to zero or ~~infinity (represented as $1 \times 10^{15}$ N m$^{-1}$ in the numerical calculations of this study) to obtain different classic boundary~~

conditionsto numerical infinity to realise the classical boundary conditions. In the numerical calculations, the values $(2a)^3 k_\xi^v / D_{11} = 10^5$ and $2a\, k_\xi^r / D_{11} = 10^5$ were found to be sufficiently large to simulate infinite stiffness, and further increases in these values did not change the computed results. Accordingly, $k_\xi^v = k_\eta^v = 1 \times 10^{11}$ N m$^{-1}$ and $k_\xi^r = k_\eta^r = 1 \times 10^{11}$ N m rad$^{-1}$ are adopted in this study.

The results for SSSS, SCSF, GCGC, CCCC, SSCC, SCCC, GGCC, CCFF, CFCF, CFFF, and FFFF boundary conditions are presented in Tables 1 to 3. These results demonstrate high accuracy compared to The results show high accuracy with respect to both the extended SOV method , with difference remaining smaller than the frequency parameter interval $2a\Delta\Omega = 0.005$. and the FEM solutions. The SOV-DSM results align more closely with the extended SOV results, with differences remaining below the frequency-parameter interval $2a\Delta\Omega = 0.005$. This is expected, since both methods use the same SOV-type mode shape functions. The frequency parameters in both directions are equal $(2a\Omega_x - 2a\Omega_y = 0)$ in almost all cases, with a few exceptions where $2a\Omega_x - 2a\Omega_y = 0.005$. In fact, higher accuracy compared to the extended SOV method can be achieved if the frequency parameter interval $2a\Delta\Omega$ is set smaller than 0.005. It should be noted that the accuracy improves only by reducing $2a\Delta\Omega$, and no additional iterations are required according to our calculations. Figure 2 shows the first six nonzero mode shapes of a square orthotropic plate with FFFF boundary conditions, where the mode shape coefficients are calculated using the numerical method developed in this study. Instead of selecting fixed expressions for the mode shape coefficients based on specific boundary conditions, our method is applicable to all boundary conditions.

### *4.2. Rotational spring-supported edges*

In this subsection, rectangular orthotropic plates with rotational spring-supported edges with no translations $(k_\xi^v = k_\eta^v = \infty)$ are examined. The

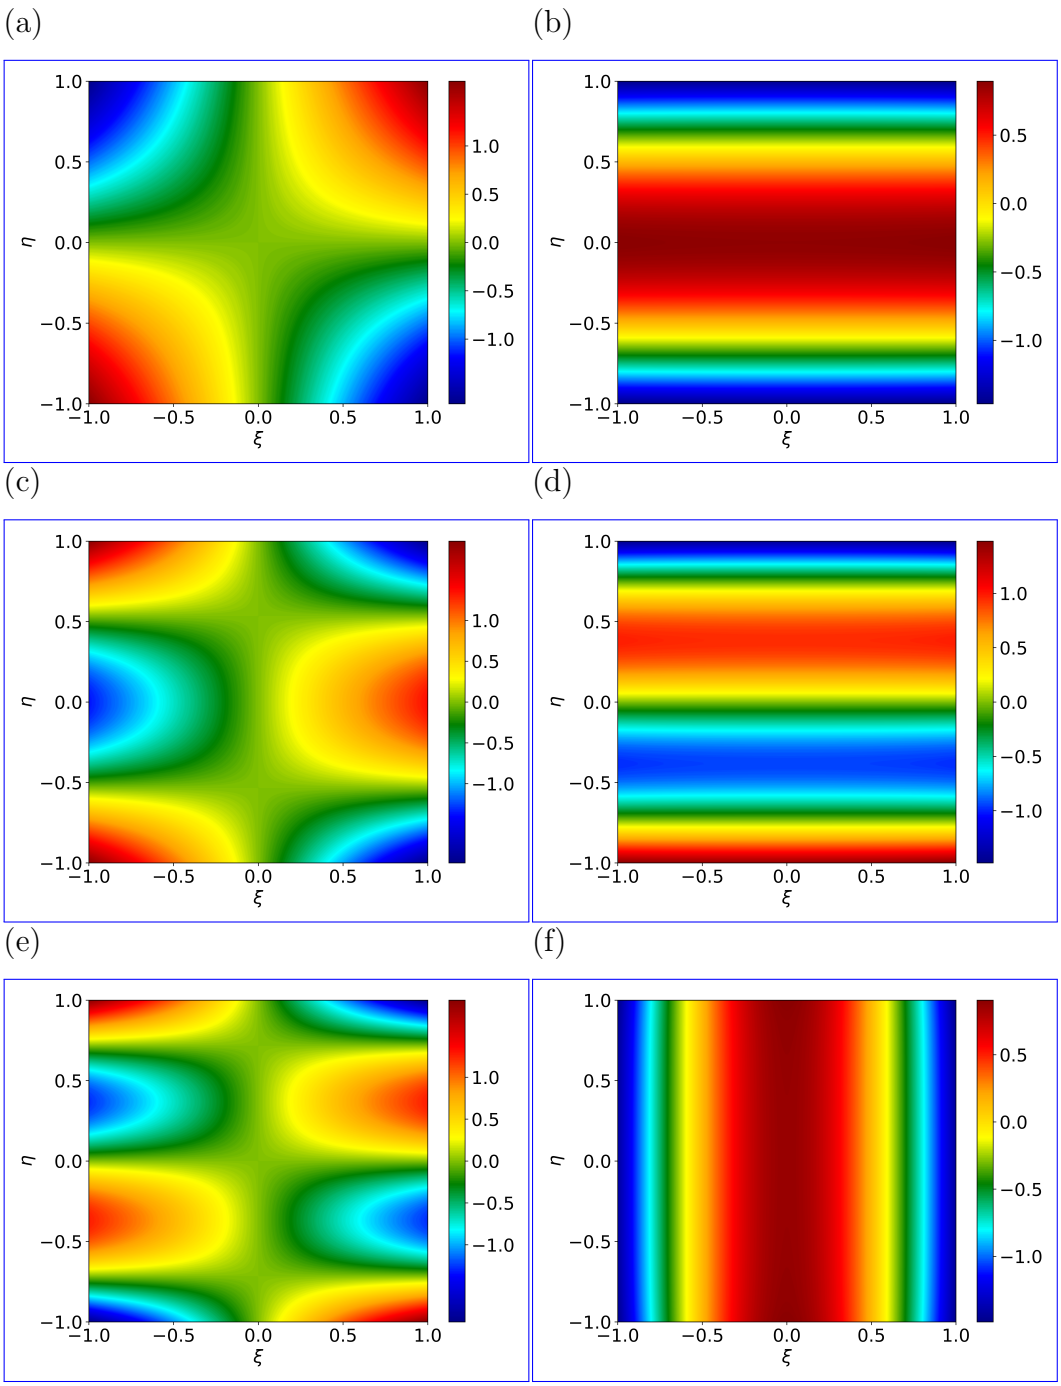



Figure 2: The first six nonzero mode shapes of a square orthotropic plate with FFFF boundary conditions: (a) the first mode; (b) the second mode; (c) the third mode; (d) the fourth mode; (e) the fifth mode; (f) the sixth mode.

Table 1: The first seven frequency parameter $2a\Omega$ of of orthotropic rectangular plates with SSSS, SCSF and GCGC boundary conditions.

| | | | $2a\Omega_x = 2a\Omega_y = 2a\sqrt[4]{\rho h\omega^2/D_{11}}$ | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| BCs | $\chi$ | Mode | 1 | 2 | 3 | 4 | 5 | 6 | 7 |
| SSSS | 0.5 | Mode number | (1,1) | (1,2) | (1,3) | (1,4) | (1,5) | (1,6) | (1,7) |
| | | extended SOV 53 | 3.1807 | 3.3190 | 3.5938 | 4.0135 | 4.5495 | 5.1635 | 5.8265 |
| | | Present | 3.1825 | 3.3225 | 3.5975 | 4.0175 | 4.5525 | 5.1625 | 5.8275 |
| | 1 | Mode number | (1,1) | (1,2) | (1,3) | (2,1) | (1,4) | (2,2) | (2,3) |
| | | extended SOV 53 | 3.3190 | 4.0135 | 5.1635 | 6.3615 | 6.5200 | 6.6379 | 7.1876 |
| | | Present | 3.3175 | 4.0175 | 5.1625 | 6.3625 | 6.5175 | 6.6375 | 7.1875 |
| | 1.5 | Mode number | (1,1) | (1,2) | (2,1) | (2,2) | (1,3) | (2,3) | (1,4) |
| | | extended SOV 53 | 3.5938 | 5.1635 | 6.4698 | 7.1876 | 7.2331 | 8.5389 | 9.4352 |
| | | Present | 3.5975 | 5.1675 | 6.4725 | 7.1875 | 7.2325 | 8.5375 | 9.4375 |
| SCSF | 0.5 | Mode number | (1,1) | (1,2) | (1,3) | (1,4) | (1,5) | (1,6) | (1,7) |
| | | extended SOV 53 | 3.1516 | 3.2451 | 3.4588 | 3.8131 | 4.2950 | 4.8711 | 5.5087 |
| | | Present | 3.1525 | 3.2475 | 3.4575 | 3.8175 | 4.2925 | 4.8725 | 5.5075 |
| | 1 | Mode number | (1,1) | (1,2) | (1,3) | (1,4) | (2,1) | (2,2) | (2,3) |
| | | extended SOV 53 | 3.1908 | 3.6428 | 4.5972 | 5.8599 | 6.3033 | 6.4901 | 6.9177 |
| | | Present | 3.1925 | 3.6425 | 4.5975 | 5.8575 | 6.3025 | 6.4925 | 6.9175 |
| | 1.5 | Mode number | (1,1) | (1,2) | (1,3) | (2,1) | (2,2) | (2,3) | (1,4) |
| | | extended SOV 53 | 3.2710 | 4.3430 | 6.2157 | 6.3337 | 6.8043 | 7.8718 | 8.3518 |
| | | Present | 3.2725 | 4.3425 | 6.2175 | 6.3325 | 6.8025 | 7.8725 | 8.3525 |
| GCGC | 0.5 | Mode number | (1,1) | (1,2) | (1,3) | (2,1) | (2,2) | (1,4) | (2,3) |
| | | extended SOV 53 | 1.1544 | 1.9166 | 2.6835 | 3.1983 | 3.3890 | 3.4501 | 3.7372 |
| | | Present | 1.1525 | 1.9175 | 2.6825 | 3.1975 | 3.3875 | 3.4525 | 3.7375 |
| | 1 | Mode number | (1,1) | (2,1) | (1,2) | (2,2) | (1,3) | (2,3) | (3,1) |
| | | extended SOV 53 | 2.3087 | 3.4900 | 3.8331 | 4.4682 | 5.3669 | 5.7736 | 6.3967 |
| | | Present | 2.3075 | 3.4875 | 3.8325 | 4.4675 | 5.3675 | 5.7725 | 6.3975 |
| | 1.5 | Mode number | (1,1) | (2,1) | (1,2) | (2,2) | (3,1) | (3,2) | (1,3) |
| | | extended SOV 53 | 3.4631 | 4.1353 | 5.7497 | 6.0981 | 6.6049 | 7.6449 | 8.0504 |
| | | Present | 3.4625 | 4.1325 | 5.7475 | 6.0975 | 6.6075 | 7.6425 | 8.0525 |

Table 2: The first seven frequency parameter $2a\Omega$ of of orthotropic rectangular plates with CCCC, SSCC, SCCC and GGCC boundary conditions.

| | | | $2a\Omega_x = 2a\Omega_y = 2a\sqrt[4]{\rho h\omega^2/D_{11}}$ | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| BCs | $\chi$ | Mode | 1 | 2 | 3 | 4 | 5 | 6 | 7 |
| CCCC | 0.5 | Mode number | (1,1) | (1,2) | (1,3) | (1,4) | (1,5) | (1,6) | (1,7) |
| | | extended SOV 53 | 4.7500 | 4.8208 | 4.9682 | 5.2177 | 5.5791 | 6.0430 | 6.5892 |
| | | Present | 4.7475 | 4.8225 | 4.9725 | 5.2175 | 5.5825 | 6.0425 | 6.5875 |
| | 1 | Mode number | (1,1) | (1,2) | (1,3) | (1,4) | (2,1) | (2,2) | (2,3) |
| | | extended SOV 53 | 4.8579 | 5.3546 | 6.2819 | 7.4972 | 7.9193 | 8.1490 | 8.6054 |
| | | Present | 4.8575 | 5.3575 | 6.2875 | 7.4975 | 7.9175 | 8.1475 | 8.6075 |
| | 1.5 | Mode number | (1,1) | (1,2) | (2,1) | (1,3) | (2,2) | (2,3) | (1,4) |
| | | extended SOV 53 | 5.1581 | 6.5412 | 8.0409 | 8.4945 | 8.7204 | 9.9793 | 10.6460 |
| | | Present | 5.1575 | 6.5375 | 8.0425 | 8.4975 | 8.7175 | 9.9775 | 10.6425 |
| SSCC | 0.5 | Mode number | (1,1) | (1,2) | (1,3) | (1,4) | (1,5) | (1,6) | (1,7) |
| | | extended SOV 53 | 3.9542 | 4.0520 | 4.2525 | 4.5785 | 5.0254 | 5.5682 | 6.1789 |
| | | Present | 3.9575 | 4.0525 | 4.2475 | 4.5775 | 5.0225 | 5.5725 | 6.1825 |
| | 1 | Mode number | (1,1) | (1,2) | (1,3) | (1,4) | (2,1) | (2,2) | (2,3) |
| | | extended SOV 53 | 4.0745 | 4.6606 | 5.7009 | 6.9940 | 7.1396 | 7.3894 | 7.8881 |
| | | Present | 4.0775 | 4.6625 | 5.7025 | 6.9925 | 7.1375 | 7.3875 | 7.8875 |
| | 1.5 | Mode number | (1,1) | (1,2) | (2,1) | (1,3) | (2,2) | (2,3) | (1,4) |
| | | extended SOV 53 | 4.3602 | 5.8384 | 7.2531 | 7.8560 | 7.9481 | 9.2515 | 10.0366 |
| | | Present | 4.3625 | 5.8325 | 7.2525 | 7.8575 | 7.9525 | 9.2525 | 10.0325 |
| SCCC | 0.5 | Mode number | (1,1) | (1,2) | (1,3) | (1,4) | (1,5) | (1,6) | (1,7) |
| | | extended SOV 53 | 3.9596 | 4.0745 | 4.3027 | 4.6606 | 5.1361 | 5.7009 | 6.3271 |
| | | Present | 3.9575 | 4.0725 | 4.3025 | 4.6625 | 5.1325 | 5.7025 | 6.3325 |
| | 1 | Mode number | (1,1) | (1,2) | (1,3) | (2,1) | (1,4) | (2,2) | (2,3) |
| | | extended SOV 53 | 4.1349 | 4.8478 | 5.9805 | 7.1541 | 7.3192 | 7.4478 | 8.0121 |
| | | Present | 4.1325 | 4.8475 | 5.9825 | 7.1525 | 7.3175 | 7.4475 | 8.0125 |
| | 1.5 | Mode number | (1,1) | (1,2) | (2,1) | (2,2) | (1,3) | (2,3) | (3,1) |
| | | extended SOV 53 | 4.5824 | 6.2766 | 7.3116 | 8.1528 | 8.3705 | 9.5986 | 10.3507 |
| | | Present | 4.5825 | 6.2775 | 7.3125 | 8.1525 | 8.3725 | 9.5975 | 10.3525 |
| GGCC | 0.5 | Mode number | (1,1) | (1,2) | (1,3) | (1,4) | (1,5) | (1,6) | (1,7) |
| | | extended SOV 53 | 2.3750 | 2.4841 | 2.7895 | 3.2946 | 3.9226 | 4.6123 | 5.3326 |
| | | Present | 2.3725 | 2.4875 | 2.7925 | 3.2975 | 3.9225 | 4.6075 | 5.3325 |
| | 1 | Mode number | (1,1) | (1,2) | (1,3) | (2,1) | (2,2) | (1,4) | (2,3) |
| | | extended SOV 53 | 2.4290 | 3.1410 | 4.4293 | 5.5202 | 5.7315 | 5.8801 | 6.2606 |
| | | Present | 2.4325 | 3.1425 | 4.4325 | 5.5225 | 5.7325 | 5.8775 | 6.2625 |
| | 1.5 | Mode number | (1,1) | (1,2) | (2,1) | (2,2) | (1,3) | (2,3) | (3,1) |
| | | extended SOV 53 | 2.5790 | 4.2472 | 5.5565 | 6.1533 | 6.4347 | 7.5231 | 8.6732 |
| | | Present | 2.5825 | 4.2475 | 5.5575 | 6.1525 | 6.4325 | 7.5225 | 8.6725 |

Table 3: The first seven nonzero frequency parameter $2a\Omega$ of of orthotropic rectangular plates with CCFF, CFCF, CFFF and FFFF boundary conditions.

| | | | $2a\Omega_x = 2a\Omega_y = 2a\sqrt[4]{\rho h\omega^2/D_{11}}$ | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| BCs | $\chi$ | Mode | 1 | 2 | 3 | 4 | 5 | 6 | 7 |
| CCFF | 0.5 | Mode number | (1,1) | (1,2) | (1,3) | (1,4) | (1,5) | (1,6) | (2,1) |
| | | extended SOV 53 | 1.8978 | 2.0905 | 2.4925 | 3.0563 | 3.7110 | 4.4117 | 4.7029 |
| | | Present | 1.8975 | 2.0925 | 2.4925 | 3.0575 | 3.7125 | 4.4125 | 4.7025 |
| | 1 | Mode number | (1,1) | (1,2) | (1,3) | (2,1) | (2,2) | (1,4) | (2,3) |
| | | extended SOV 53 | 1.9930 | 2.7895 | 4.0733 | 4.7338 | 5.0652 | 5.5128 | 5.7419 |
| | | Present | 1.9925 | 2.7875 | 4.0725 | 4.7325 | 5.0675 | 5.5125 | 5.7425 |
| | 1.5 | Mode number | (1,1) | (1,2) | (2,1) | (2,2) | (1,3) | (2,3) | (3,1) |
| | | extended SOV 53 | 2.1780 | 3.7411 | 4.7931 | 5.5758 | 5.8895 | 7.0263 | 7.9006 |
| | | FEM 54 | 2.1736 | 3.7339 | 4.7921 | 5.5646 | 5.8914 | 7.0174 | 7.8986 |
| | | Present | 2.1775 | 3.7425 | 4.7925 | 5.5725 | 5.8875 | 7.0275 | 7.9025 |
| CFCF | 0.5 | Mode number | (1,1) | (1,2) | (1,3) | (1,4) | (1,5) | (1,6) | (1,7) |
| | | extended SOV 53 | 4.7297 | 4.7427 | 4.7881 | 4.8819 | 5.0478 | 5.3072 | 5.6694 |
| | | Present | 4.7275 | 4.7425 | 4.7875 | 4.8825 | 5.0475 | 5.3075 | 5.6675 |
| | 1 | Mode number | (1,1) | (1,2) | (1,3) | (1,4) | (1,5) | (1,6) | (2,1) |
| | | extended SOV 53 | 4.7295 | 4.7817 | 5.0012 | 5.5348 | 6.4407 | 7.6182 | 7.8523 |
| | | FEM 54 | 4.7293 | 4.7814 | 5.0006 | 5.5335 | 6.4388 | 7.6160 | 7.8522 |
| | | Present | 4.7275 | 4.7825 | 5.0025 | 5.5325 | 6.4425 | 7.6175 | 7.8525 |
| | 1.5 | Mode number | (1,1) | (1,2) | (1,3) | (1,4) | (2,1) | (2,2) | (2,3) |
| | | extended SOV 53 | 4.7292 | 4.8458 | 5.4221 | 6.7635 | 7.8518 | 7.9470 | 8.3021 |
| | | Present | 4.7275 | 4.8475 | 5.4225 | 6.7625 | 7.8525 | 7.9475 | 8.3025 |
| CFFF | 0.5 | Mode number | (1,1) | (1,2) | (1,3) | (1,4) | (1,5) | (1,6) | (1,7) |
| | | extended SOV 53 | 1.8751 | 1.9439 | 2.1679 | 2.5657 | 3.1106 | 3.7486 | 4.4382 |
| | | FEM 54 | 1.8749 | 1.9436 | 2.1654 | 2.5612 | 3.1058 | 3.7441 | 4.4331 |
| | | Present | 1.8775 | 1.9425 | 2.1675 | 2.5675 | 3.1125 | 3.7475 | 4.4375 |
| | 1 | Mode number | (1,1) | (1,2) | (1,3) | (1,4) | (2,1) | (2,2) | (2,3) |
| | | extended SOV 53 | 1.8750 | 2.1242 | 2.9077 | 4.1319 | 4.6937 | 4.8226 | 5.2263 |
| | | FEM 54 | 1.8747 | 2.1210 | 2.9020 | 4.1256 | 4.6928 | 4.8221 | 5.2164 |
| | | Present | 1.8775 | 2.1225 | 2.9075 | 4.1325 | 4.6925 | 4.8225 | 5.2275 |
| | 1.5 | Mode number | (1,1) | (1,2) | (1,3) | (2,1) | (2,2) | (2,3) | (1,4) |
| | | extended SOV 53 | 1.8750 | 2.3402 | 3.8522 | 4.6935 | 4.9753 | 5.8314 | 5.9292 |
| | | FEM 54 | 1.8746 | 2.3347 | 3.8473 | 4.6935 | 4.9686 | 5.8226 | 5.9279 |
| | | Present | 1.8775 | 2.3425 | 3.8525 | 4.6925 | 4.9775 | 5.8325 | 5.9275 |
| FFFF | 0.5 | Mode number | (1,3) | (2,2) | (1,4) | (2,3) | (1,5) | (2,4) | (2,5) |
| | | extended SOV 53 | 1.1540 | 1.4858 | 1.9157 | 2.1704 | 2.6821 | 2.7881 | 3.4093 |
| | | FEM 54 | 1.1531 | 1.4853 | 1.9146 | 2.1686 | 2.6810 | 2.7848 | 3.4050 |
| | | Present | 1.1525 | 1.4875 | 1.9175 | 2.1725 | 2.6825 | 2.7875 | 3.4075 |
| | 1 | Mode number | (2,2) | (1,3) | (2,3) | (1,4) | (2,4) | (3,1) | (3,2) |
| | | extended SOV 53 | 2.1311 | 2.3082 | 3.2734 | 3.8320 | 4.4962 | 4.7298 | 4.9138 |
| | | FEM 54 | 2.1283 | 2.3062 | 3.2772 | 3.8291 | 4.4896 | 4.7278 | 4.9124 |
| | | Present | 2.1325 | 2.3075 | 3.2725 | 3.8325 | 4.4975 | 4.7275 | 4.9125 |
| | 1.5 | Mode number | (2,2) | (1,3) | (2,3) | (3,1) | (3,2) | (1,4) | (3,3) |
| | | extended SOV 53 | 2.6277 | 3.4625 | 4.2915 | 4.7296 | 5.1259 | 5.7485 | 6.1588 |
| | | FEM 54 | 2.6219 | 3.4589 | 4.2844 | 4.7293 | 5.1189 | 5.7498 | 6.1506 |
| | | Present | 2.6275 | 3.4625 | 4.2925 | 4.7275 | 5.1275 | 5.7475 | 6.1575 |

dimensionless rotational stiffness coefficients are defined as:

$$r_\xi = \frac{2ak_\xi^r}{D_{11}}, \tag{54a}$$

$$r_\eta = \frac{2bk_\eta^r}{D_{22}}. \tag{54b}$$

The first example considers a square isotropic plate with all four edges rotationally restrained. The vertical translational springs along the four edges are numerically set as ~~$k^v_{\xi=-1} = k^v_{\xi=1} = k^v_{\eta=-1} = k^v_{\eta=1} = 1\times10^{12}\ \mathrm{N\,m^{-1}}$~~ $k^v_{\xi=-1} = k^v_{\xi=1} = k^v_{\eta=-1} = k^v_{\eta=1}$ The material properties are given as $D_{11} = D_{22} = D_3$ and ~~$v_{12} = v_{21} = 0.3$~~ $\nu_{12} = \nu_{21} = 0.3$.

Table 4 presents the frequency parameter $2a\Omega$ for different rotational stiffness coefficients $r_\xi = r_\eta$ with values $0.1, 1, 10, 100$, and $1000$. Notably, when $r_\xi = r_\eta = 0$ and $r_\xi = r_\eta = \infty$, the boundary conditions correspond to SSSS and CCCC, respectively. Figure 3 illustrates the variation in mode shapes corresponding to the fundamental natural frequency as the rotational stiffness $r_\xi = r_\eta$ increases from zero to $\infty$, transitioning the boundary conditions from SSSS to CCCC. As the rotational stiffness increases, the edges become more restricted against rotation, leading to higher natural frequencies. Owing to the increased bending resistance, both the slope and the deflection of the mode shape near the boundaries decrease accordingly. Throughout the transition from SSSS to CCCC, the mode shape remains symmetric due to the symmetry of the boundary conditions.

Interestingly, the results indicate that the frequencies $\Omega_x$ and $\Omega_y$ are not strictly equal for some mode shapes under these boundary conditions. The actual frequency $\Omega$ lies between $\Omega_x$ and $\Omega_y$, which may be attributed to the fact that $\Omega_x$ and $\Omega_y$ satisfy Rayleigh's principle in Equation (3), representing the weak-form governing equations, but do not necessarily satisfy the strong-form governing equations in Equation (1). For a physical problem with exact solutions, both Equations (1) and (3) must be satisfied. If this condition is not met, applying Equation (3) still provides a viable approach for approximating the exact solution of the plate. Thus, the exact frequency

can be estimated as $\Omega = (\Omega_x + \Omega_y)/2$. As shown in Table 4, the maximum difference between $\Omega$ and the analytical solutions of the finite integral transform method reported in 103 is less than 1.3%. ~~Figure 3 illustrates the variation in mode shapes corresponding to the fundamental natural frequency as the rotational stiffness $r_\xi = r_\eta$ increases from zero to $\infty$, transitioning the boundary conditions from SSSS to CCCC.~~

The next example considers a rectangular orthotropic plate with three simply supported edges ($k^r_{\xi=-1} = k^r_{\xi=1} = k^r_{\eta=1} = 0$), while the edge at $\eta = -1$ is rotationally restrained. The material properties are consistent with those in 103, where $2D_{11} = 2D_{22} = D_3$ and $\nu_{12} = \nu_{21} = 0.3$. Table 5 shows the fundamental frequency results for different length ratios ($b/a$), comparing them with those reported in 103. The maximum observed difference is 0.8% when $r_{\eta=-1} = 10$. As expected, increasing the rotational stiffness on the edge at $\eta = -1$ raises the natural frequency by restricting edge rotation and increasing the local bending rigidity.

~~Interestingly, in certain numerical calculations involving rotationally restrained~~

### *4.3. Remarks*

(i) For the classical S, C, G, and F boundary conditions, the ~~variables $\alpha_1$ and $\alpha_2$ may take complexvalues rather than being purely real~~frequency coefficients $(\alpha_1, \beta_1, \alpha_2, \beta_2)$ are real values as expected. As a result, the corresponding mode shape coefficients $A_1$ to $A_4$ and $B_1$ to $B_4$ are real, and thus the mode shape $\phi(\xi)\psi(\eta)$ is real. However, for elastically restrained boundary conditions, some of the frequency coefficients $(\alpha_1, \alpha_2)$ may become complex. Consequently, the associated mode shape coefficients ~~$A_1$, $A_2$, $B_1$, and $B_2$ become complex-valued, leading to $\mathbf{R}$ and $\mathbf{Q}^{-1}$ being complex matrices .~~ $A_1$ to $A_2$ or $B_1$ to $B_2$ also take complex values. Nevertheless, the constructed mode shape $\phi(\xi)\psi(\eta)$ must be real to have physical meaning. Accordingly, by assuming a real-valued mode shape, the mode shape vector $\mathbf{\Phi}_x$ in Equation (29),

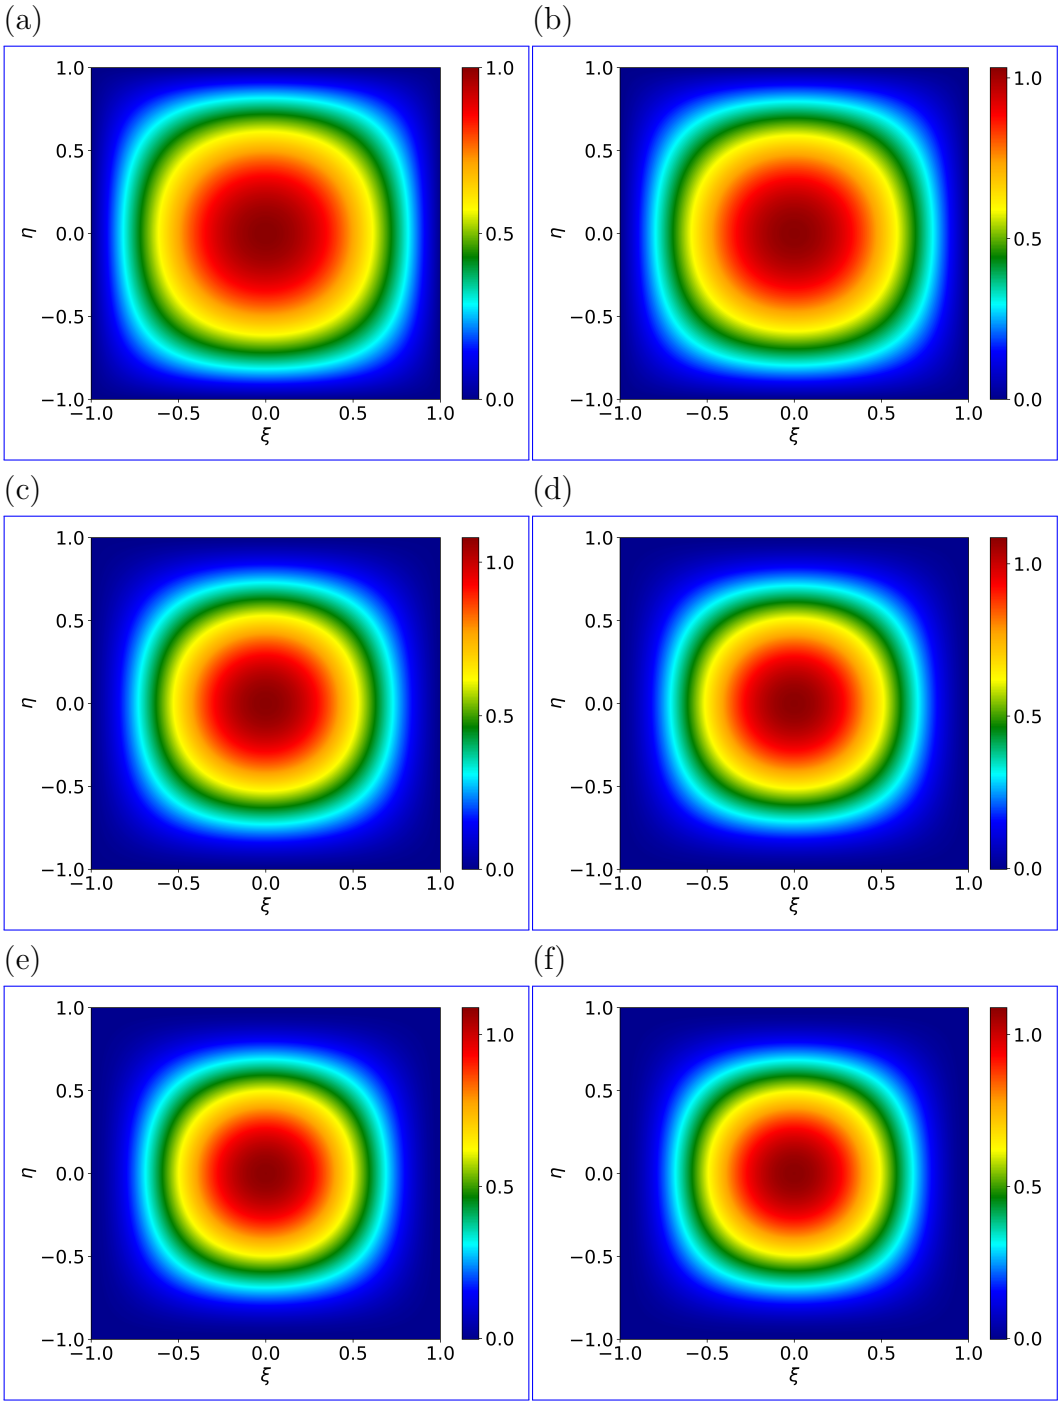



Figure 3: The first vibration mode shapes of a square isotropic plate with all four edges rotationally restrained, shown for different dimensionless rotational stiffness values $r_\xi = r_\eta$. (a) $r_\xi = r_\eta = 0$ (simply supported); (b) $r_\xi = r_\eta = 1$ (light rotational restraint); (c) $r_\xi = r_\eta = 10$ (moderate restraint); (d) $r_\xi = r_\eta = 20$; (e) $r_\xi = r_\eta = 100$ (nearly clamped); (f) $r_\xi = r_\eta = \infty$ (perfectly clamped edges).

Table 4: The first six frequency parameters $2a\Omega = 2a\sqrt[4]{\rho h\omega^2/D_{11}}$ of a square isotropic plate with all four edges rotationally restrained, for rotational stiffness coefficients $r_\xi = r_\eta$ equal to 0.1, 1, 10, 100, and 1000.

| | | $2a\Omega$ | | | | | |
|---|---|---|---|---|---|---|---|
| $r$ | Mode | 1 | 2 | 3 | 4 | 5 | 6 |
| 0.1 | Mode number | (1,1) | (1,2) | (2,1) | (2,2) | (1,3) | (3,1) |
| | Ref.104 | 4.454 | 6.992 | 7.045 | 8.890 | 9.782 | 9.960 |
| | Ref.103 | 4.465 | 7.039 | 7.039 | 8.897 | 9.945 | 9.945 |
| | Present ($\Omega_x$) | 4.463 | 7.028 | 7.043 | 8.893 | 9.938 | 9.953 |
| | Present ($\Omega_y$) | 4.463 | 7.043 | 7.028 | 8.893 | 9.953 | 9.938 |
| | Present ($\Omega$) | 4.463 | 7.035 | 7.035 | 8.893 | 9.945 | 9.945 |
| | Difference (%) | 0.044 | 0.056 | 0.056 | 0.044 | 0.000 | 0.000 |
| 1 | Mode number | (1,1) | (1,2) | (2,1) | (2,2) | (3,1) | (1,3) |
| | Ref.104 | 4.529 | 7.008 | 7.136 | 8.936 | 9.787 | 10.036 |
| | Ref.103 | 4.637 | 7.155 | 7.155 | 8.991 | 10.029 | 10.030 |
| | Present ($\Omega_x$) | 4.648 | 7.098 | 7.223 | 8.993 | 10.093 | 9.968 |
| | Present ($\Omega_y$) | 4.648 | 7.223 | 7.098 | 8.993 | 9.968 | 10.098 |
| | Present ($\Omega$) | 4.648 | 7.160 | 7.160 | 8.993 | 10.030 | 10.033 |
| | Difference (%) | 0.237 | 0.069 | 0.069 | 0.022 | 0.009 | 0.029 |
| 10 | Mode number | (1,1) | (1,2) | (2,1) | (2,2) | (1,3) | (3,1) |
| | Ref.103 | 5.346 | 7.768 | 7.768 | 9.537 | 10.552 | 10.563 |
| | Present ($\Omega_x$) | 5.413 | 7.718 | 7.953 | 9.598 | 10.448 | 10.782 |
| | Present ($\Omega_y$) | 5.413 | 7.953 | 7.718 | 9.598 | 10.782 | 10.453 |
| | Present ($\Omega$) | 5.413 | 7.835 | 7.835 | 9.598 | 10.615 | 10.618 |
| | Difference (%) | 1.253 | 0.862 | 0.862 | 0.639 | 0.597 | 0.520 |
| 100 | Mode number | (1,1) | (1,2) | (2,1) | (2,2) | (1,3) | (3,1) |
| | Ref.104 | 5.895 | 8.326 | 8.422 | 10.167 | 10.957 | 11.297 |
| | Ref.103 | 5.901 | 8.442 | 8.442 | 10.253 | 11.307 | 11.333 |
| | Present ($\Omega_x$) | 5.913 | 8.428 | 8.473 | 10.258 | 11.293 | 11.373 |
| | Present ($\Omega_y$) | 5.913 | 8.473 | 8.478 | 10.258 | 11.373 | 11.293 |
| | Present ($\Omega$) | 5.913 | 8.450 | 8.450 | 10.258 | 11.333 | 11.333 |
| | Difference (%) | 0.203 | 0.094 | 0.094 | 0.048 | 0.229 | 0.000 |
| 1000 | Mode number | (1,1) | (1,2) | (2,1) | (2,2) | (1,3) | (3,1) |
| | Ref.103 | 6.011 | 8.585 | 8.585 | 10.424 | 11.495 | 11.522 |
| | Present ($\Omega_x$) | 5.988 | 8.553 | 8.553 | 10.388 | 11.463 | 11.478 |
| | Present ($\Omega_y$) | 5.988 | 8.553 | 8.553 | 10.388 | 11.478 | 11.463 |
| | Present ($\Omega$) | 5.988 | 8.553 | 8.553 | 10.388 | 11.470 | 11.470 |
| | Difference (%) | 0.382 | 0.372 | 0.372 | 0.345 | 0.217 | 0.451 |

Table 5: Fundamental frequency parameter $2a\Omega = 2a\sqrt[4]{\rho h\omega^2/D_{11}}$ of rectangular orthotropic plates with three edges simply supported ($k^r_{\xi=-1} = k^r_{\xi=1} = k^r_{\eta=1} = 0$) and the edge at $\eta = -1$ rotationally restrained.

| | | $2a\Omega$ | | | | |
|---|---|---|---|---|---|---|
| $b/a$ | $r_{\eta=-1}$ | Ref.103 | Present ($\Omega$) | Present ($\Omega_x$) | Present ($\Omega_y$) | Difference (%) |
| 0.5 | 0 | 7.530 | 7.523 | 7.523 | 7.523 | 0.092 |
| | 1 | 7.690 | 7.700 | 7.588 | 7.813 | 0.130 |
| | 10 | 8.250 | 8.308 | 8.198 | 8.418 | 0.703 |
| | $\infty$ | 8.705 | 8.695 | 8.695 | 8.695 | 0.114 |
| 1.0 | 0 | 4.917 | 4.918 | 4.918 | 4.918 | 0.020 |
| | 1 | 4.954 | 4.960 | 4.933 | 4.988 | 0.121 |
| | 10 | 5.114 | 5.128 | 5.088 | 5.168 | 0.273 |
| | $\infty$ | 5.289 | 5.278 | 5.278 | 5.278 | 0.207 |
| 1.5 | 0 | 4.126 | 4.128 | 4.128 | 4.128 | 0.048 |
| | 1 | 4.139 | 4.138 | 4.128 | 4.148 | 0.024 |
| | 10 | 4.202 | 4.208 | 4.188 | 4.228 | 0.142 |
| | $\infty$ | 4.292 | 4.288 | 4.288 | 4.288 | 0.093 |

which contains $\phi(\xi)$ and its derivative, is also real. From Equation (29), which gives the relation $\mathbf{R}_x\mathbf{Q}_x^{-1}\mathbf{\Phi}_x = \mathbf{0}$, it follows that the resulting dynamic stiffness matrix $\mathbf{K}_x = \mathbf{R}_x\mathbf{Q}_x^{-1}$ must also be real. Similarly, the dynamic stiffness matrix $\mathbf{K}_y = \mathbf{R}_y\mathbf{Q}_y^{-1}$ in Equation (40) is likewise real. In the numerical experiments conducted in this study, it is shown that the imaginary residual of the stiffness matrix is sufficiently small compared to its real part and can be neglected. Thus, the W-W frequency count is not compromised, and the calculated dynamic stiffness matrices are numerically validated to be real-valued and symmetric.

(ii) For the classical SOV methods, one of the main challenges is to solve the highly nonlinear eigenvalue equations obtained from the governing equations and boundary conditions. Although the transcendental equations can be simplified for the classical S, C, G, and F boundary conditions, the equations corresponding to elastically restrained boundary conditions become much more complicated and difficult to be simplified. The solution of classical SOV methods relies heavily on numerical approaches to solve the resulting equations; however, convergence difficulties and large computational cost may arise even for the classical boundary conditions. As a result, it is difficult for the classical SOV methods to handle elastically restrained boundary conditions. The calculation time of the classical SOV methods depends on the complexity of the transcendental equations associated with the boundary conditions and the numerical methods selected to solve them. However, the ~~mode shapes~~ SOV-DSM method avoids the need to solve any of these equations, regardless of the complexity of the transcendental expressions, and therefore effectively reduces the computational effort compared with the classical SOV approaches.

(iii) Compared with the classical DSM methods, which needs sets of series expansions to capture each exact mode shape, the SOV-DSM requires

only a single term for each vibration mode. Due to the SOV-type formulation of the plate, the solution $W(\xi,\eta) = \phi(\xi)\psi(\eta)$ is coupled through both $\phi(\xi)$ and $\psi(\eta)$~~remain real-valued, and the dynamic stiffness matrix $\mathbf{K} = \mathbf{R}\mathbf{Q}^{-1}$ is a real symmetric matrix . Thus, the frequency $\Omega$ can be obtained by solving $\mathbf{K}$ using this enhanced W-W algorithm provided in this study , which avoids solving the eigenvalue equations in both the real and complex domains.~~ each containing both unknown frequency and mode shape coefficients. Thus, the SOV-DSM needs to be solved based on two equations: the governing differential equation in the $x$-direction in Equation (17), and the governing differential equation in the $y$-direction in Equation (31). As a result, the SOV-DSM method requires solving two dynamic stiffness matrices iteratively in the $x$- and $y$-directions, respectively, whereas classical DSM methods usually require only one dynamic stiffness matrix accounting for both directions. Despite the iterative procedure, the SOV-DSM method remains computationally efficient, since the dimension of each dynamic stiffness matrix is constantly four, while the dimension of a traditional DSM dynamic stiffness matrix could be much larger, depending on the number of truncated series-expansion terms. When capturing high-order natural frequencies, the traditional DSM requires even more terms to maintain accuracy.

~~Fundamental frequency parameter $2a\Omega = 2a\sqrt[4]{\rho h\omega^2/D_{11}}$ of rectangular orthotropic plates with three edges simply supported ($k^r_{\xi=-1} = k^r_{\xi=1} = k^r_{\eta=1} = 0$) and the edge at $\eta = -1$ rotationally restrained.~~

(iv) It should be noted that this study is the first to apply an extended SOV-type solution to elastically restrained boundary conditions. For the classical S, C, G, and F boundary conditions, the two frequencies $\omega_x$ and $\omega_y$ are identical, even though they are treated as independent variables in a mathematical sense. This is because, from a physical point of view, the natural frequencies obtained separately from the $x$- and $y$-directions should be equal to ensure that the same vibration

mode has only one frequency. However, for elastically restrained boundary conditions, there are some cases where $\omega_x \neq \omega_y$. Even though the physical frequency obtained from other methods typically lies between $\omega_x$ and $\omega_y$, and the two values are very close, it is difficult to regard either $\omega_x$ or $\omega_y$ individually as the physical frequency of the mode. Therefore, the average of the two values is adopted as an estimate of the physical frequency. This phenomenon indicates that the SOV-DSM method based on the extended SOV formulation, while highly accurate for the classical S, C, G, and F boundary conditions, may show reduced accuracy for some elastically restrained cases where $\omega_x \neq \omega_y$. A possible reason is that the extended SOV formulation is derived from the weak-form expression based on Rayleigh's principle, rather than from the strong-form governing differential equation. Therefore, the extended SOV solutions do not strictly satisfy the strong-form equations, which may contribute to the observed discrepancy for certain elastically restrained boundary conditions.

## 5. Conclusion

In this study, a separation-of-variables dynamic stiffness ~~matrix~~ method (SOV-DSM) has been developed for the vibration analysis of orthotropic rectangular plates with general homogeneous boundary conditions. The boundary conditions of the SOV-type plate are extended to homogeneous elastically restrained boundaries beyond the classical cases, resulting in two more complex eigenvalue equations. Existing SOV methods face the challenge of solving six unknown variables ($\alpha_1$, $\beta_1$, $\Omega_x$, $\alpha_2$, $\beta_2$, $\Omega_y$) through six eigenvalue equations, which leads to high computational cost and convergence difficulties. To address this, dynamic stiffness matrices are formulated based on the extended SOV-type plate, and an enhanced Wittrick–Williams (W–W) algorithm is introduced to solve these matrices regardless of the complexity of the highly nonlinear eigenvalue equations derived from them. This enhanced

W–W algorithm resolves the well-known $J_0$ problem by providing an explicit closed-form expression for the $J_0$ term, derived from the characteristics of SOV-type plates. Furthermore, a novel yet simple numerical technique is proposed for mode shape calculation, making it applicable to all boundary conditions.

Classical boundary conditions, such as guided, simply supported, clamped, and free edges, can be realized by setting the translational springs ($\cancel{k^v}\, k^v_\xi, k^v_\eta$) and rotational springs ($\cancel{k^r}\, k^r_\xi, k^r_\eta$) along the plate edges to either zero or infinity, as appropriate. Numerical experiments validate the high accuracy of this approach for these boundary conditions. The results shows that the SOV solution can also be extended to handle elastically restrained boundary conditions. Despite certain approximations inherent in few elastically restrained cases, the maximum percentage error across all numerical experiments remains within 1.25%. This may occur because the SOV solution used is derived from the weak-form governing equation, which is based on Rayleigh's principle.

As a closed-form dynamic stiffness formulation, this approach has the potential to construct more concise and lower-dimensional dynamic stiffness matrices for orthotropic rectangular plate assemblies compared to existing DSM approaches.

## Appendix A Integral parameters

The integral parameters $I_1$, $I_2$, $I_3$, and $I_4$ are defined as follows:

$$\begin{aligned} I_1 &= \int_0^1 \psi^2 \, d\eta \\ &= (B_1^2 + B_2^2 - B_3^2 + B_4^2) + \frac{-B_1^2 + B_2^2}{2\alpha_2} \sin(2\alpha_2) + \frac{B_3^2 + B_4^2}{2\beta_2} \sinh(2\beta_2) \\ &\quad + \frac{4(\alpha_2 B_2 B_4 + \beta_2 B_1 B_3)}{\alpha_2^2 + \beta_2^2} \sin(\alpha_2)\cosh(\beta_2) \\ &\quad + \frac{4(-\alpha_2 B_1 B_3 + \beta_2 B_2 B_4)}{\alpha_2^2 + \beta_2^2} \cos(\alpha_2)\sinh(\beta_2). \end{aligned} \tag{A.1}$$

$$\begin{aligned} I_2 &= \int_0^1 \left(\psi \frac{d^2\psi}{d\eta^2}\right) d\eta \\ &= \left(-\alpha_2^2 B_1^2 - \alpha_2^2 B_2^2 - \beta_2^2 B_3^2 + \beta_2^2 B_4^2\right) \\ &\quad + \frac{\alpha_2(B_1^2 - B_2^2)}{2} \sin(2\alpha_2) + \frac{\beta_2(B_3^2 + B_4^2)}{2} \sinh(2\beta_2) \\ &\quad + \frac{2(-\alpha_2^2 + \beta_2^2)(\alpha_2 B_2 B_4 + \beta_2 B_1 B_3)}{\alpha_2^2 + \beta_2^2} \sin(\alpha_2)\cosh(\beta_2) \\ &\quad + \frac{2(-\alpha_2^2 + \beta_2^2)(-\alpha_2 B_1 B_3 + \beta_2 B_2 B_4)}{\alpha_2^2 + \beta_2^2} \cos(\alpha_2)\sinh(\beta_2). \end{aligned} \tag{A.2}$$

$$\begin{aligned} I_3 &= \int_0^1 \left(\frac{d\psi}{d\eta}\right)^2 d\eta \\ &= \alpha_2^2 B_1^2 + \alpha_2^2 B_2^2 + \beta_2^2 B_3^2 - \beta_2^2 B_4^2 \\ &\quad + \frac{\alpha_2(B_1^2 - B_2^2)}{2} \sin(2\alpha_2) + \frac{\beta_2(B_3^2 + B_4^2)}{2} \sinh(2\beta_2) \\ &\quad + \frac{4\alpha_2\beta_2(\alpha_2 B_1 B_3 - \beta_2 B_2 B_4)}{\alpha_2^2 + \beta_2^2} \sin(\alpha_2)\cosh(\beta_2) \\ &\quad + \frac{4\alpha_2\beta_2(\alpha_2 B_2 B_4 + \beta_2 B_1 B_3)}{\alpha_2^2 + \beta_2^2} \cos(\alpha_2)\sinh(\beta_2). \end{aligned} \tag{A.3}$$

$$
\begin{aligned}
I_4 &= \int_0^1 \left(\frac{d^2\psi}{d\eta^2}\right)^2 d\eta \\
&= \left(\alpha_2^4 B_1^2 + \alpha_2^4 B_2^2 - \beta_2^4 B_3^2 + \beta_2^4 B_4^2\right) \\
&\quad + \frac{\alpha_2^3(-B_1^2 + B_2^2)}{2}\sin(2\alpha_2) + \frac{\beta_2^3(B_3^2 + B_4^2)}{2}\sinh(2\beta_2) \\
&\quad + \frac{4\alpha_2^2\beta_2^2(-\alpha_2 B_2 B_4 - \beta_2 B_1 B_3)}{\alpha_2^2 + \beta_2^2}\sin(\alpha_2)\cosh(\beta_2) \\
&\quad + \frac{4\alpha_2^2\beta_2^2(\alpha_2 B_1 B_3 - \beta_2 B_2 B_4)}{\alpha_2^2 + \beta_2^2}\cos(\alpha_2)\sinh(\beta_2)
\end{aligned} \tag{A.4}
$$

The integral parameters $J_1$, $J_2$, $J_3$, and $J_4$ can be obtained by replacing $B_1$ to $B_4$ by $A_1$ to $A_4$, respectively, and $\alpha_2$ and $\beta_2$ by $\alpha_1$ and $\beta_1$, respectively.

## Appendix B $J(\bar{p}_1)$ count for S-G boundary conditions

If the S-G boundary conditions are selected as the specific boundary conditions to solve the $J(\bar{p}_1, \omega^*)$, then, from the eigenvalue equations in the $x$- and $y$-directions,

$$\cos 2\alpha_1 = 0, \tag{B.1a}$$

$$\cos 2\alpha_2 = 0, \tag{B.1b}$$

the closed-form solution of the $n_x$-th S-G boundary conditions $\Omega_{x,n_x}$ for the given $n_y$-order $\psi_{n_y}(\eta)$ , can be expressed as

$$
\begin{aligned}
b\Omega_{x,n_x}^4 = &\left[\frac{1}{\chi^2}\left(\frac{n_x\pi}{2} - \frac{\pi}{4}\right)^2 - \frac{D_{12}\underset{\sim}{S_2}\underset{\sim}{I_2}}{D_{11}\underset{\sim}{S_1}\underset{\sim}{I_1}} + 2\frac{D_{66}\underset{\sim}{S_3}\underset{\sim}{I_3}}{D_{11}\underset{\sim}{S_1}\underset{\sim}{I_1}}\right]^2 \\
&- \left(\frac{D_{12}\underset{\sim}{S_2}\underset{\sim}{I_2}}{D_{11}\underset{\sim}{S_1}\underset{\sim}{I_1}} - 2\frac{D_{66}\underset{\sim}{S_3}\underset{\sim}{I_3}}{D_{11}\underset{\sim}{S_1}\underset{\sim}{I_1}}\right)^2 + \frac{D_{22}\underset{\sim}{S_4}\underset{\sim}{I_4}}{D_{11}\underset{\sim}{S_1}\underset{\sim}{I_1}},
\end{aligned} \tag{B.2}
$$

and the closed-form solution of the $n_y$-th S-G boundary conditions frequency $\Omega_{y,n_y}$ for the given $n_x$-order $\phi_{n_x}(\xi)$ can be obtained as:

$$a\Omega^4_{y,n_y} = \frac{D_{22}}{D_{11}}\left\{\left[\chi^2\left(\frac{n_y\pi}{2}-\frac{\pi}{4}\right)^2 - \frac{D_{12}\underline{T_2}\underset{\sim}{J_2}}{D_{22}\underline{T_1}\underset{\sim}{J_1}} + 2\frac{D_{66}\underline{T_3}\underset{\sim}{J_3}}{D_{22}\underline{T_1}\underset{\sim}{J_1}}\right]^2 - \left(\frac{D_{12}\underline{T_2}\underset{\sim}{J_2}}{D_{22}\underline{T_1}\underset{\sim}{J_1}} - 2\frac{D_{66}\underline{T_3}\underset{\sim}{J_3}}{D_{22}\underline{T_1}\underset{\sim}{J_1}}\right)^2 + \frac{D_{11}\underline{T_4}\underset{\sim}{J_4}}{D_{22}\underline{T_1}\underset{\sim}{J_1}}\right\}. \tag{B.3}$$

## References


[1] M. E. Biancolini, C. Brutti, L. Reccia, Approximate solution for free vibrations of thin orthotropic rectangular plates, J. Sound Vib. 288 (1-2) (2005) 321–344. doi:10.1016/j.jsv.2005.01.005.

[2] L. Navier, Extrait des recherches sur la flexion des plans elastiques, Bull. Sci. Soc. Philomat. (1823) 95–102.

[3] M. Levy, Sur l'équilibre élastique d'une plaque rectangulaire, Comptes Rendus Acad. Sci. Paris 129 (1899) 535–539.

[4] A. W. Leissa, The free vibration of rectangular plates, J. Sound Vib. 31 (3) (1973) 257–293. doi:10.1016/S0022-460X(73)80371-2.

[5] K. Y. Lam, K. C. Hung, S. T. Chow, Vibration analysis of plates with cutouts by the modified rayleigh-ritz method, Appl. Acoust. 28 (1) (1989) 49–60. doi:10.1016/0003-682X(89)90030-3.

[6] S. Zhao, J. Sun, X. Ma, J. Sun, Y. An, K. Li, T. Wang, Free vibration analysis of thin rectangular plates with mixed point support conditions using the rayleigh–ritz method, J. Aerospace Eng. 38 (5) (2025) 04025067. doi:10.1061/JAEEEZ.ASENG-6193.

[7] R. Jain, M. S. Azam, P. P. Singh, Bending analysis of functionally graded plates resting on elastic foundation: A rayleigh-ritz approach and ann method, Mech. Adv. Mater. Struc. 31 (29) (2024) 11484–11502. doi:10.1080/15376494.2024.2307474.

[8] A. Bagheri, A. Mortezaei, M. A. Sayarinejad, Analysis of free in-plane vibrations of a rectangular plate with various boundary conditions canonical form using the modified riley-ritz method, Results in Engineering 21 (2024) 101768. doi:10.1016/j.rineng.2024.101768.

[9] P. A. Laura, B. F. Saffell Jr, Study of small-amplitude vibrations of clamped rectangular plates using polynomial approximations, The Journal of the Acoustical Society of America 41 (4A) (1967) 836–839. doi:10.1121/1.1910414.

[10] P. Krysl, T. Belytschko, Analysis of thin plates by the element-free galerkin method, Comput. Mech. 17 (1) (1995) 26–35. doi:10.1007/BF00356476.

[11] H. Ma, J. Chen, J. Deng, Analysis of the dynamic response for kirchhoff plates by the element-free galerkin method, J. Comput. Appl. Math. 451 (2024) 116093. doi:10.1016/j.cam.2024.116093.

[12] H. Ma, J. Chen, J. Deng, Error analysis of the element-free galerkin method for a nonlinear plate problem, Comput. Math. Appl. 163 (2024) 56–65. doi:10.1016/j.camwa.2024.03.020.

[13] M. S. Pereira, M. V. Donadon, Modified consistent element-free galerkin method applied to reissner–mindlin plates, Thin-Walled Structures 212 (2025) 113185. doi:10.1016/j.tws.2025.113185.

[14] Y. Zhao, K. Yuan, B. Qin, L. Shen, Z. Wang, A fast polynomial-fe method for the vibration of the composite laminate quadrilateral plates

and shells based on the segmentation strategy, Compos. Struct. 338 (2024) 118035. doi:10.1016/j.compstruct.2024.118035.

[15] Y. Yang, M. J. Kingan, B. R. Mace, Analysis of the forced response of coupled panels using a hybrid finite element/wave and finite element method, J. Sound Vib. 537 (2022) 117174. doi:10.1016/j.jsv.2022.117174.

[16] R. R. Paccola, M. S. M. Sampaio, H. B. Coda, Continuous stress distribution following transverse direction for fem orthotropic laminated plates and shells, Appl. Math. Model. 40 (15-16) (2016) 7382–7409. doi:10.1016/j.apm.2016.03.005.

[17] E. Carrera, D. Scano, Finite elements based on jacobi shape functions for the free vibration analysis of beams, plates, and shells, Mech. Adv. Mater. Struc. 31 (1) (2024) 4–12. doi:10.1080/15376494.2023.2219438.

[18] C. Yang, J. Nakaoka, S. Hirose, Semi-analytical fem for modelling 3d guided waves scattering in an infinite plate, Appl. Math. Model. (2025) 116236doi:10.1016/j.apm.2025.116236.

[19] Z. Ding, Natural frequencies of rectangular plates using a set of static beam functions in rayleigh-ritz method, J. Sound Vib. 189 (1) (1996) 81–87. doi:10.1006/jsvi.1996.0006.

[20] K. Y. Cheung, D. Zhou, The free vibrations of tapered rectangular plates using a new set of beam functions with the rayleigh–ritz method, J. Sound Vib. 223 (5) (1999) 703–722. doi:10.1006/jsvi.1998.2160.

[21] Y. K. Cheung, D. Zhou, The free vibrations of rectangular composite plates with point-supports using static beam functions, Compos. Struct. 44 (2-3) (1999) 145–154. doi:10.1016/S0263-8223(98)00122-6.

[22] D. Zhou, Vibrations of point-supported rectangular plates with variable thickness using a set of static tapered beam functions, Int. J. Mech. Sci. 44 (1) (2002) 149–164. doi:10.1016/S0020-7403(01)00081-9.

[23] R. B. Bhat, Natural frequencies of rectangular plates using characteristic orthogonal polynomials in rayleigh-ritz method, J. Sound Vib. 102 (4) (1985) 493–499. doi:10.1016/S0022-460X(85)80109-7.

[24] X. Xie, G. Jin, An efficient domain decomposition approach for the free and forced vibration analysis of plate assemblies, Thin-Walled Structures (2025) 113621doi:10.1016/j.tws.2025.113621.

[25] Z. Celep, Z. Özcan, A. Güner, Elastic triangular plate dynamics on unilateral winkler foundation: Analysis using chebyshev polynomial expansion for forced vibrations, J. Mech. Sci. Technol. 39 (1) (2025) 65–79. doi:10.1007/s12206-024-1207-5.

[26] N. Madinier, Q. Leclère, K. Ege, A. Berry, Spatial and frequency identification of the dynamic properties of thin plates with the frequency-adapted virtual fields method, J. Sound Vib. 596 (2025) 118760. doi:10.1016/j.jsv.2024.118760.

[27] X. Sun, R. Gao, Y. Zhang, Spectral stochastic isogeometric analysis of bending and free vibration of porous functionally graded plates, Appl. Math. Model. 116 (2023) 711–734. doi:10.1016/j.apm.2022.12.017.

[28] C. P. Filipich, M. B. Rosales, Arbitrary precision frequencies of a free rectangular thin plate, J. Sound Vib. 230 (3) (2000) 521–539. doi:10.1006/jsvi.1999.2629.

[29] Y. V. S. Kumar, J. K. Paik, Buckling analysis of cracked plates using hierarchical trigonometric functions, Thin-Walled Structures 42 (5) (2004) 687–700. doi:10.1016/j.tws.2003.12.012.

[30] G. A. Yessenbayeva, F. M. Akhanov, T. K. Makazhanova, On the calculation of rectangular plates by the trigonometric series, Bulletin of the Karaganda University. Mathematics Series 94 (2) (2019) 115–120. doi:10.31489/2019M2/115-120.

[31] G. He, D. Cao, J. Wei, Y. Cao, Z. Chen, Study on analytical global modes for a multi-panel structure connected with flexible hinges, Appl. Math. Model. 91 (2021) 1081–1099. doi:10.1016/j.apm.2020.10.044.

[32] J. Su, W. He, K. Zhang, Q. Zhang, Y. Qu, Vibration analysis of functionally graded porous cylindrical shells filled with dense fluid using an energy method, Appl. Math. Model. 108 (2022) 167–188. doi:10.1016/j.apm.2022.03.028.

[33] W. L. Li, Vibration analysis of rectangular plates with general elastic boundary supports, J. Sound Vib. 273 (3) (2004) 619–635. doi:10.1016/S0022-460X(03)00562-5.

[34] Y. K. Cheung, D. Zhou, Vibrations of moderately thick rectangular plates in terms of a set of static timoshenko beam functions, Comput. Struct. 78 (6) (2000) 757–768. doi:10.1016/S0045-7949(00)00058-4.

[35] D. Zhou, Vibrations of mindlin rectangular plates with elastically restrained edges using static timoshenko beam functions with the rayleigh–ritz method, Int. J. Solids Struct. 38 (32-33) (2001) 5565–5580. doi:10.1016/S0020-7683(00)00384-X.

[36] L. E. Monterrubio, S. Ilanko, Proof of convergence for a set of admissible functions for the rayleigh–ritz analysis of beams and plates and shells of rectangular planform, Comput. Struct. 147 (2015) 236–243. doi:10.1016/j.compstruc.2014.09.008.

[37] F. C. Onyeka, B. O. Mama, C. D. Nwa-David, Application of variation method in three dimensional stability analysis of rectangular plate using various exact shape functions, Nigerian Journal of Technology 41 (1) (2022) 8–20. doi:10.4314/njt.v41i1.2.

[38] L. V. Kantorovich, V. I. Krylov, Approximate Methods of Higher Analysis, Interscience Publishers, New York, 1958.

[39] A. D. Kerr, An extension of the kantorovich method, Q. Appl. Math. 26 (2) (1968) 219–229. doi:10.1090/qam/99857.

[40] A. D. Kerr, H. Alexander, An application of the extended kantorovich method to the stress analysis of a clamped rectangular plate, Acta Mech. 6 (2) (1968) 180–196. doi:10.1007/BF01170382.

[41] H. Rostami, A. R. Ranji, F. Bakhtiari-Nejad, Free in-plane vibration analysis of rotating rectangular orthotropic cantilever plates, Int. J. Mech. Sci. 115 (2016) 438–456. doi:10.1016/j.ijmecsci.2016.07.030.

[42] B. Huang, H. S. Kim, Interlaminar stress analysis of piezo-bonded composite laminates using the extended kantorovich method, Int. J. Mech. Sci. 90 (2015) 16–24. doi:10.1016/j.ijmecsci.2014.11.003.

[43] I. Shufrin, M. Eisenberger, Semi-analytical modeling of cutouts in rectangular plates with variable thickness–free vibration analysis, Appl. Math. Model. 40 (15-16) (2016) 6983–7000. doi:10.1016/j.apm.2016.02.020.

[44] A. Singh, P. Kumari, Three-dimensional free vibration analysis of composite fgm rectangular plates with in-plane heterogeneity: An ekm solution, Int. J. Mech. Sci. 180 (2020) 105711. doi:10.1016/j.ijmecsci.2020.105711.

[45] W.-X. Zhong, A new systematic methodology for theory of elasticity, Dalian University of Technology Press, Dalian (1995) 182–187.

[46] Y. Xing, B. Liu, New exact solutions for free vibrations of rectangular thin plates by symplectic dual method, Acta Mech. Sinica-prc. 25 (2009) 265–270. doi:10.1007/s10409-008-0208-4.

[47] C. W. Lim, C. F. Lü, Y. Xiang, W. Yao, On new symplectic elasticity approach for exact free vibration solutions of rectangular kirchhoff plates, Int. J. Eng. Sci. 47 (1) (2009) 131–140. doi:10.1016/j.ijengsci.2008.08.003.

[48] Y. Shi, D. An, Z. Wu, L. Liang, L. Chen, R. Li, Symplectic analytical solutions for free vibration of elastically line-hinged orthotropic rectangular plates with rotationally restrained edges, Appl. Math. Model. 136 (2024) 115629. doi:10.1016/j.apm.2024.08.001.

[49] D. Xu, J. Xu, S. Xiong, L. Chen, Q. He, B. Wang, R. Li, Hamiltonian system-based analytic thermal buckling solutions of orthotropic rectangular plates, Int. J. Mech. Sci. 267 (2024) 108987. doi:10.1016/j.ijmecsci.2024.108987.

[50] Y. Shi, D. An, Z. Hu, Z. Zhou, R. Li, Free vibration solutions of rotationally restrained stepped thick rectangular plates utilizing a symplectic analytical framework, Appl. Math. Model. 143 (2025) 116044. doi:10.1016/j.apm.2025.116044.

[51] Y. F. Xing, B. Liu, New exact solutions for free vibrations of thin orthotropic rectangular plates, Compos. Struct. 89 (4) (2009) 567–574. doi:10.1016/j.compstruct.2008.11.010.

[52] Y. Xing, Q. Sun, B. Liu, Z. Wang, The overall assessment of closed-form solution methods for free vibrations of rectangular thin plates, Int. J.

Mech. Sci. 140 (2018) 455–470. doi:10.1016/j.ijmecsci.2018.03.013.

[53] Y. Xing, Z. Wang, An extended separation-of-variable method for the free vibration of orthotropic rectangular thin plates, Int. J. Mech. Sci. 182 (2020) 105739. doi:10.1016/j.ijmecsci.2020.105739.

[54] Y. Xing, Z. Wang, An improved separation-of-variable method for the free vibration of orthotropic rectangular thin plates, Compos. Struct. 252 (2020) 112664. doi:10.1016/j.compstruct.2020.112664.

[55] Y. Xing, G. Li, Y. Yuan, A review of the analytical solution methods for the eigenvalue problems of rectangular plates, Int. J. Mech. Sci. 221 (2022) 107171. doi:10.1016/j.ijmecsci.2022.107171.

[56] Z. Wang, Y. Xing, G. Li, Closed-form solutions for the free vibrations of three-dimensional orthotropic rectangular plates, Int. J. Mech. Sci. 199 (2021) 106398. doi:10.1016/j.ijmecsci.2021.106398.

[57] Z. Wang, Y. Xing, An extended separation-of-variable method for free vibrations of orthotropic rectangular thin plate assemblies, Thin-Walled Structures 169 (2021) 108491. doi:10.1016/j.tws.2021.108491.

[58] Z. Wang, Y. Xing, Q. Sun, Y. Yang, Highly accurate closed-form solutions for free vibration and eigenbuckling of rectangular nanoplates, Compos. Struct. 210 (2019) 822–830. doi:10.1016/j.compstruct.2018.11.094.

[59] Z. Wang, Y. Xing, Q. Sun, Highly accurate closed-form solutions for the free in-plane vibration of rectangular plates with arbitrary homogeneous boundary conditions, J. Sound Vib. 470 (2020) 115166. doi:10.1016/j.jsv.2019.115166.

[60] J. R. Banerjee, Dynamic stiffness formulation for structural elements: a general approach, Comput. Struct. 63 (1997) 101–103. doi:10.1016/S0045-7949(96)00326-4.

[61] S. O. Papkov, J. R. Banerjee, Dynamic stiffness formulation and free vibration analysis of specially orthotropic mindlin plates with arbitrary boundary conditions, J. Sound Vib. 458 (2019) 522–543. doi:10.1016/j.jsv.2019.06.028.

[62] X. Liu, A. Pagani, E. Carrera, X. Liu, Dynamic stiffness method and cuf-based component-wise theories applied to free vibration analysis of solid beams, thin-walled structures and reinforced panels, Thin-Walled Structures 198 (2024) 111707. doi:10.1016/j.tws.2024.111707.

[63] M. Boscolo, J. Banerjee, Dynamic stiffness elements and their applications for plates using first order shear deformation theory, Comput. Struct. 89 (3-4) (2011) 395–410. doi:10.1016/j.compstruc.2010.11.005.

[64] F. Fazzolari, M. Boscolo, J. Banerjee, An exact dynamic stiffness element using a higher order shear deformation theory for free vibration analysis of composite plate assemblies, Compos. Struct. 96 (2013) 262–278. doi:10.1016/j.compstruct.2012.08.033.

[65] O. Ghorbel, J.-B. Casimir, L. Hammami, I. Tawfiq, M. Haddar, Dynamic stiffness formulation for free orthotropic plates, J. Sound Vib. 346 (2015) 361–375. doi:10.1016/j.jsv.2015.02.020.

[66] F. W. Williams, H. J. Ouyang, D. Kennedy, C. B. York, Wave propagation along longitudinally periodically supported or stiffened prismatic plate assemblies, J. Sound Vib. 186 (2) (1995) 197–205. doi:10.1006/jsvi.1995.0443.

[67] J. Banerjee, S. Papkov, X. Liu, D. Kennedy, Dynamic stiffness matrix of a rectangular plate for the general case, J. Sound Vib. 342 (2015) 177–199. doi:10.1016/j.jsv.2014.12.031.

[68] X. Liu, J. Banerjee, Free vibration analysis for plates with arbitrary boundary conditions using a novel spectral-dynamic stiffness method, Comput. Struct. 164 (2016) 108–126. doi:10.1016/j.compstruc.2015.11.005.

[69] X. Liu, W. Zhou, M. Filippi, Y. Wang, A wavenumber dynamic stiffness method for exact and efficient dispersion analysis of plate built-up waveguides, J. Sound Vib. 591 (2024) 118605. doi:10.1016/j.jsv.2024.118605.

[70] W. Zhou, X. Liu, Y. Wang, X. Zhao, Wavenumber dynamic stiffness formulation for exact dispersion analysis of moderately thick symmetric cross-ply laminated plate built-up waveguides, Thin-Walled Structures 204 (2024) 112305. doi:10.1016/j.tws.2024.112305.

[71] X. Liu, J. Banerjee, An exact spectral-dynamic stiffness method for free flexural vibration analysis of orthotropic composite plate assemblies–part i: Theory, Compos. Struct. 132 (2015) 1274–1287. doi:10.1016/j.compstruct.2015.07.020.

[72] S. Timoshenko, Theory of Plates and Shells, McGraw-Hill Book Company, 1940.

[73] D. J. Gorman, Free in-plane vibration analysis of rectangular plates with elastic support normal to the boundaries, J. Sound Vib. 285 (4-5) (2005) 941–966. doi:10.1016/j.jsv.2004.09.017.

[74] Y. Mochida, S. Ilanko, Transient vibration analysis of a completely free plate using modes obtained by gorman's superposition method,

J. Sound Vib. 329 (10) (2010) 1890–1900. doi:10.1016/j.jsv.2009.11.029.

[75] B. Wang, P. Li, R. Li, Symplectic superposition method for new analytic buckling solutions of rectangular thin plates, Int. J. Mech. Sci. 119 (2016) 432–441. doi:10.1016/j.ijmecsci.2016.11.006.

[76] Z. Hu, X. Zheng, D. An, C. Zhou, Y. Yang, R. Li, New analytic buckling solutions of side-cracked rectangular thin plates by the symplectic superposition method, Int. J. Mech. Sci. 191 (2021) 106051. doi:10.1016/j.ijmecsci.2020.106051.

[77] Z. Wang, D. Xu, J. Li, Z. Hu, G. Gong, R. Li, New analytical buckling solutions for non-lévy-type graphene-reinforced composite laminated plates, Compos. Struct. 360 (2025) 119067. doi:10.1016/j.compstruct.2025.119067.

[78] H. Khov, W. L. Li, R. F. Gibson, An accurate solution method for the static and dynamic deflections of orthotropic plates with general boundary conditions, Compos. Struct. 90 (4) (2009) 474–481. doi:10.1016/j.compstruct.2009.04.020.

[79] W. L. Li, X. Zhang, J. Du, Z. Liu, An exact series solution for the transverse vibration of rectangular plates with general elastic boundary supports, J. Sound Vib. 321 (1-2) (2009) 254–269. doi:10.1016/j.jsv.2008.09.035.

[80] Y. M. Grigorenko, L. S. Rozhok, Discrete fourier-series method in problems of bending of variable-thickness rectangular plates, J. Eng. Math. 46 (3) (2003) 269–280. doi:10.1023/A:1025076708442.

[81] Q. Wang, D. Shi, Q. Liang, F. Ahad, An improved fourier series solution for the dynamic analysis of laminated composite annular, circular,

and sector plate with general boundary conditions, J. Compos. Mater. 50 (30) (2016) 4199–4233. doi:10.1177/00219983166352.

[82] B. Leng, S. Ullah, T. Yu, K. Li, New analytical free vibration solutions of thin plates using the fourier series method, Applied Sciences 12 (17) (2022) 8631. doi:10.3390/app12178631.

[83] R. Li, Y. Zhong, B. Tian, Y. Liu, On the finite integral transform method for exact bending solutions of fully clamped orthotropic rectangular thin plates, Appl. Math. Lett. 22 (12) (2009) 1821–1827. doi:10.1016/j.aml.2009.07.003.

[84] Y. Zhong, X.-F. Zhao, R. Li, Free vibration analysis of rectangular cantilever plates by finite integral transform method, Int. J. Comput. Methods Eng. Sci. Mech. 14 (3) (2013) 221–226. doi:10.1080/15502287.2012.711424.

[85] B. Tian, R. Li, Y. Zhong, Integral transform solutions to the bending problems of moderately thick rectangular plates with all edges free resting on elastic foundations, Appl. Math. Model. 39 (1) (2015) 128–136. doi:10.1016/j.apm.2014.05.012.

[86] S. Zhang, L. Xu, Bending of rectangular orthotropic thin plates with rotationally restrained edges: a finite integral transform solution, Appl. Math. Model. 46 (2017) 48–62. doi:10.1016/j.apm.2017.01.053.

[87] Y. Chen, D. An, C. Zhou, Y. Li, J. Xu, R. Li, Analytical free vibration solutions of rectangular edge-cracked plates by the finite integral transform method, Int. J. Mech. Sci. 243 (2023) 108032. doi:10.1016/j.ijmecsci.2022.108032.

[88] B. Li, H. Liu, J. Liu, M. Cui, X. Gao, J. Lv, A novel weak-form meshless method based on lagrange interpolation for mechanical analysis of

complex thin plates, Eng. Anal. Boundary Elem. 169 (2024) 106021. doi:10.1016/j.enganabound.2024.106021.

[89] Z. Zhu, Y. Song, Y. Zhang, Q. Liu, G. Wang, Sound radiation of the plate with arbitrary holes, Int. J. Mech. Sci. 264 (2024) 108814. doi:10.1016/j.ijmecsci.2023.108814.

[90] D. Shao, B. Li, Analytic vibration solutions for moving-loaded composite plates beyond lévy boundaries, Int. J. Mech. Sci. (2025) 110547doi:10.1016/j.ijmecsci.2025.110547.

[91] X. Liu, A. Pagani, E. Carrera, X. Liu, Free vibration analysis of composite beams and laminated reinforced panels by refined dynamic stiffness method and cuf-based component-wise theory, Compos. Struct. 337 (2024) 118058. doi:10.1016/j.compstruct.2024.118058.

[92] E. Carrera, V. V. Zozulya, Carrera unified formulation (cuf) for the composite plates and shells of revolution: Layer-wise models, Compos. Struct. 334 (2024) 117936. doi:10.1016/j.compstruct.2024.117936.

[93] A. Pagani, E. Carrera, J. R. Banerjee, P. H. Cabral, G. Caprio, A. Prado, Free vibration analysis of composite plates by higher-order 1d dynamic stiffness elements and experiments, Compos. Struct. 118 (2014) 654–663. doi:10.1016/j.compstruct.2014.08.020.

[94] E. Carrera, M. Petrolo, Refined beam elements with only displacement variables and plate/shell capabilities, Meccanica 47 (3) (2012) 537–556. doi:10.1007/s11012-011-9466-5.

[95] M. Filippi, A. Pagani, M. Petrolo, G. Colonna, E. Carrera, Static and free vibration analysis of laminated beams by refined theory based on chebyshev polynomials, Compos. Struct. 132 (2015) 1248–1259. doi:10.1016/j.compstruct.2015.07.014.

998 [96] E. Carrera, A. G. de Miguel, A. Pagani, Hierarchical theories of struc-
999 tures based on legendre polynomial expansions with finite element ap-
1000 plications, Int. J. Mech. Sci. 120 (2017) 286–300. doi:10.1016/j.
1001 ijmecsci.2016.10.009.

1002 [97] W. H. Wittrick, F. W. Williams, A general algorithm for computing
1003 natural frequencies of elastic structures, Quart. J. Mech. Appl. Math.
1004 24 (3) (1971) 263–284. doi:10.1093/qjmam/24.3.263.

1005 [98] F. Han, D. Dan, W. Cheng, J. Zang, An improved wittrick-williams
1006 algorithm for beam-type structures, Compos. Struct. 204 (2018) 560–
1007 566. doi:10.1016/j.compstruct.2018.07.108.

1008 [99] X. Liu, L. Chang, J. R. Banerjee, H.-C. Dan, Closed-form dynamic
1009 stiffness formulation for exact modal analysis of tapered and function-
1010 ally graded beams and their assemblies, Int. J. Mech. Sci. 214 (2022)
1011 106887. doi:10.1016/j.ijmecsci.2021.106887.

1012 [100] Y. Du, Y. Tang, C. Fan, Y. Zou, Z. Bao, Y. Ma, A novel approach to the
1013 design of distributed dynamic vibration absorbers for plates subjected
1014 to classical and elastic edge conditions, Journal of Marine Science and
1015 Engineering 13 (3) (2025) 401. doi:10.3390/jmse13030401.

1016 [101] C. Svedholm, A. Zangeneh, C. Pacoste, S. François, R. Karoumi, Vibra-
1017 tion of damped uniform beams with general end conditions under mov-
1018 ing loads, Eng. Struct. 126 (2016) 40–52. doi:10.1016/j.engstruct.
1019 2016.07.037.

1020 [102] S. Yuan, K. Ye, F. Williams, Second order mode-finding method in
1021 dynamic stiffness matrix methods, J. Sound Vib. 269 (3-5) (2004) 689–
1022 708. doi:10.1016/S0022-460X(03)00126-3.

1023 [103] S. Zhang, L. Xu, R. Li, New exact series solutions for transverse vibra-

tion of rotationally-restrained orthotropic plates, Appl. Math. Model. 65 (2019) 348–360. doi:10.1016/j.apm.2018.08.033.

[104] M. Mukhopadhyay, Free vibration of rectangular plates with edges having different degrees of rotational restraint, J. Sound Vib. 67 (4) (1979) 459–468. doi:10.1016/0022-460X(79)90438-3.